


# Level Sensors

## Amplifier, Conductive

### Types S195, S196 (Charging/Discharging)

CARLO GAVAZZI

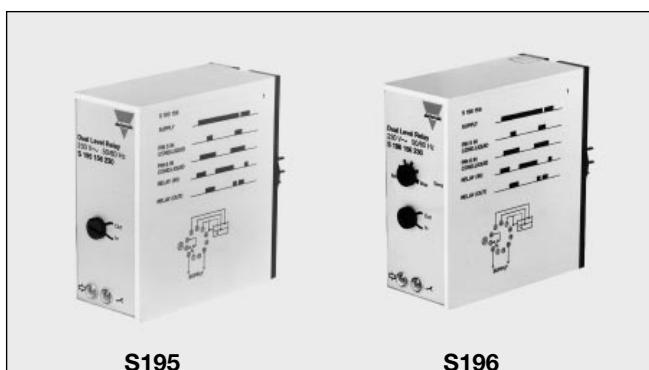

- Level control for conductive liquids
- Max.-min. control of charging/discharging
- Selection of charging or discharging by a switch at the front of the system
- S195: Fixed sensitivity
- S196: Adjustable sensitivity
- 10 A SPDT or 8 A DPDT output relay
- LED-indications: Power supply and relay ON
- AC power supply

## Product Description

Level control relays for conductive liquids which can control two levels of charging or discharging. When the

relays are used for registering only one level, the sensitivity is half as large.

## Type Selection

Plug	Output	Supply: 24 VAC	Supply: 115 VAC	Supply: 230 VAC
Circular	SPDT	S 195 156 024	S 195 156 115	S 195 156 230
Circular	DPDT	S 195 166 024	S 195 166 115	S 195 166 230
Circular	SPDT	S 196 156 024	S 196 156 115	S 196 156 230
Circular	DPDT	S 196 166 024	S 196 166 115	S 196 166 230

## Input Specifications

Level probe supply	Max. 24 VAC
Level probe current	Max. 2.5 mA
<b>Sensitivity</b>	
ON	< 25 kΩ (approx.)
S195 (pin 5-6 and 7)	3.5 - 30 kΩ (approx.)
S196 (pin 5-6 and 7)	
OFF	> 50 kΩ (approx.)
S195 (pin 5-6 and 7)	15-60 kΩ (approx.)
S196 (pin 5-6 and 7)	

## Ordering Key

**S 195 156 024**

Housing \_\_\_\_\_  
 Type/function \_\_\_\_\_  
 Output \_\_\_\_\_  
 Power supply \_\_\_\_\_

## Supply Specifications

<b>Power supply</b>	Overvoltage cat. II (IEC 60664)
Rated operational voltage through pin 2 & 10	230
	115
	024
Rated insulation voltage	230 VAC ± 15%
Rated impulse withstand voltage	115 VAC ± 15%
	24 VAC ± 15%
	≥ 2.0 kVAC (rms)
	4 kV (1.2/50 µs)
	(line/neutral)

## General Specifications

<b>Indication for</b>	Power supply ON Output ON	LED, green LED, red
<b>Environment</b>	Degree of protection Pollution degree Operating temperature Storage temperature	IP 20 B 3 (IEC 60664) -20 to +50°C (-4 to +122°F) -50 to +85°C (-58 to +185°F)
<b>Approvals</b> <b>CE-marking</b>		UL, CSA Yes

# Output Specifications

		<b>S 19x 156</b>	<b>S19x 166</b>
<b>Output</b>		SPDT relay 250 VAC (rms) (cont./elec.)	DPDT relay 250 VAC (rms) (cont./elec., cont./cont.)
<b>Contact ratings ( Ag-Cd0)</b>		μ (micro gap) 10 A/250 VAC (2500 VA) 1 A/250 VDC (250 W) 10 A/25 VDC (250 W)	μ (micro gap) 8 A/250 VAC (2000 VA) 0.4 A/250 VDC (100 W) 4 A/25 VDC (100 W)
Resistive loads	AC 1	2.5 A/230 VAC 5 A/24 VDC	2.5 A/230 VAC 5 A/24 VDC
	DC 1		
	or		
Small inductive loads	AC 13		
	DC 15		
<b>Mechanical life</b>		≥ 30 x 10 <sup>6</sup> operations	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	AC 1	≥ 2.5 x 10 <sup>5</sup> operations (at max. load)	≥ 2.5 x 10 <sup>5</sup> operations (at max. load)
<b>Operating frequency</b>		≤ 7200 operations/h	≤ 7200 operations/h
<b>Insulation voltages</b>			
Rated insulation voltage		≥ 2.0 kVAC (rms) (cont./elec.)	≥ 2.0 kVAC (rms) (cont./elec.)
Rated transient protection voltage		4 kV (1.2/50 µs) (cont./elec.) (IEC 60664)	4 kV (1.2/50 µs) (cont./elec.) (IEC 60664)

## Mode of Operation

The switch at the front is set in the desired mode IN (charging) or OUT (discharging).


to the load cables (mains).  
The screen is connected to  
pin 7.

The relay releases (OUT)/-operates (IN) when the min. electrode is no longer in contact with the liquid. Pin 7 must be connected to the container. If the container consists of a non-conductive material, an additional electrode must be used. (To be connected to pin 7. In the diagram this electrode is shown by the dotted line.


**Example 2 and 4**  
 The diagram shows the level control connected as max. or min. control, i.e. registration of 1 level. The relay operates (OUT)/releases (IN) when the electrode (pin 6) is in contact with the liquid. An additional electrode must be used if the container consists of a non-conductive material. Interconnect pins 5 and 6 directly on the base.

## Wiring Diagrams

### Example 1 and 3

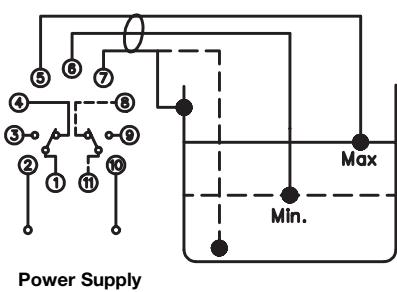


## Example 2 and 4

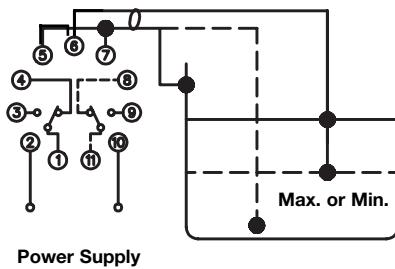


## Operation Diagrams

### Example 1 OUT (Discharging)

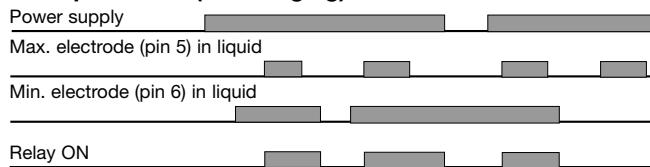


### Example 2 OUT (Discharging)

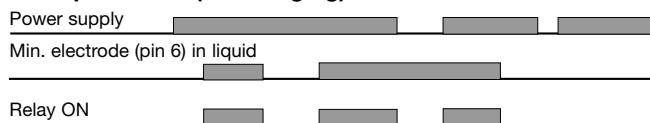

### Example 3 IN (Charging)



### Example 4 IN (Charging)

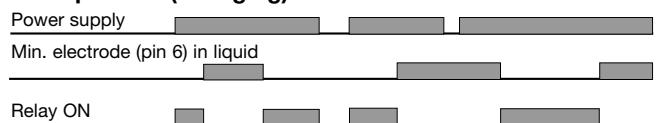

## Accessories

Conductive level probe:

VH  
VPC, VPP  
VN, VNY, VNI  
VT, VTI  
VS

Base S411  
Hold down spring HF  
Base covers BB $\alpha$ 4  
Front mounting bezel FRS2

## Settings

Knob adjustable sensitivity on relative scale (S 196).

ON: From 3.5 to 30 k $\Omega$   
OFF: From 15 to 60 k $\Omega$

When S 196 is used for registering only one level, the sensitivity is half as large