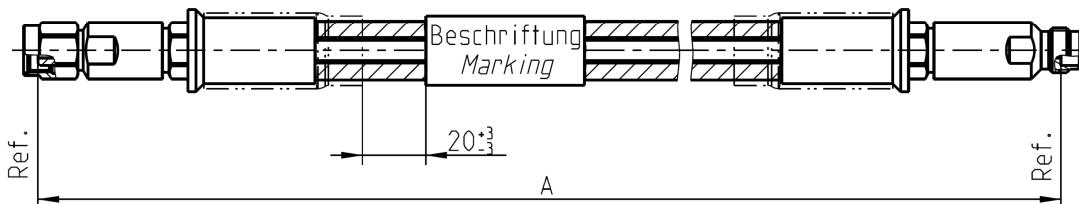


Technical Data Sheet

Rosenberger

Cable assembly
RPC-2.40 Plug / RPC-2.40 Jack – RTK 125 Cable

LU8-101-XXX

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm

Available variants

Type	max. Insertion loss at 50 GHz	Marking	Weight (g) / pce
LU8-101-XXX	$\leq 0.00397 \text{ dB/mm} * A \text{ mm} + 0.90 \text{ dB}$	ROSENBERGER YYYY-WW LU8-101-XXX FAC-RRRRRRR ssss	0,174 g/mm * A mm + 29 g

XXX – length in mm = A

WW – week

YYYY – year

ssss – serial no.

FAC – Factory Code

RRRRRRR – lot nr.

Note:

max. Insertion Loss:

First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:

First constant = Cable and armour weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-2.40 plug	09S128-2U8S3
Connector right	RPC-2.40 jack	09K128-2U8S3
Cable	RTK 125	
Armour	T1 armour Outer Diameter 9.3mm (Polyurethane jacket over braid / stainless steel spiral)	

Electrical data

Impedance	50 Ω
Frequency	DC to 50 GHz
Return loss ¹	$\geq 16.5 \text{ dB}$, DC to 50 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:

Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

Mechanical data

Minimum bend radius:	
Single	12.7 mm
Multiple	16 mm

Environmental data

Temperature range	-40°C to +85°C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	06/02/12	Herbert Babinger	30/07/14	c00	15-1219	Manfred Ruf	11/09/15

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.deTel. : +49 8684 18-0
Email : info@rosenberger.dePage
1 / 1