

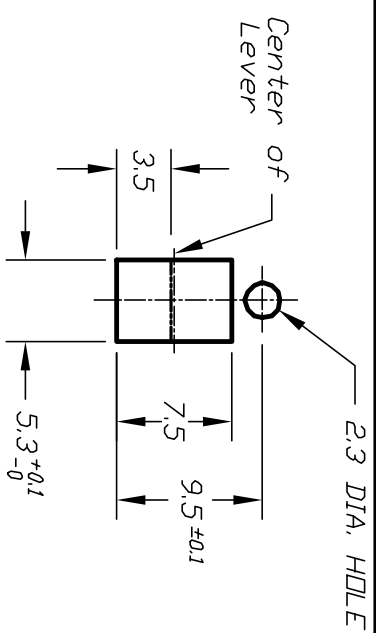


RECOMMEND P.C.B. HOLES

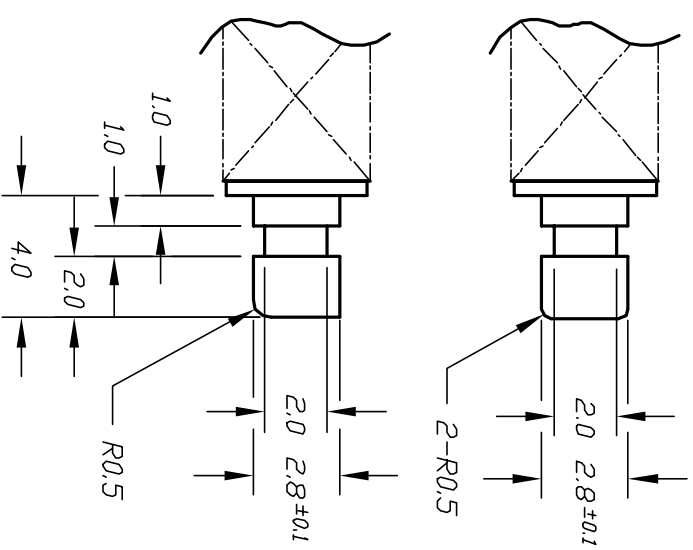

PANEL LAYOUT

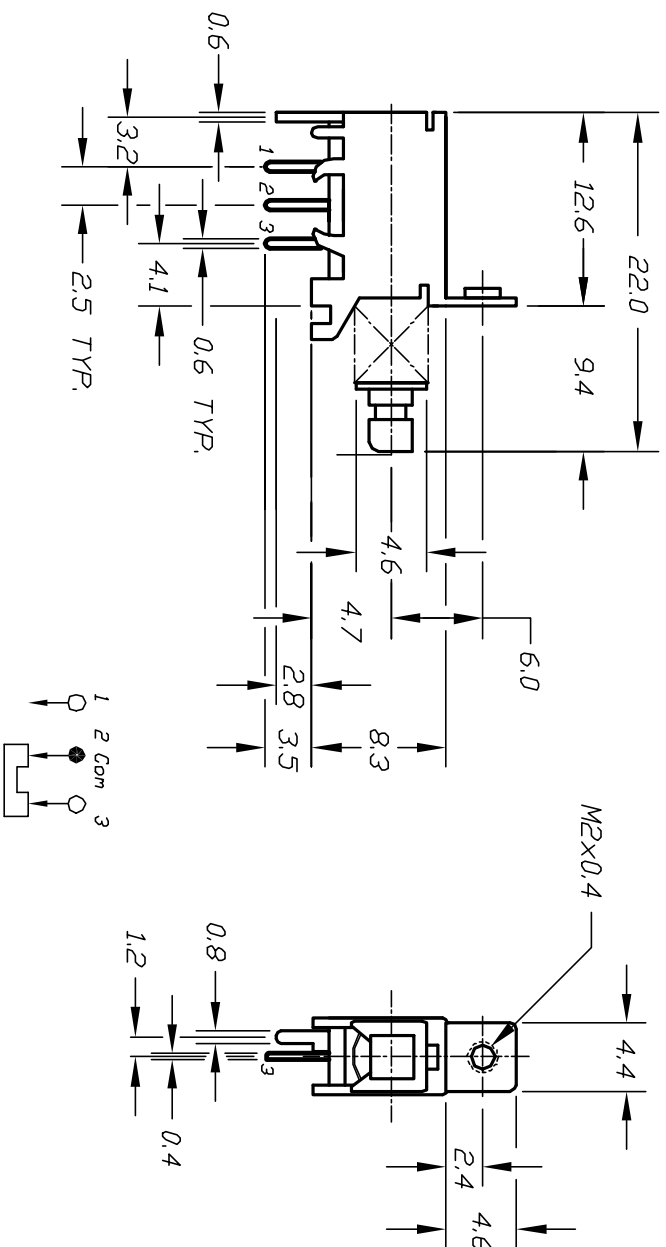

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 30V DC, 0.3A
4. OPERATING FORCE: 200±100gf.
5. TRAVEL: FULL 3.5mm; Lock 2.5mm
6. TIMING: SHORTING

CIRCUIT: SPDT

CONTACT CONFIGURATION

ACTUATOR DETAIL SCALE 4:1

E-SWITCH®					
TITLE LC1257 EE SP (SHORTING)					
SCALE 2:1		DATE 10/4/02	DR CJB	DWG P070111	REV A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
A	12464	RELEASED FOR PRODUCTION	10/4/02	CJB	
6. TIMING: SHORTING					
O. TRAVEL: TOLL CUSHING LOCK Z-0.0mm					