

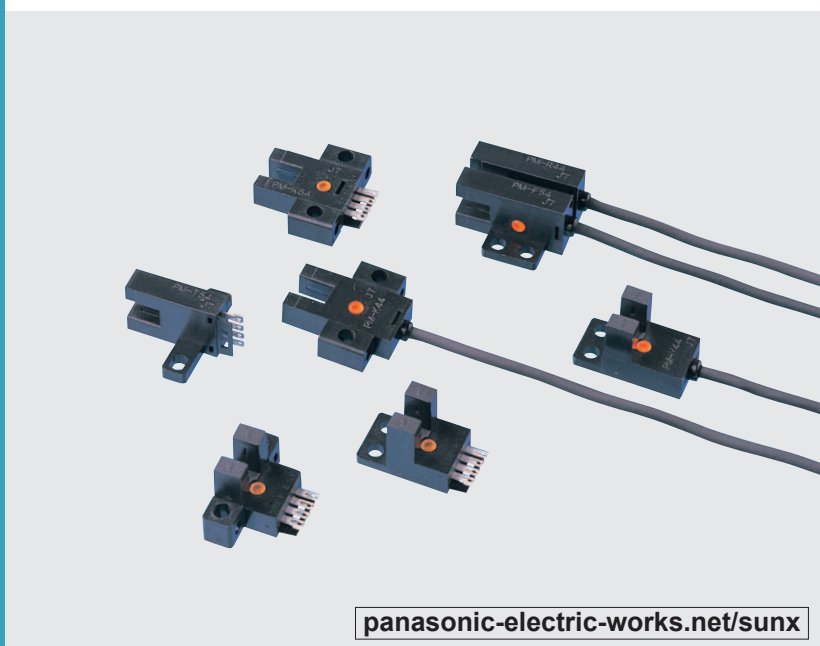
**PM-44 SERIES PM-54 SERIES****Related Information**

■ General terms and conditions ..... F-17

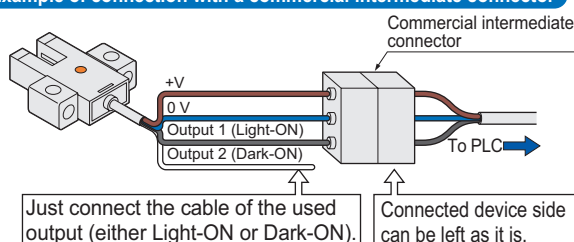
■ Sensor selection guide ..... P.441~

■ Glossary of terms / General precautions ..... P.1359~ / P.1405

■ Korea's S-mark ..... P.1410

**Enables space saving and quick installation!****Equipped with two independent outputs**

All models are equipped with two independent outputs Light-ON and Dark-ON. Hence, one model suffices even if the output is to be used differently, depending upon the location of use. Also, since two independent outputs have been provided, cumbersome handling of the output conversion control input, or fear of logic inversion due to a cable break, is eliminated. The sensor can be connected to the existing wiring as it is.

**Example of connection with a commercial intermediate connector**

Note: Ensure to insulate the unused output wire.

**Wide model variety**

A wide variety of 12 shapes and 24 models is available. You may select from this wide range to suit the mounting conditions.

**Meets global requirements**

Conforms to Europe's EMC Directive and obtains UL Recognition.

The NPN output type with cable (excluding 3 m 9.843 ft cable length type) has also obtained Korea's S-mark certification.



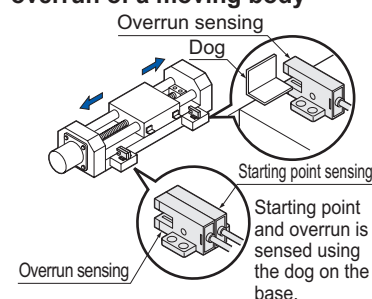
Both, NPN and PNP output models are available.

**Quick fitting hook-up connector**

Easy to maintain connector type models are available. Its exclusive connector is the hook-up connector.

Since only crimping with exclusive pliers is to be done, cumbersome soldering or insulation is absolutely not required.

Further, connector attached cable is also available.

**APPLICATIONS****Sensing the starting point and overrun of a moving body**

**ORDER GUIDE**

| Type  | Appearance (mm in) |        | Sensing range                                                                                             | Model No. | Output                        | Output operation                                   |
|-------|--------------------|--------|-----------------------------------------------------------------------------------------------------------|-----------|-------------------------------|----------------------------------------------------|
| Small | With cable         | K type |  5 mm 0.197 in (fixed) | PM-K44    | NPN open-collector transistor | Incorporated with 2 outputs:<br>Light-ON / Dark-ON |
|       |                    | T type |                                                                                                           | PM-K44P   | PNP open-collector transistor |                                                    |
|       |                    | L type |                                                                                                           | PM-T44    | NPN open-collector transistor |                                                    |
|       |                    | Y type |                                                                                                           | PM-T44P   | PNP open-collector transistor |                                                    |
|       |                    | F type |                                                                                                           | PM-L44    | NPN open-collector transistor |                                                    |
|       |                    | R type |                                                                                                           | PM-L44P   | PNP open-collector transistor |                                                    |
|       |                    | K type |                                                                                                           | PM-Y44    | NPN open-collector transistor |                                                    |
|       |                    | T type |                                                                                                           | PM-Y44P   | PNP open-collector transistor |                                                    |
|       |                    | L type |                                                                                                           | PM-F44    | NPN open-collector transistor |                                                    |
|       |                    | Y type |                                                                                                           | PM-F44P   | PNP open-collector transistor |                                                    |
|       |                    | F type |                                                                                                           | PM-R44    | NPN open-collector transistor |                                                    |
|       |                    | R type |                                                                                                           | PM-R44P   | PNP open-collector transistor |                                                    |
|       | With connector     | K type |                                                                                                           | PM-K54    | NPN open-collector transistor |                                                    |
|       |                    | T type |                                                                                                           | PM-K54P   | PNP open-collector transistor |                                                    |
|       |                    | L type |                                                                                                           | PM-T54    | NPN open-collector transistor |                                                    |
|       |                    | Y type |                                                                                                           | PM-T54P   | PNP open-collector transistor |                                                    |
|       |                    | F type |                                                                                                           | PM-L54    | NPN open-collector transistor |                                                    |
|       |                    | R type |                                                                                                           | PM-L54P   | PNP open-collector transistor |                                                    |
|       |                    | K type |                                                                                                           | PM-Y54    | NPN open-collector transistor |                                                    |
|       |                    | T type |                                                                                                           | PM-Y54P   | PNP open-collector transistor |                                                    |
|       |                    | L type |                                                                                                           | PM-F54    | NPN open-collector transistor |                                                    |
|       |                    | Y type |                                                                                                           | PM-F54P   | PNP open-collector transistor |                                                    |
|       |                    | F type |                                                                                                           | PM-R54    | NPN open-collector transistor |                                                    |
|       |                    | R type |                                                                                                           | PM-R54P   | PNP open-collector transistor |                                                    |

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
Guide

U-shaped

Convergent  
Reflective**PM-64****PM-24****PM-44/  
PM-54**

ORDER GUIDE

3 m 9.843 ft cable length type


3 m 9.843 ft cable length type (standard: 1 m 3.281 ft) is also available.  
When ordering this type, suffix “-C3” to the model No.  
(e.g.) 3m 9.843 ft cable length type of **PM-K44** is “**PM-K44-C3**”.

OPTIONS

| Designation              | Model No.        | Description                                                                                                                                                                                |                                                                                                                    |
|--------------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Connector                | <b>CN-14</b>     | Connector for soldering                                                                                                                                                                    |                                                                                                                    |
| Hook-up connector        | <b>CN-14H</b>    | This connector can be hooked-up on 0.08 to 0.2 mm <sup>2</sup> cable simply in one grip.<br>Wire diameter: ø0.7 to ø1.2 mm <b>ø0.028 to ø0.047 in</b>                                      |                                                                                                                    |
|                          | <b>CN-14H-2</b>  | Suitable for UL standard cable.<br>This connector can be hooked-up on 0.18 to 0.22 mm <sup>2</sup> cable simply in one grip.<br>Wire diameter: ø1.2 to ø1.52 mm <b>ø0.047 to ø0.060 in</b> |                                                                                                                    |
| Connector attached cable | <b>CN-14H-C1</b> | Length:<br>1 m <b>3.281 ft</b><br>Net weight:<br>20 g approx.                                                                                                                              | For the connector type, with 0.18 mm <sup>2</sup> 4-core cabtyre cable<br>Cable diameter: ø3.8 mm <b>ø0.150 in</b> |
|                          | <b>CN-14H-C3</b> | Length:<br>3 m <b>9.843 ft</b><br>Net weight:<br>65 g approx.                                                                                                                              |                                                                                                                    |
| Hook-up pliers           | <b>CN-HP</b>     | These are exclusive pliers for hook-up connectors <b>CN-14H</b> and <b>CN-14H-2</b> .                                                                                                      |                                                                                                                    |


Connector

- **CN-14**




Hook-up connector

- **CN-14H**
- **CN-14H-2**




Connector attached cable

- **CN-14H-C1**
- **CN-14H-C3**



Hook-up pliers

- **CN-HP**



**SPECIFICATIONS**

|                          |                          | Type                                                                                                                                                                                                                                                                                                            | Small                   |                |
|--------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------|
|                          |                          |                                                                                                                                                                                                                                                                                                                 | With cable              | With connector |
| Item                     | Model No.                | NPN output                                                                                                                                                                                                                                                                                                      | PM-□44                  | PM-□54         |
|                          |                          | PNP output                                                                                                                                                                                                                                                                                                      | PM-□44P                 | PM-□54P        |
| Sensing range            |                          | 5 mm 0.197 in (fixed)                                                                                                                                                                                                                                                                                           |                         |                |
| Minimum sensing object   |                          | 0.8 × 1.8 mm 0.031 × 0.071 in opaque object                                                                                                                                                                                                                                                                     |                         |                |
| Hysteresis               |                          | 0.05 mm 0.002 in or less                                                                                                                                                                                                                                                                                        |                         |                |
| Repeatability            |                          | 0.03 mm 0.001 in or less                                                                                                                                                                                                                                                                                        |                         |                |
| Supply voltage           |                          | 5 to 24 V DC ±10 % Ripple P-P 10 % or less                                                                                                                                                                                                                                                                      |                         |                |
| Current consumption      |                          | 15 mA or less                                                                                                                                                                                                                                                                                                   |                         |                |
| Output                   |                          | <NPN output type><br>NPN open-collector transistor <ul style="list-style-type: none"><li>Maximum sink current: 50 mA</li><li>Applied voltage: 30 V DC or less (between output and 0 V)</li><li>Residual voltage: 0.7 V or less (at 50 mA sink current)<br/>0.4 V or less (at 16 mA sink current)</li></ul>      |                         |                |
|                          |                          | <PNP output type><br>PNP open-collector transistor <ul style="list-style-type: none"><li>Maximum source current: 50 mA</li><li>Applied voltage: 30 V DC or less (between output and +V)</li><li>Residual voltage: 0.7 V or less (at 50 mA source current)<br/>0.4 V or less (at 16 mA source current)</li></ul> |                         |                |
|                          |                          |                                                                                                                                                                                                                                                                                                                 |                         |                |
|                          | Utilization category     | DC-12 or DC-13                                                                                                                                                                                                                                                                                                  |                         |                |
|                          | Output operation         | Incorporated with 2 outputs: Light-ON / Dark-ON                                                                                                                                                                                                                                                                 |                         |                |
| Response time            |                          | Under light received condition: 20 μs or less, Under light interrupted condition: 100 μs or less<br>(Response frequency: 1 kHz or more) (Note 2)                                                                                                                                                                |                         |                |
| Operation indicator      |                          | Vermilion LED (lights up under light received condition)                                                                                                                                                                                                                                                        |                         |                |
| Environmental resistance | Pollution degree         | 3 (Industrial environment)                                                                                                                                                                                                                                                                                      |                         |                |
|                          | Ambient temperature      | −25 to +55 °C −13 to +131 °F (No dew condensation or icing allowed), Storage: −30 to +80 °C −22 to +176 °F                                                                                                                                                                                                      |                         |                |
|                          | Ambient humidity         | 35 to 85 % RH, Storage: 35 to 85 % RH                                                                                                                                                                                                                                                                           |                         |                |
|                          | Ambient illuminance      | Fluorescent light: 1,000 lx at the light-receiving face                                                                                                                                                                                                                                                         |                         |                |
|                          | EMC                      | EN 60947-5-2                                                                                                                                                                                                                                                                                                    |                         |                |
|                          | Voltage withstandability | 1,000 V AC for one min. between all supply terminals connected together and enclosure                                                                                                                                                                                                                           |                         |                |
|                          | Insulation resistance    | 50 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure                                                                                                                                                                                                              |                         |                |
|                          | Vibration resistance     | 10 to 2,000 Hz frequency, 1.5 mm 0.059 in amplitude in X, Y and Z directions for two hours each                                                                                                                                                                                                                 |                         |                |
|                          | Shock resistance         | 15,000 m/s <sup>2</sup> acceleration (1,500 G approx.) in X, Y and Z directions for three times each                                                                                                                                                                                                            |                         |                |
| Emitting element         |                          | Infrared LED (Peak emission wavelength: 940 nm 0.037 mil, non-modulated)                                                                                                                                                                                                                                        |                         |                |
| Material                 |                          | Enclosure: PBT, Slit cover: Polycarbonate, Terminal part [PM-□54(P) only]: Solder plated                                                                                                                                                                                                                        |                         |                |
| Cable                    |                          | 0.09 mm <sup>2</sup> 4-core cabtyre cable, 1 m 3.281 ft long                                                                                                                                                                                                                                                    | —————                   |                |
| Cable extension          |                          | Extension up to total 100 m 328.084 ft is possible with 0.3 mm <sup>2</sup> , or more, cable.                                                                                                                                                                                                                   |                         |                |
| Weight                   |                          | Net weight: 15 g approx.                                                                                                                                                                                                                                                                                        | Net weight: 3 g approx. |                |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) The response frequency is the value when the disc, given in the figure below, is rotated.

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
Guide

U-shaped

Convergent  
Reflective**PM-64****PM-24****PM-44/  
PM-54**

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
Guide

U-shaped

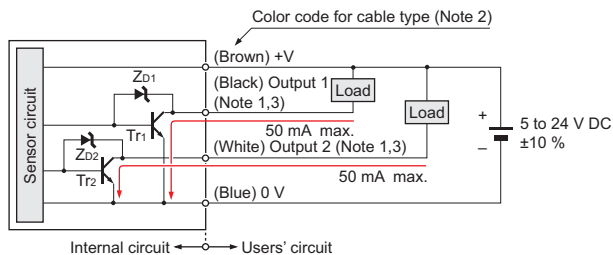
Convergent  
Reflective

PM-64

PM-24

PM-44/  
PM-54**I/O CIRCUIT AND WIRING DIAGRAMS****PM-□44 PM-□54**

NPN output type

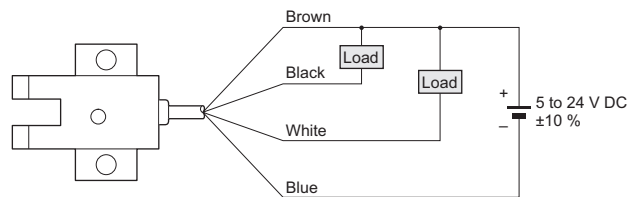
**I/O circuit diagram**

Notes: 1) Make sure to connect terminals correctly as the sensor does not incorporate a reverse polarity protection circuit. Further, the output is not incorporated with a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load. Faulty wiring may result in damage.

2) The color code of the connector attached cable is also the same.

3) Ensure to insulate the unused output wire.

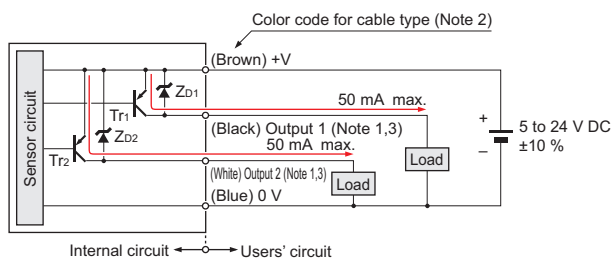
Symbols ... ZD1, ZD2: Surge absorption zener diode  
Tr1, Tr2 : NPN output transistor

**Wiring diagram****Output operation**

|          | Color code | Output operation |
|----------|------------|------------------|
| Output 1 | Black      | Light-ON         |
| Output 2 | White      | Dark-ON          |

**PM-□44P PM-□54P**

PNP output type

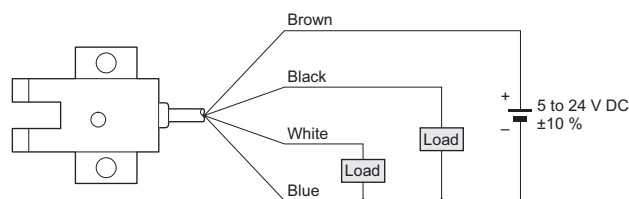
**I/O circuit diagram**

Notes: 1) Make sure to connect terminals correctly as the sensor does not incorporate a reverse polarity protection circuit. Further, the output is not incorporated with a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load. Faulty wiring may result in damage.

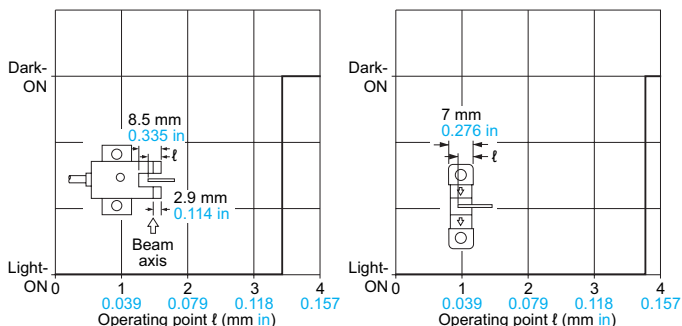
2) The color code of the connector attached cable is also the same.

3) Ensure to insulate the unused output wire.

Symbols ... ZD1, ZD2: Surge absorption zener diode  
Tr1, Tr2 : PNP output transistor

**Wiring diagram****Output operation**

|          | Color code | Output operation |
|----------|------------|------------------|
| Output 1 | Black      | Light-ON         |
| Output 2 | White      | Dark-ON          |

**SENSING CHARACTERISTICS (TYPICAL)****PM-L44(P)/K44(P) PM-L54(P)/K54(P)****Sensing position**

**PRECAUTIONS FOR PROPER USE**

Refer to General precautions.

**All models**

- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

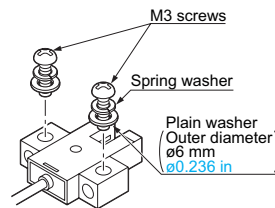


- Make sure to connect terminals correctly as the sensor does not incorporate a reverse polarity protection circuit. Further, the output is not incorporated with a short-circuit protection circuit. Do not connect it directly to a power supply or a capacitive load. Faulty wiring may result in damage.

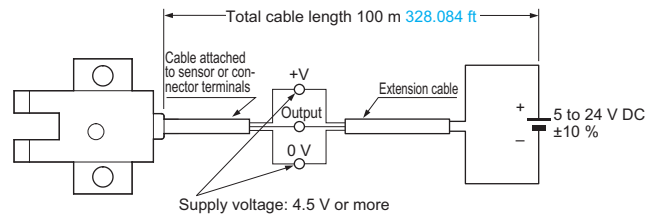
**Mounting**

- When fixing the sensor with screws, use M3 screws and the tightening torque should not exceed the values given below. Further, use small, round type plain washers (ø6 mm ø0.236 in).

| Model No.        | Tightening torque |
|------------------|-------------------|
| <b>PM-□44(P)</b> | 0.5 N·m           |
| <b>PM-□54(P)</b> |                   |

**Cable extension**

- Cable extension is possible up to an overall length of 100 m 328.084 ft with a 0.3 mm<sup>2</sup>, or more, cable. However, since a voltage drop shall occur due to the cable extension, ensure that the power supply voltage at the end of the cable attached to the sensor or at the sensor terminals is within the rating.




But, when the overall cable length, including the cable attached to the sensor, is as given below, there is no need to confirm the voltage.

| Conductor cross-section area of extension cable | Total cable length   |
|-------------------------------------------------|----------------------|
| 0.08 to 0.1 mm <sup>2</sup>                     | Up to 5 m 16.404 ft  |
| 0.2 mm <sup>2</sup>                             | Up to 10 m 32.808 ft |
| 0.3 mm <sup>2</sup>                             | Up to 20 m 65.617 ft |

**Others**

- Since the sensor is intended for use inside machines, no special countermeasures have been taken against extraneous light. Take care that extraneous light is not directly incident on the beam receiving section.
- Do not use during the initial transient time (50 ms) after the power supply is switched on.



FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC CONTROL DEVICES

ENDOSCOPE

LASER MARKERS

PLC / TERMINALS

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

U-shaped

Convergent Reflective

**PM-64****PM-24****PM-44/PM-54**

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
Guide

U-shaped

Convergent  
Reflective**PM-64****PM-24****PM-44/  
PM-54****PRECAUTIONS FOR PROPER USE**


Refer to General precautions.

**PM-□54 PM-□54P****Cautions in plugging or unplugging a connector**


- Do not plug or unplug a connector more than 10 times.
- Be sure not to give stress more than 5 N to a terminal of both a connector and a sensor. If you do not follow the above cautions, it will cause a poor contact.

**Procedures of plugging or unplugging a connector**


- ① Insert a connector straight into a sensor until the connector lug is locked by the sensor hook.



- ② When unplugging, give as much stress as a connector lug can be relieved from a hook. Then unplug it.

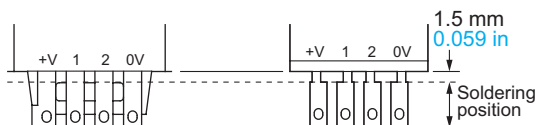


**Caution:** Be sure to hold a connector when plugging or unplugging it. Do not hold a terminal or a cable when plugging or unplugging the connector. Otherwise, it will cause a poor contact.


**Soldering (Both connector CN-14 and sensor)**

- If soldering is done directly on the terminals, strictly adhere to the conditions given below.

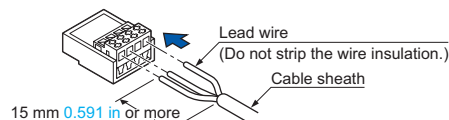
|                       |                           |
|-----------------------|---------------------------|
| Soldering temperature | 260 °C 500 °F or less     |
| Soldering time        | 3 sec. or less            |
| Soldering position    | Refer to the below figure |

**Sensor****Connector****Crimping of hook-up connectors CN-14H and CN-14H-2**

| Model No.                    | CN-14H                                          | CN-14H-2                                         |
|------------------------------|-------------------------------------------------|--------------------------------------------------|
| Conductor cross-section area | 0.08 to 0.2 mm <sup>2</sup><br>(AWG28 to AWG24) | 0.18 to 0.22 mm <sup>2</sup><br>(AWG25 to AWG24) |
| Wire diameter                | ø0.7 to ø1.2 mm<br>ø0.028 to ø0.047 in          | ø1.2 to ø1.52 mm<br>ø0.047 to ø0.060 in          |
| Wire insulation material     | Vinyl chloride or soft polyethylene             |                                                  |

**Crimping method**

- ① Strip the cable sheath 15 mm 0.591 in, or more, and insert the wires into the connector insertion holes till the wire tips reach the end.


**Arrangement of connector terminals**

|                        |                     |
|------------------------|---------------------|
| +V: +V                 |                     |
| 1: Output 1 (Light-ON) | (Note) Power supply |
| 2: Output 2 (Dark-ON)  |                     |
| 0V: 0 V                |                     |

Note: Wire at Pin No.1 or 2 as per requirement.


- ② Crimp with the exclusive hook-up pliers **CN-HP**.

- Notes: 1) When attaching or detaching the connector fitted with a cable, make sure to hold the connector firmly before proceeding.  
2) After crimping, do not pull on the cable.



**Caution:** Make sure to use the exclusive hook-up pliers **CN-HP**. Commercially available pliers cannot be used.

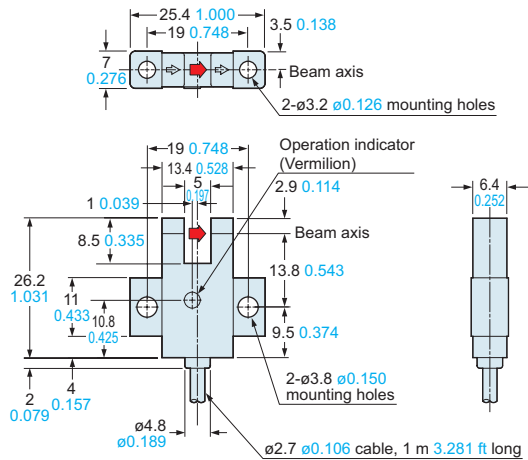
- Prior to using the sensor, affix the cable in a way as to avoid direct stress on the crimped part.



The CAD data in the dimensions can be downloaded from our website.

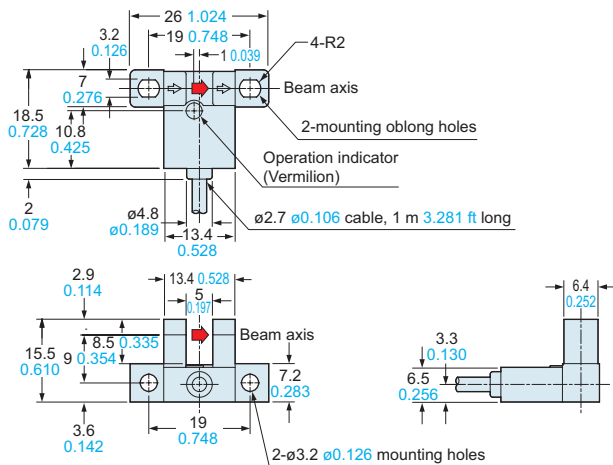
PM-K44 PM-K44P

Sensor



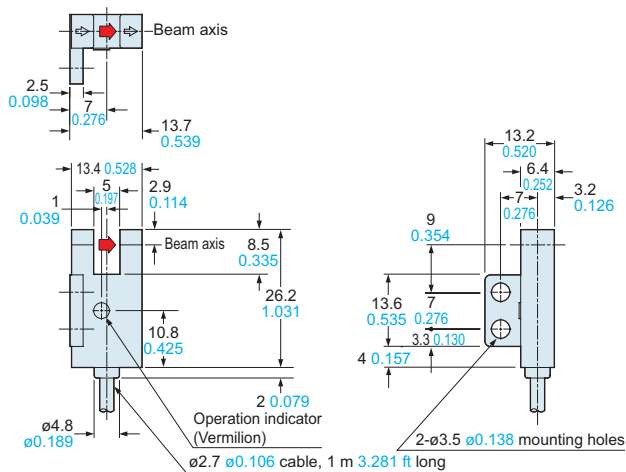
**PM-L44    PM-L44P**

Sensor



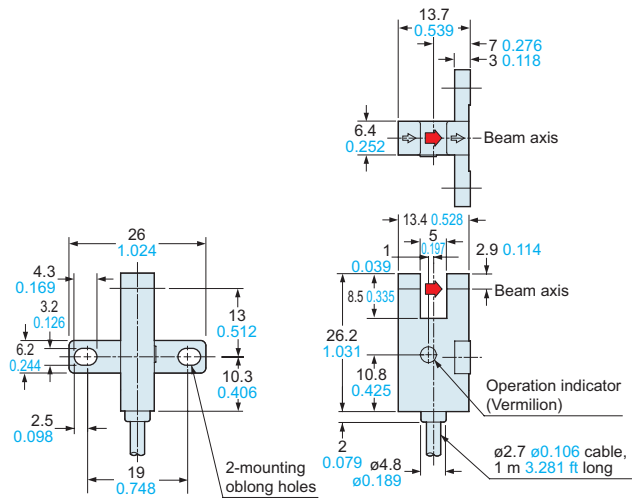
PM-F44 PM-F44P

Sensor



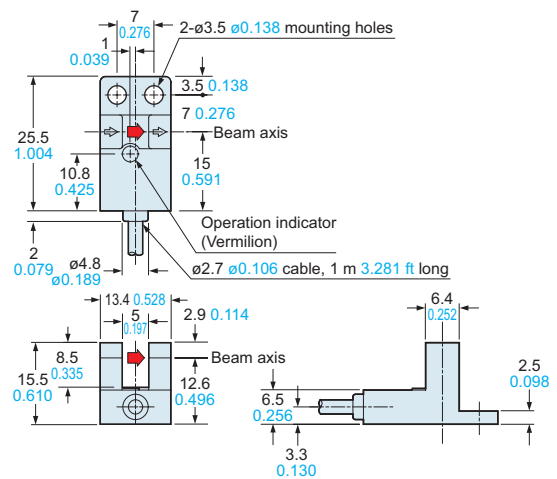
**PM-T44 PM-T44P**

Sensor



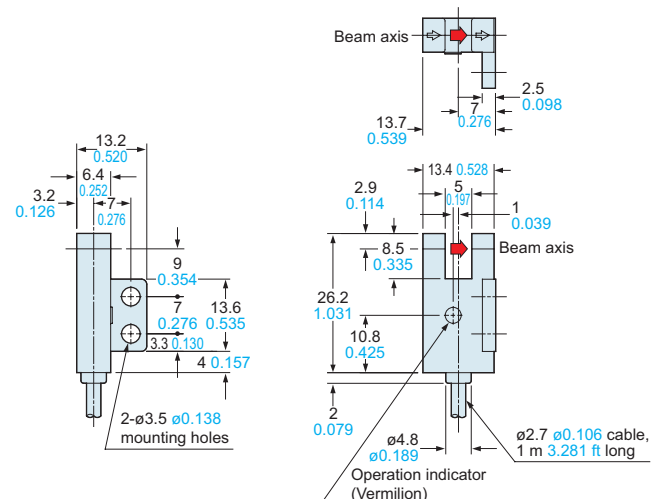
PM-Y44 PM-Y44P

Sensor



PM-R44 PM-R44P

Sensor



## FIBER SENSORS

LASER  
SENSORS

## PHOTO-ELECTRIC SENSORS

**MICRO  
PHOTO-  
ELECTRIC  
SENSORS**

## AREA SENSORS

LIGHT  
CURTAINS

## INDUCTIVE

### PARTICULAR USE SENSORS

## SENSOR OPTIONS

## SIMPLE WIRE-SAVING UNITS

## WIRE-SAVING SYSTEMS

## MEASURE- MENT SENSORS

## STATIC CONTROL DEVICES

## ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINAL CHUMAN  
MACHINE  
INTERFACES

## ENERGY CONSUMPTION VISUALIZATION COMPONENTS

## FA COMPONENTS

## MACHINE VISION

UV  
CURING  
SYSTEMS

## Selection Guide

Reflective

**PM-64**

PM-24

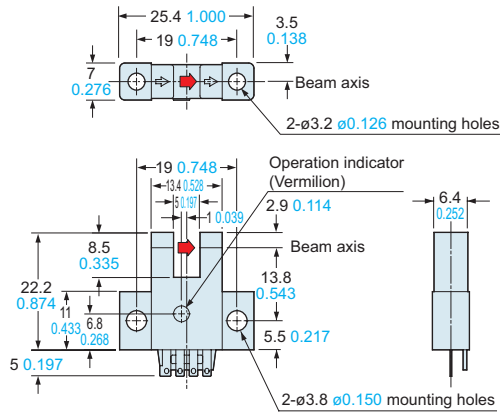
PM-44/  
PM-54

**DIMENSIONS (Unit: mm in)**

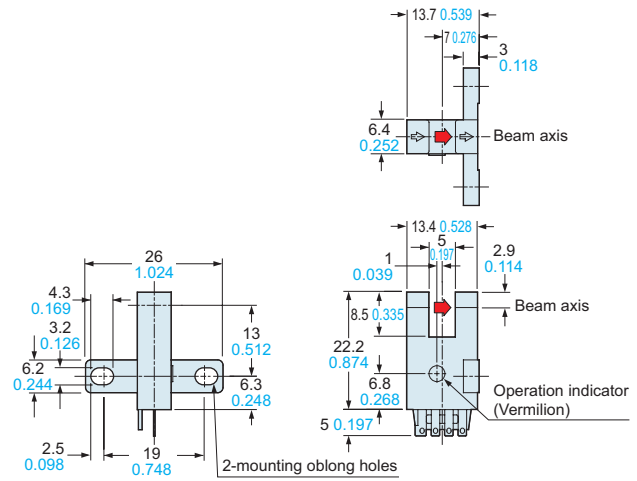
The CAD data in the dimensions can be downloaded from our website.

**PM-K54 PM-K54P**

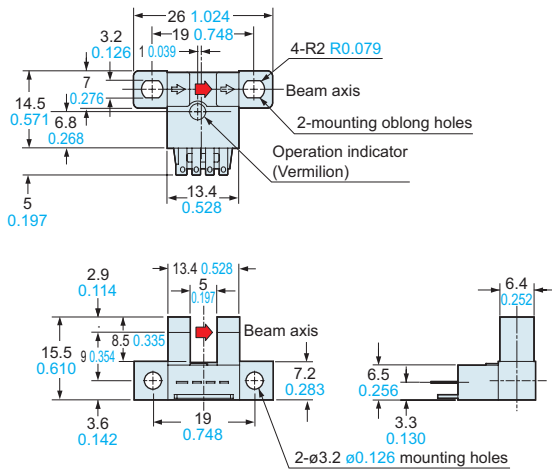
Sensor

**PM-T54 PM-T54P**

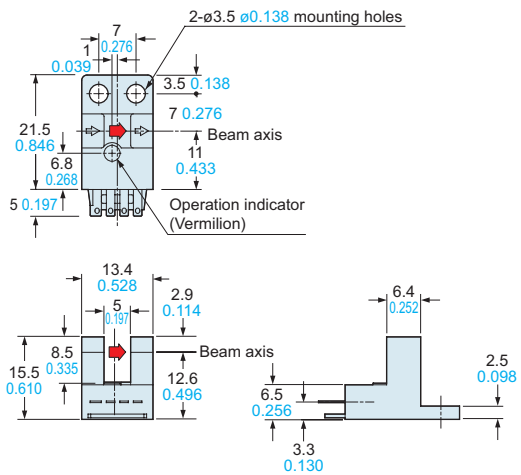
Sensor

**PM-L54 PM-L54P**

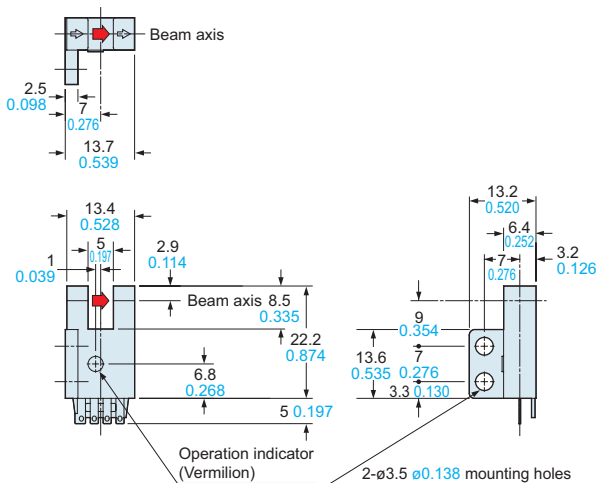
Sensor

**PM-Y54 PM-Y54P**

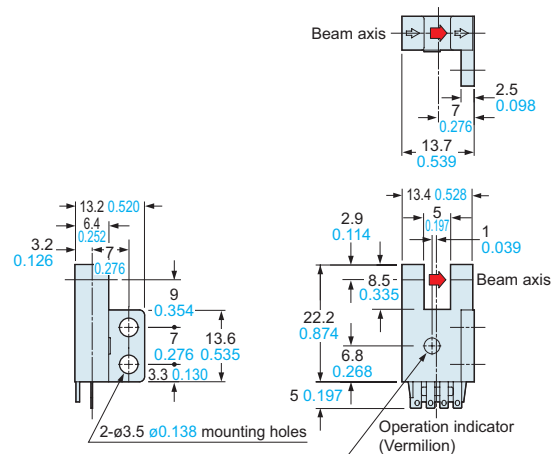
Sensor

**PM-F54 PM-F54P**

Sensor

**PM-R54 PM-R54P**

Sensor



Selection

Guide

U-shaped

Convergent

Reflective

PM-64

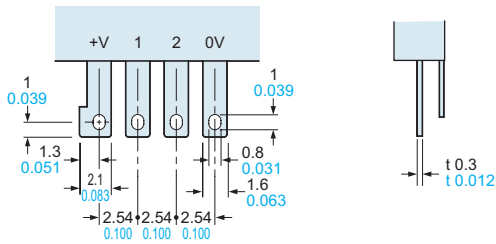
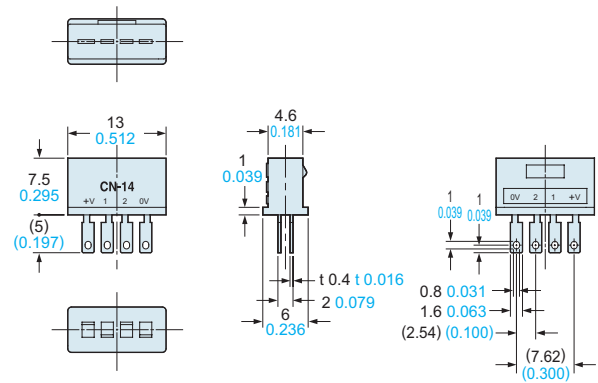
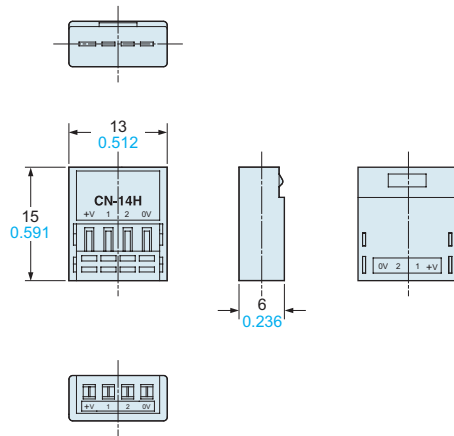
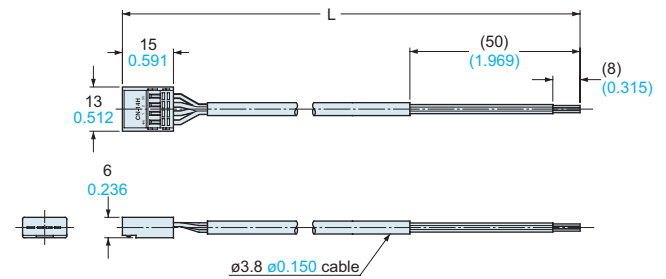
PM-24

PM-44/

PM-54

**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from our website.

**\* Terminal part (PM-□54, PM-□54P)****CN-14****Connector (Optional)****CN-14H CN-14H-2****Hook-up connector (Optional)****CN-14H-C1 CN-14H-C3****Connector attached cable (Optional)**

## • Length L

| Model No.        | Length L            |
|------------------|---------------------|
| <b>CN-14H-C1</b> | 1 m <b>3.281 ft</b> |
| <b>CN-14H-C3</b> | 3 m <b>9.843 ft</b> |

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSLIGHT  
CURTAINSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICES

ENDOSCOPE

LASER  
MARKERSPLC /  
TERMINALSHUMAN  
MACHINE  
INTERFACESENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTSFA  
COMPONENTSMACHINE  
VISION  
SYSTEMSUV  
CURING  
SYSTEMSSelection  
Guide

U-shaped

Convergent  
Reflective**PM-64****PM-24****PM-44/  
PM-54**