
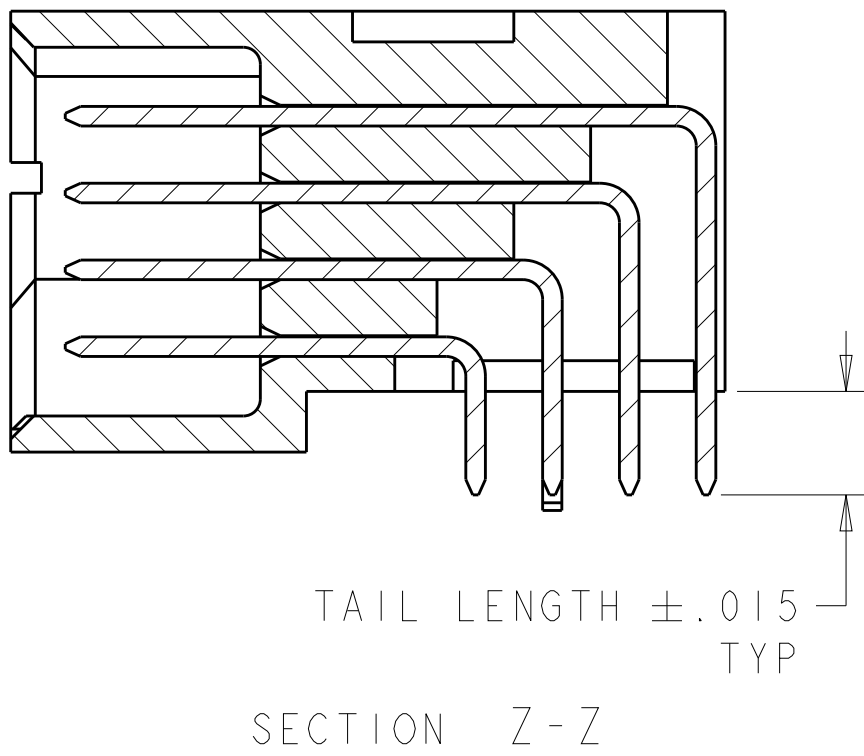
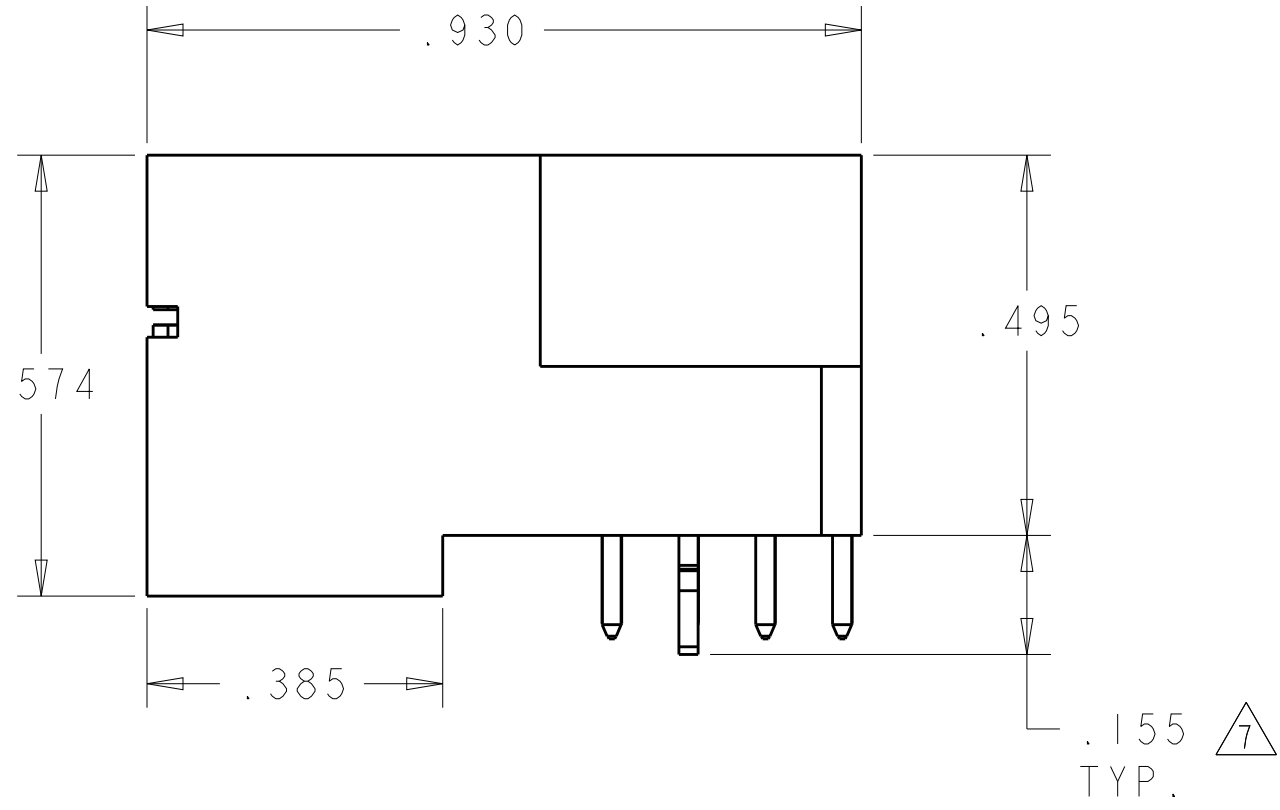
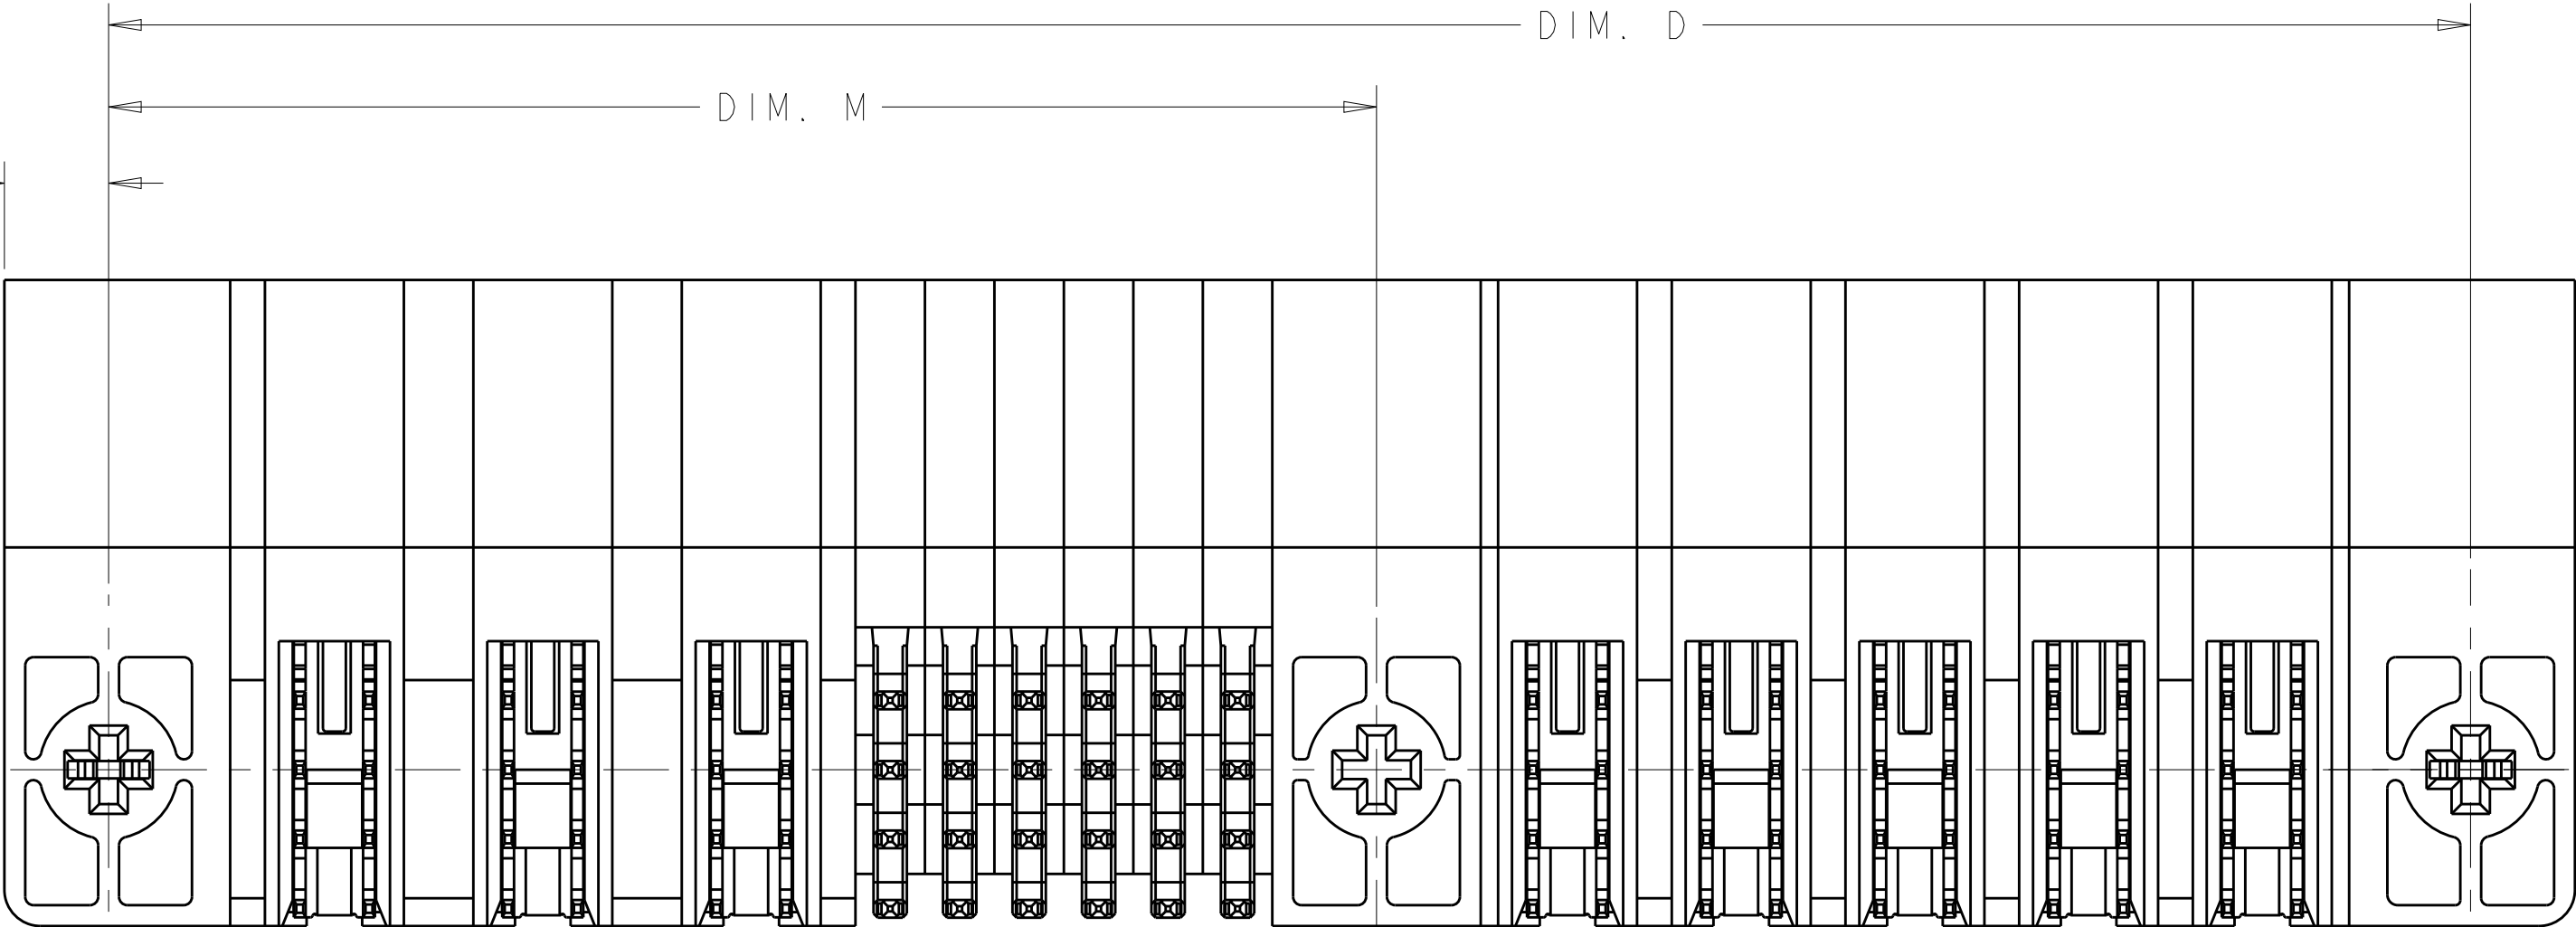
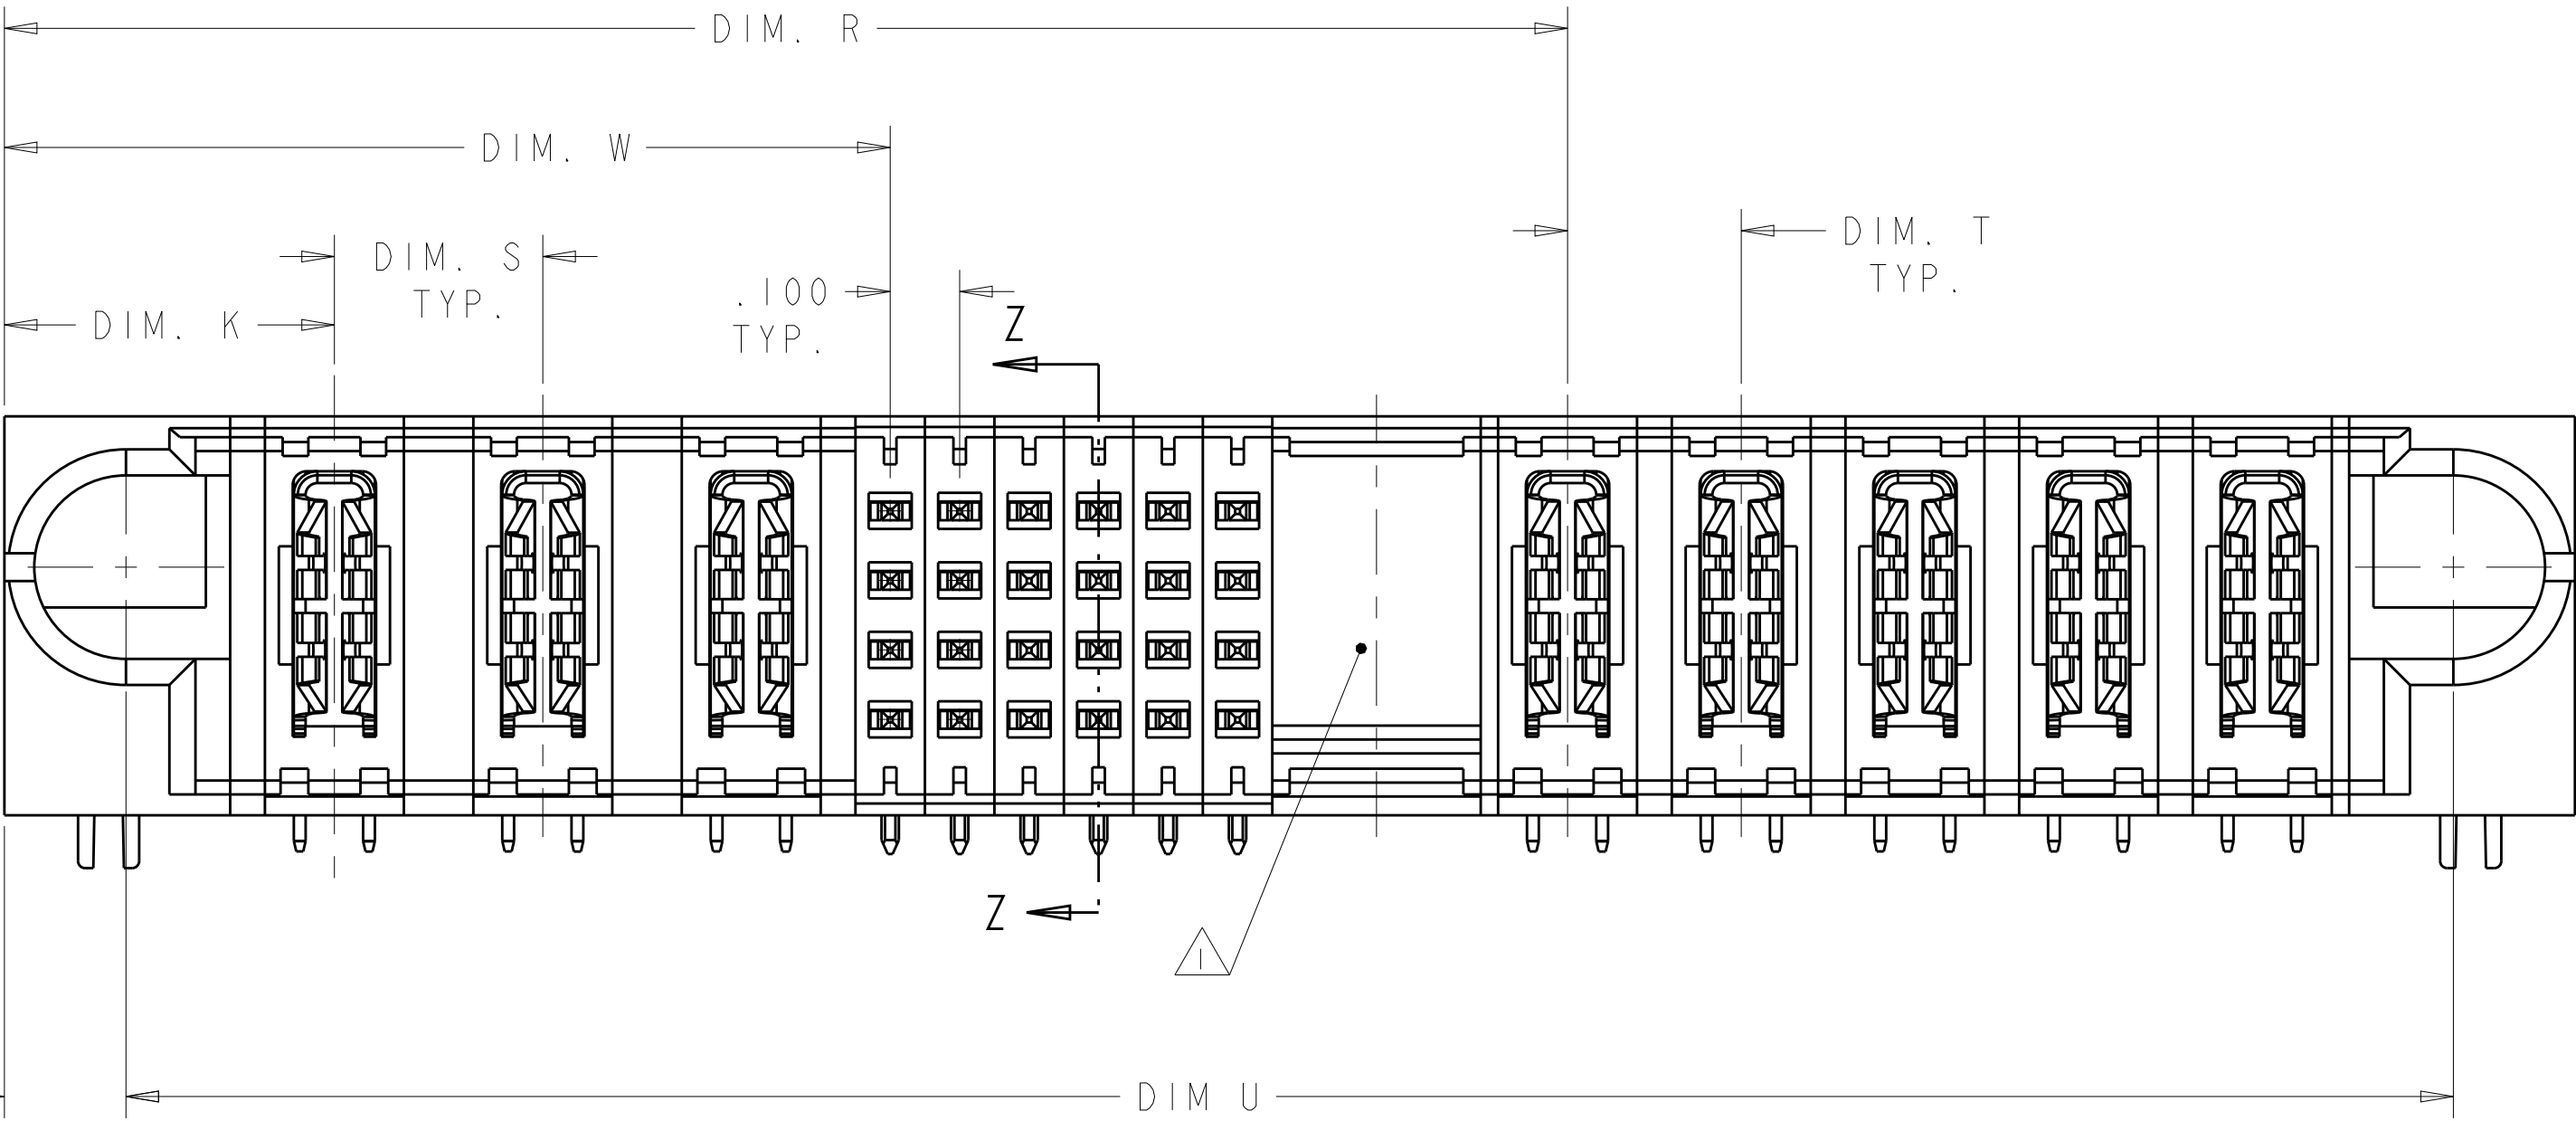


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			L9	REV PER ECR-12-010228	07JUN2012	AY	SZ
			M1	ADD 5-6450130-3	25JULY2012	OL	SZ

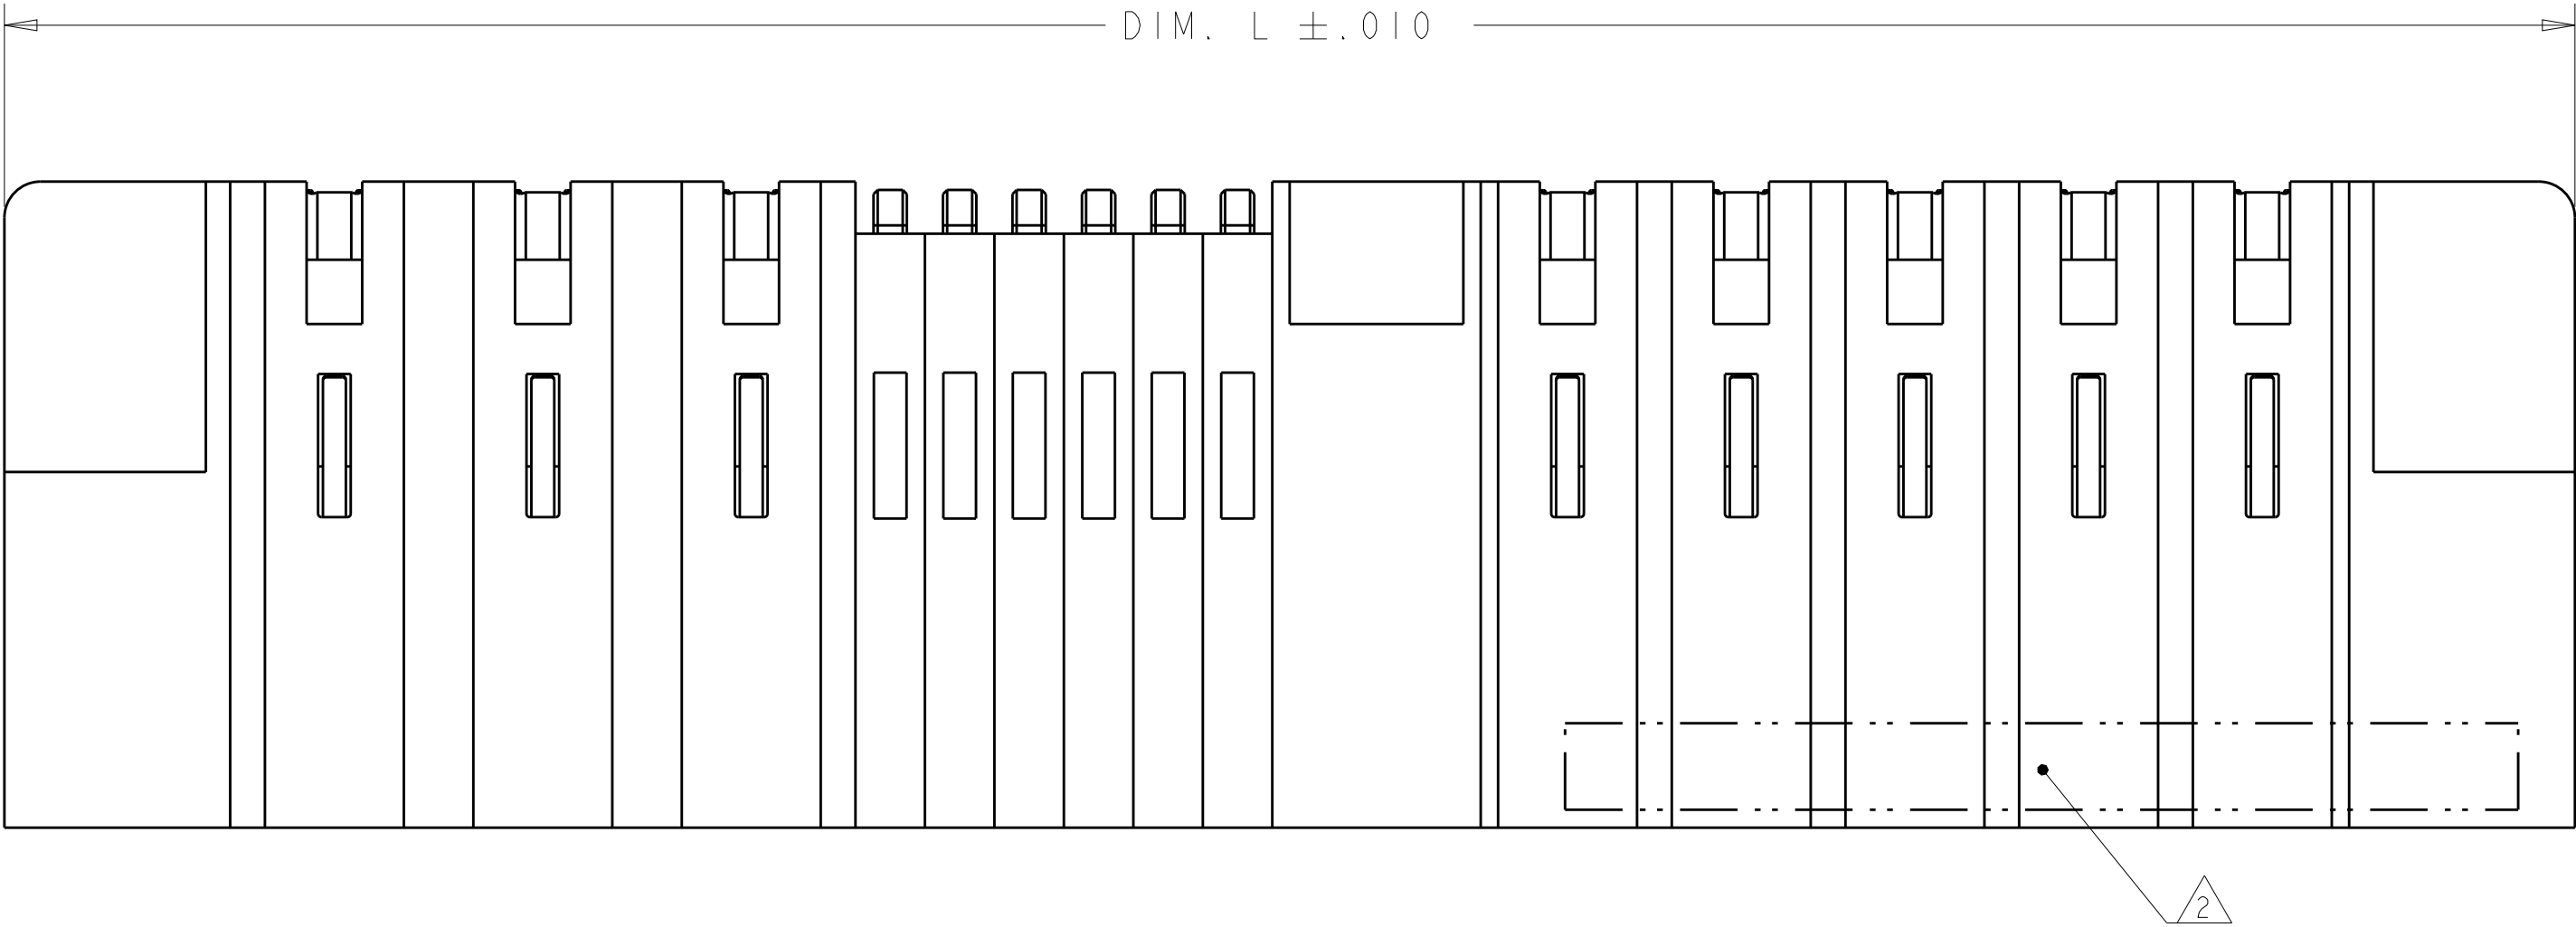

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHEKKE APVD M.PERCHEKKE	4FEB2005 14FEB2005	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL	
0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT		SIZE A100779	
MATERIAL 3		Customer Drawing		RESTRICTED TO -	
4		SCALE 4:1		SHEET 1 OF 28	
				REV M2	

LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			-	SEE SHEET 1	-	-	-	

- △1
- OPTIONAL CENTER MODULE WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.
- △2
- "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- △3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
-
- SIGNAL CONTACT - COPPER ALLOY
-
- POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
-
- OF SIGNAL CONTACTS AND POWER CONTACTS.
- △5
- MECHANICAL CONNECTOR KEEP OUT ZONE.
- △6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △7
- HOLD DOWN SEATING DEPTH DIMENSION FOR 6450130-4 IS .185 TYP
- △8
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- △9
- PCB - .0453 +/- .0010 DRILLED HOLES PLATES WITH .0003 MIN Sn OVER
-
- .0001 TO .0003 Cu PLATING TO ACHIEVE A .040±.003 DIA HOLE.
- △10
- VARIABLE DIMS. SHOWN ON VIEW

L9


PART IS SHEET 27

L8	1.600	-	-	1.500	.625	1.650	-	1.950	.450	1P + 32S + 1P	9-6450130-9
L7	2.400	.250	.250	1.550	.875	2.450	-	2.750	.450	2P + 24S + 4P	9-6450130-8
L5	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	9-6450130-7
	1.300	-	-	1.200	.625	1.350	-	1.650	.450	1P + 20S + 1P	9-6450130-6
L3	2.300	.250	.300	1.575	.875	2.350	-	2.650	.450	2P + 24S + 3ACP	9-6450130-5
K6	2.800	.250	.300	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	9-6450130-4
	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	9-6450130-3
	DIM U	DIM S 	DIM T 	DIM R	DIM W	DIM D	DIM M	DIM L 	DIM K	DESCRIPTION	PART NUMBER

2.350	.250	.250	1.250	.875	2.400	-	2.700	.450	2P + 12S + 5P	9-6450130-2			
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	9-6450130-0			
1.200	-	-	1.100	.625	1.250	-	1.550	.450	1P + 16S + 1P	8-6450130-9			
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	8-6450130-8			
2.900	.250	.250	2.550	.875	2.950	-	3.250	.450	2P + 64S + 2P	8-6450130-7			
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	8-6450130-6			
1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	8-6450130-5			
2.800	.250	.250	1.700	1.125	2.850	-	3.150	.450	3P + 20S + 5P	8-6450130-4			
2.800	.250	.300	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	8-6450130-2			
2.850	.250	.250	2.500	1.875	2.900	-	3.200	.450	6P + 20S + 2P	8-6450130-0			
2.600	.250	.250	2.250	1.625	2.650	-	2.950	.450	5P + 20S + 2P	7-6450130-9			
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	7-6450130-8			
4.800	.250	.250	3.450	1.875	4.850	-	5.150	.450	6P + 60S + 6P	7-6450130-7			
3.050	.300	.250	1.950	1.275	3.100	-	3.400	.475	3ACP + 24S + 5P	7-6450130-6			
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	7-6450130-5			
6.250	.250	△10	5.050	4.375	6.300	-	6.600	.450	16P + 24S + 2P + 3ACP	7-6450130-4			
2.000	.300	.250	1.650	1.325	2.050	-	2.350	.475	3ACP + 8S + 2P	7-6450130-1			
2.500	.250	.250	2.150	.875	2.550	-	2.850	.450	2P + 48S + 2P	6-6450130-9			
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	6-6450130-7			
2.500	.250	.250	2.150	1.425	2.550	-	2.850	.450	4P + 24S + 2P	5-6450130-8			
6.300	△10	△10	3.925	3.275	6.350	-	6.650	.425	14P + 24S + 12P	5-6450130-6			
3.100	.200	.200	2.225	1.375	3.150	-	3.450	.425	5P + 32S + 5P	5-6450130-5			
2.400	.200	.200	1.900	1.225	2.450	-	2.750	.450	4HDP + 24S + 3HDP	5-6450130-3			
2.300	.300	.250	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	5-6450130-1			
4.000	.300	.300	2.675	1.925	4.050	-	4.350	.475	5ACP + 24S + 5ACP	5-6450130-0			
3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	4-6450130-9			
3.300	.250	.250	2.450	1.375	3.350	-	3.650	.450	4P + 40S + 4P	4-6450130-8			
3.100	.200	.200	2.225	1.375	3.150	-	3.450	.425	5P + 32S + 5P	4-6450130-5			
2.100	.300	.250	1.750	1.275	2.150	-	2.450	.475	3ACP + 16S + 2P	4-6450130-3			
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	4-6450130-2			
2.100	.200	.200	1.425	1.175	2.150	-	2.450	.425	4P + 8S + 4P	4-6450130-0			
2.100	.300	.250	1.750	1.275	2.150	-	2.450	.475	3ACP + 16S + 2P	3-6450130-9			
4.675	.250	.300	3.950	3.375	4.725	-	5.025	.450	12P + 20S + 3ACP	3-6450130-6			
3.500	.250	.250	2.900	1.625	3.550	-	3.850	.450	5P + 48S + 3P	3-6450130-2			
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	2-6450130-9			
3.250	.250	.250	2.900	1.125	3.300	-	3.600	.450	3P + 68S + 2P	2-6450130-8			
2.300	.300	.250	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	2-6450130-6			
2.600	.200	.200	1.925	1.175	2.650	-	2.950	.425	4HDP + 28S + 4HDP	2-6450130-4			
3.200	.200	.200	2.125	1.575	3.250	-	3.550	.425	6P + 20S + 6P	2-6450130-3			
2.800	.250	.300	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	2-6450130-2			
3.500	.200	.200	2.225	1.775	3.550	-	3.850	.425	7P + 16S + 7P	2-6450130-1			
5.450	△10	△10	3.075	2.425	5.500	-	5.800	.425	10P + 24S + 12P	2-6450130-0			
4.400	.250	.250	4.050	.875	4.450	-	4.750	.450	2P + 124S +2P	1-6450130-9			
4.275	△10	.250	3.175	2.500	4.325	-	4.625	.475	2ACP + 6P + 24S + 5P	1-6450130-8			
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	1-6450130-7			
3.300	.300	.250	1.950	1.275	3.350	-	3.650	.475	3ACP + 24S + 6P	1-6450130-4			
4.050	.250	-	3.950	.875	4.100	-	4.400	.450	2P + 120S + 1P	1-6450130-3			
3.250	.250	-	3.150	.875	3.300	-	3.600	.450	2P + 88S + 1P	1-6450130-2			
1.400	-	-	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	1-6450130-1			
2.900	.250	.250	2.550	.875	2.950	-	3.250	.450	2P + 64S + 2P	1-6450130-0			
2.550	.250	.300	1.825	1.125	2.600	-	2.900	.450	3P + 24S + 3ACP	6450130-9			
2.675	.200	.200	2.375	1.650	2.725	-	3.025	.450	5P + 24S + 2P	6450130-8			
3.650	.250	.250	2.550	1.875	3.700	-	4.000	.450	6P + 24S + 5P	6450130-7			
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450130-6			
4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450130-5			
2.800	.250	.300	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450130-4			
3.050	.300	.250	1.950	1.275	3.100	-	3.400	.475	3ACP + 24S + 5P	6450130-3			
2.550	.300	.250	2.200	1.525	2.600	-	2.900	.475	3ACP + 1P + 24S + 2P	6450130-2			
3.650	.300	.250	2.550	1.275	3.700	-	4.000	.475	3ACP + 48S + 5P	6450130-1			
DIM U	DIM S	△1	DIM T	△2	DIM R	DIM W	DIM D	DIM M	DIM L	△4	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH
-

DWN
R.GRZYBOWSKI
CHK
M.PERCHEKKE
APVD
M.PERCHEKKE

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

Customer Drawing

4FEB2005

4FEB2005

4FEB2005

NAME
RIGHT ANGLE HEADER ASSEMBLY W/GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450130

RESTRICTED TO
-

SCALE
4:1


SHEET
2

OF
28


REV
M2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	14FEB2005	 TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE	14FEB2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	14FEB2005	NAME RIGHT ANGLE HEAD ASSEMBLY W/GUIDES MULTI-BEAM XL	
		PRODUCT SPEC 108-1973		- -	
		APPLICATION SPEC 114-13038		- -	
MATERIAL	FINISH	WEIGHT	SIZE A1		RESTRICTED TO
-	-	-	CAGE CODE 00779		-
Customer Drawing			DRAWING NO C=6450130		-
			SCALE 4:1	SHEET 3	OF 28
			REV M2		

PART NUMBER	ROWS		POWER				SIGNAL						POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	
6450130-4	D C B A	HD	PM	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	HD
							K	K	K	K	K	K				
							N	N	N	N	N	N				
							S	S	S	S	S	H				
4P + 24S + 3ACP																

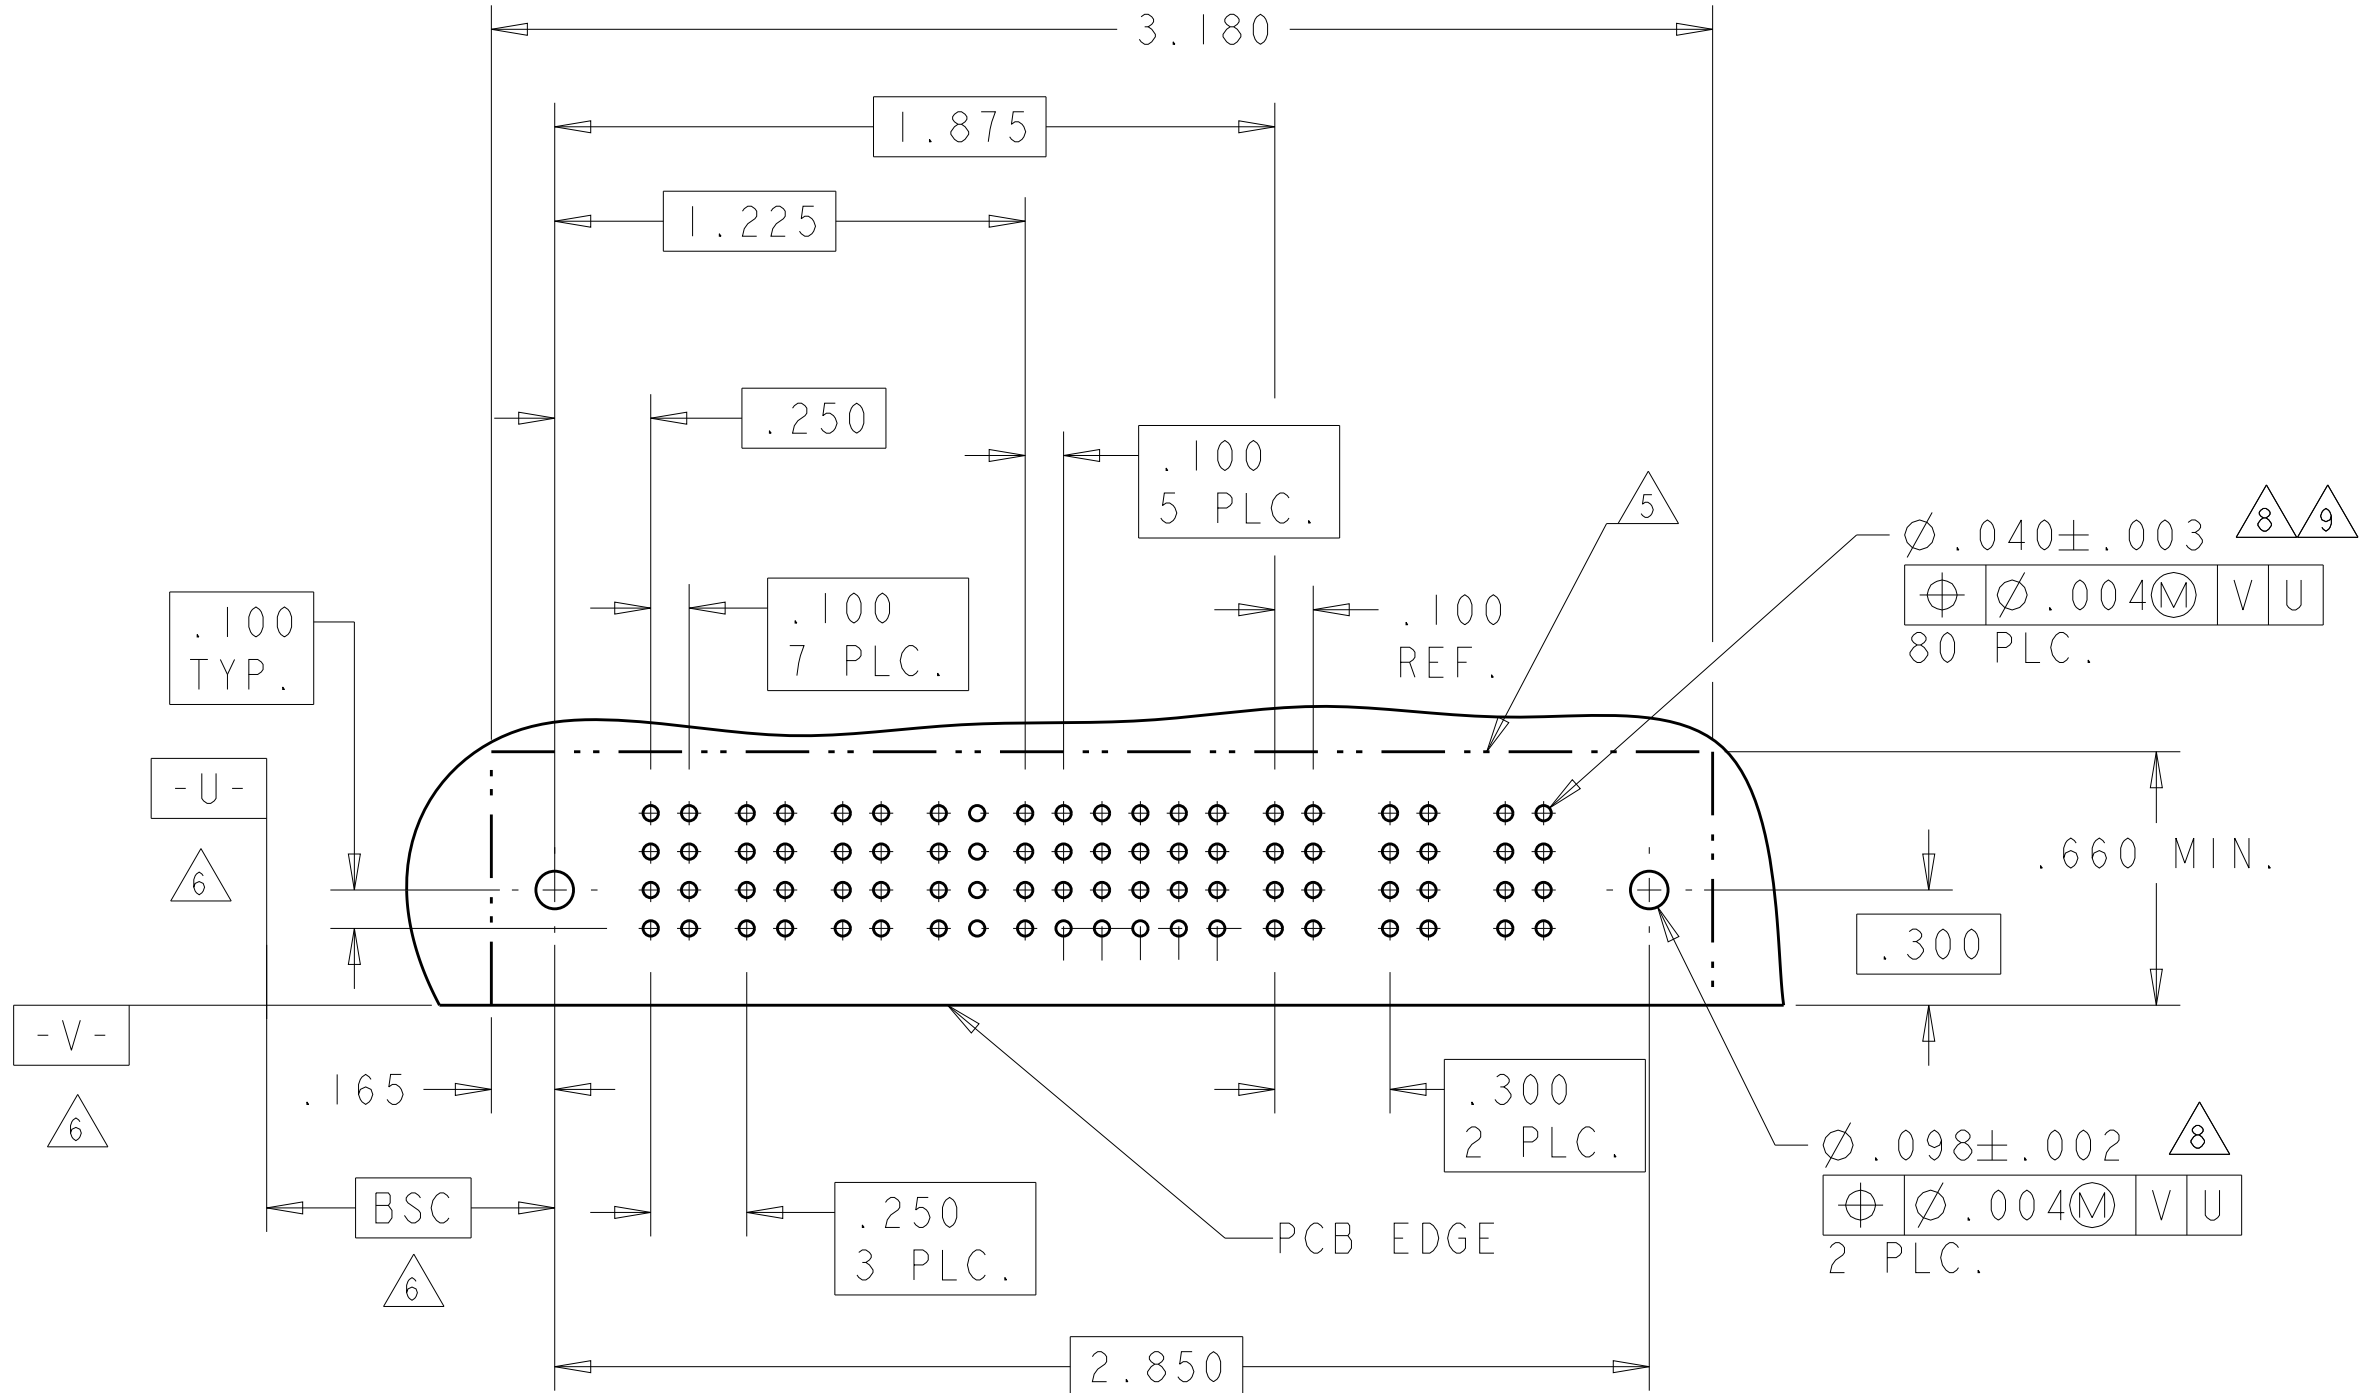


PART NUMBER	ROWS		POWER									SIGNAL								POWER				
			P1	P2	P3	P4	P5	P6	P7	P8	P9	1	2	3	4	5	6	7	8	P10	P11	P12	P13	
6450130-5	D C B A	HD	PM	PM		PM	PM	PM	PM	PM	J	J	J	J	J	E	E	E	PM	PM	PM	PM		
											K	K	K	K	K	K	K	K						
											N	N	N	N	N	N	N	N						
											S	S	S	S	S	S	S	S						
9P + 32S + 4P																								

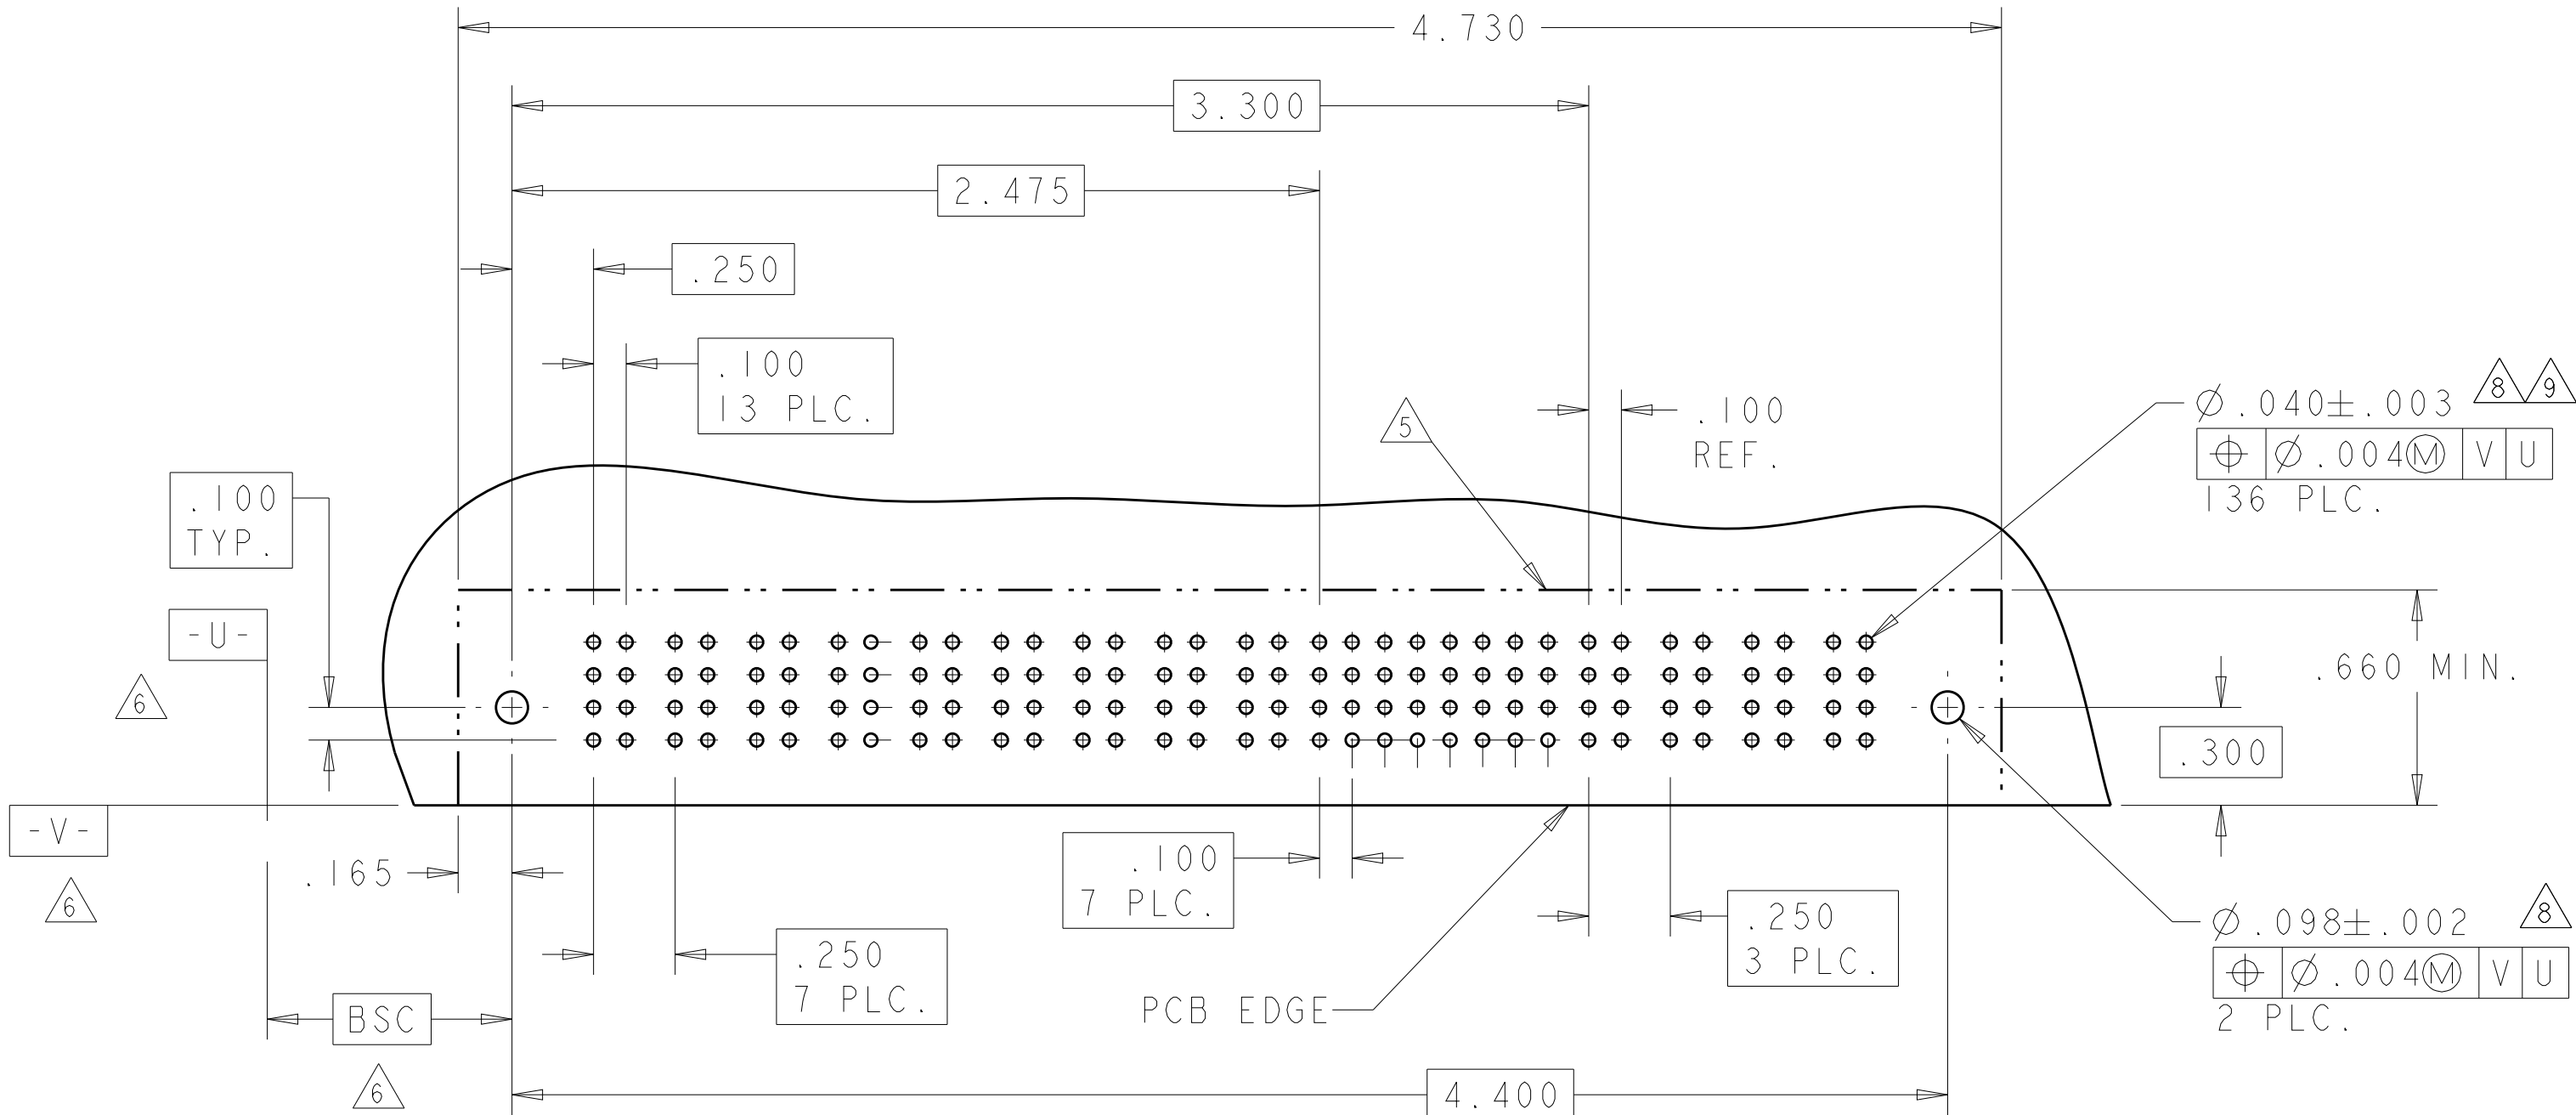


LOC	DIST	REVISIONS					
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
6450130-6	D C B A	HD	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	HD
						K	K	K	K	K	K				
						N	N	G	N	N	N				
						S	S	S	S	S	S				
3P + 24S + 3P															

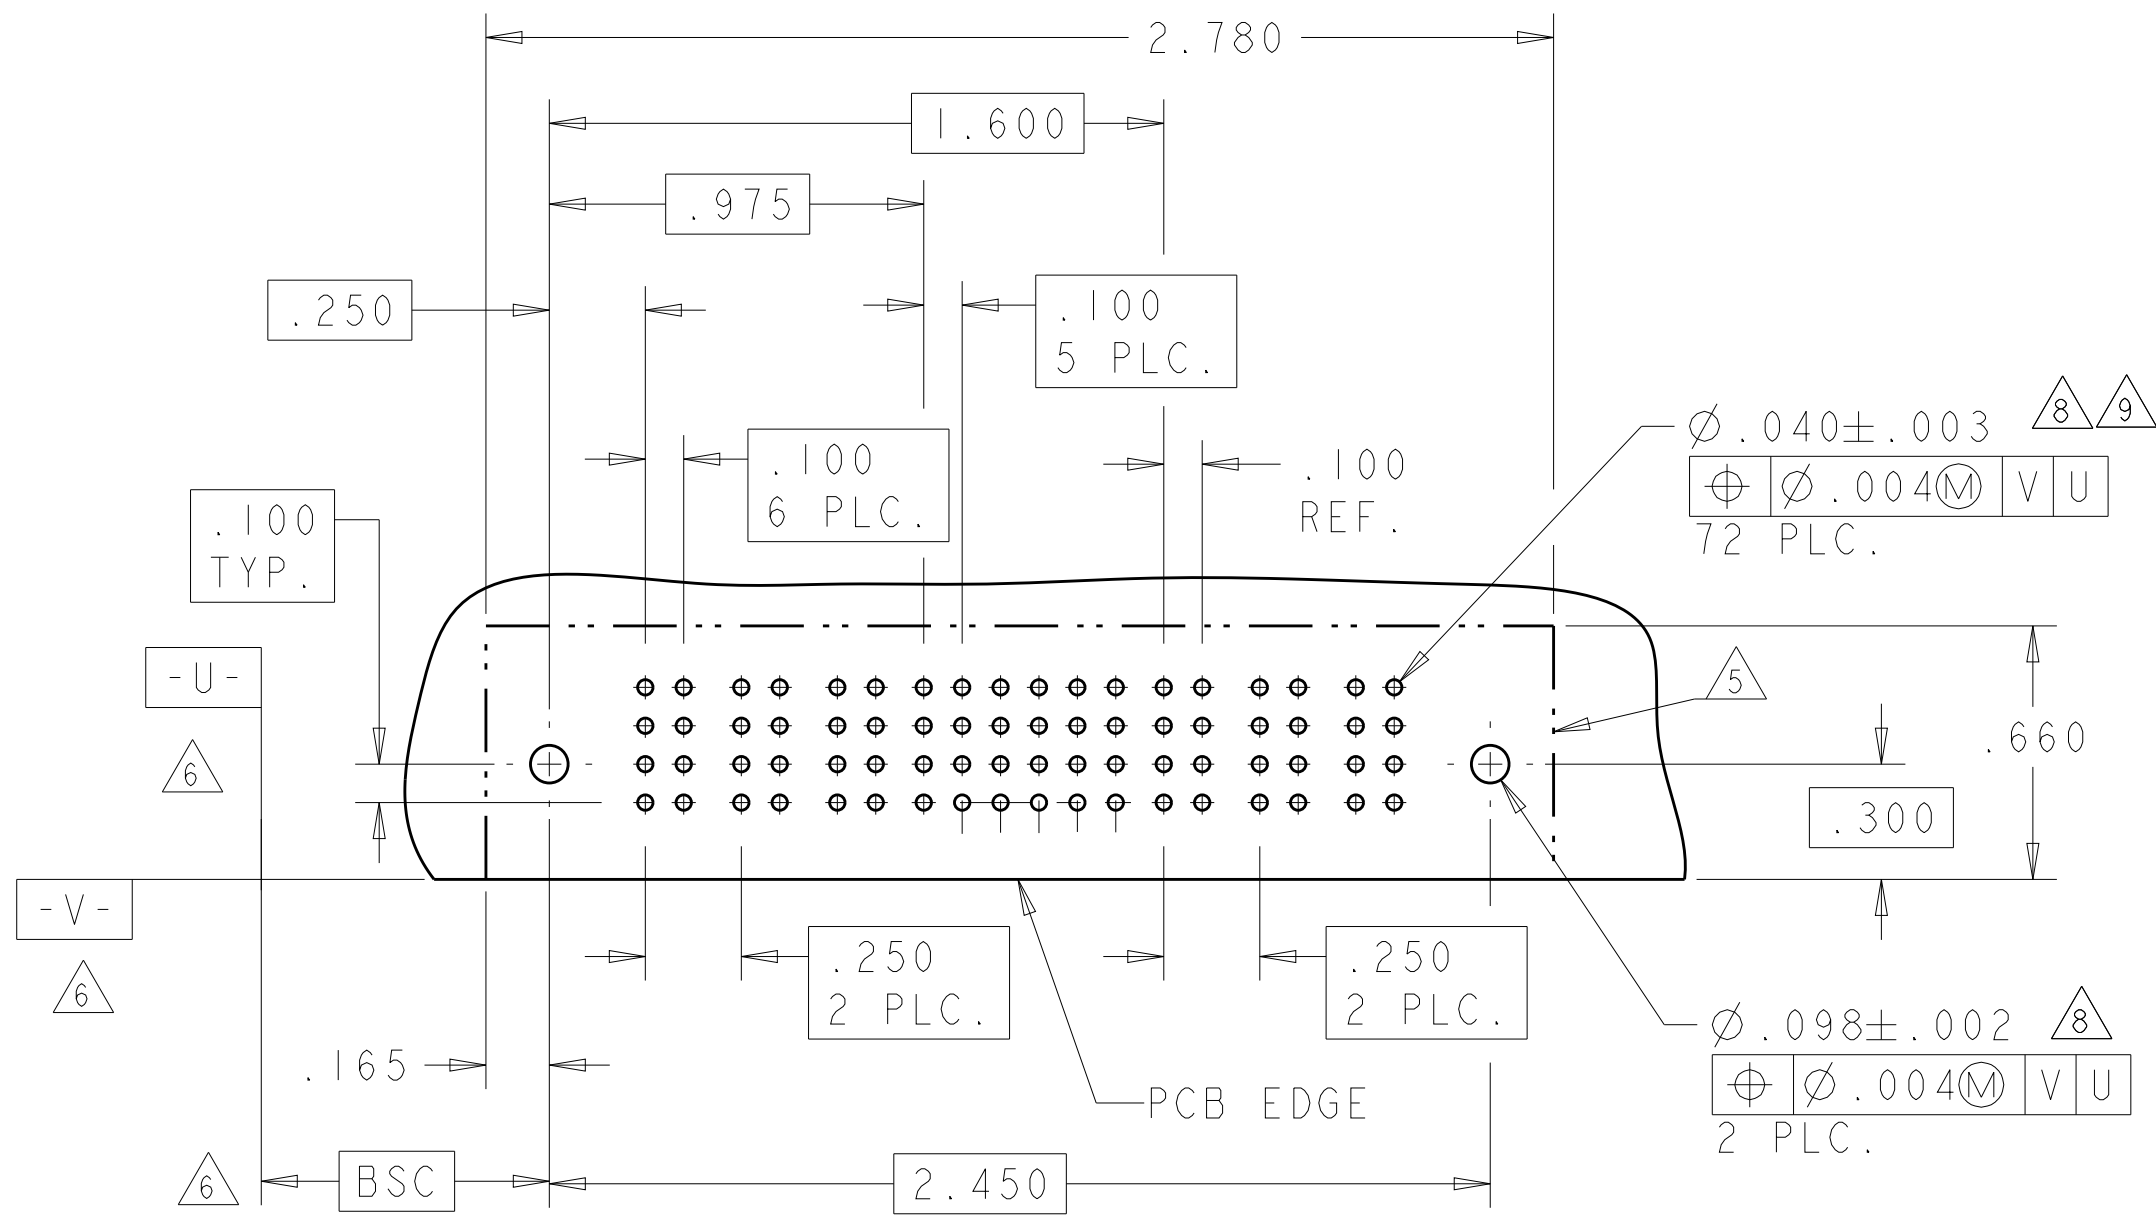


PART NUMBER	ROWS		POWER						SIGNAL						POWER					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	
6450130-7	D C B A	HD	PM	PM	PM	PM	PM	J K N S	J K N S	J F N H	J K N S	E K N S	J K G S	PM	PM	PM	PM	PM	HD	
6P + 24S + 5P																				

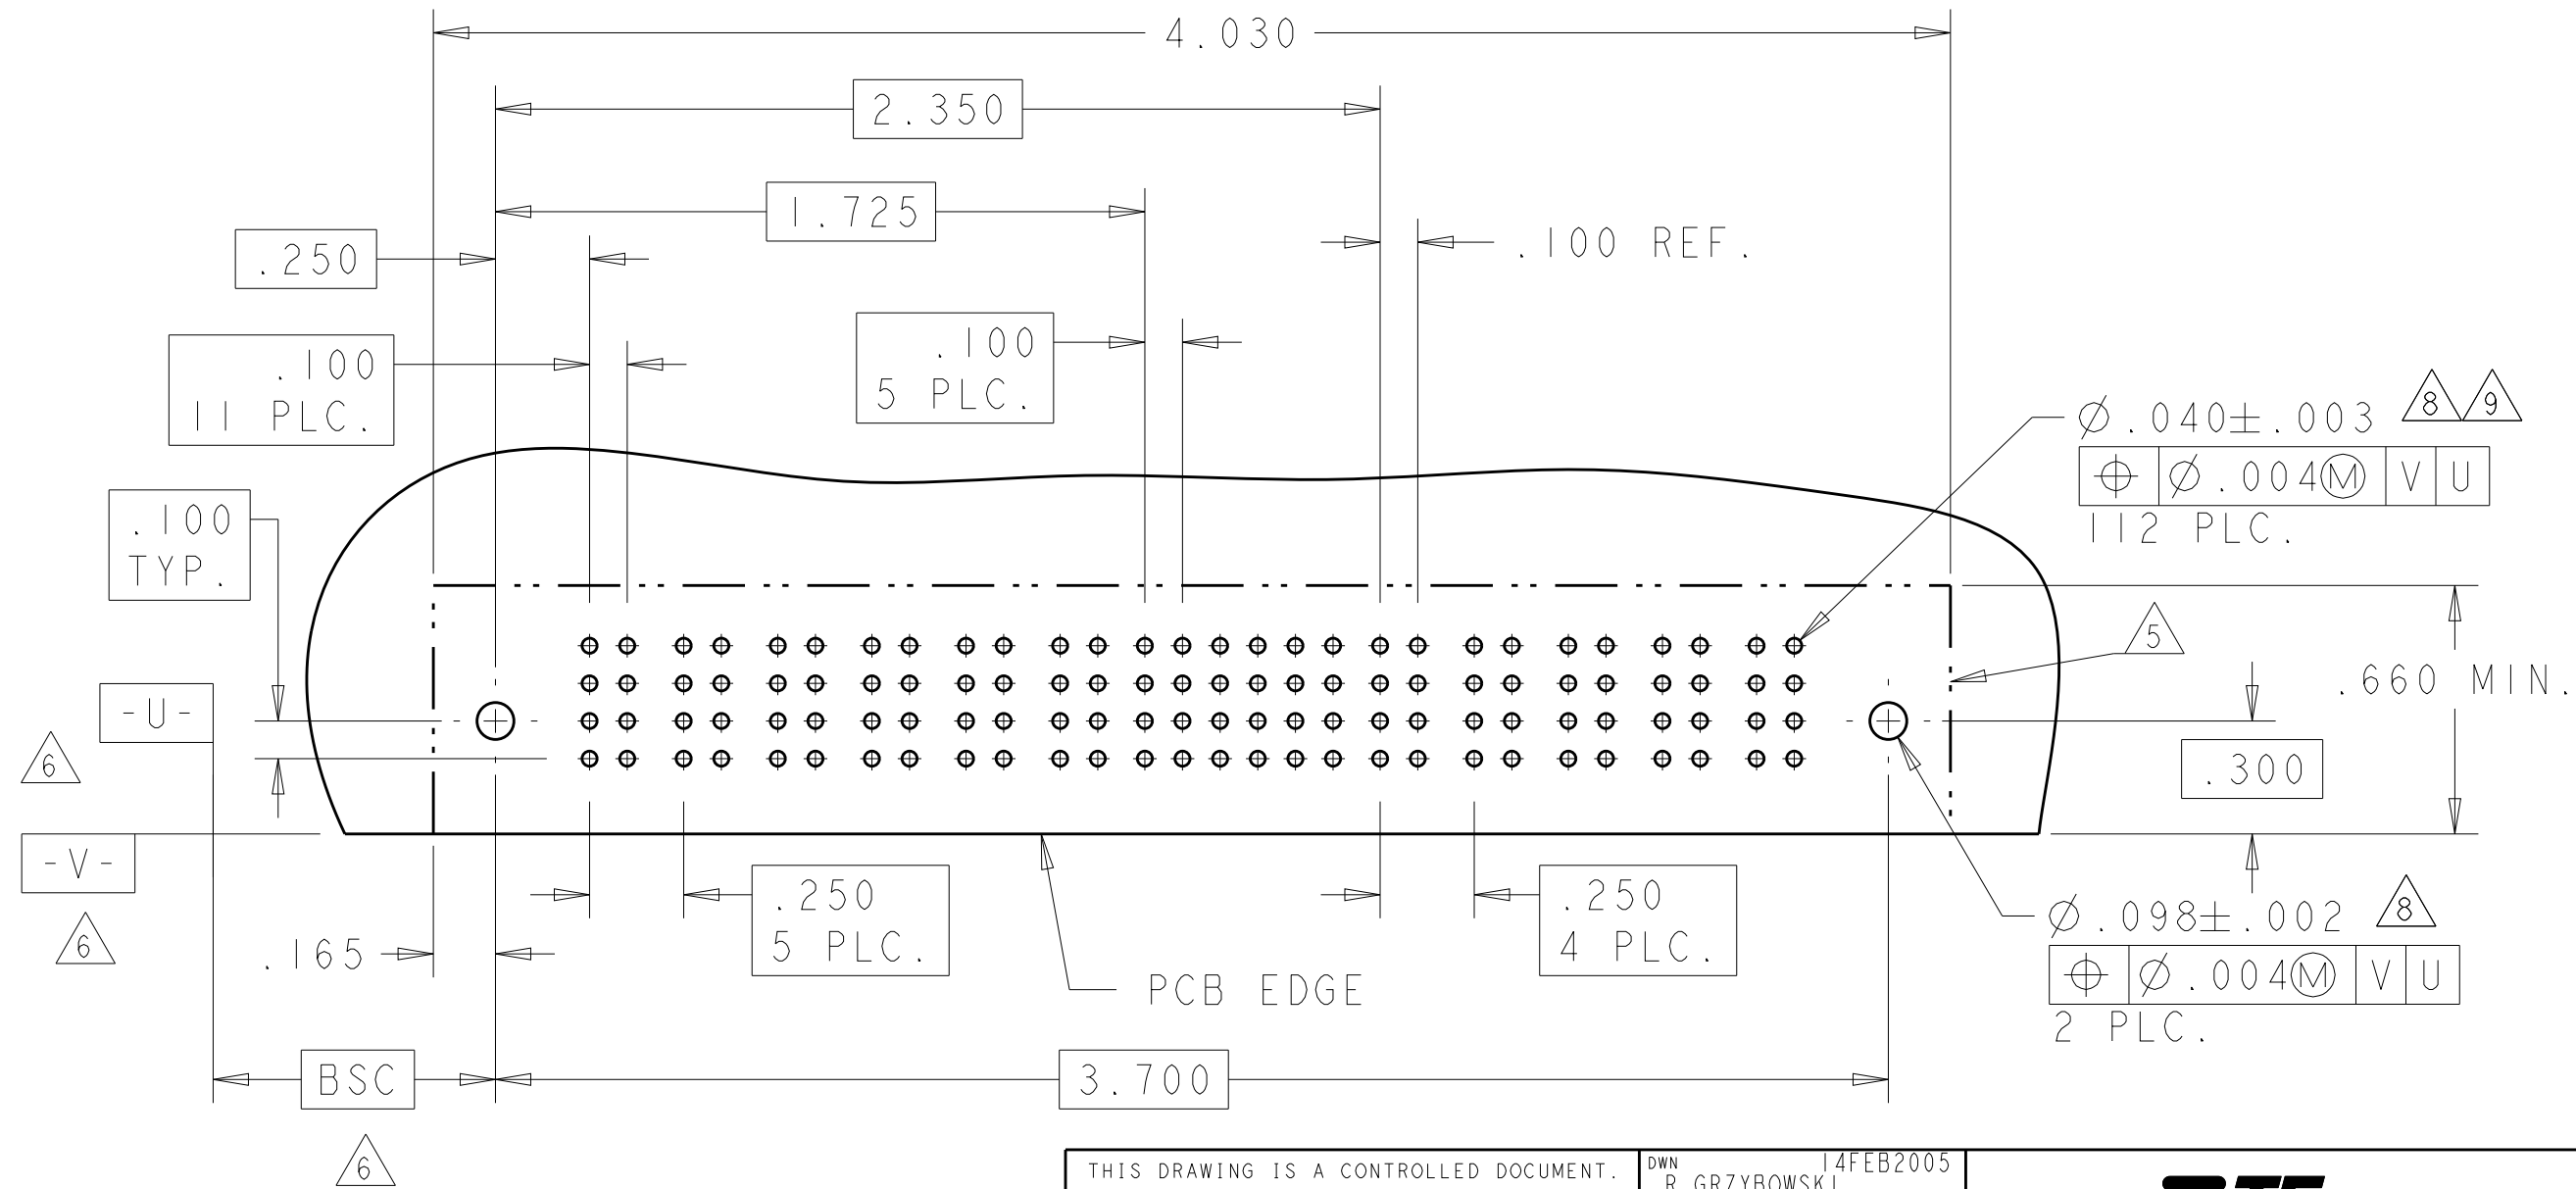


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	4FEB2005	TE Connectivity	
		CHK M. PERCHERKE	14FEB2005		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL	
		0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.002		PRODUCT SPEC 108-1973	
MATERIAL		FINISH		APPLICATION SPEC 114-13038	
				SIZE A100779	
				CAGE CODE C=6450130	
				DRAWING NO Customer Drawing	
				RESTRICTED TO M2	
				SCALE 4:1	
				SHEET 4	
				OF 28	
				REV M2	


PART NUMBER	ROWS		POWER		SIGNAL																				POWER						
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	P3				
1-6450130-2	D C B A		PA	PA	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	PA				
					Y	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3			A3		
					A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2			A2	A2	
					O	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1			A1	A1	O
2P + 88S + 1P																															

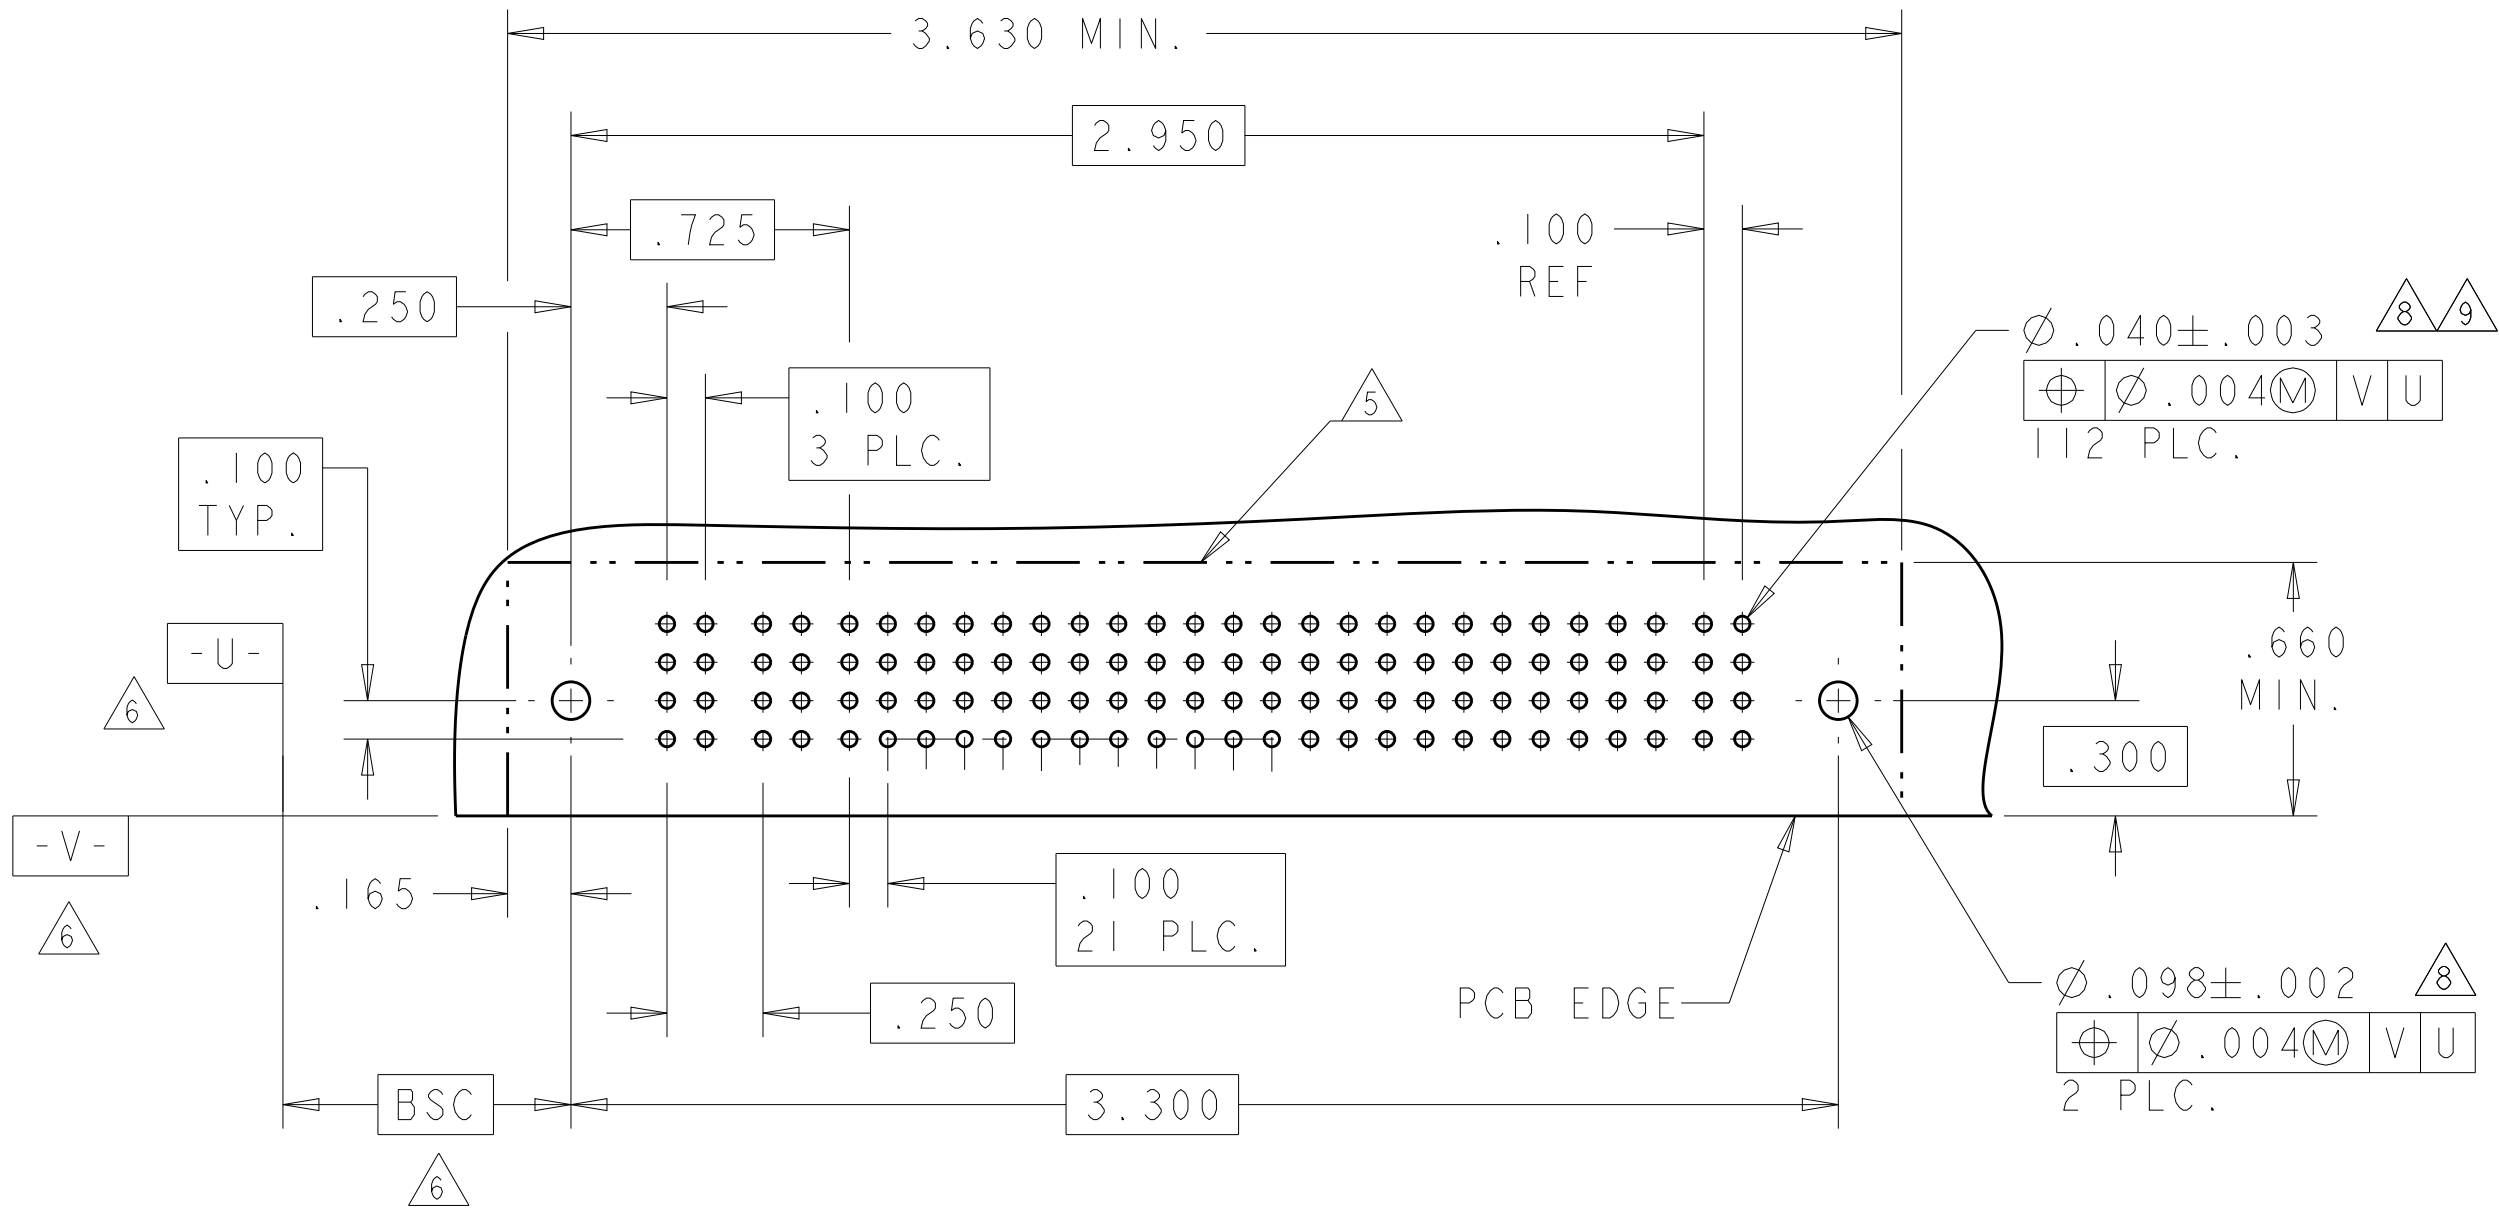


PART NUMBER	ROWS		POWER		SIGNAL																														POWER		
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	P3		
1-6450130-3	D C B A	HD	PA	PA	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	PA		
					Y	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	
					A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	
					O	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	O
2P + 120S + 1P																																				HD	

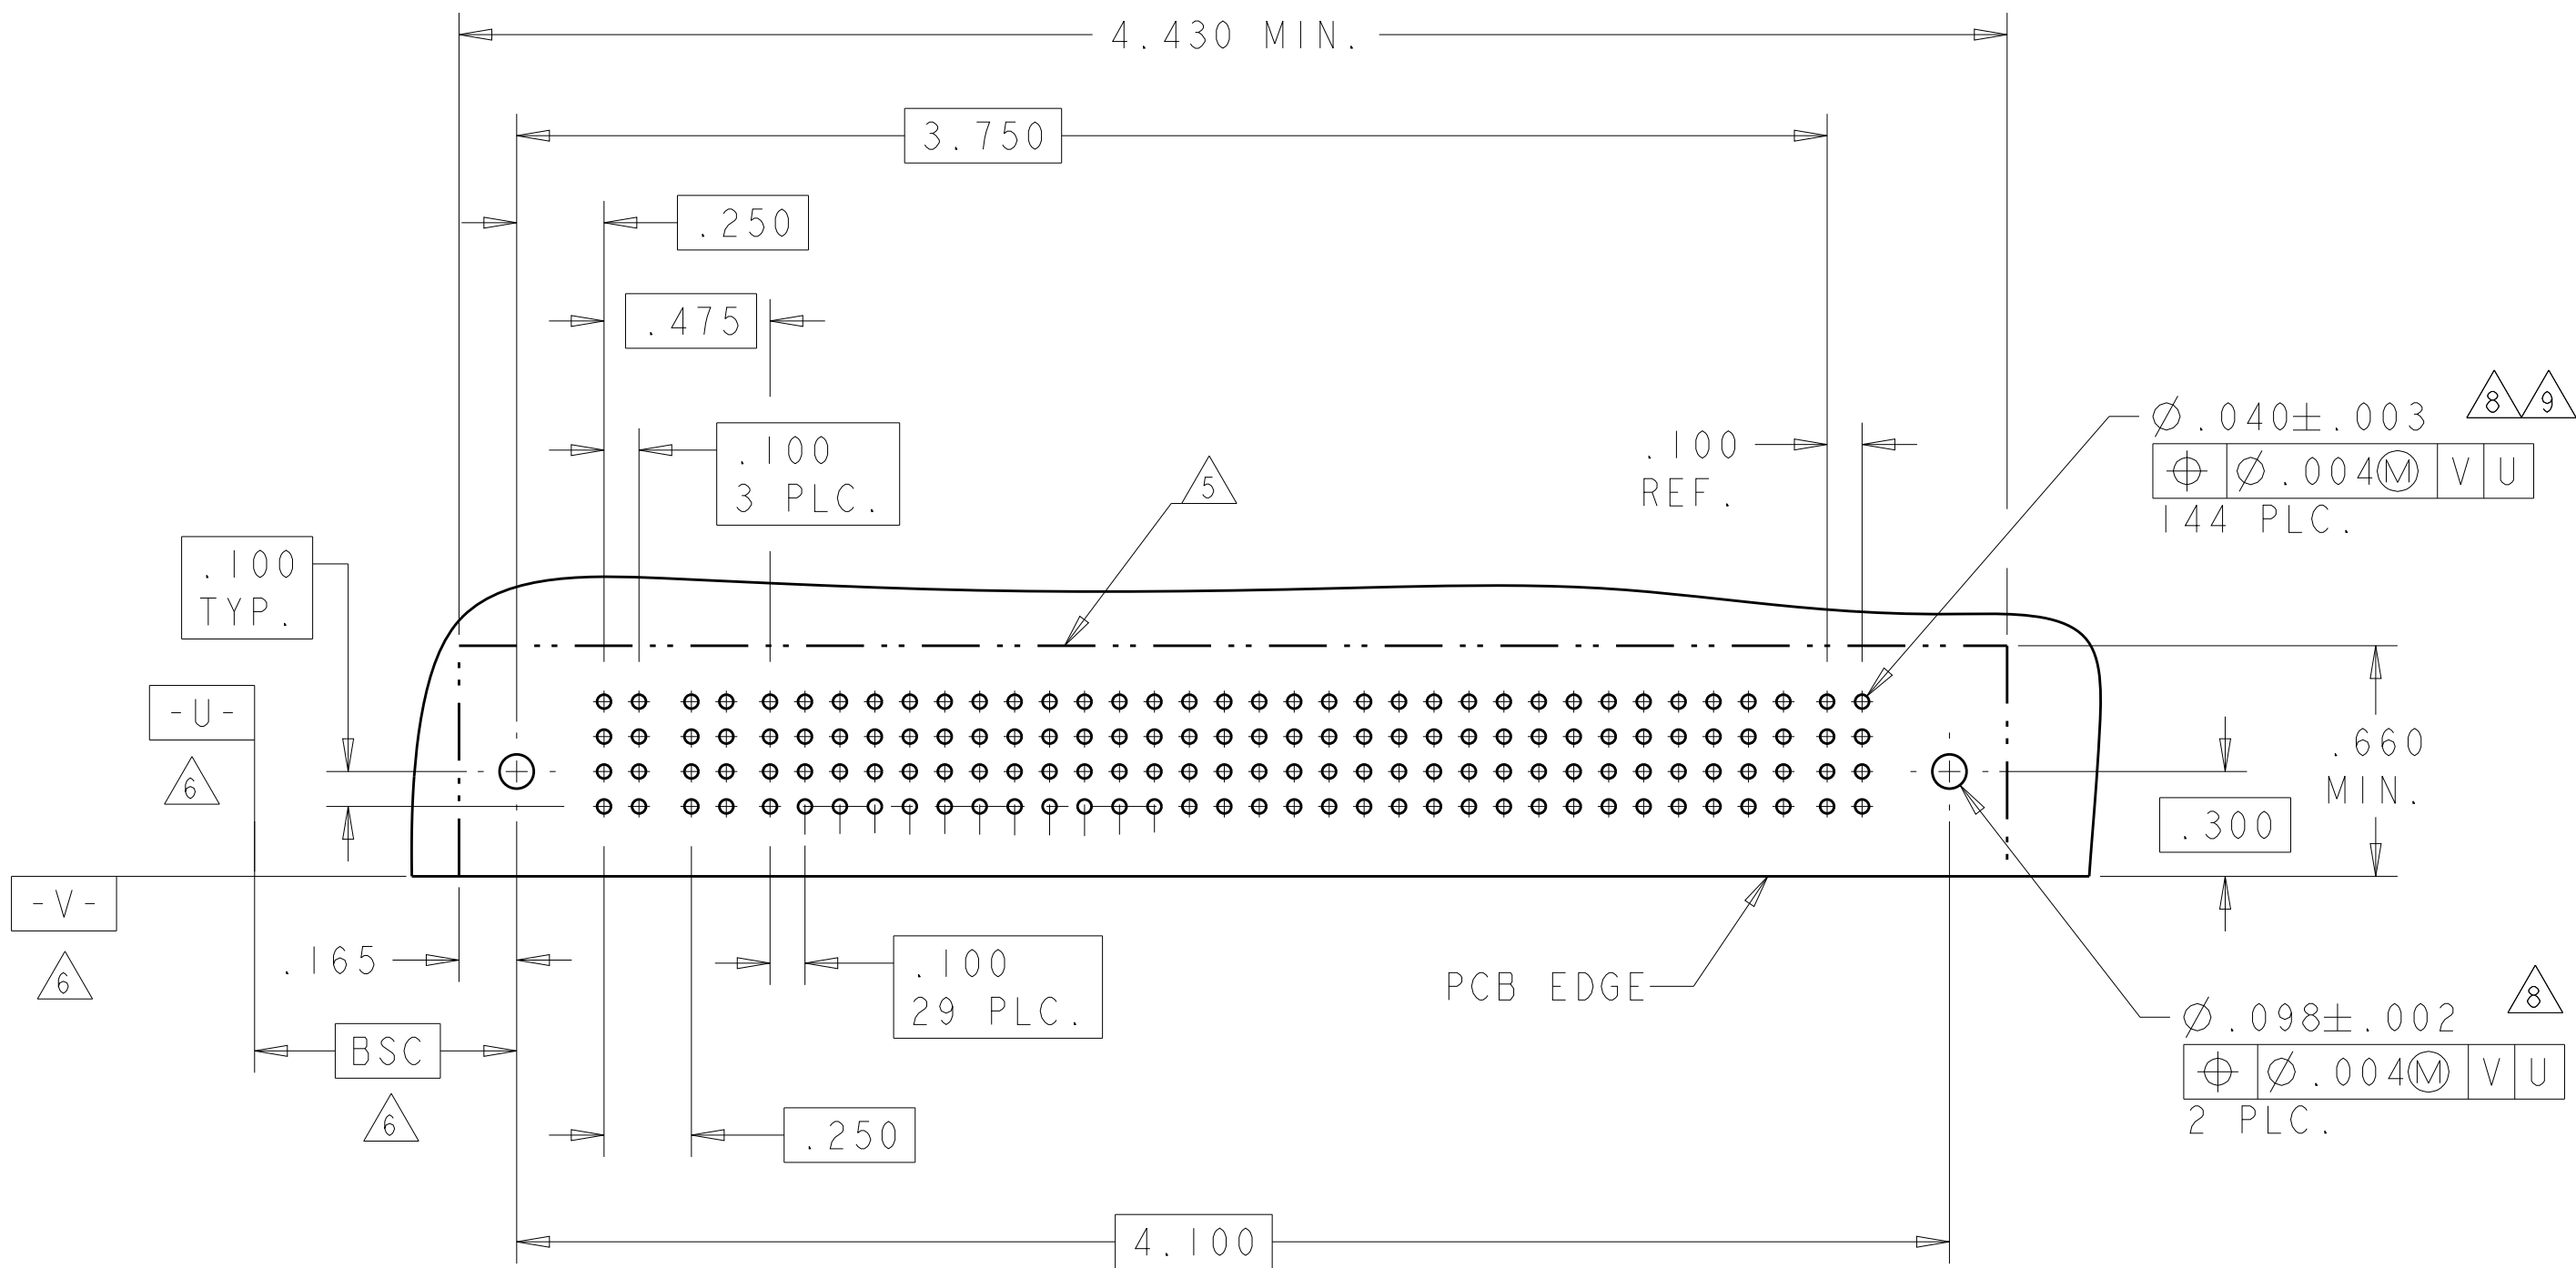




PART NUMBER	ROWS		POWER			SIGNAL						POWER						
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8	P9	
1-6450130-4	D C B A	HD	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	PM	PM	PM	HD
						K	K	K	K	K	K							
						N	N	N	N	N	N							
						H	S	S	S	S	S							
3ACP + 24S + 6P																		

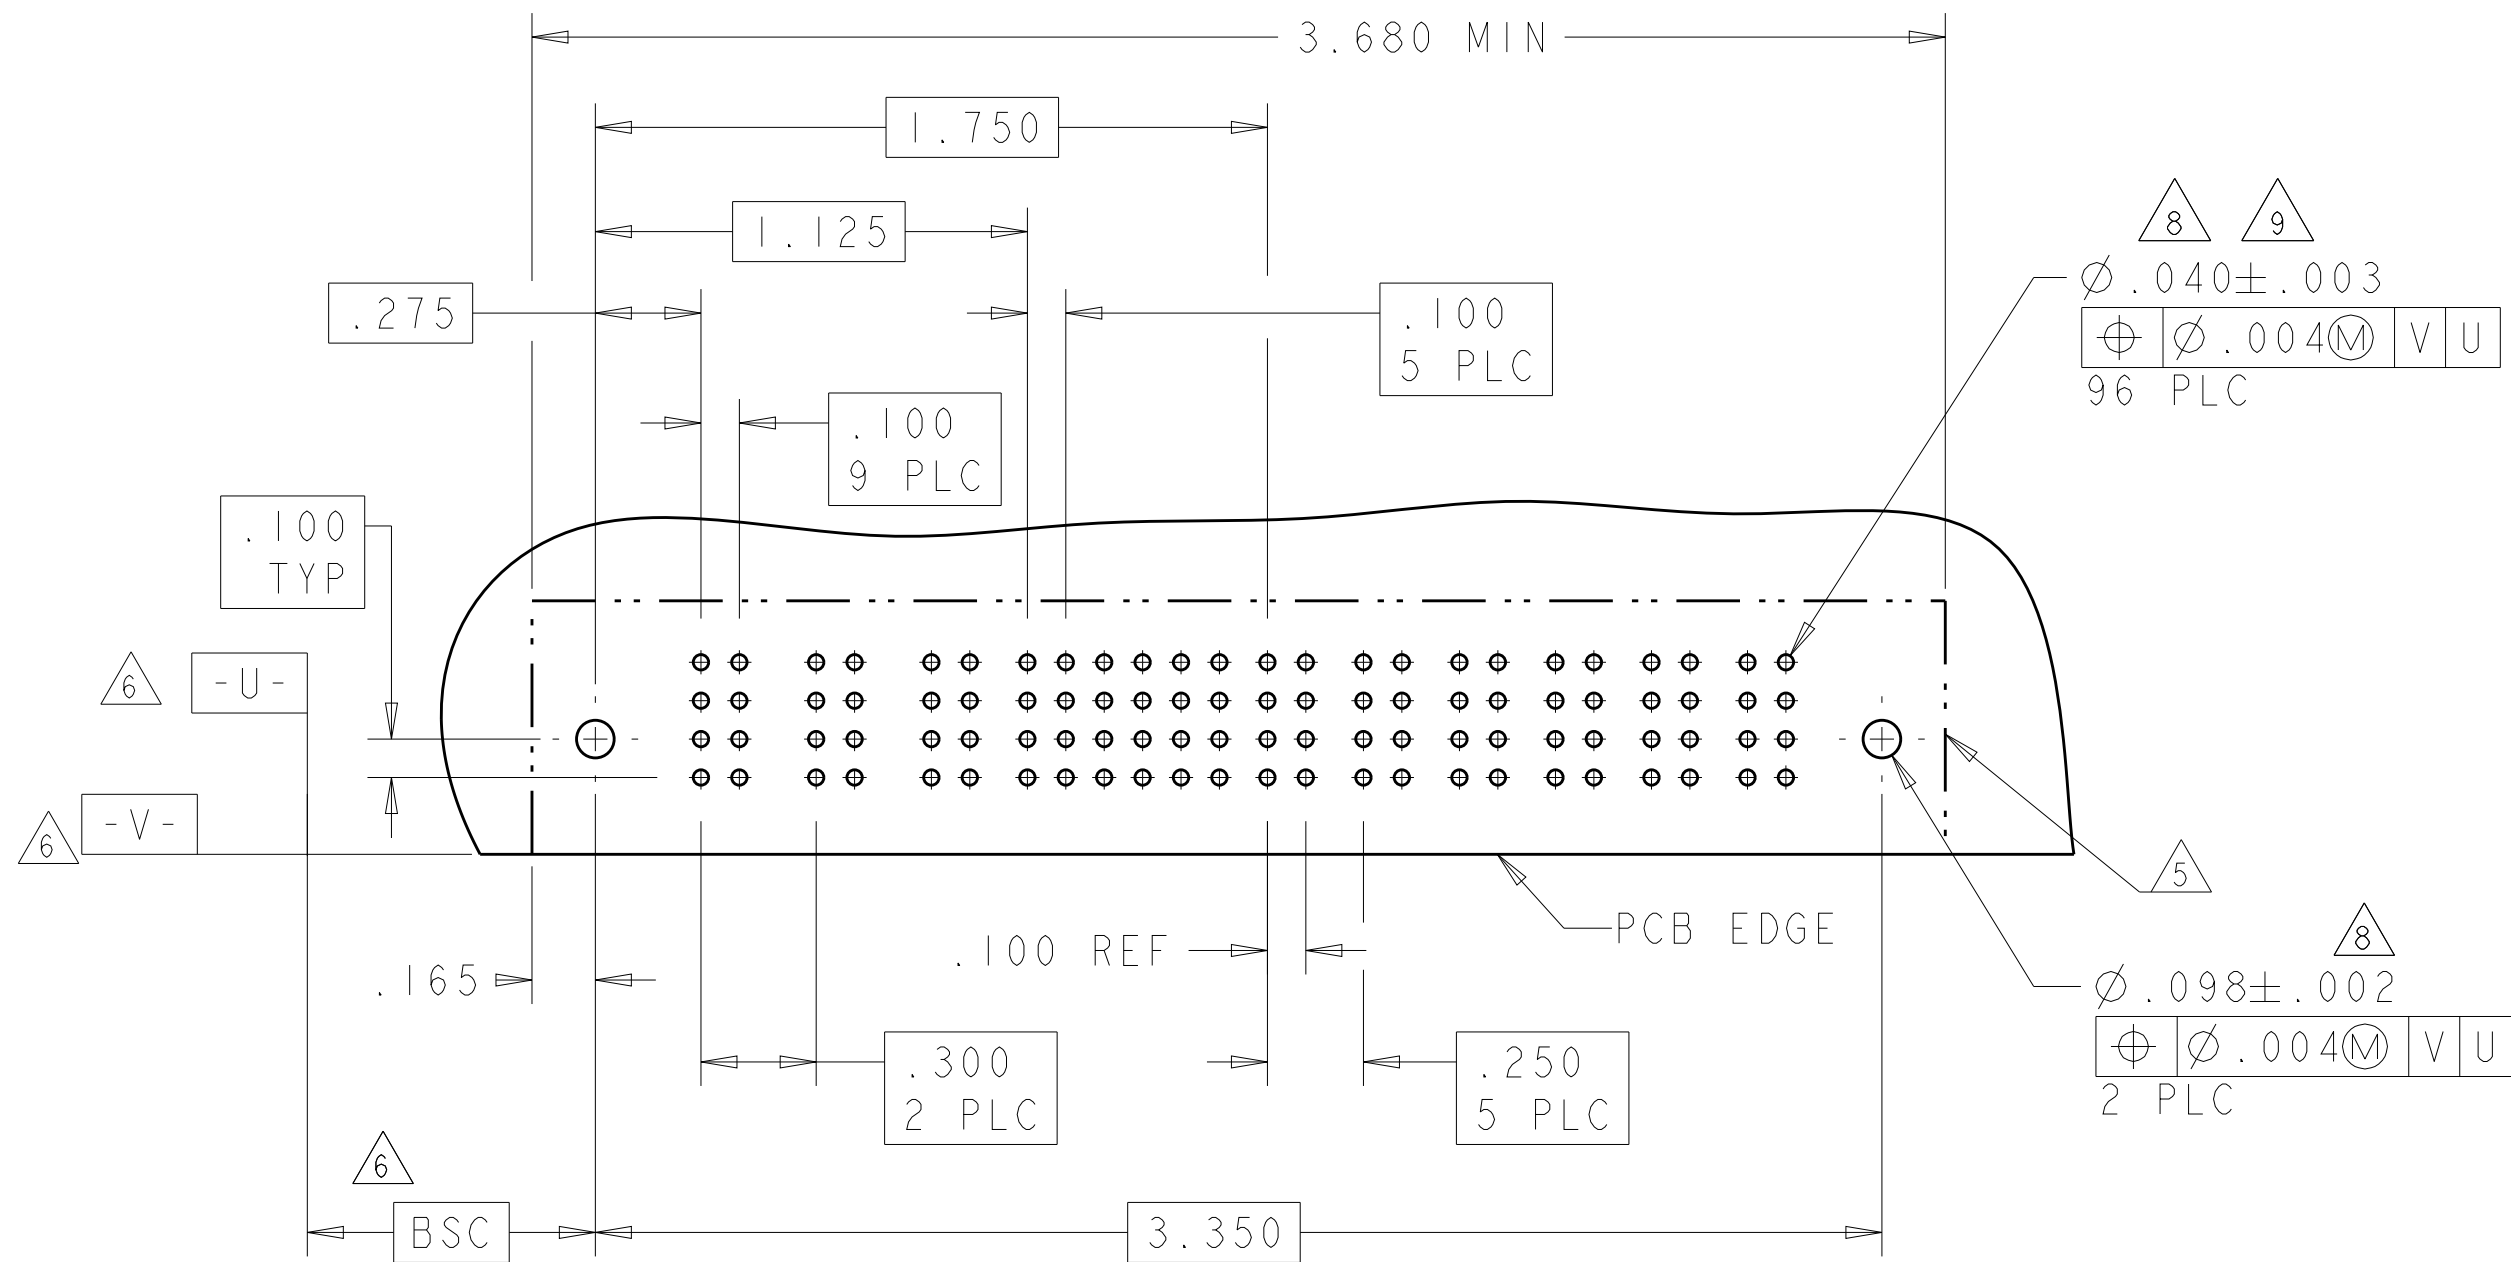


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
1-6450130-7	D C B A	HD	PM	PM	E	J	J	J	J	E	PM	PM	
					K	K	K	K	K	K			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P			HD										






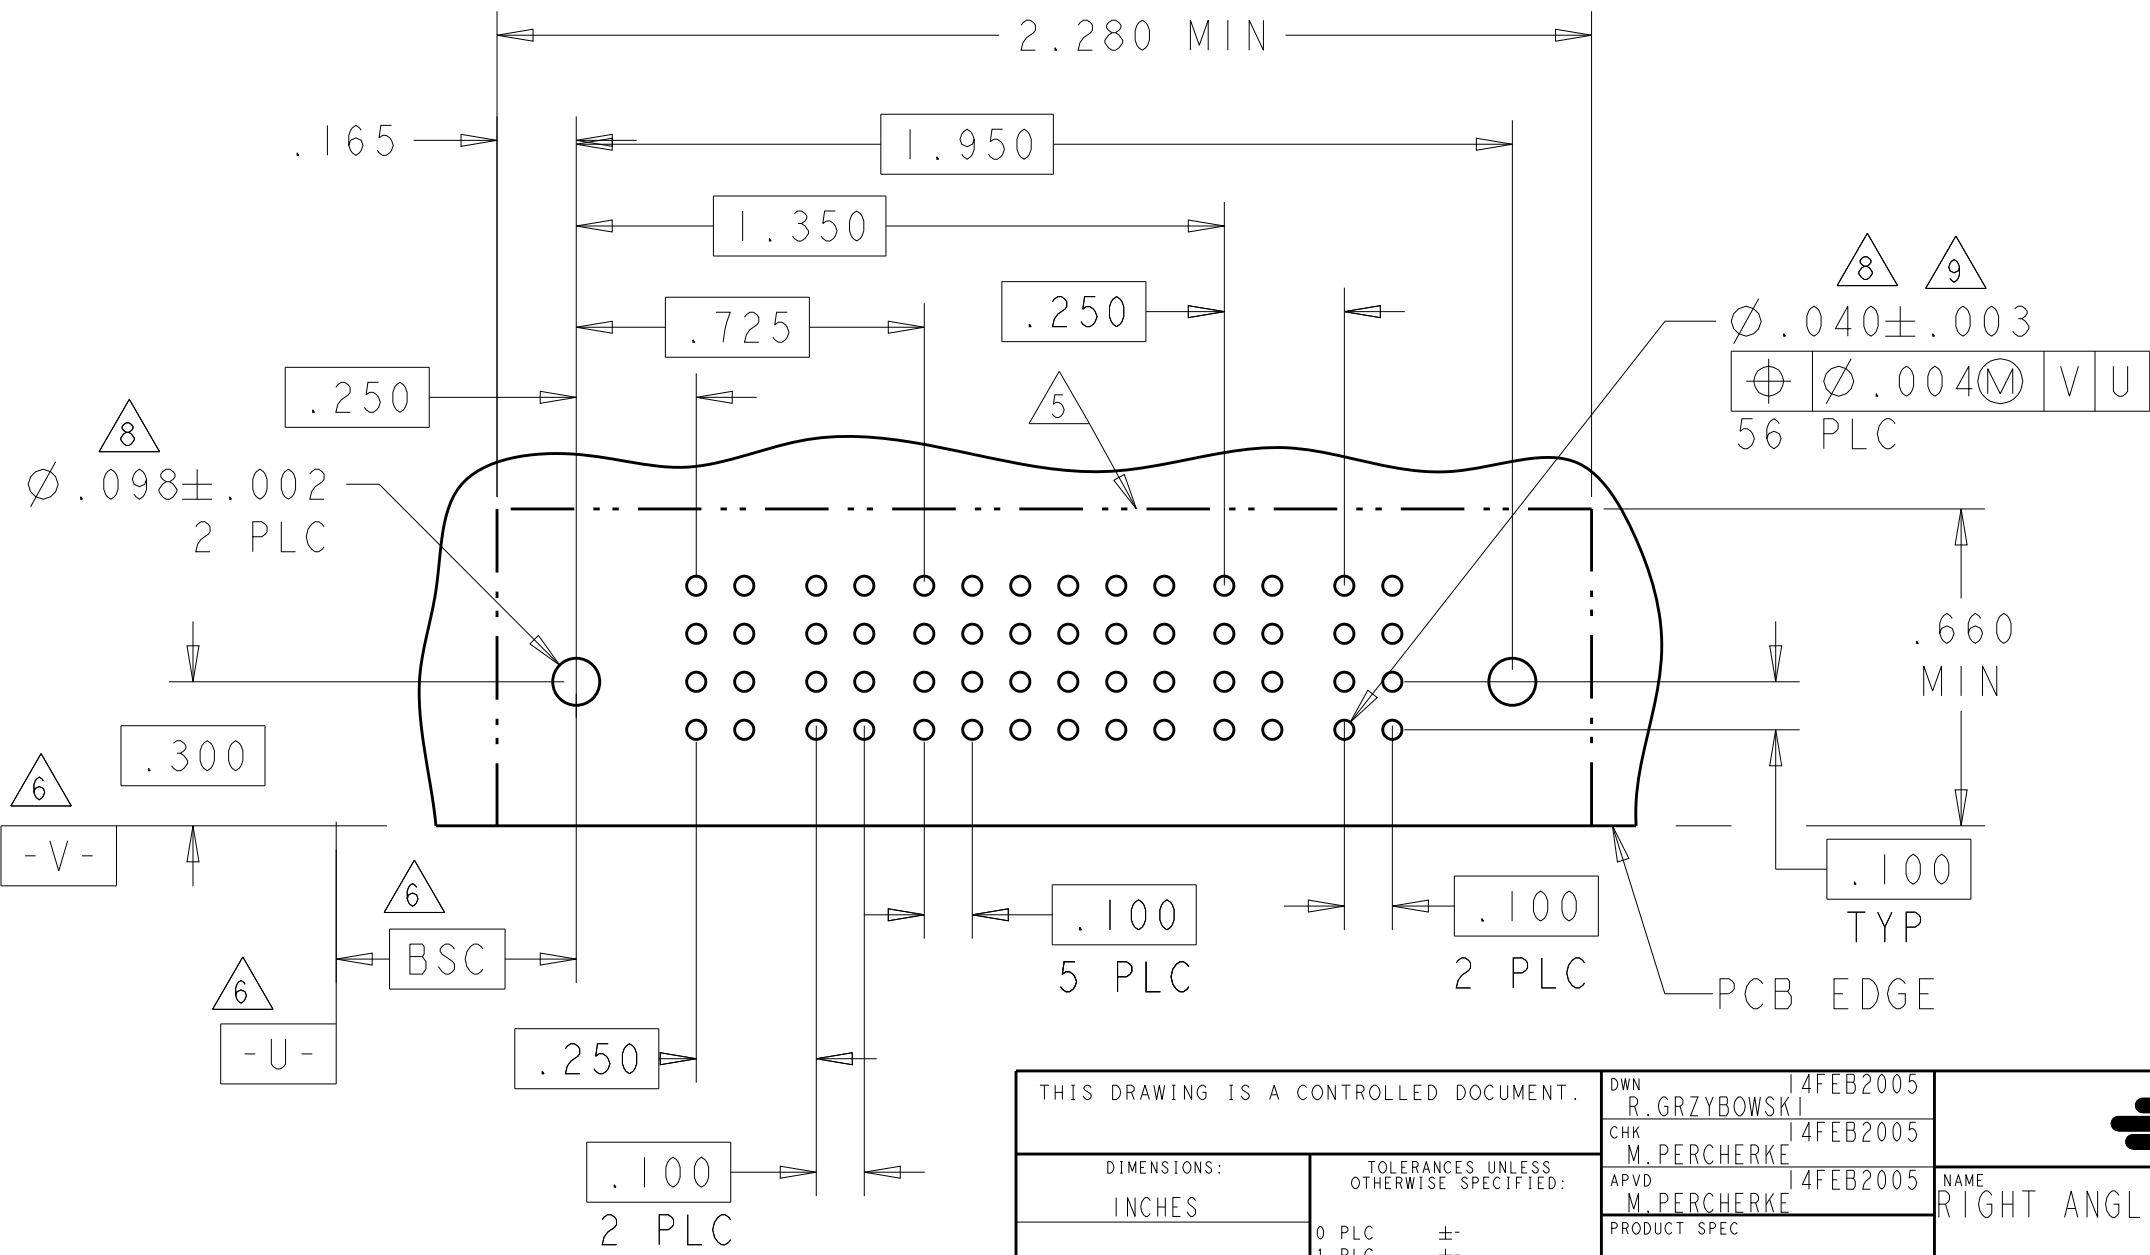


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. GRZYBOWSKI	4FEB2005
DIMENSIONS: INCHES		CHK M. PERCHERKE	14FEB2005
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	14FEB2005
0 PLC ±.01		PRODUCT SPEC	
1 PLC ±.01		108-1973	
2 PLC ±.005		APPLICATION SPEC	
3 PLC ±.002		114-13038	
4 PLC ±.002		WEIGHT	
ANGLES		Customer Drawing	
FINISH		SCALE 4:1	
MATERIAL		SHEET 6 OF 28	
		REV M2	

PART NUMBER	ROWS		POWER		SIGNAL																															POWER					
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	P3	P4				
1-6450130-9	D C B A		PA	PA	Z	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4	Z	PA	PA				
					Y	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3				A3	Y	
					R	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2				A2	R	A2
					A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1				A1	A1	
2P + 124S + 2P																																									

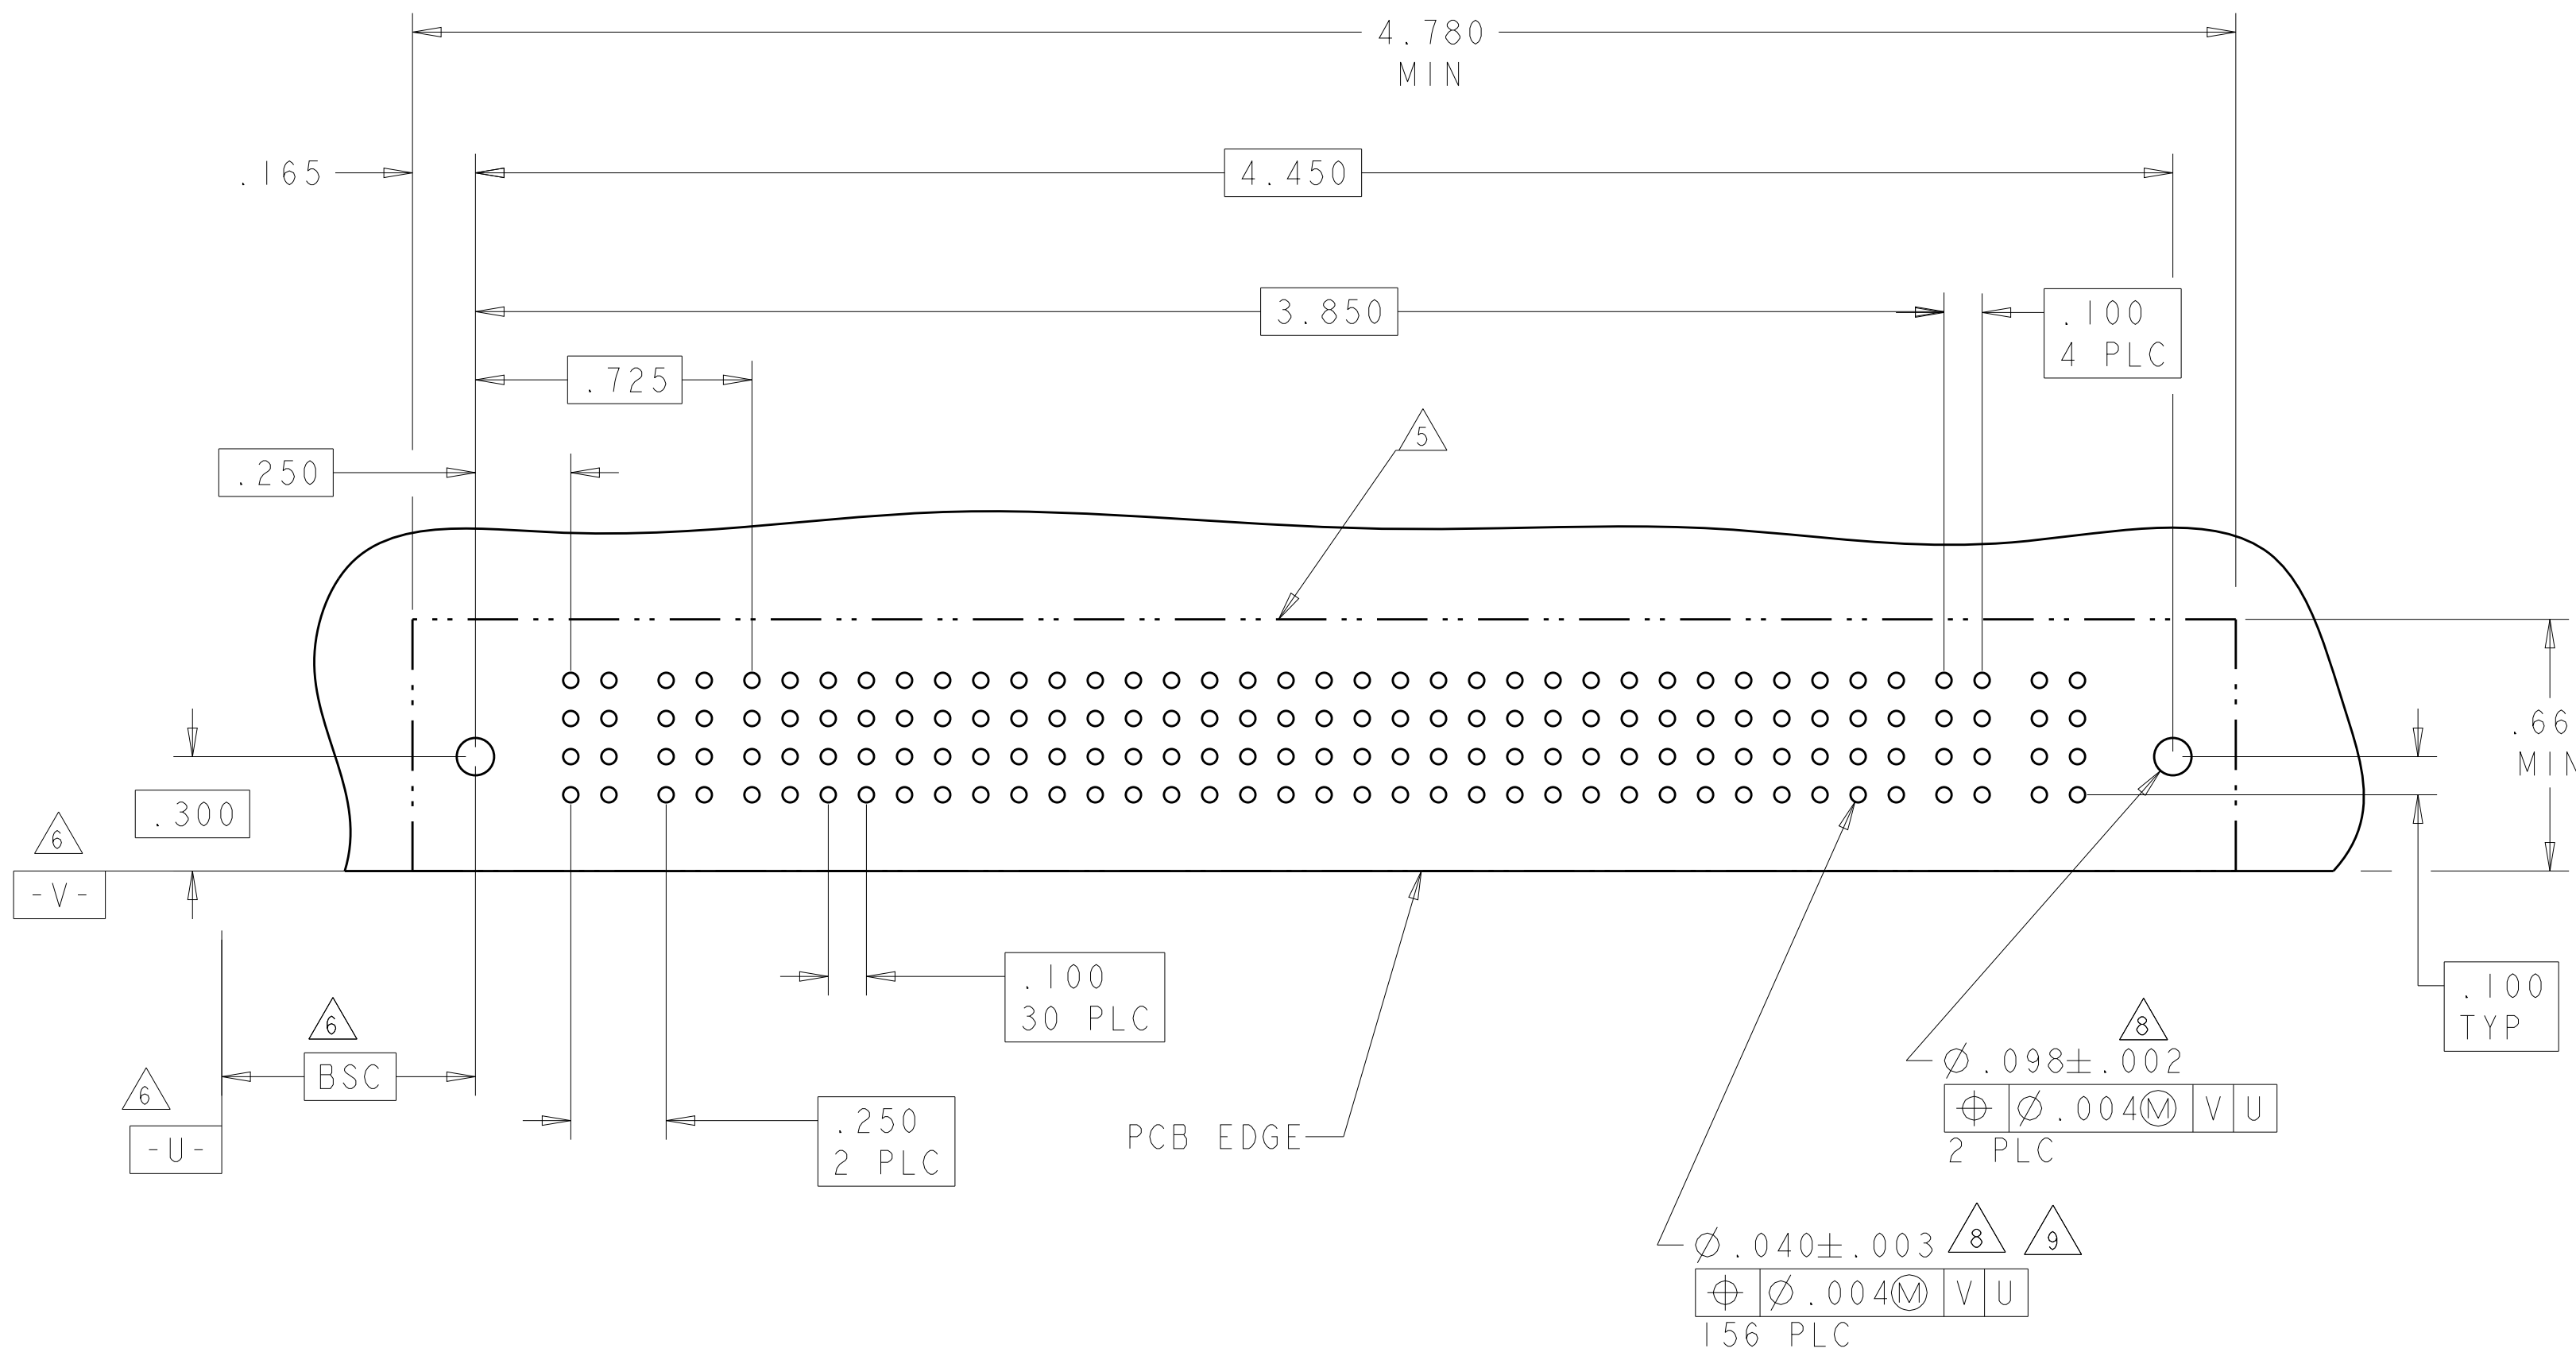
4805 (3/11)





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

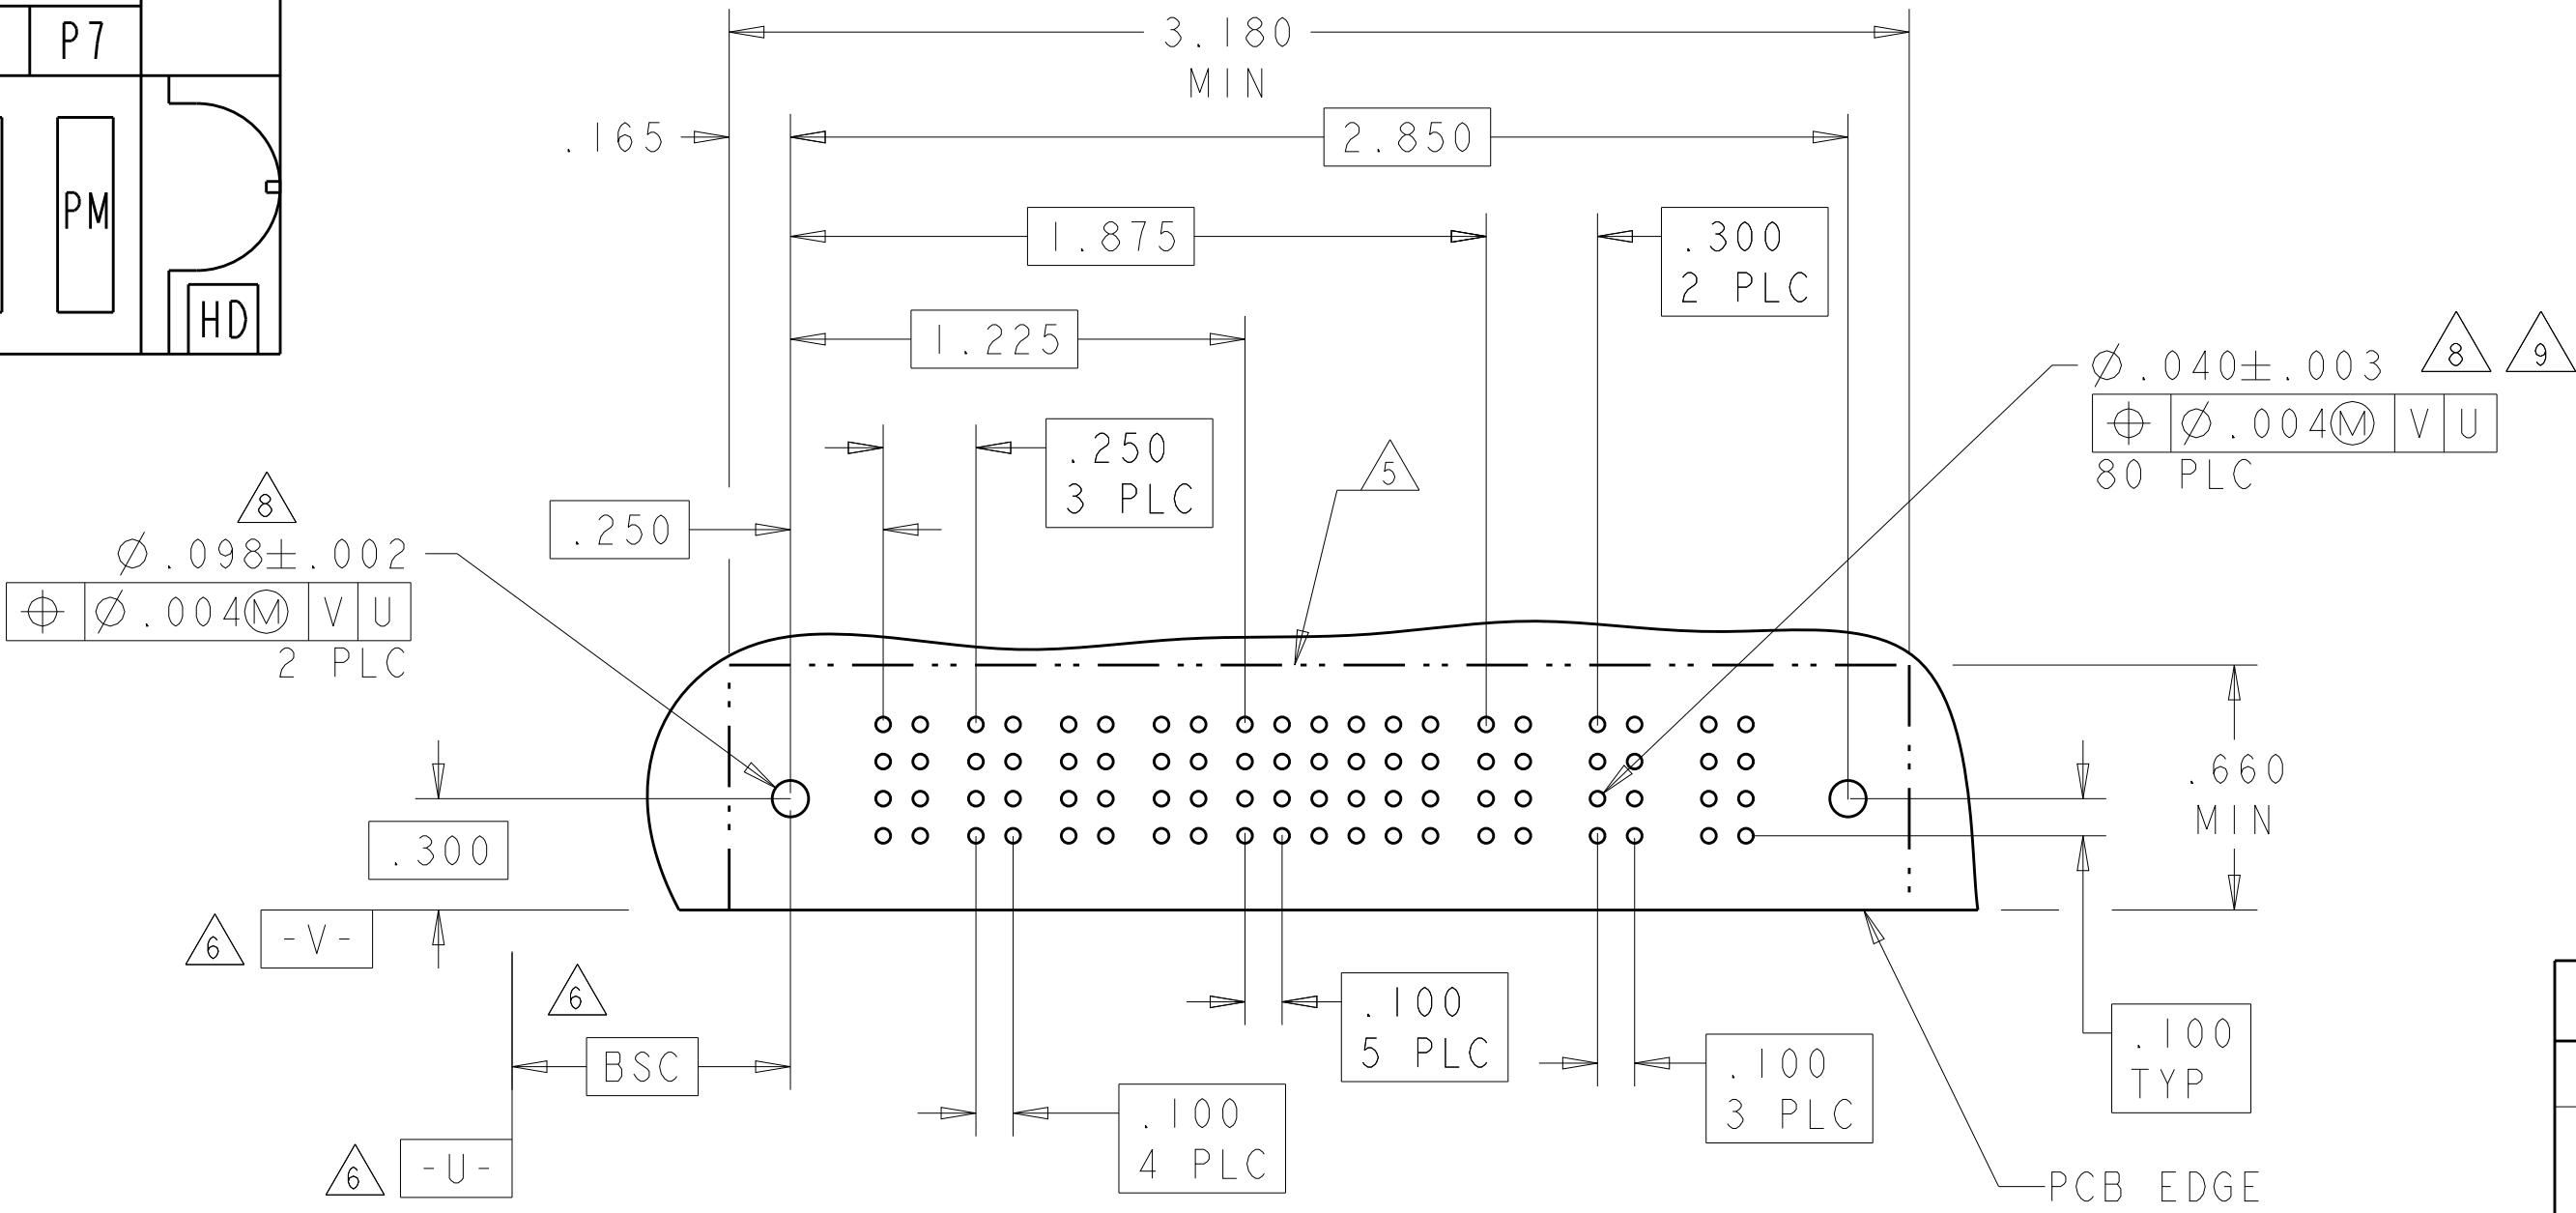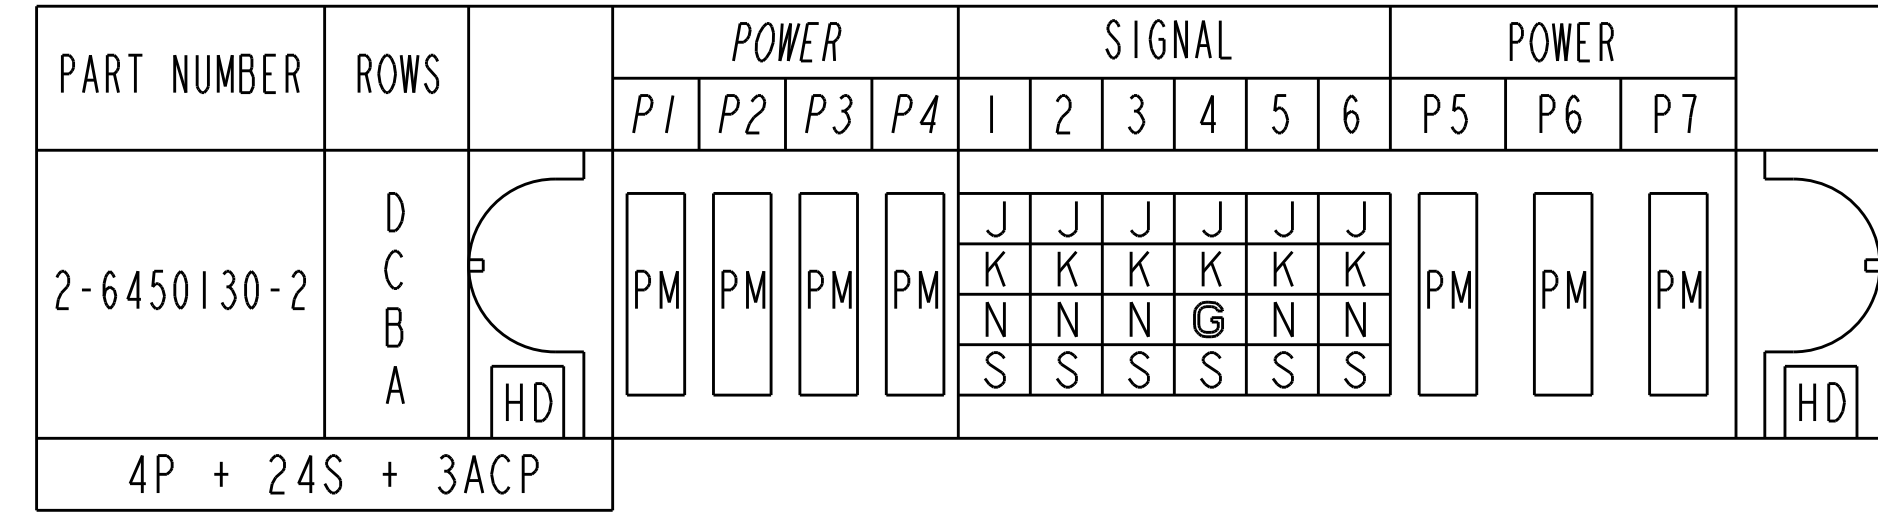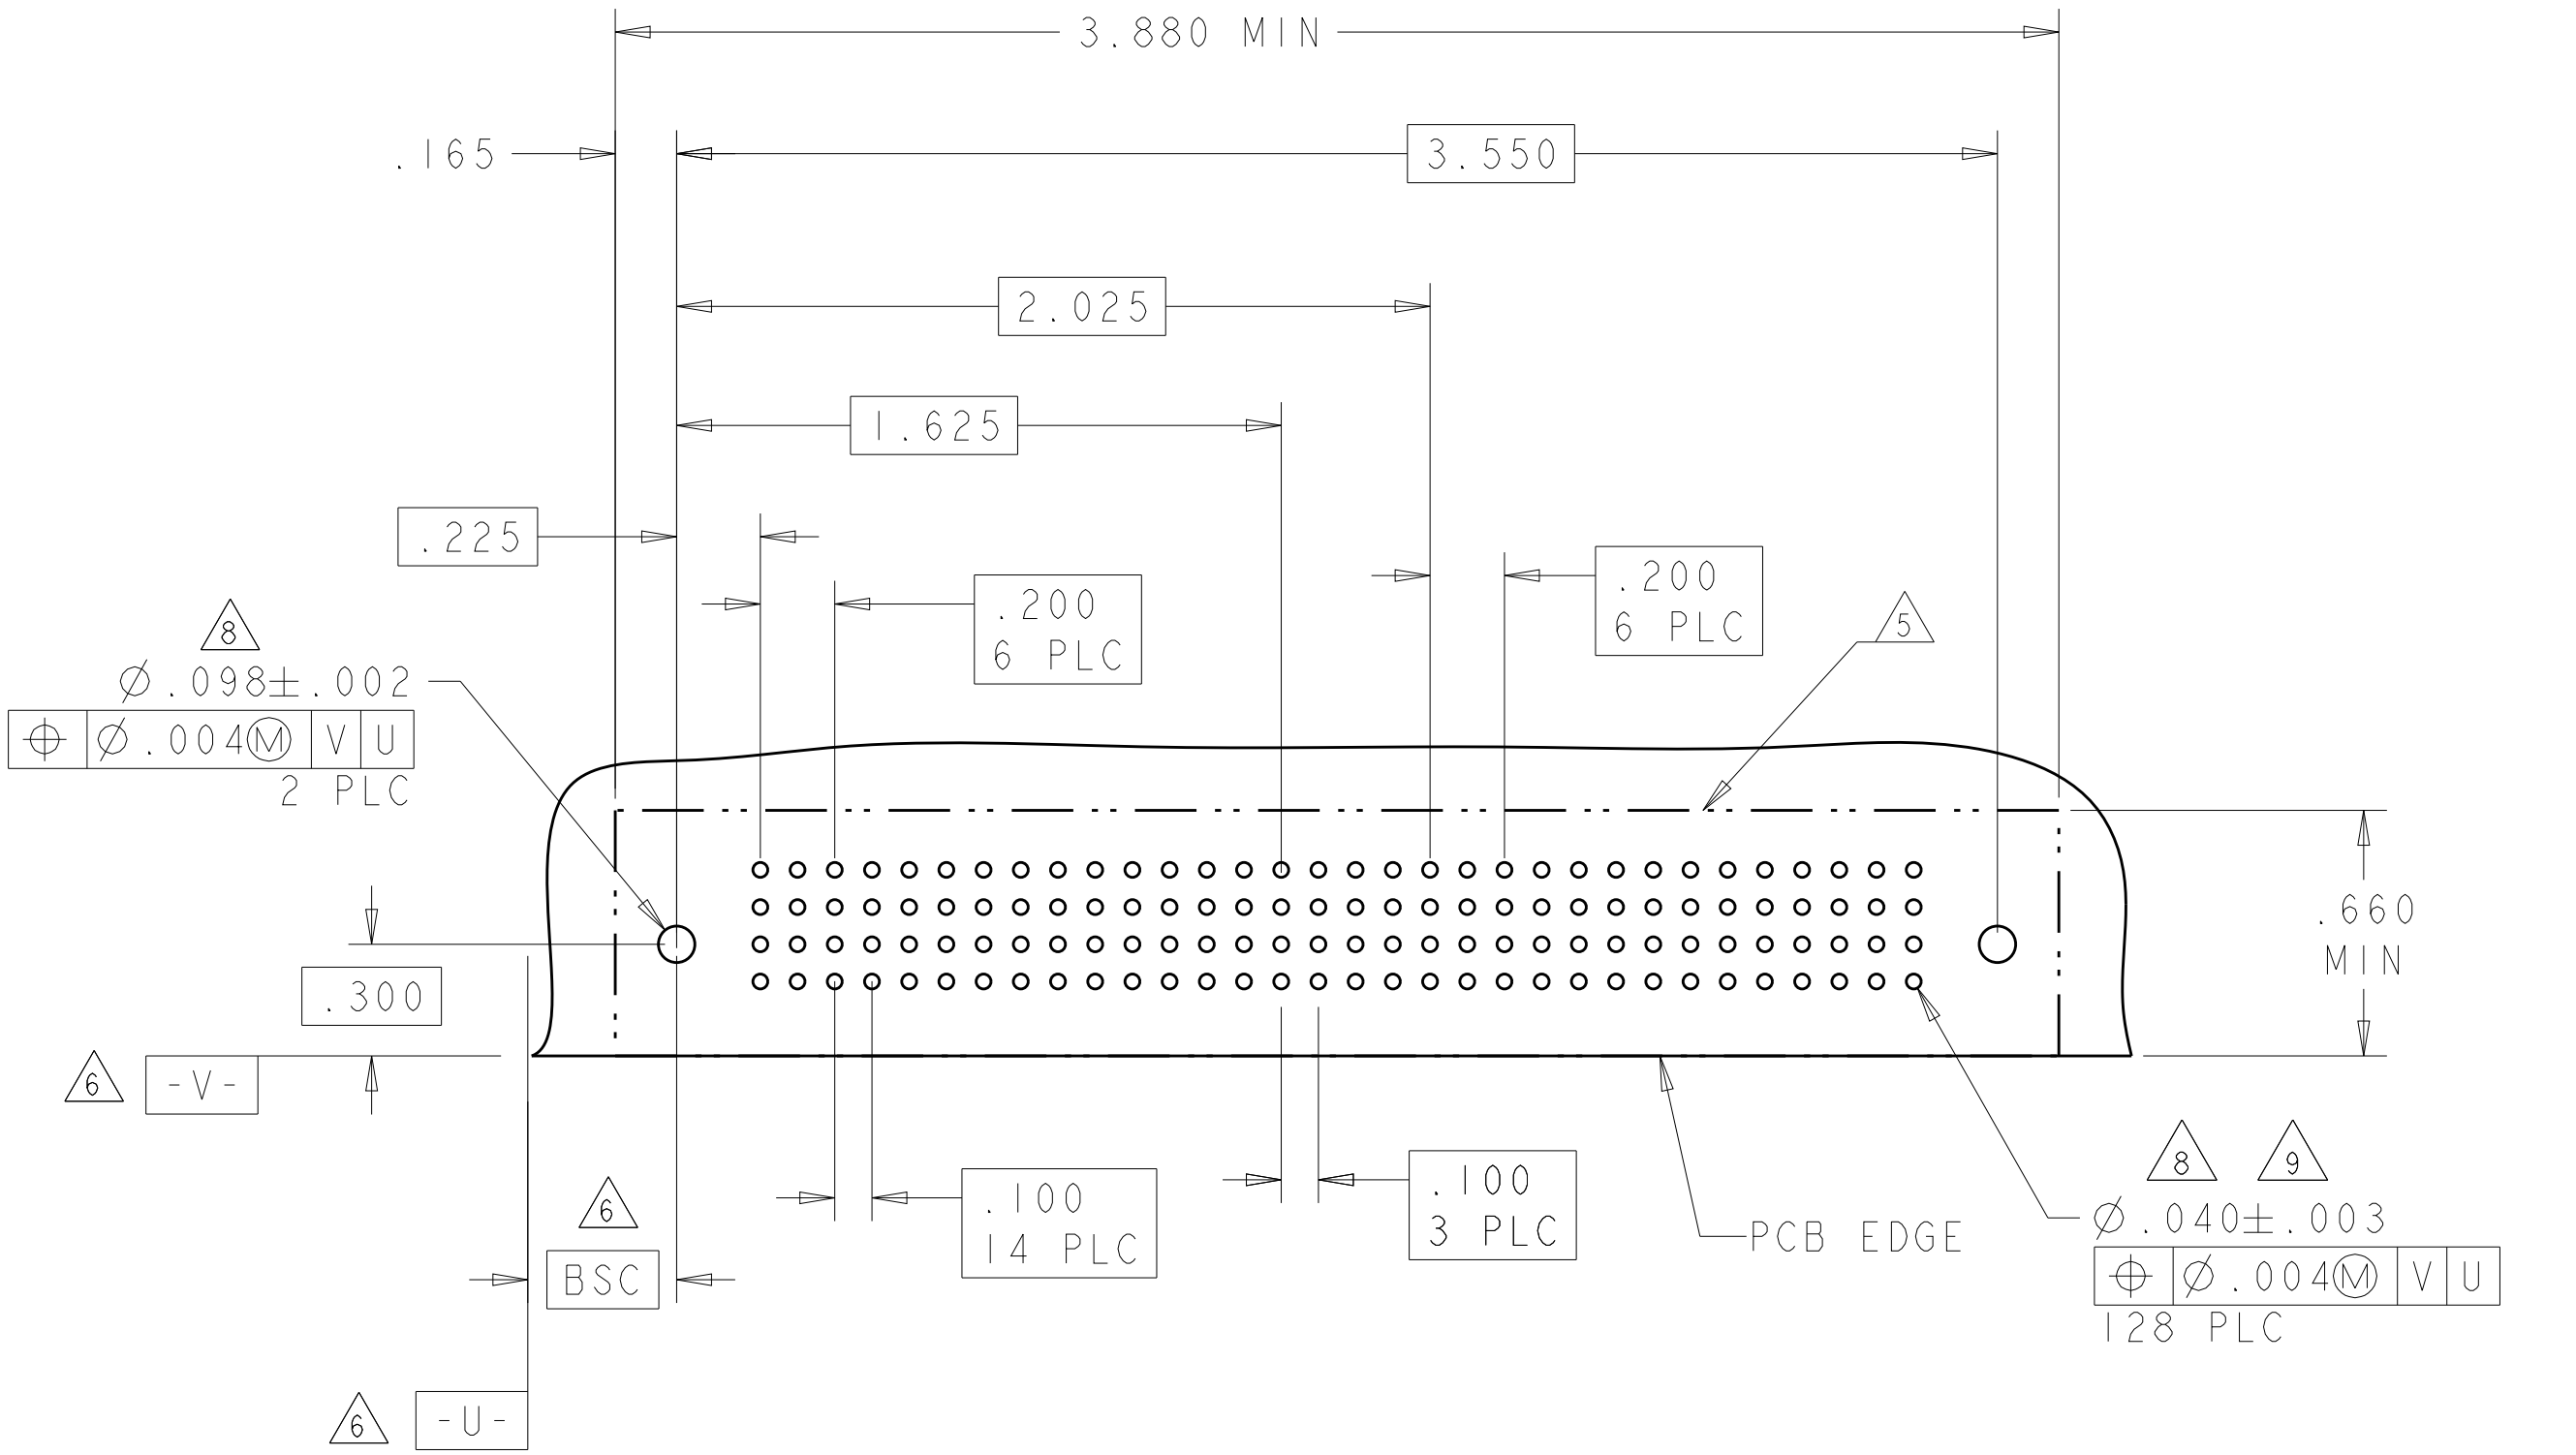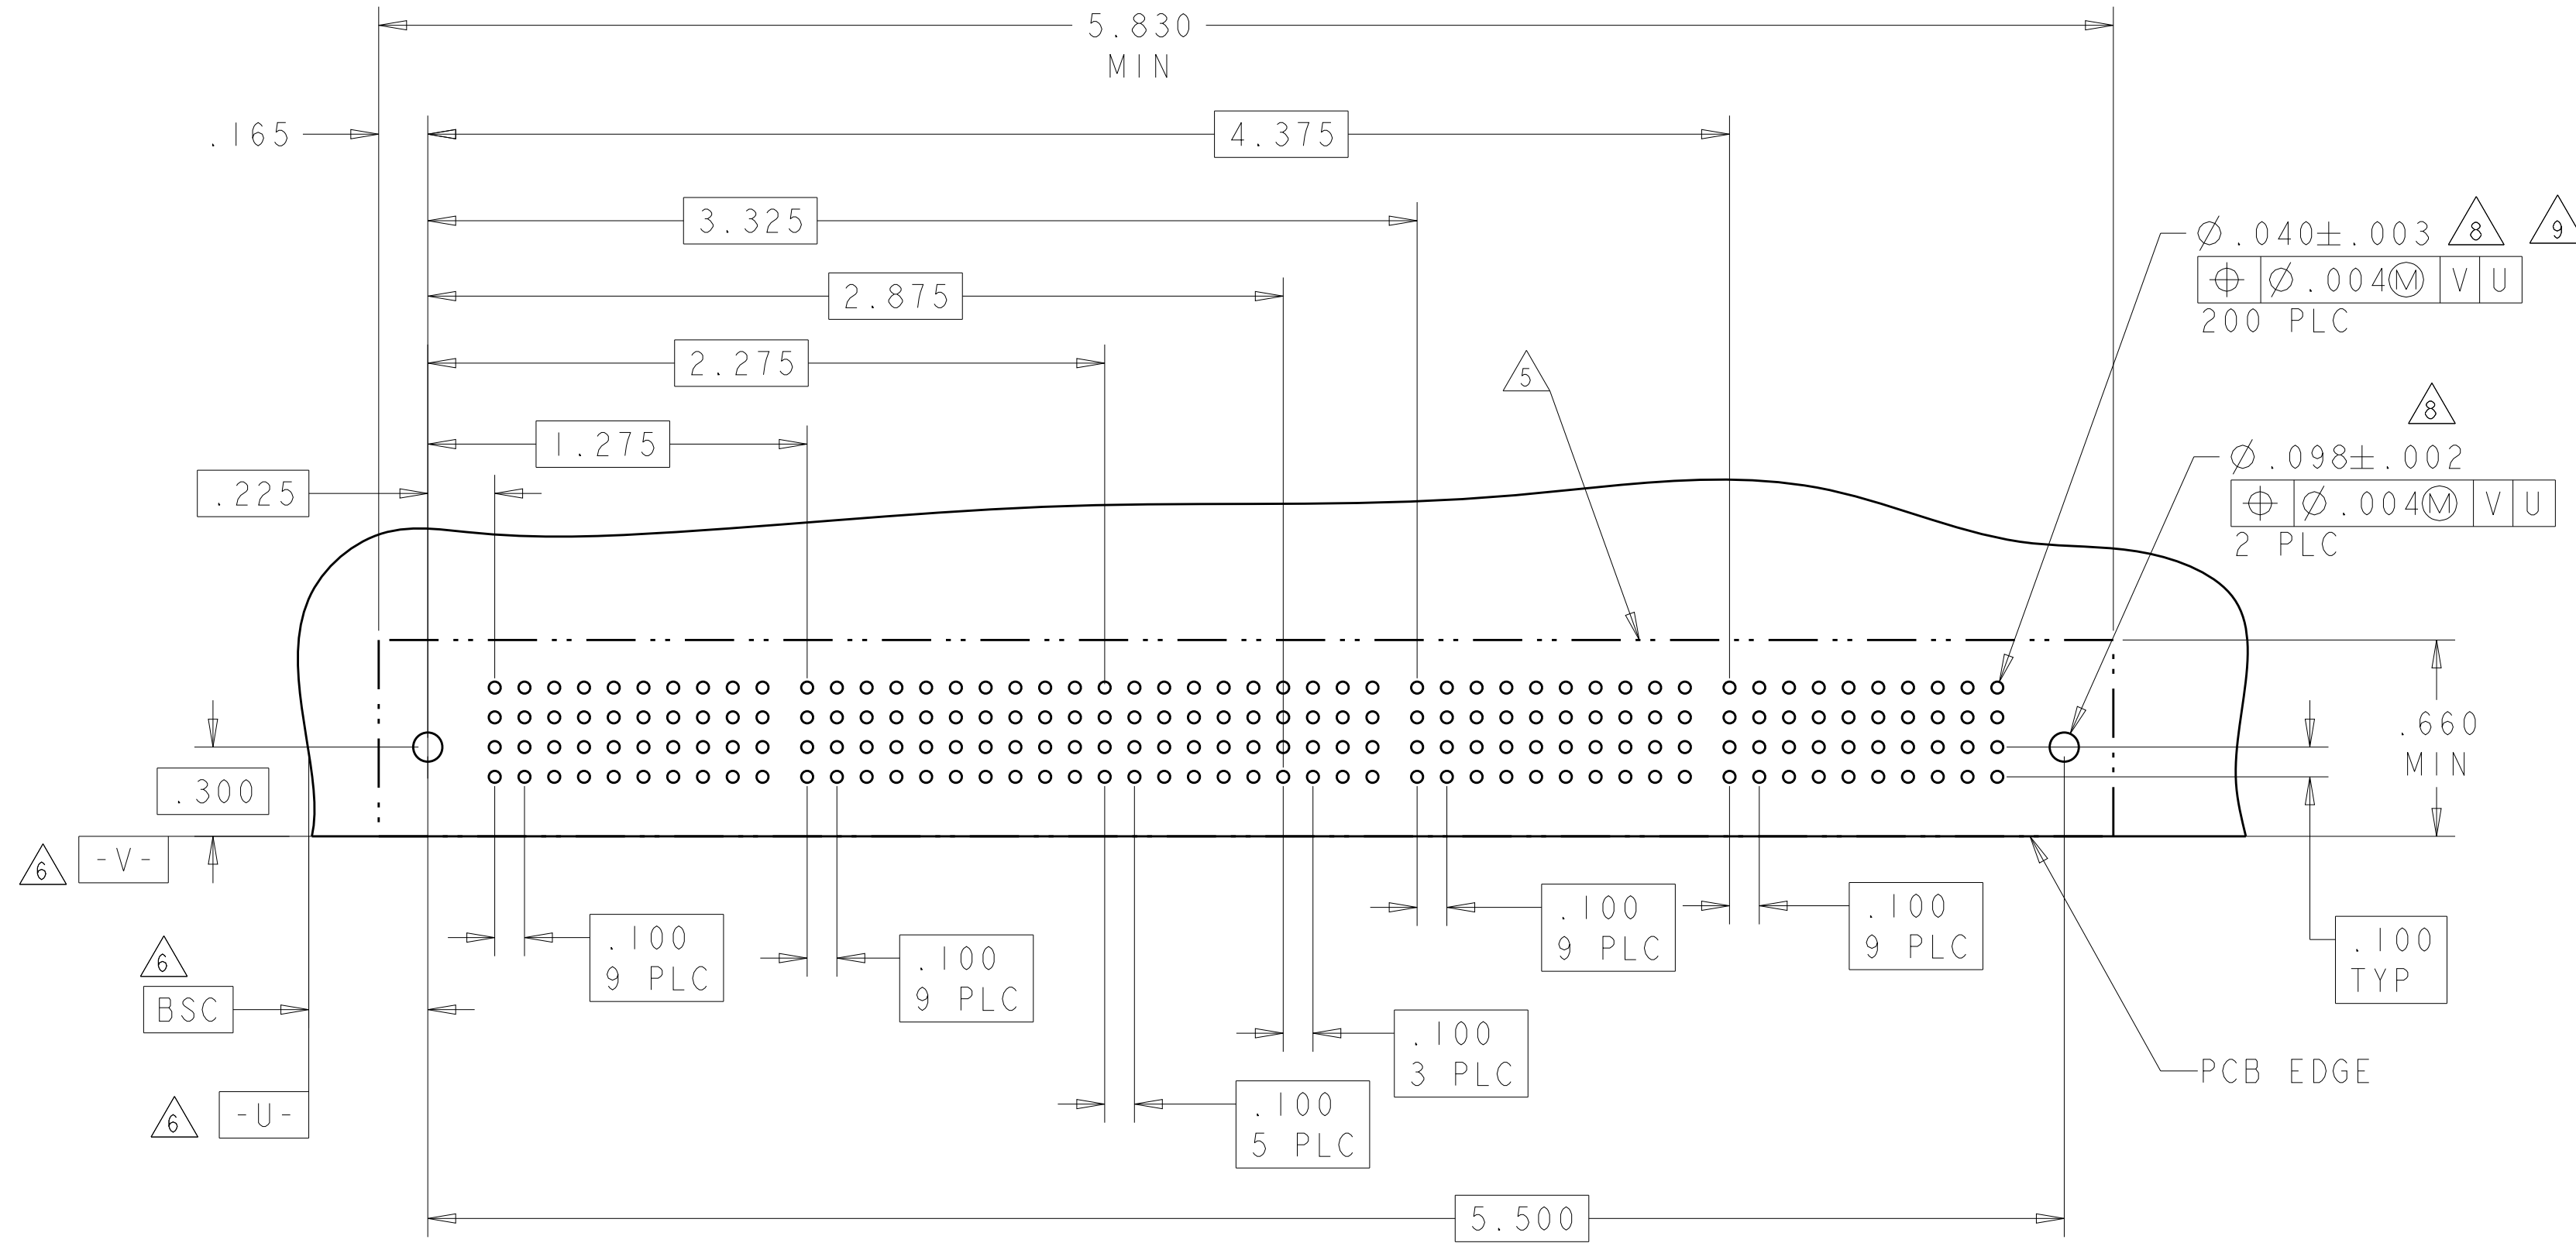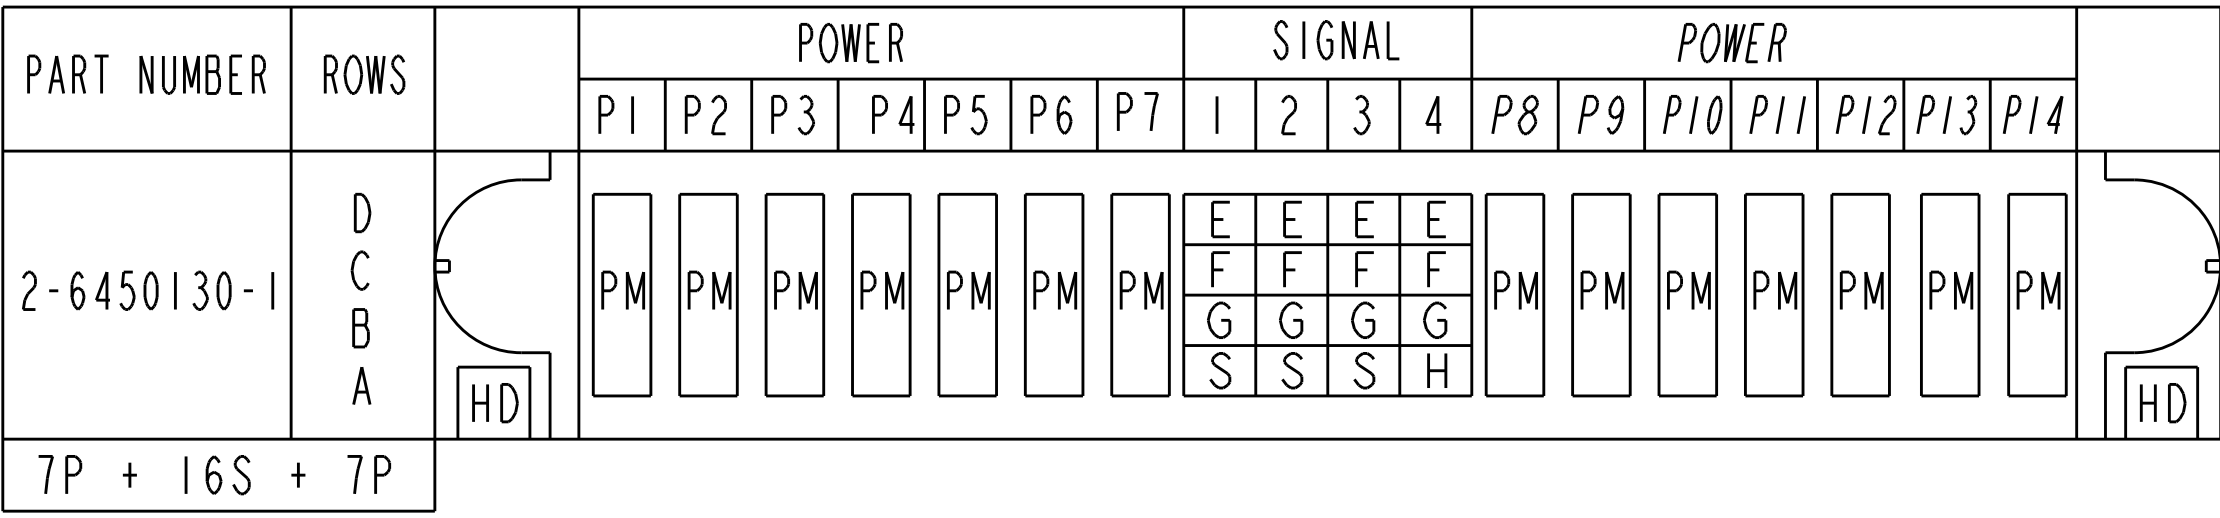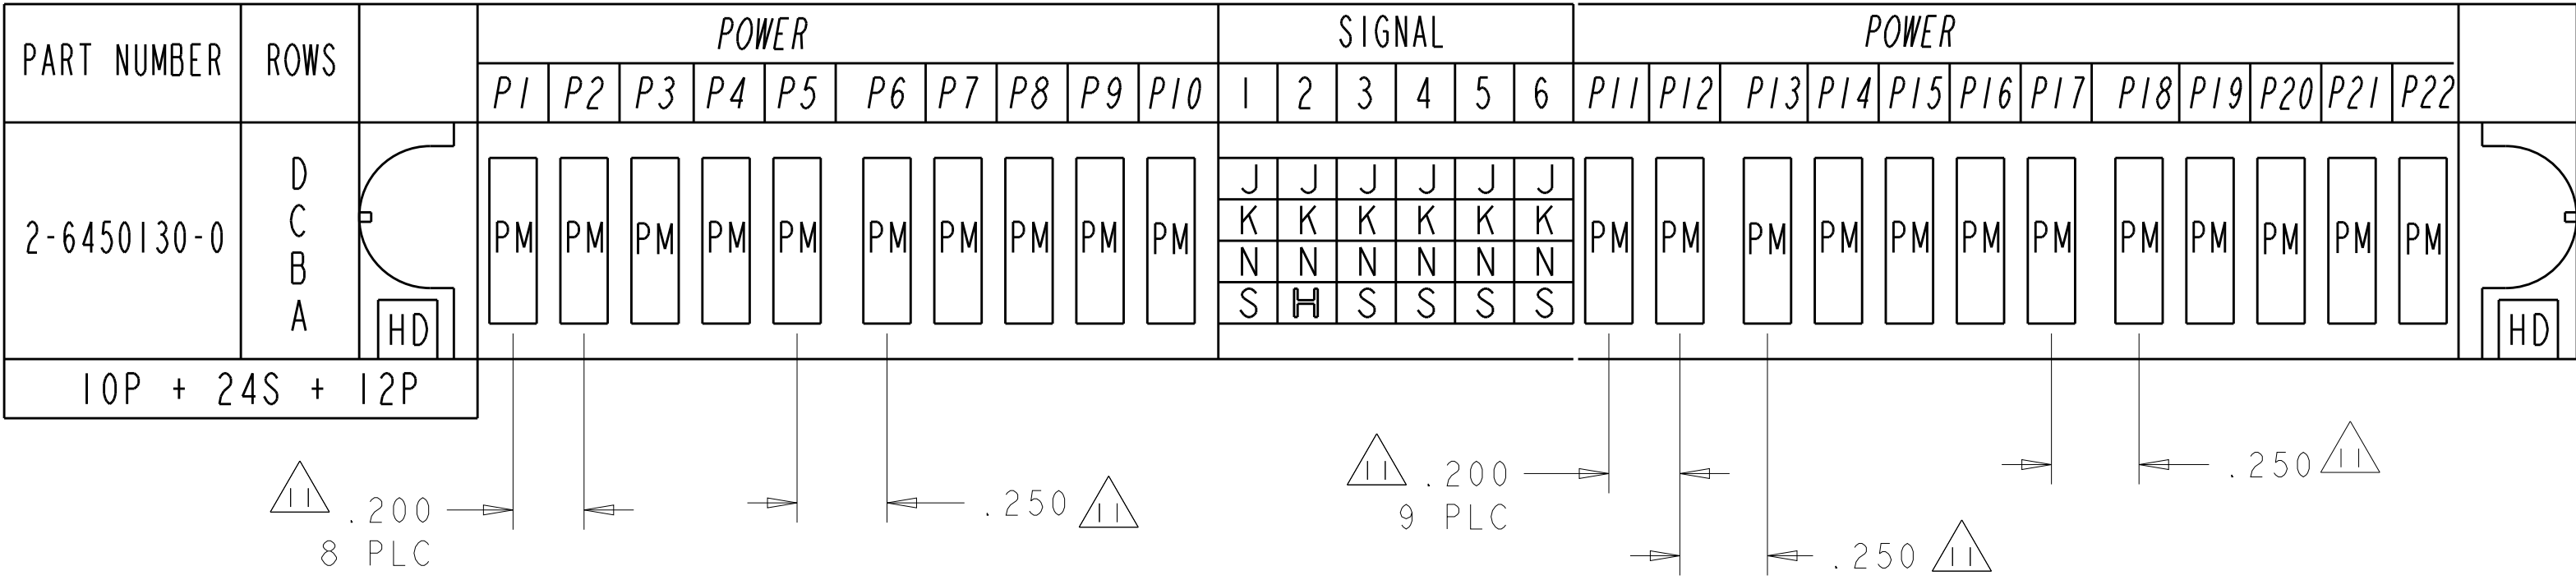


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 14FEB2005	 TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE 14FEB2005		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. PERCHERKE 14FEB2005	NAME	
		PRODUCT SPEC	RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL	
		108-1973	-	
		APPLICATION SPEC	-	
MATERIAL	FINISH	114-13038	SIZE	
		WEIGHT	CAGE CODE DRAWING NO	
-		-	-	RESTRICTED TO
		Customer Drawing	A100779C=6450130	
			SCALE 4:1	SHEET 8 OF 28
				REV M2

PART NUMBER	ROWS		POWER					SIGNAL												POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8		
3-6450130-2	D C B A	 HD	 PM	 PM	 PM	 PM	J	J	J	J	J	J	J	J	J	J	J	J	 PM	 PM	 PM	 HD		
							K	K	K	K	K	K	K	K	K	K	K	K					K	
							N	N	N	N	N	N	N	N	N	N	N	N					N	N
							H	S	S	S	S	S	S	S	S	S	S	S					S	H
5P + 48S + 3P																								

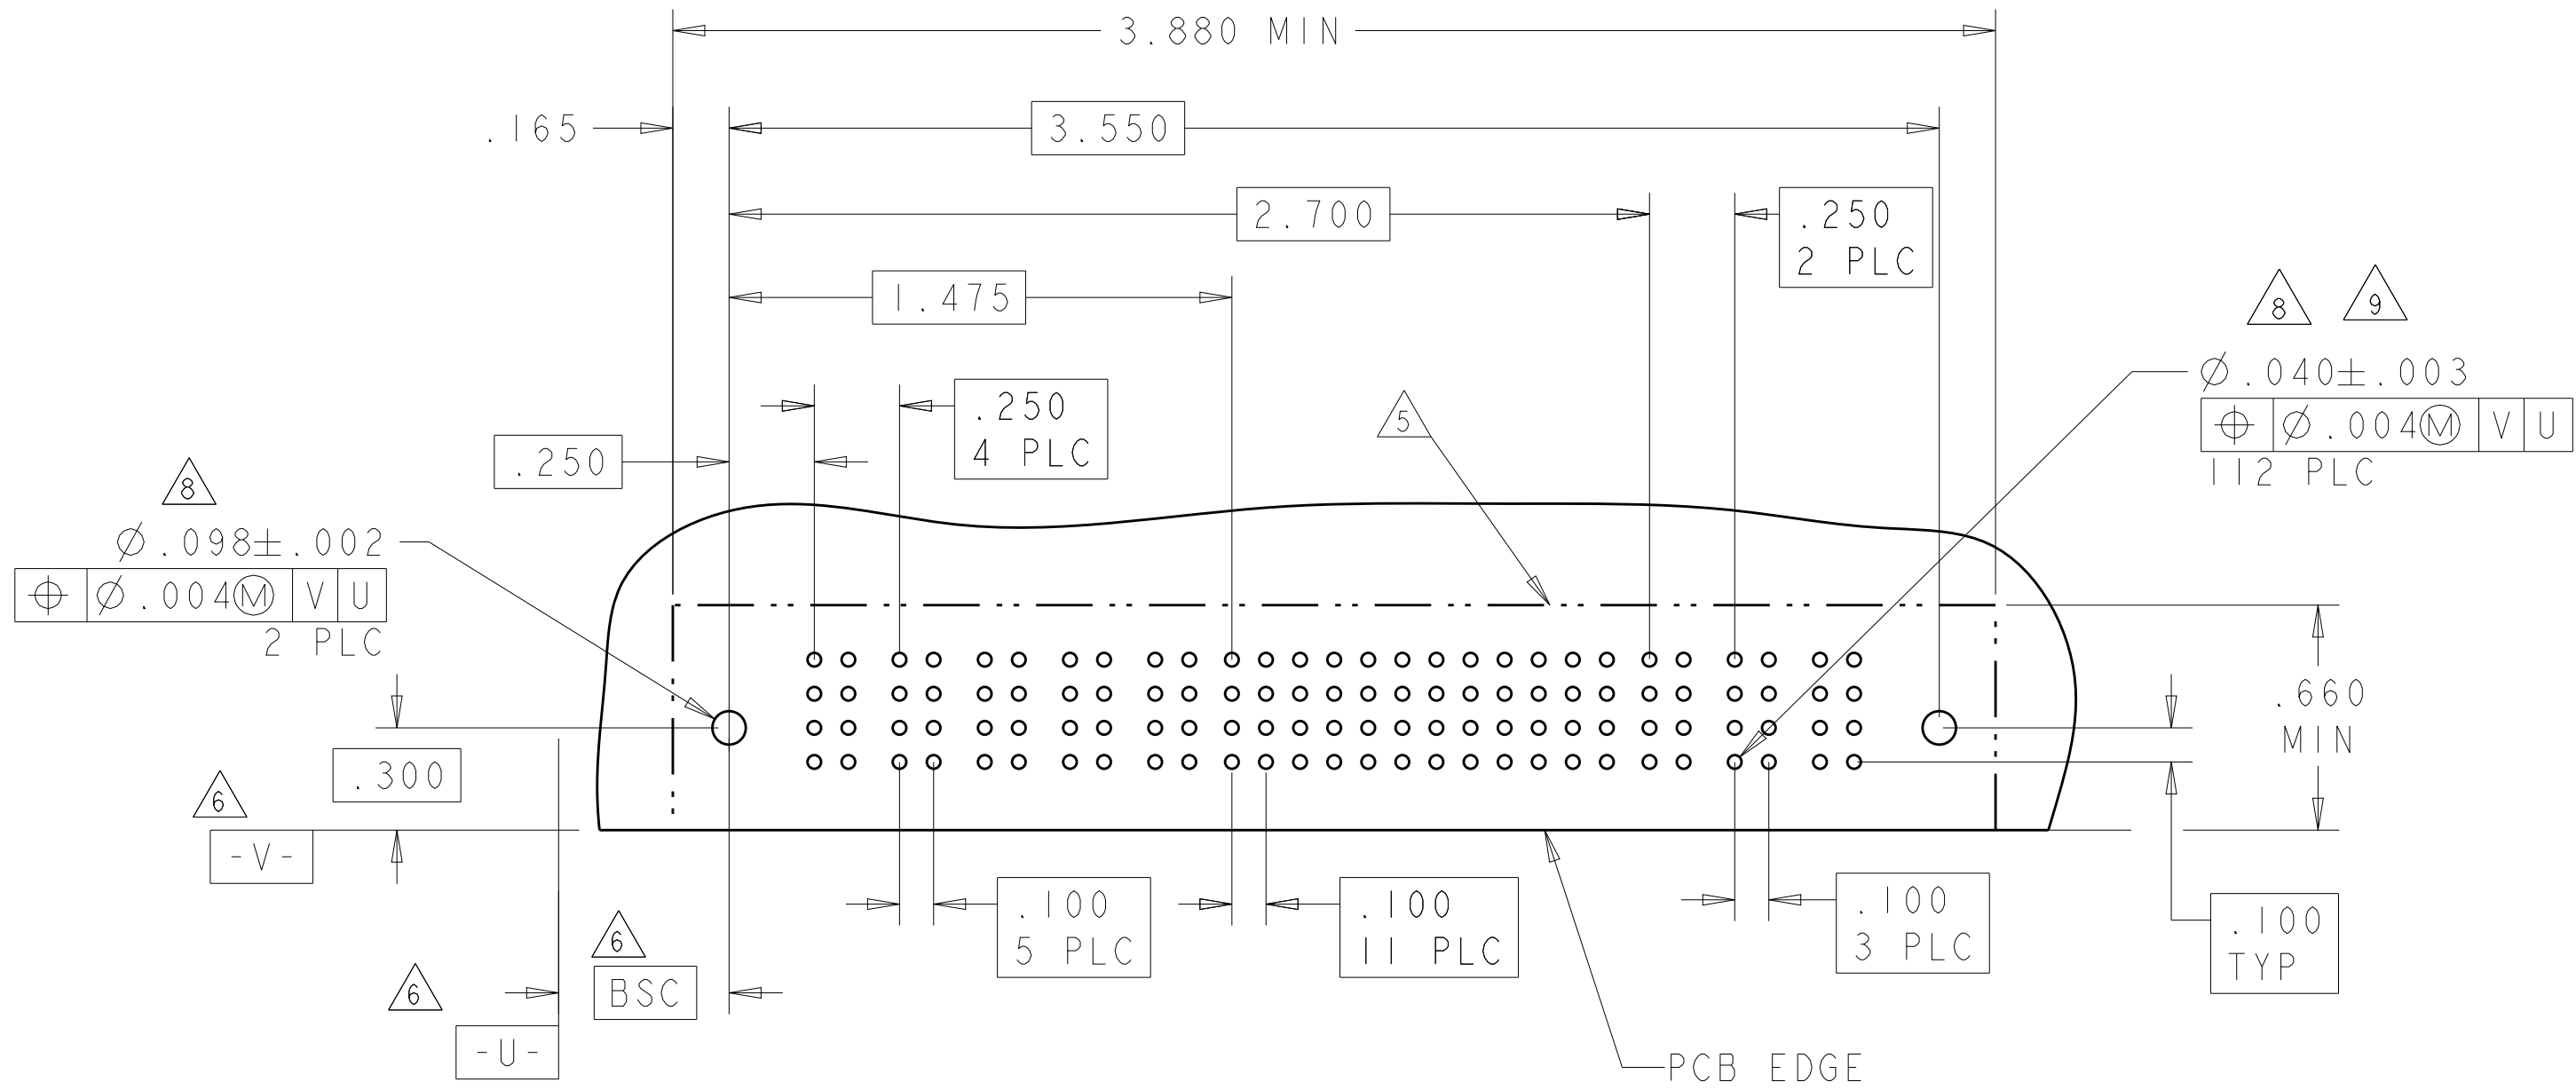

PART NUMBER	ROWS		POWER												SIGNAL					POWER																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4	5	P13	P14	P15																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
3-6450130-6	D C B A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
													E	E	J	J	J																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
													K	K	F	K	K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
													N	N	N	N	N																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																</

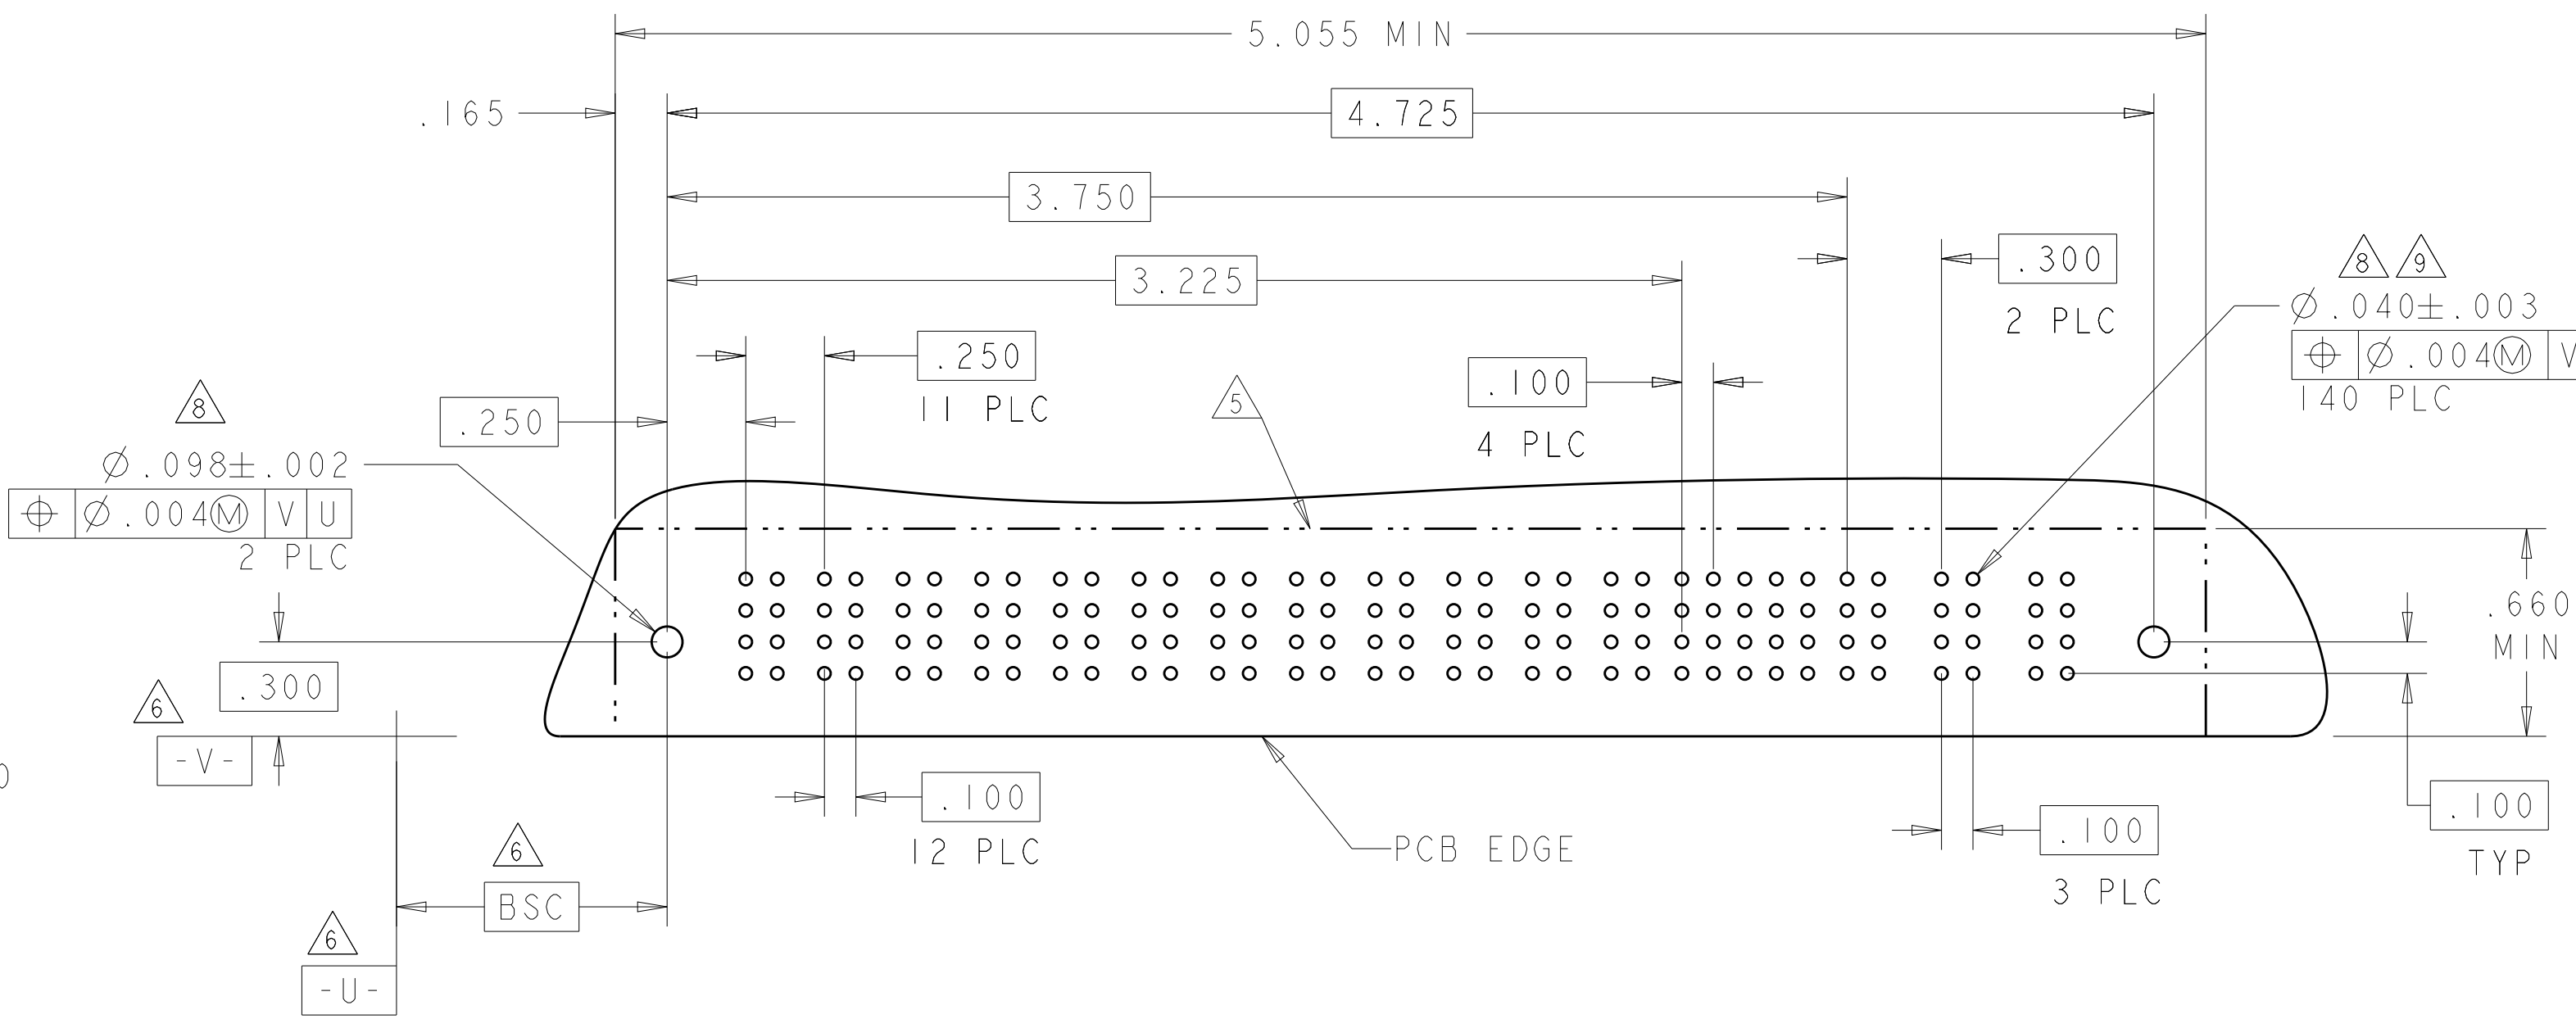4805 (3/11)

PART NUMBER	ROWS		POWER			SIGNAL				POWER		
			P1	P2	P3	1	2	3	4	P4	P5	
4-6450130-3	D				PM	J	J	J	PM	PM		
	K					K	K					
	N					N	N					
	S					S	H					
3ACP + 16S + 2P												

Top view drawing of the PCB showing dimensions and component locations. The drawing includes a grid of 36 pins (8x9) and a 2x8 grid of pins. Dimensions are provided in inches, with some values in millimeters (MIN). The drawing also shows the location of the PCB edge, the BSC (Bottom Surface Center) point, and the locations of the 36 PLC and 2 PLC components.

Dimensions (inches):



- Overall width: 2.480 MIN
- Distance from left edge to first pin column: 2.150
- Distance between first and second pin columns: 1.550
- Distance between second and third pin columns: 1.225
- Distance between third and fourth pin columns: .875
- Distance from right edge to last pin column: .250
- Distance from bottom edge to first pin row: .100
- Distance between first and second pin rows: .100
- Distance between second and third pin rows: .100
- Distance between third and fourth pin rows: .100
- Distance between fourth and fifth pin rows: .100
- Distance between fifth and sixth pin rows: .100
- Distance between sixth and seventh pin rows: .100
- Distance between seventh and eighth pin rows: .100
- Distance from bottom edge to last pin row: .100
- Distance from left edge to BSC point: .165
- Distance from BSC point to first pin column: .100
- Distance from first pin column to BSC point: .100
- Distance from BSC point to last pin column: .100
- Distance from last pin column to BSC point: .100
- Distance from BSC point to last pin row: .100
- Distance from last pin row to BSC point: .100

Component locations:

- 36 PLC: 8x9 grid of pins, dimensions: $\varnothing .040 \pm .003$, $\varnothing .004 (M)$, V U
- 2 PLC: 2x8 grid of pins, dimensions: $\varnothing .098 \pm .002$, $\varnothing .004 (M)$, V U


Other features:



- PCB EDGE
- BSC (Bottom Surface Center)
- Dimensions: .660 MIN, .100 TYP

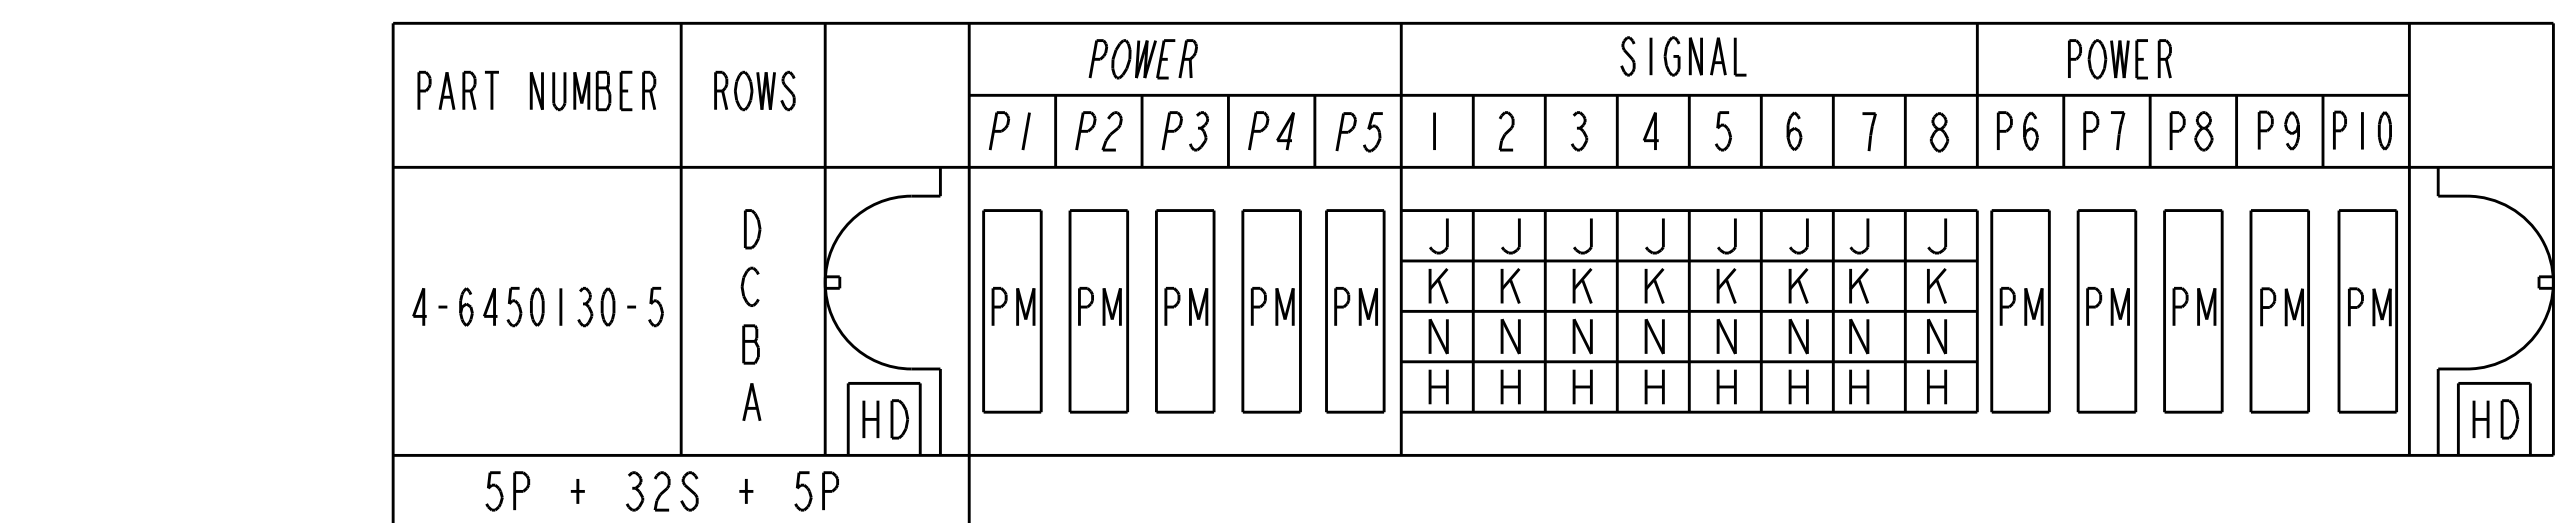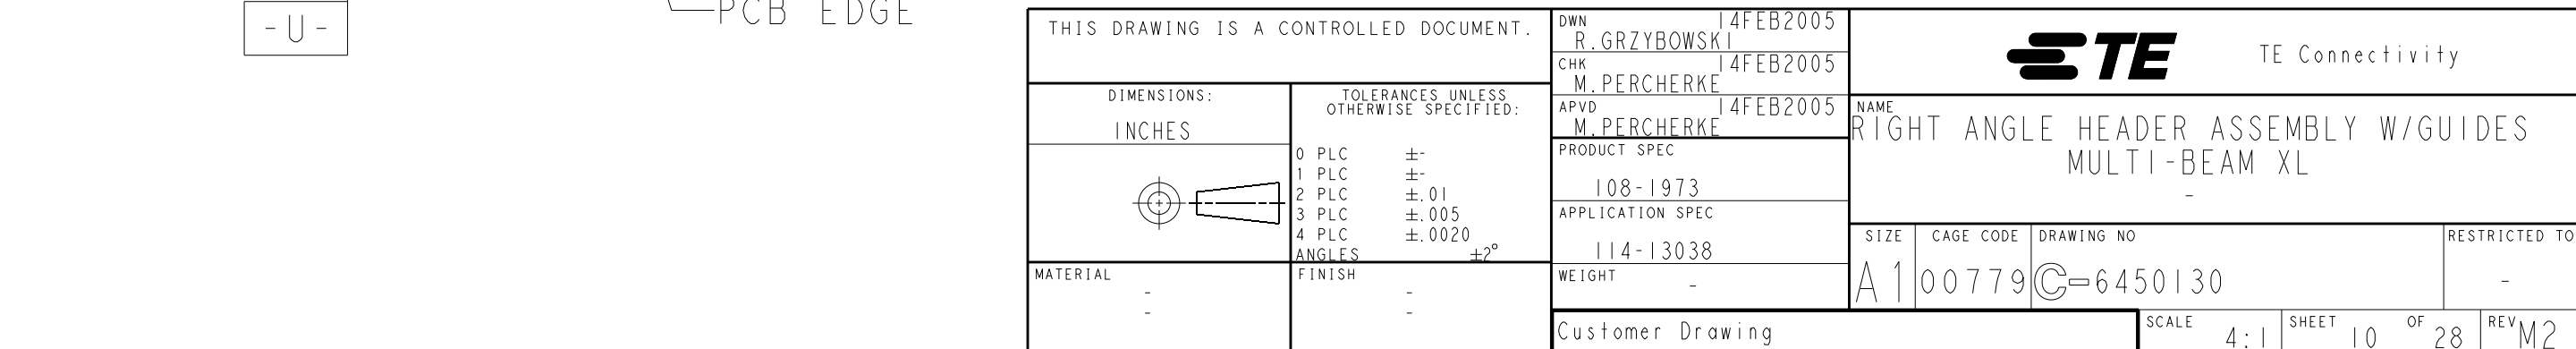
[illegible]

LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL										POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	P5	P6	P7	P8		
4-6450130-8	D C B A		PM	PM	PM	PM	J	J	J	J	J	J	J	J	J	J	PM	PM	PM	PM		
							K	K	K	K	K	K	K	K	K	K						K
							N	N	N	N	N	N	N	N	N	N						N
							H	S	S	S	S	S	S	S	S	S						H
4P + 40S + 4P																						HD


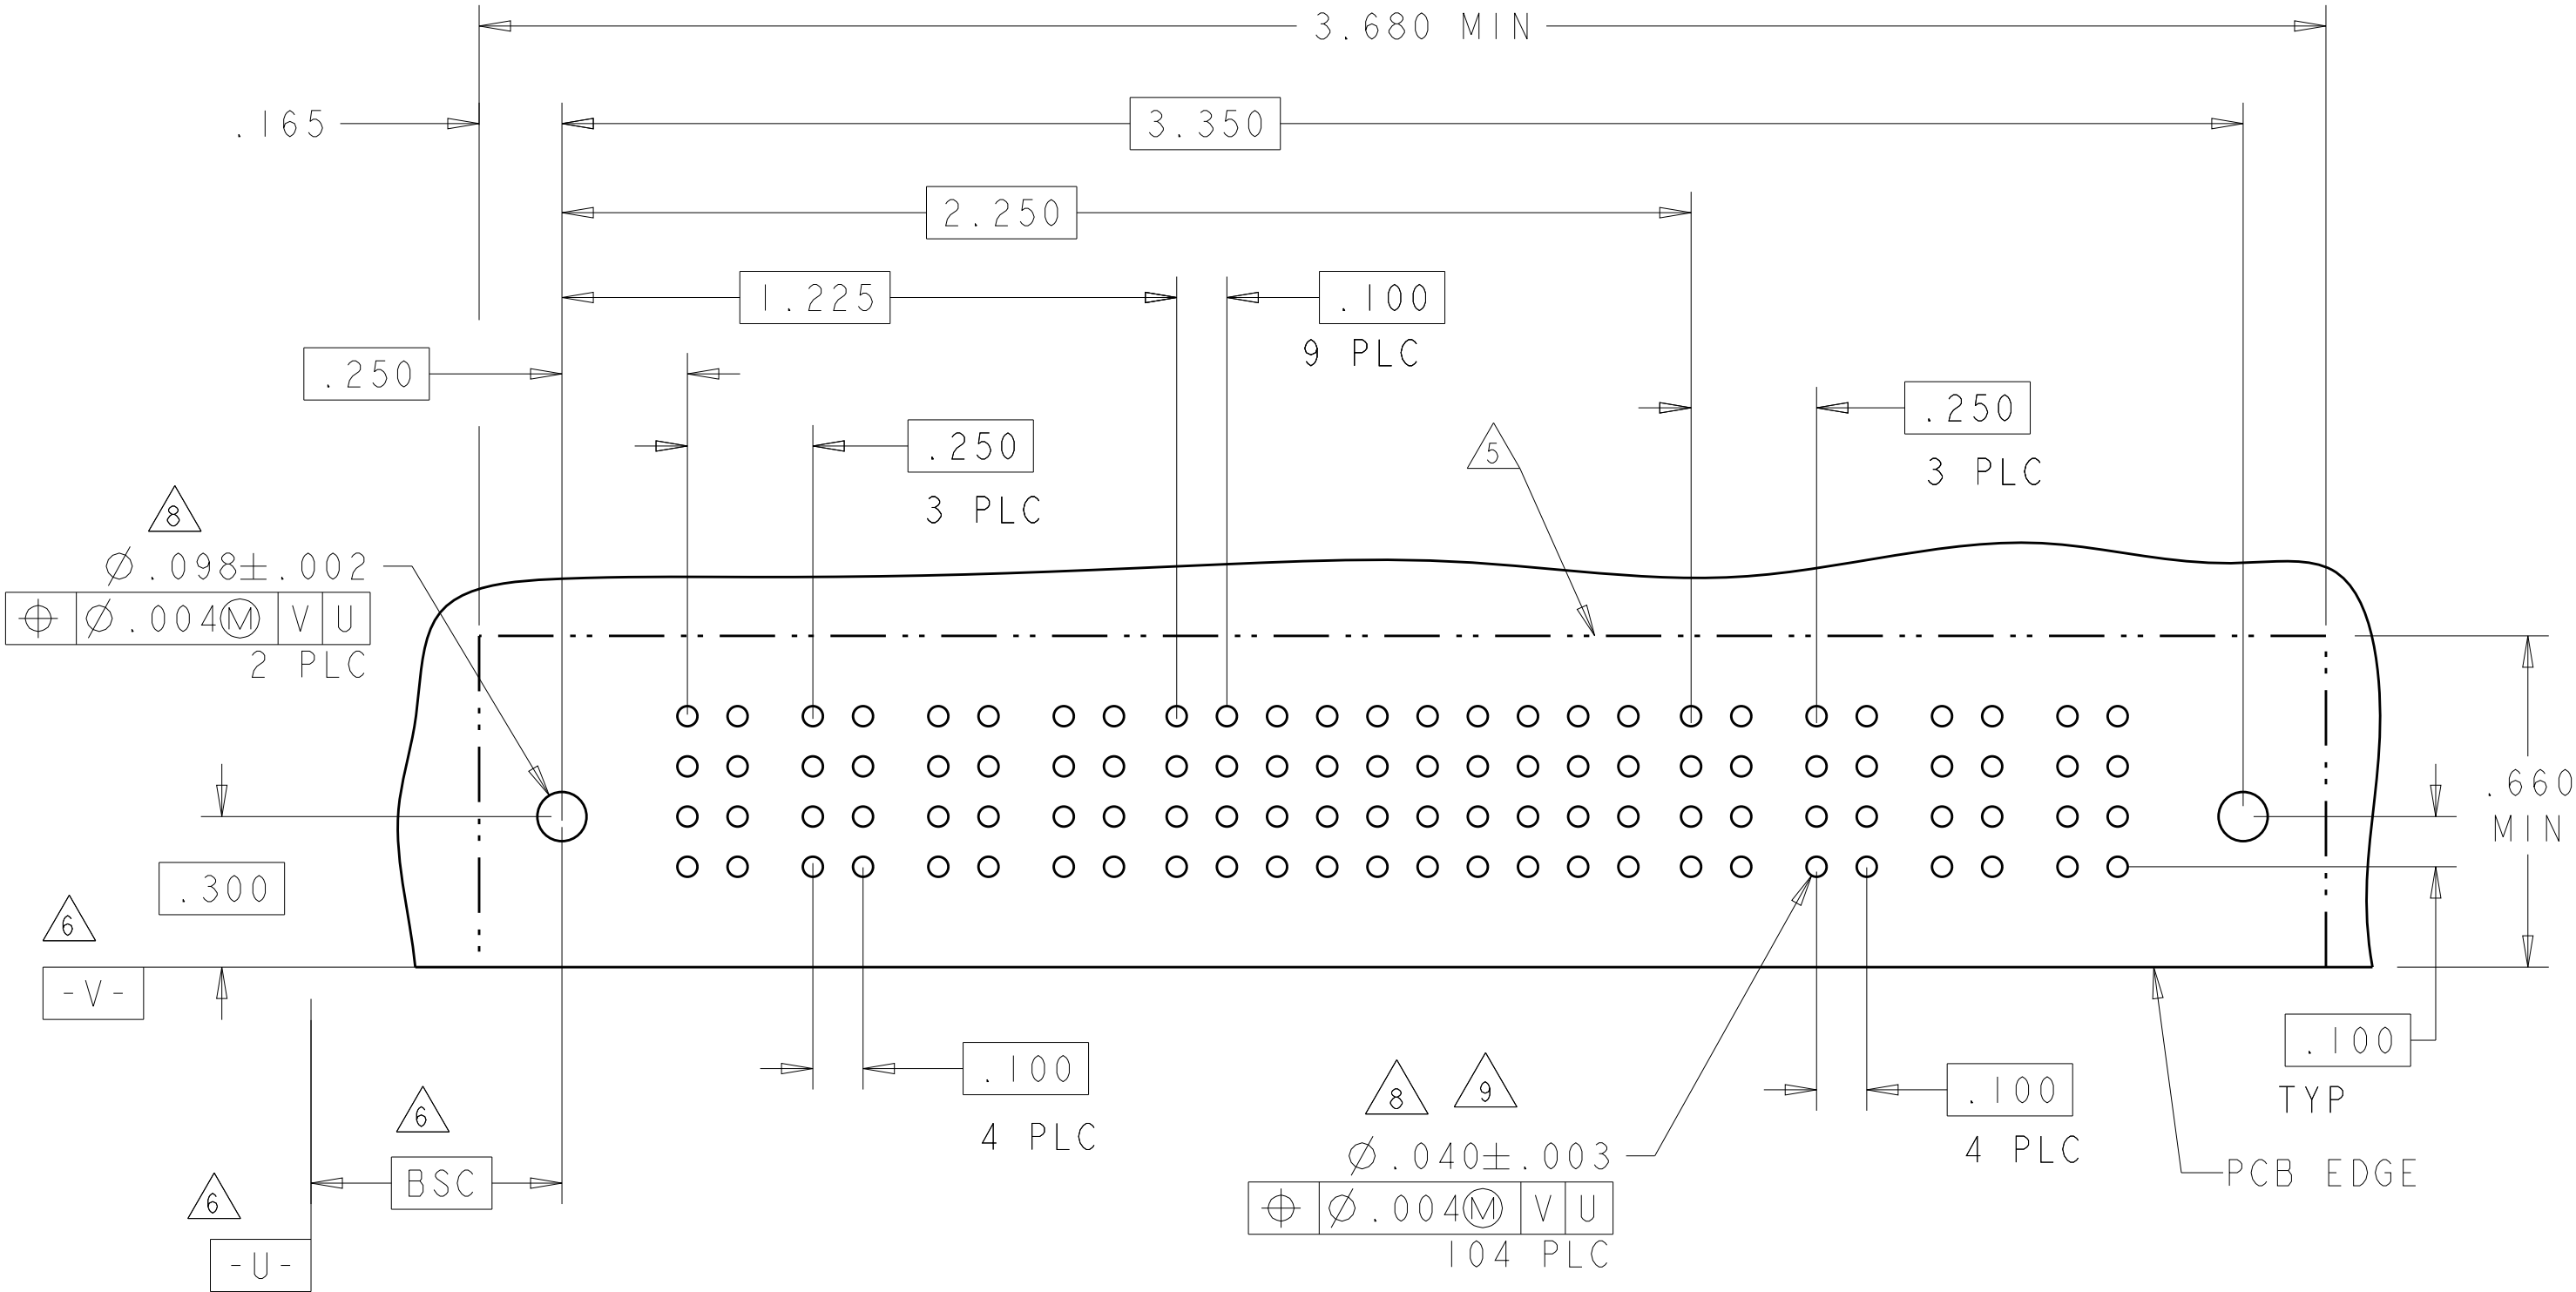



PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
4-6450130-9	D C B A		 PM	 PM	 PM	 PM	J	J	J	J	J	J	 PM	 PM	 PM	 PM	
							K	K	K	K	K	K					
							N	N	N	N	N	N					
							H	H	H	H	H	H					
4P + 24S + 4P																	

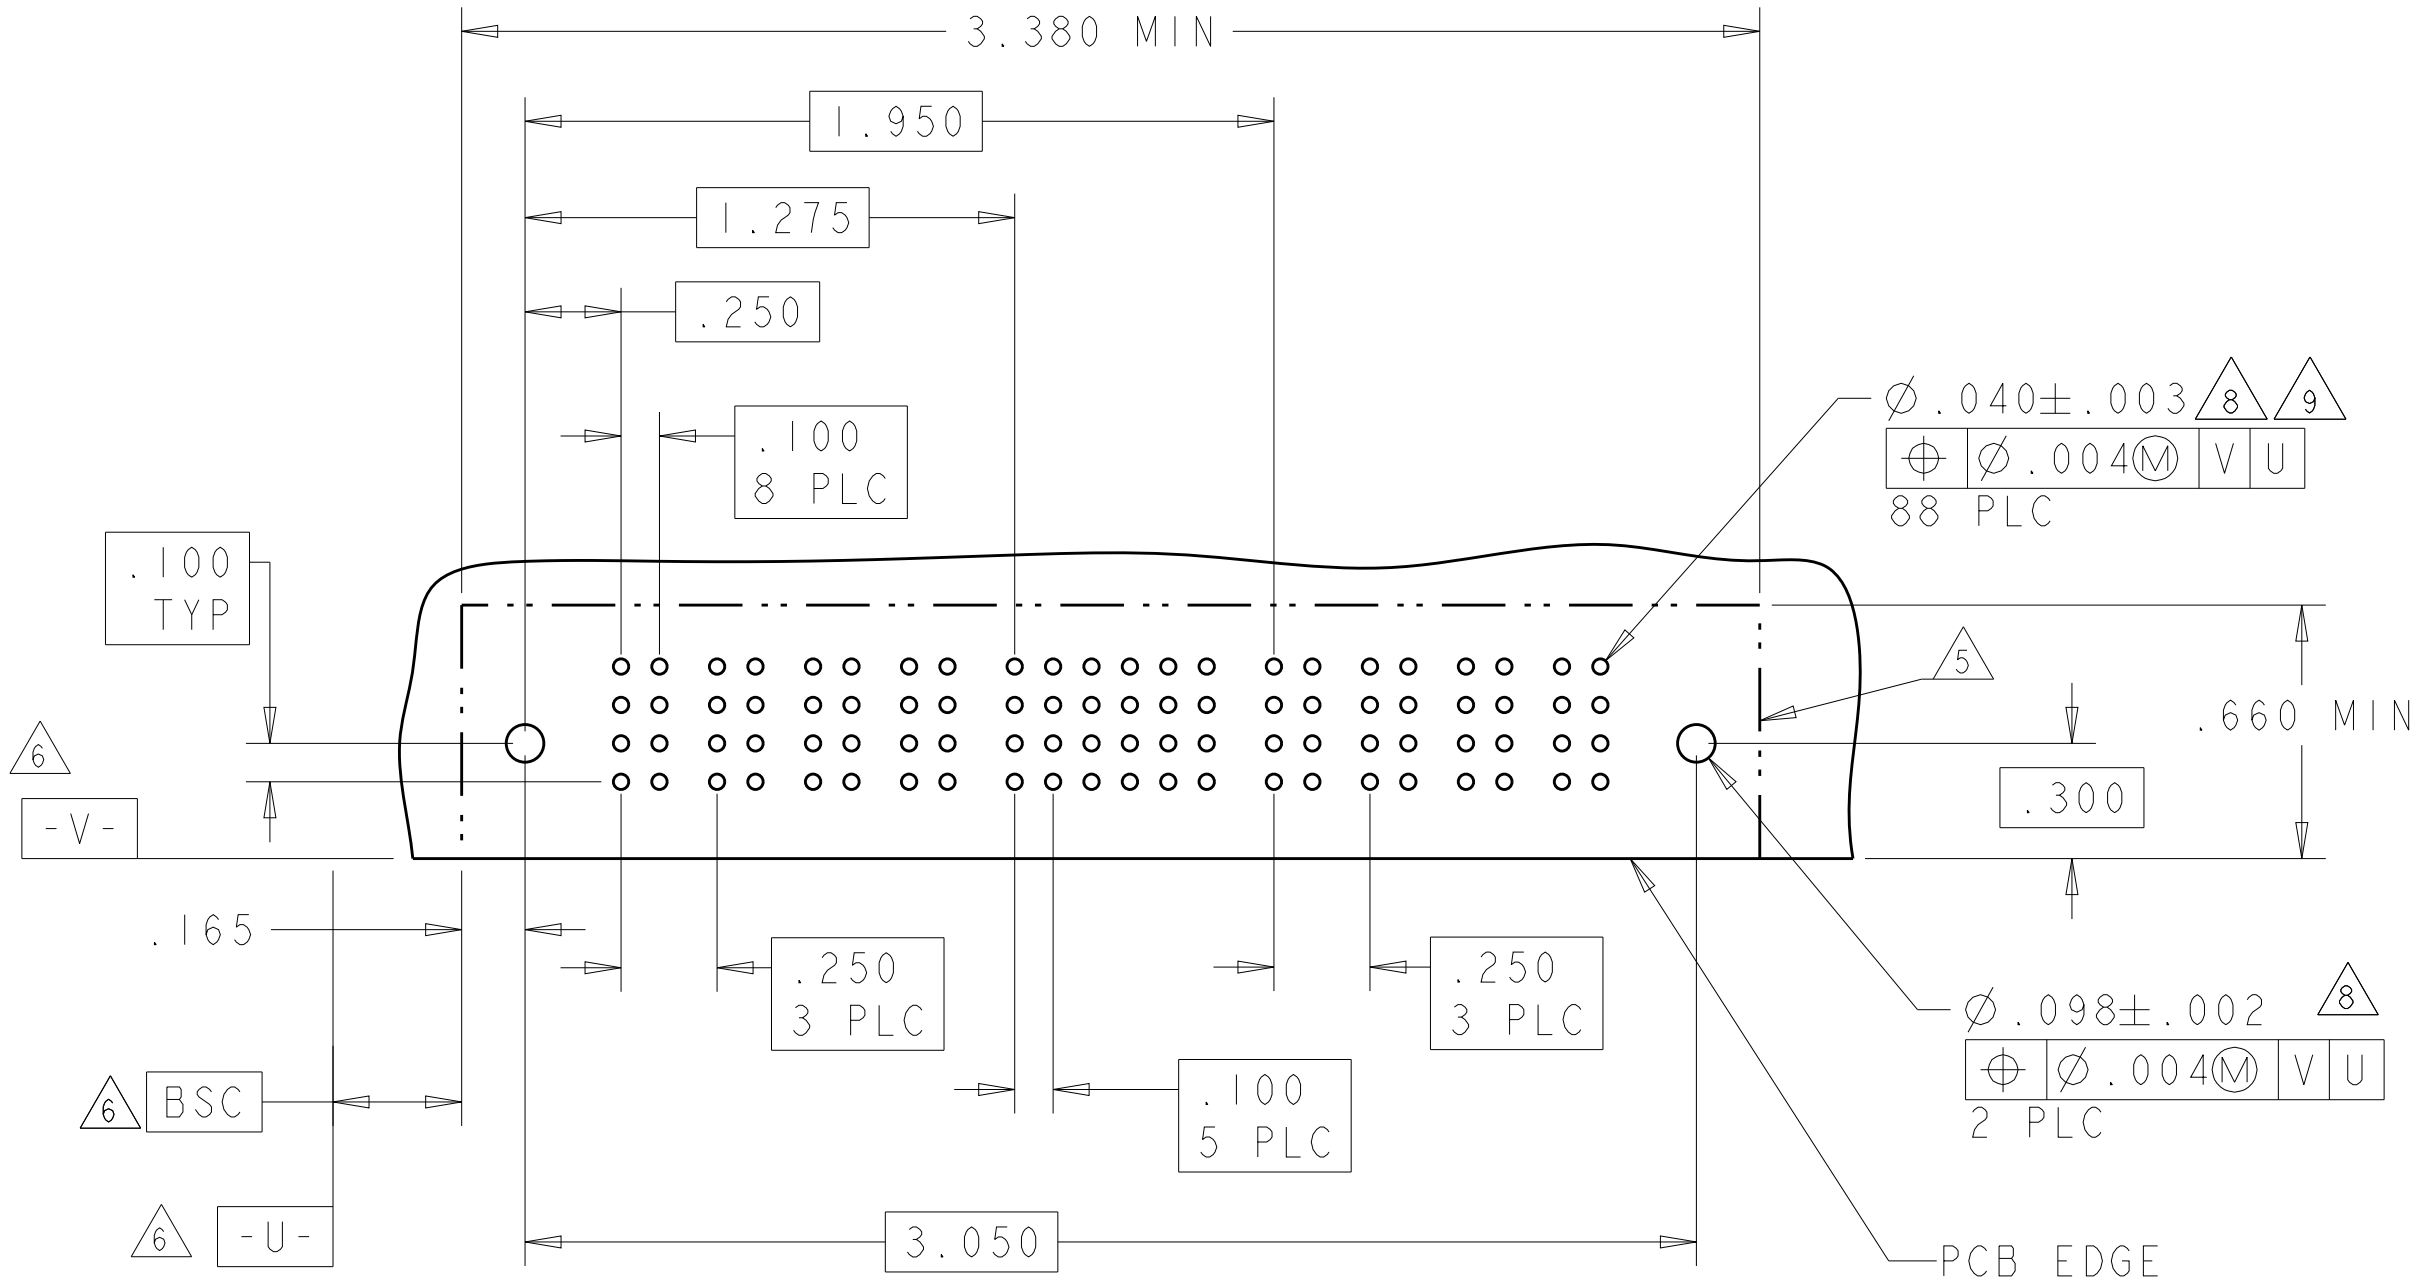


PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
5-6450130-0	D C B A		PM	PM	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	PM	PM	
								K	K	K	K	K	K						
								N	N	N	N	N	N						
5ACP + 24S + 5ACP								H	H	H	H	H	H						HD

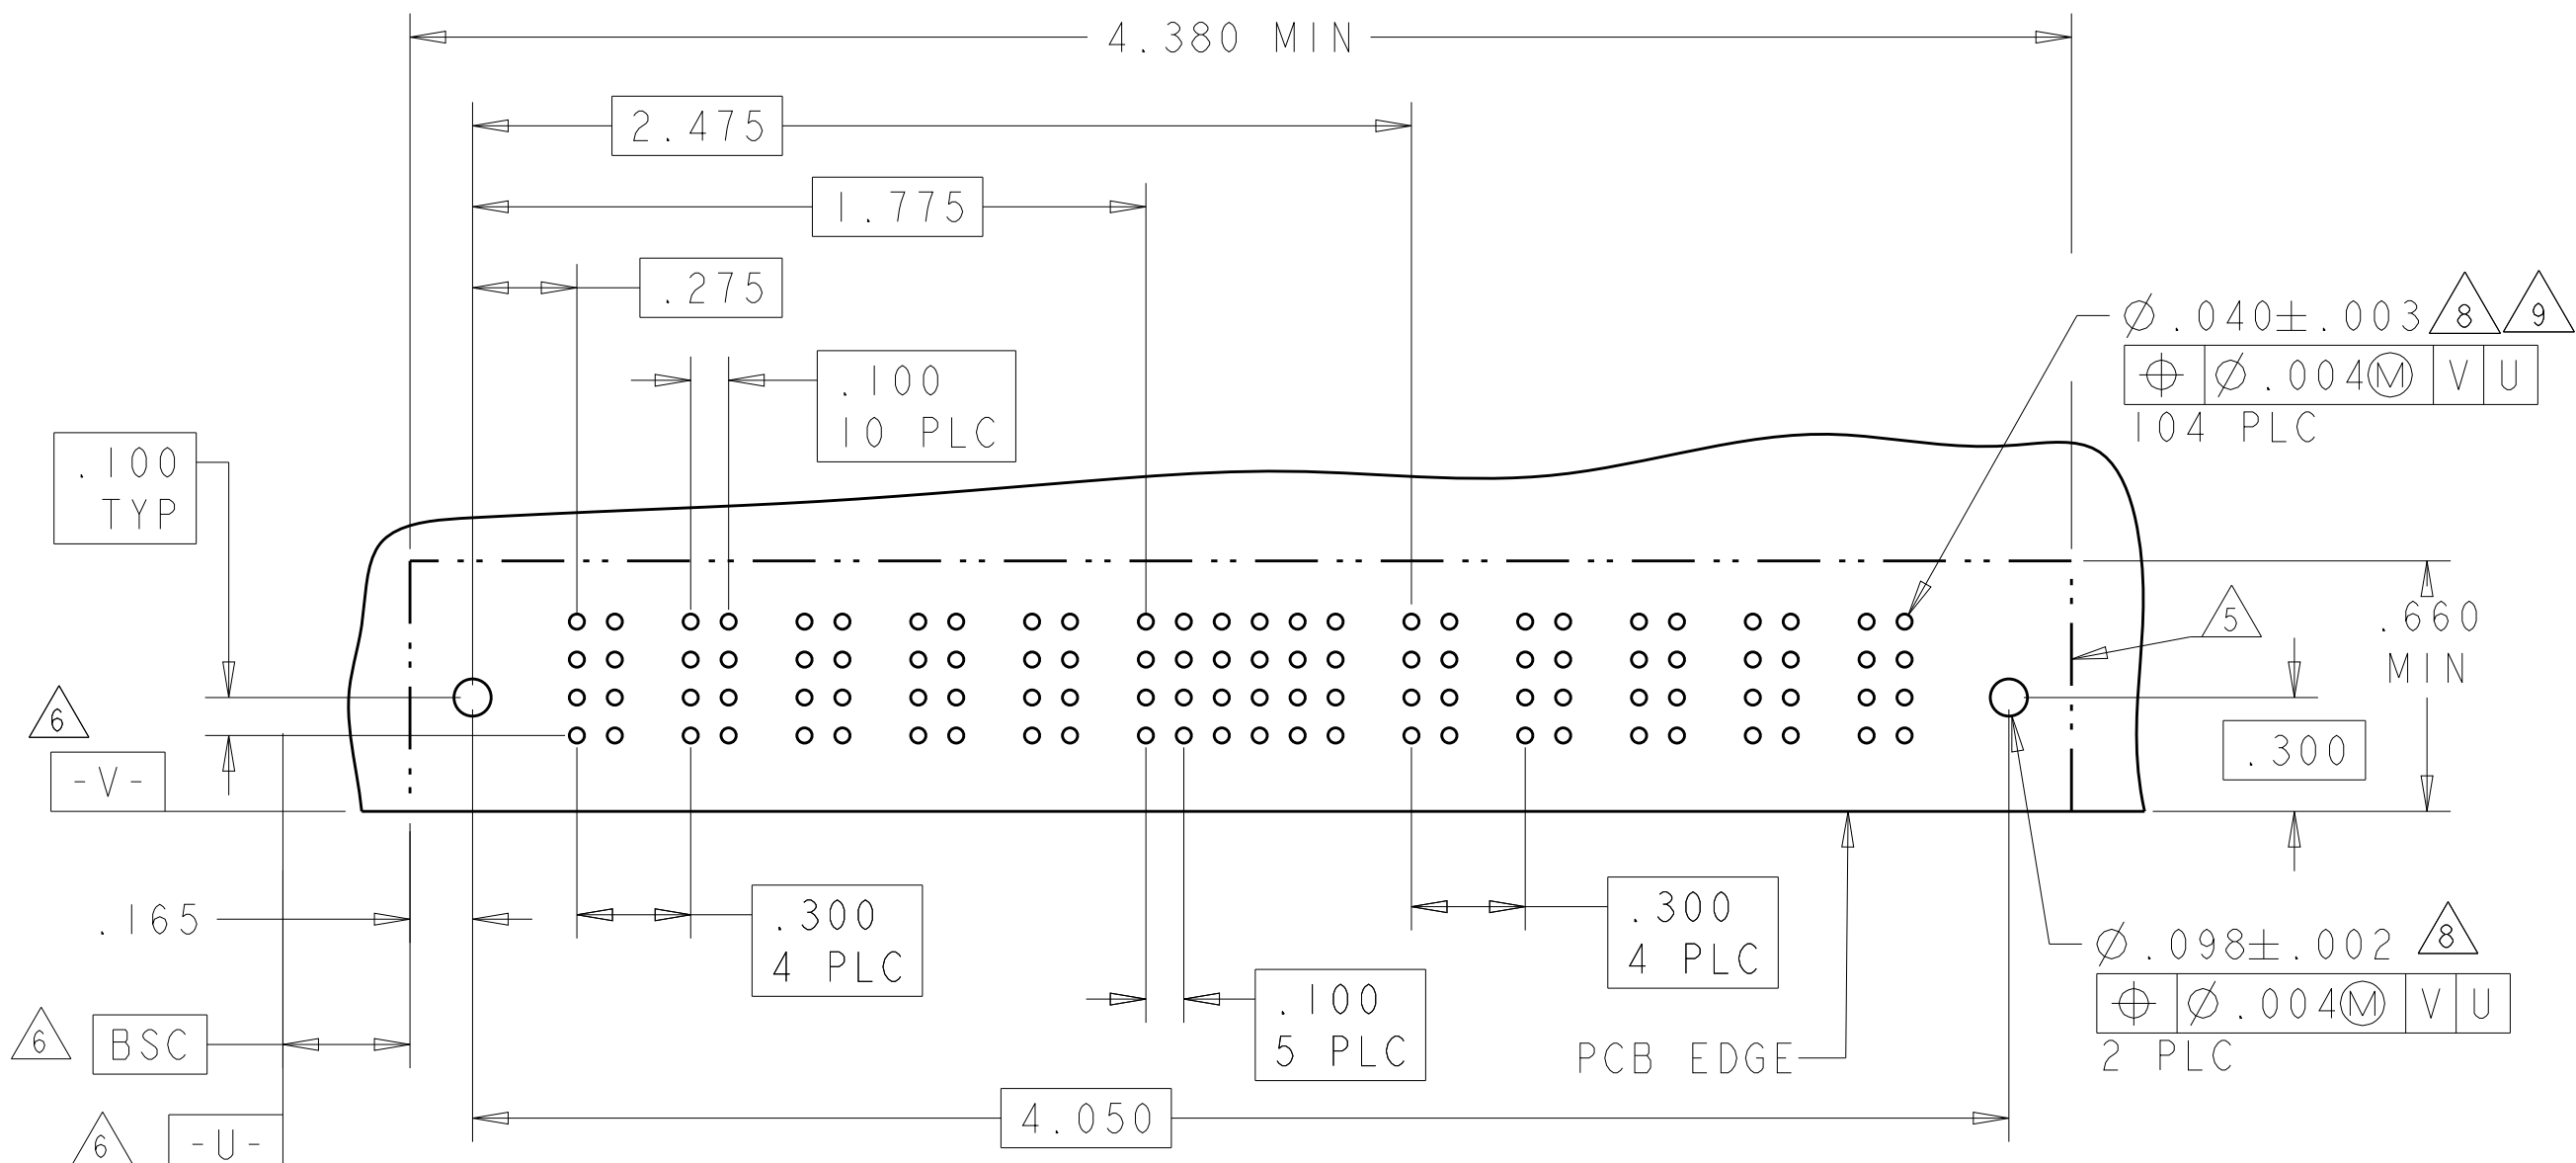








PART NUMBER	ROWS		POWER					SIGNAL								POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	P6	P7	P8	P9	P10	
5-6450130-5	D						J	J	J	J	J	J	J	J							
	K						K	K	K	K	K	K	K								
	N						N	N	N	N	N	N	N								
	H						H	H	H	H	H	H	H								
5P + 32S + 5P																					

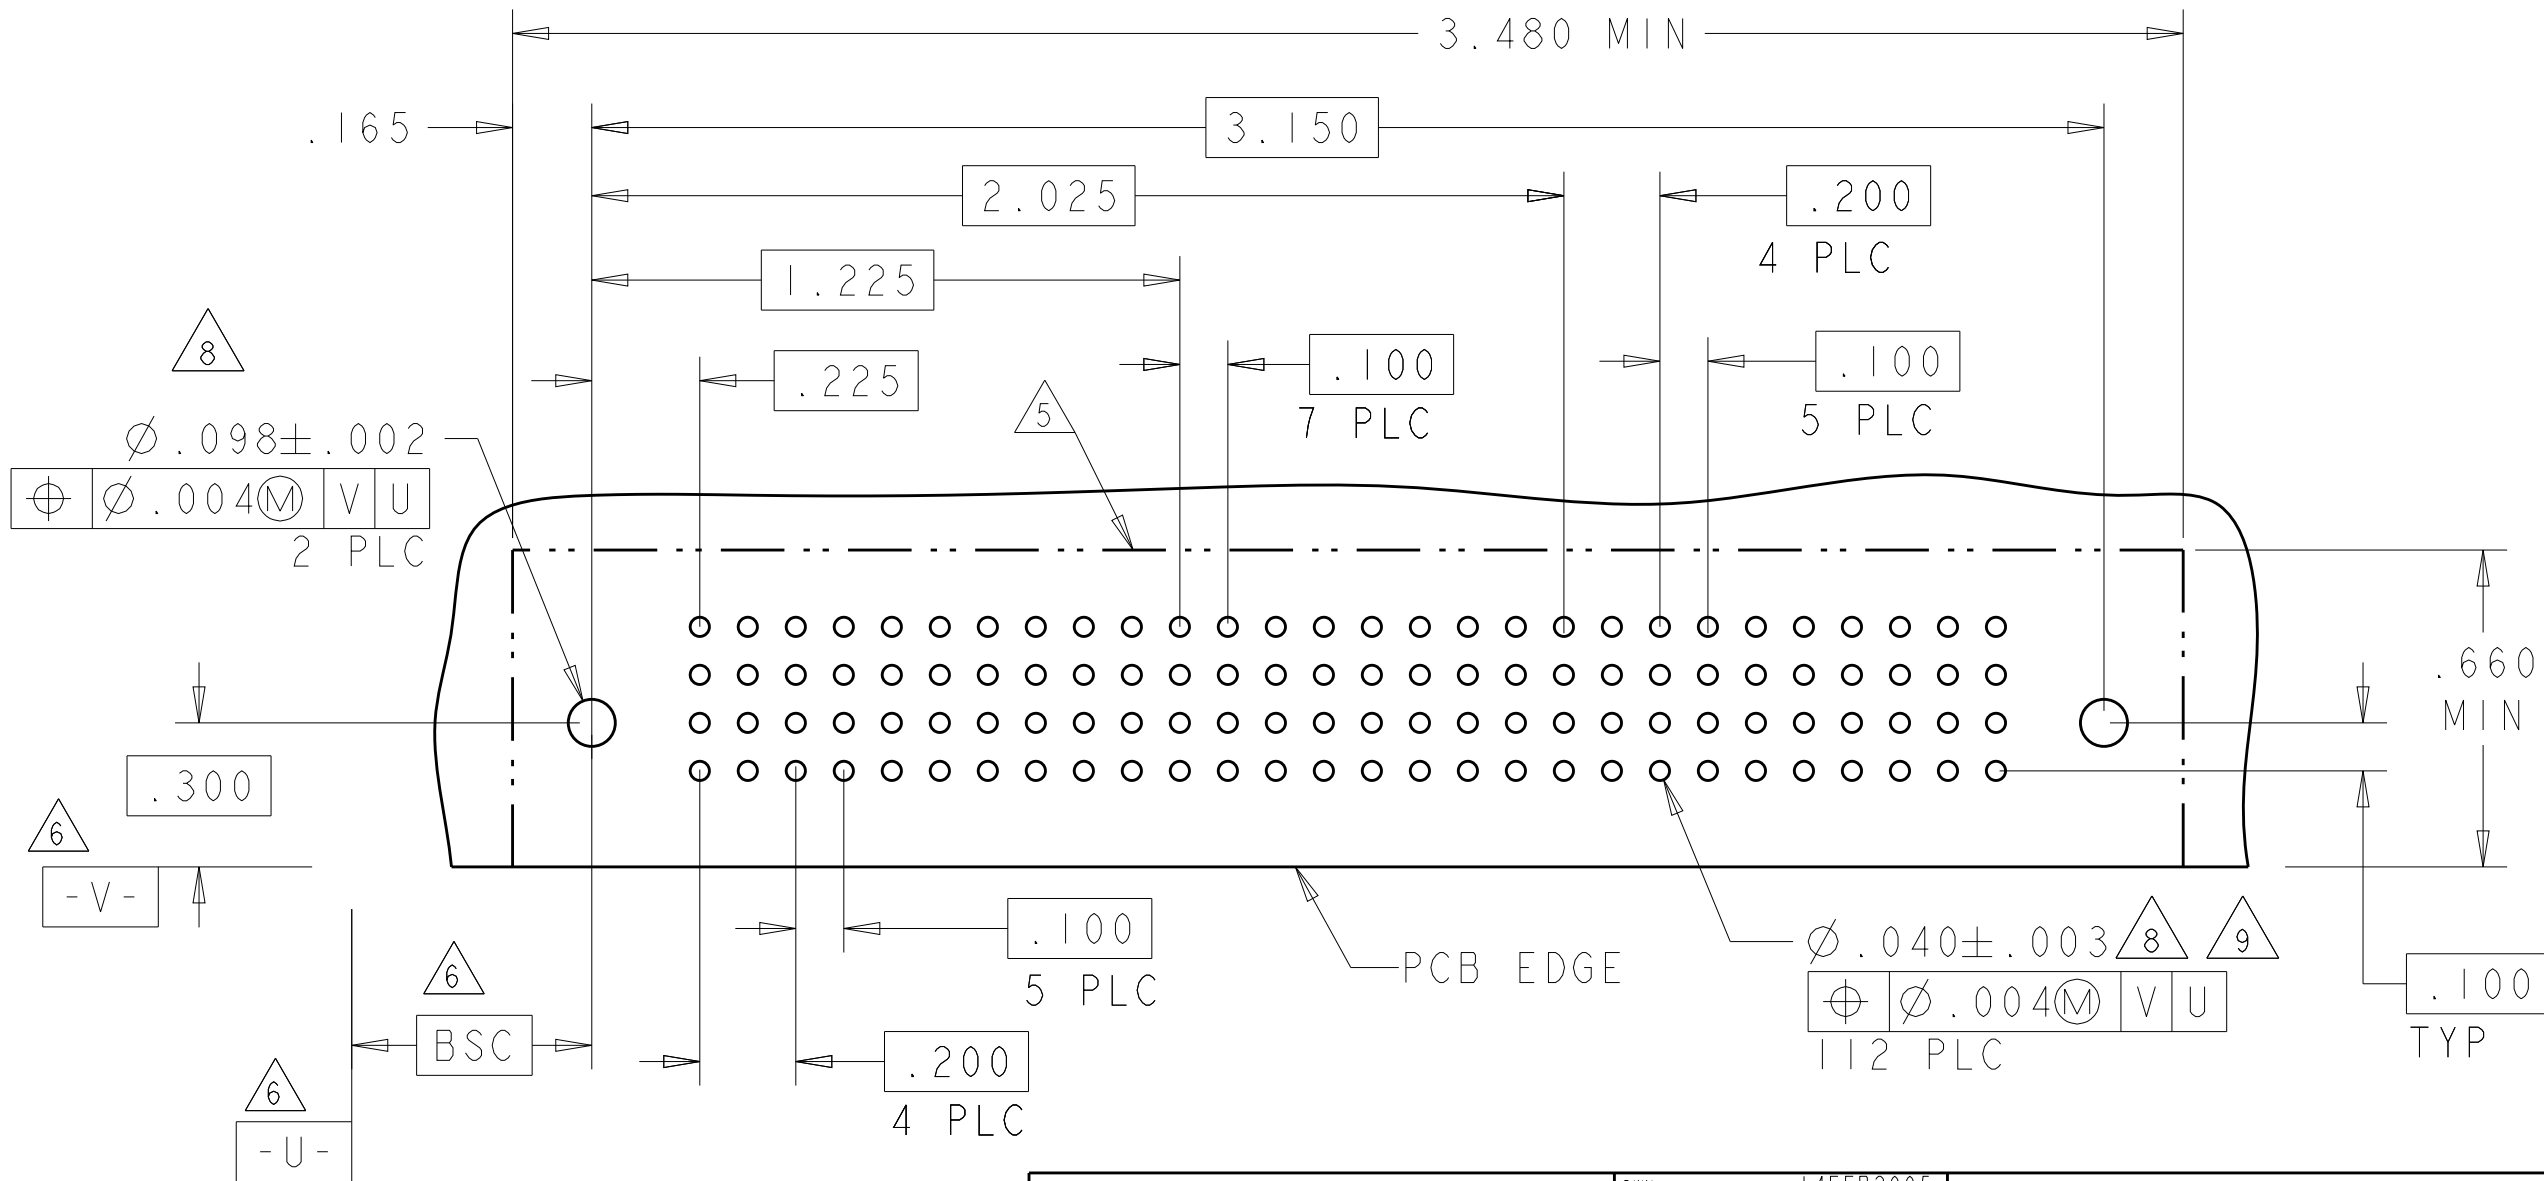



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	4FEB2005	TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE	4FEB2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	4FEB2005	NAME RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL	
0 PLC ± .01		PRODUCT SPEC		SIZE 108-1973	
1 PLC ± .01		APPLICATION SPEC		CAGE CODE 114-13038	
2 PLC ± .005		WEIGHT		DRAWING NO A100779	
3 PLC ± .005		Customer Drawing		REV M2	
4 PLC ± .002		SCALE 4:1		SHEET 11	
ANGLES ± .002		RESTRICTED TO		OF 28	
FINISH					

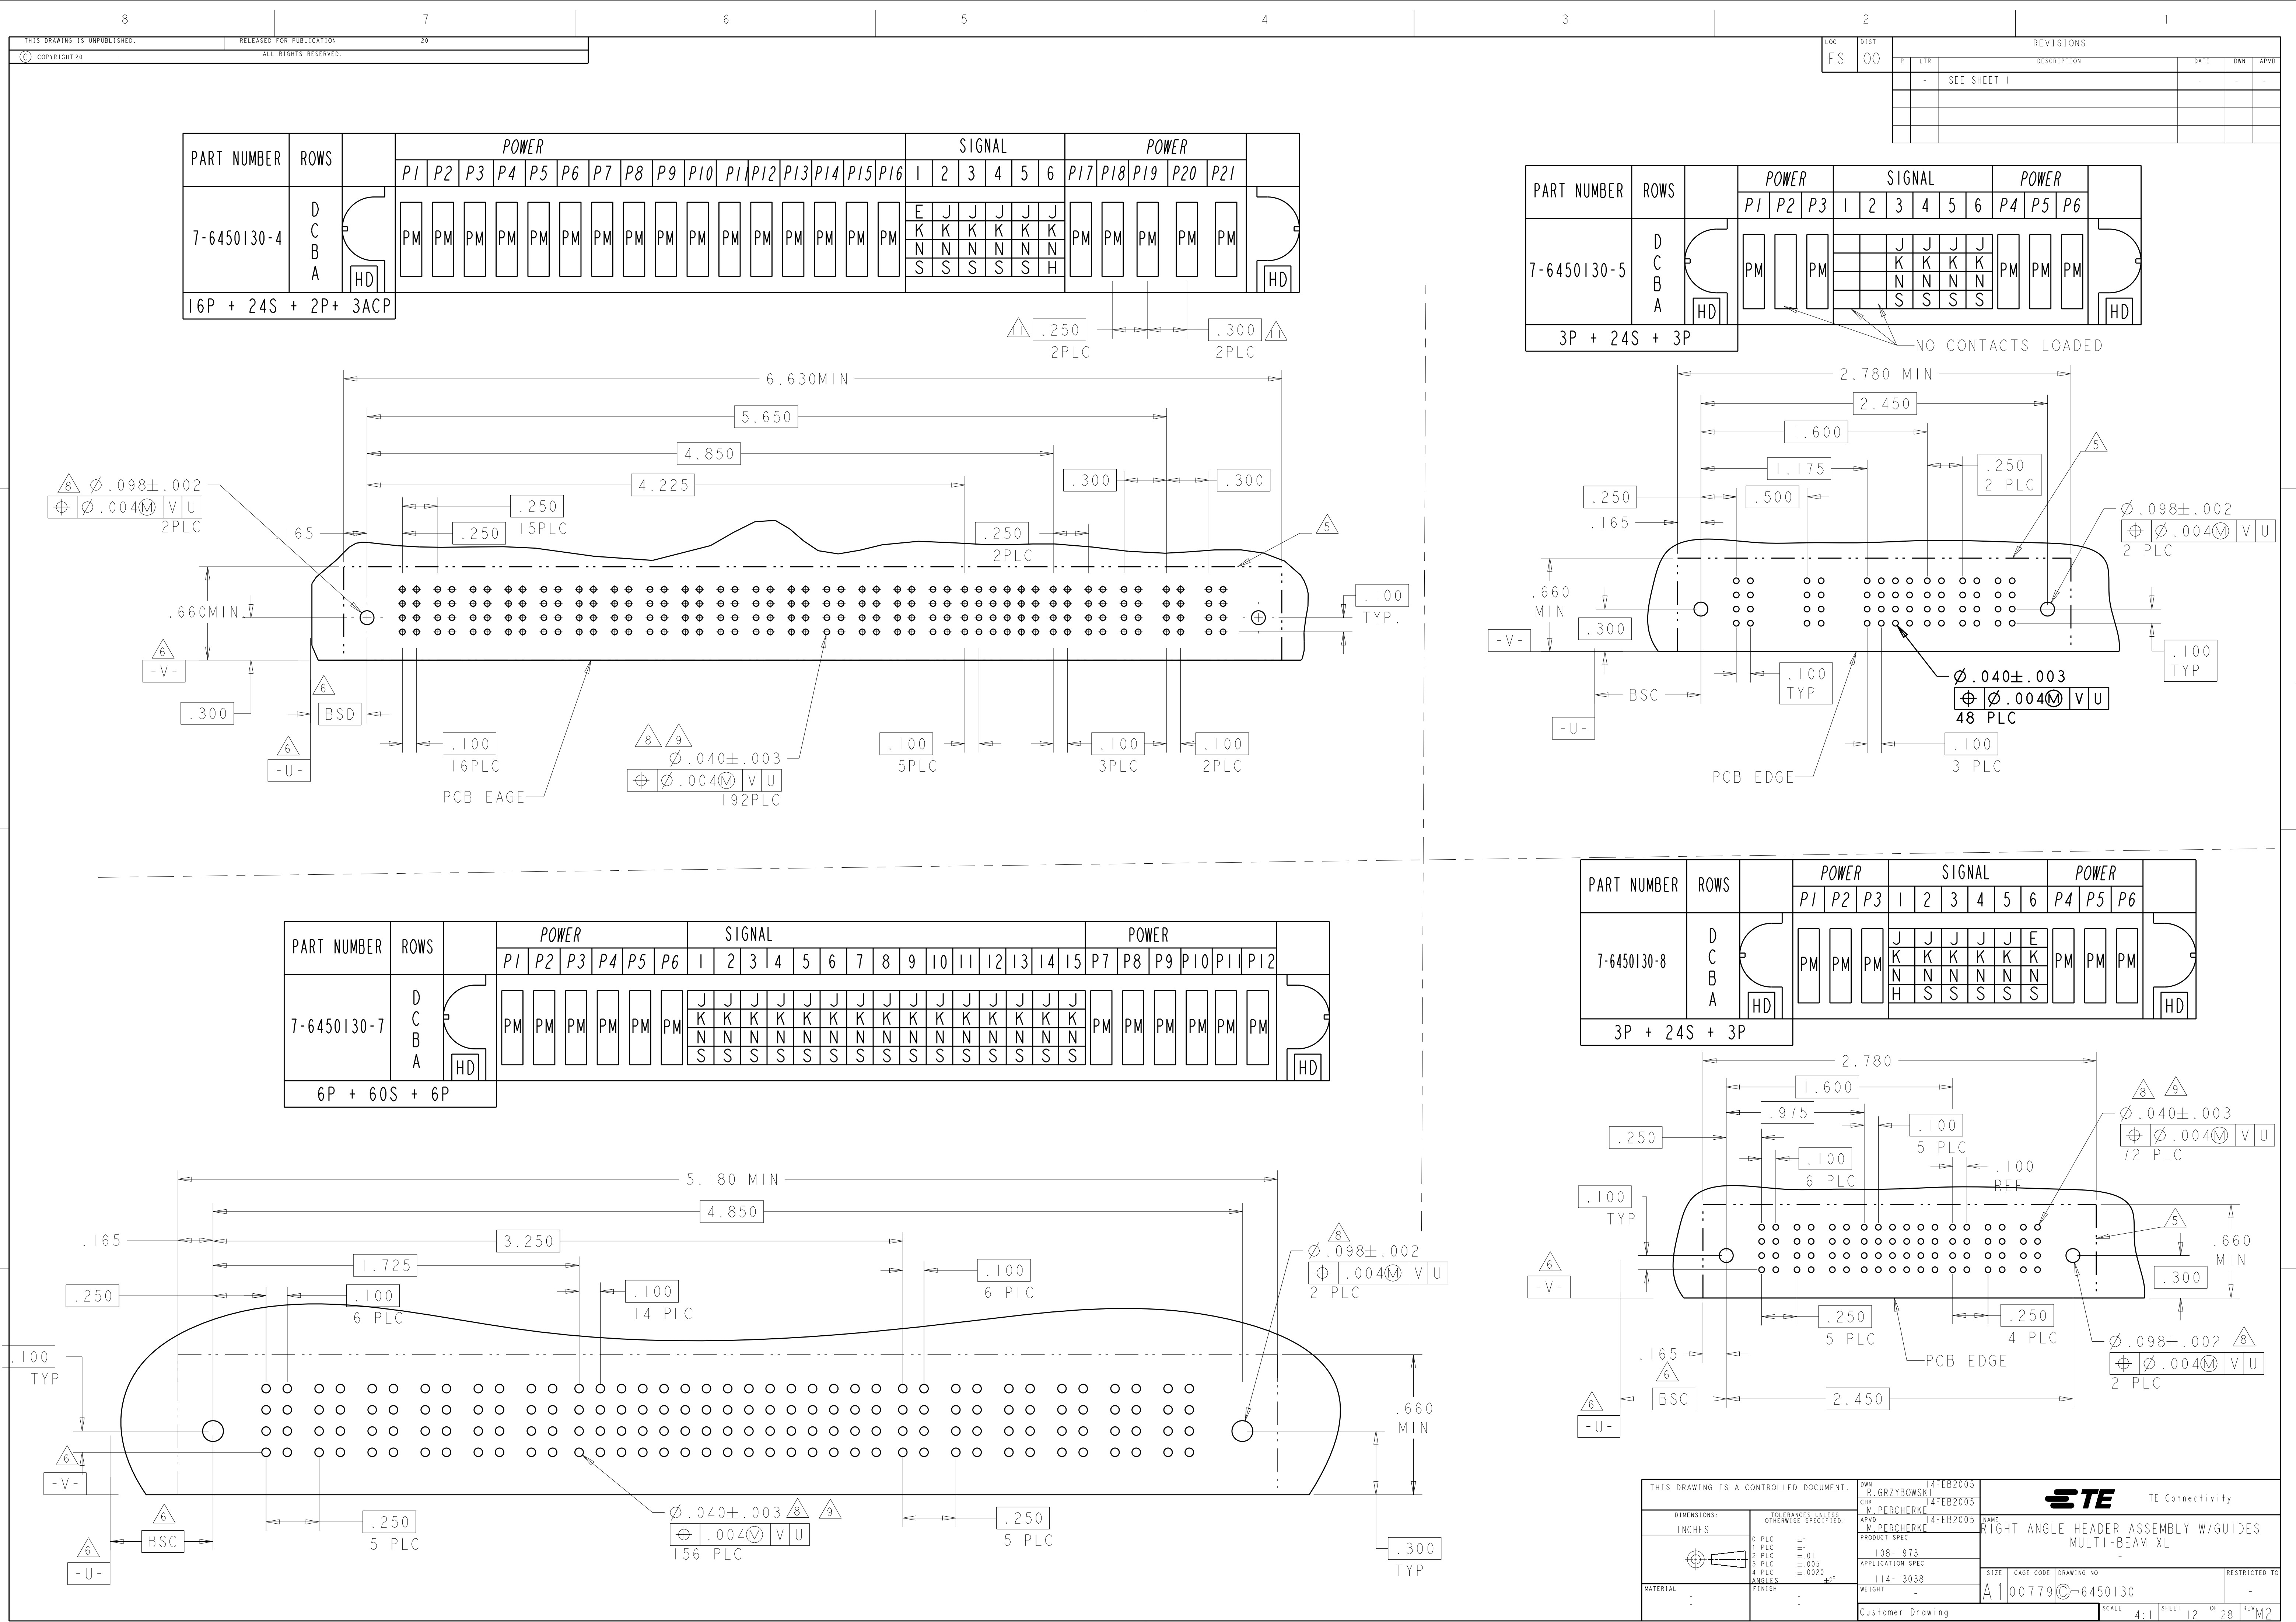

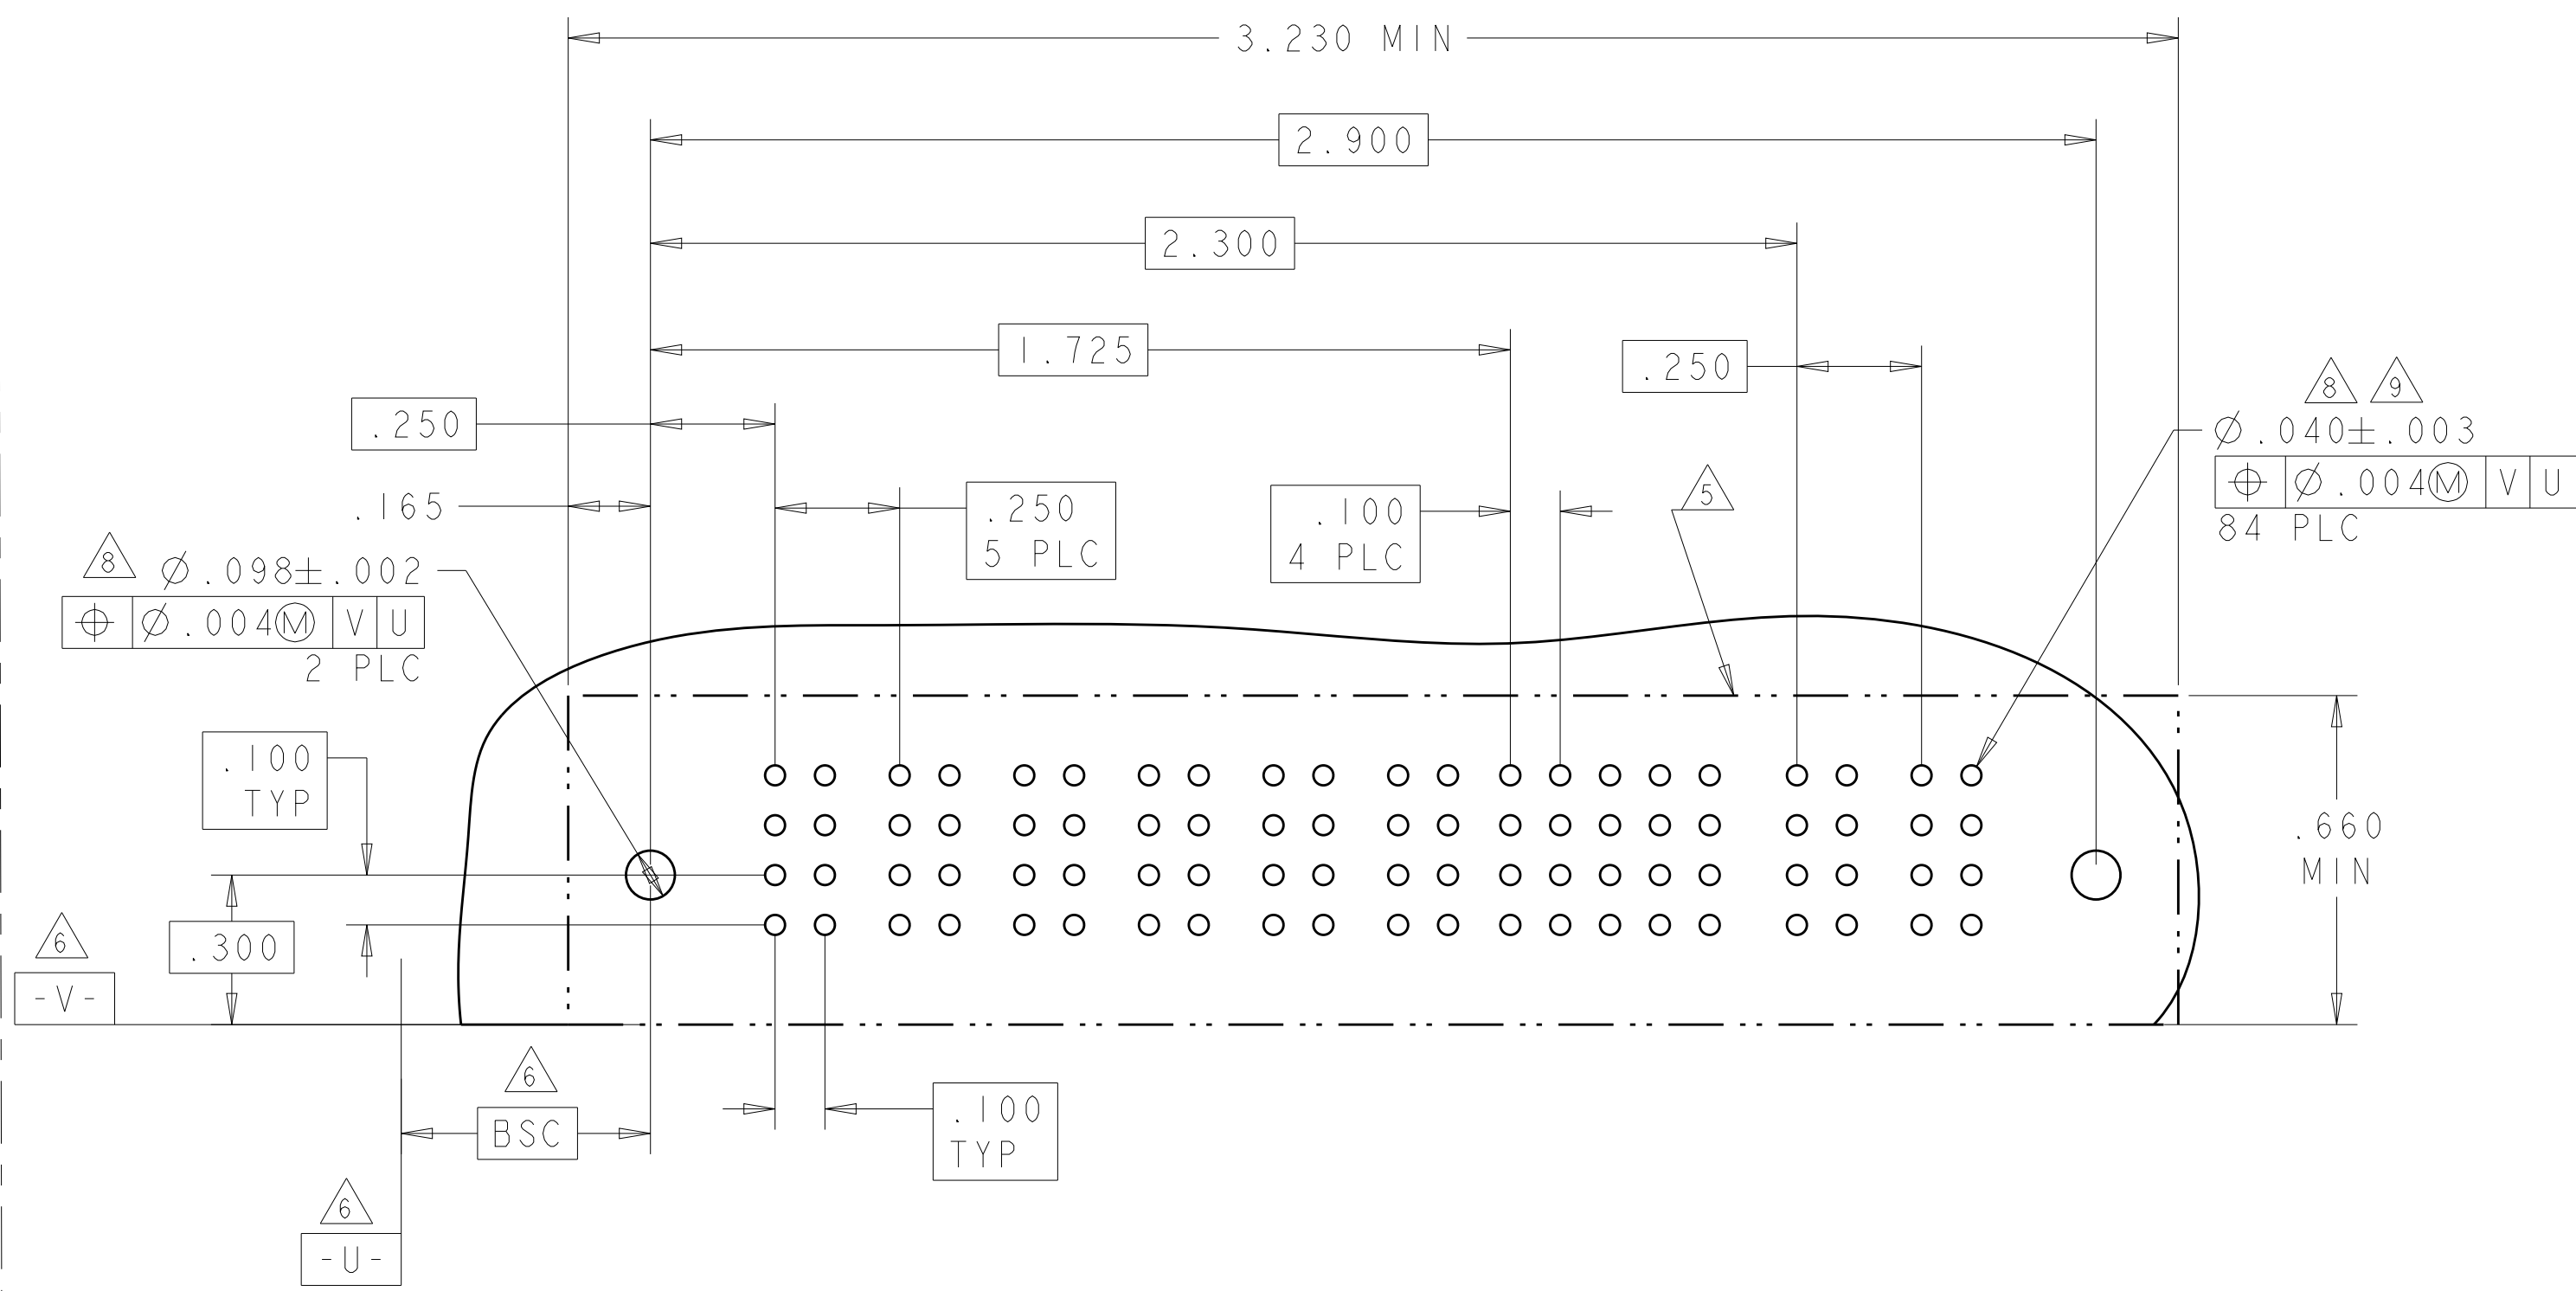
[illegible]


PART NUMBER	ROWS		POWER				SIGNAL						POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	
8-6450130-2	D C B A					J	J	J	J	J	J					
						K	K	K	K	K	K					
						N	N	N	N	N	N					
						S	S	S	S	S	H					
4P + 24S + 3ACP																

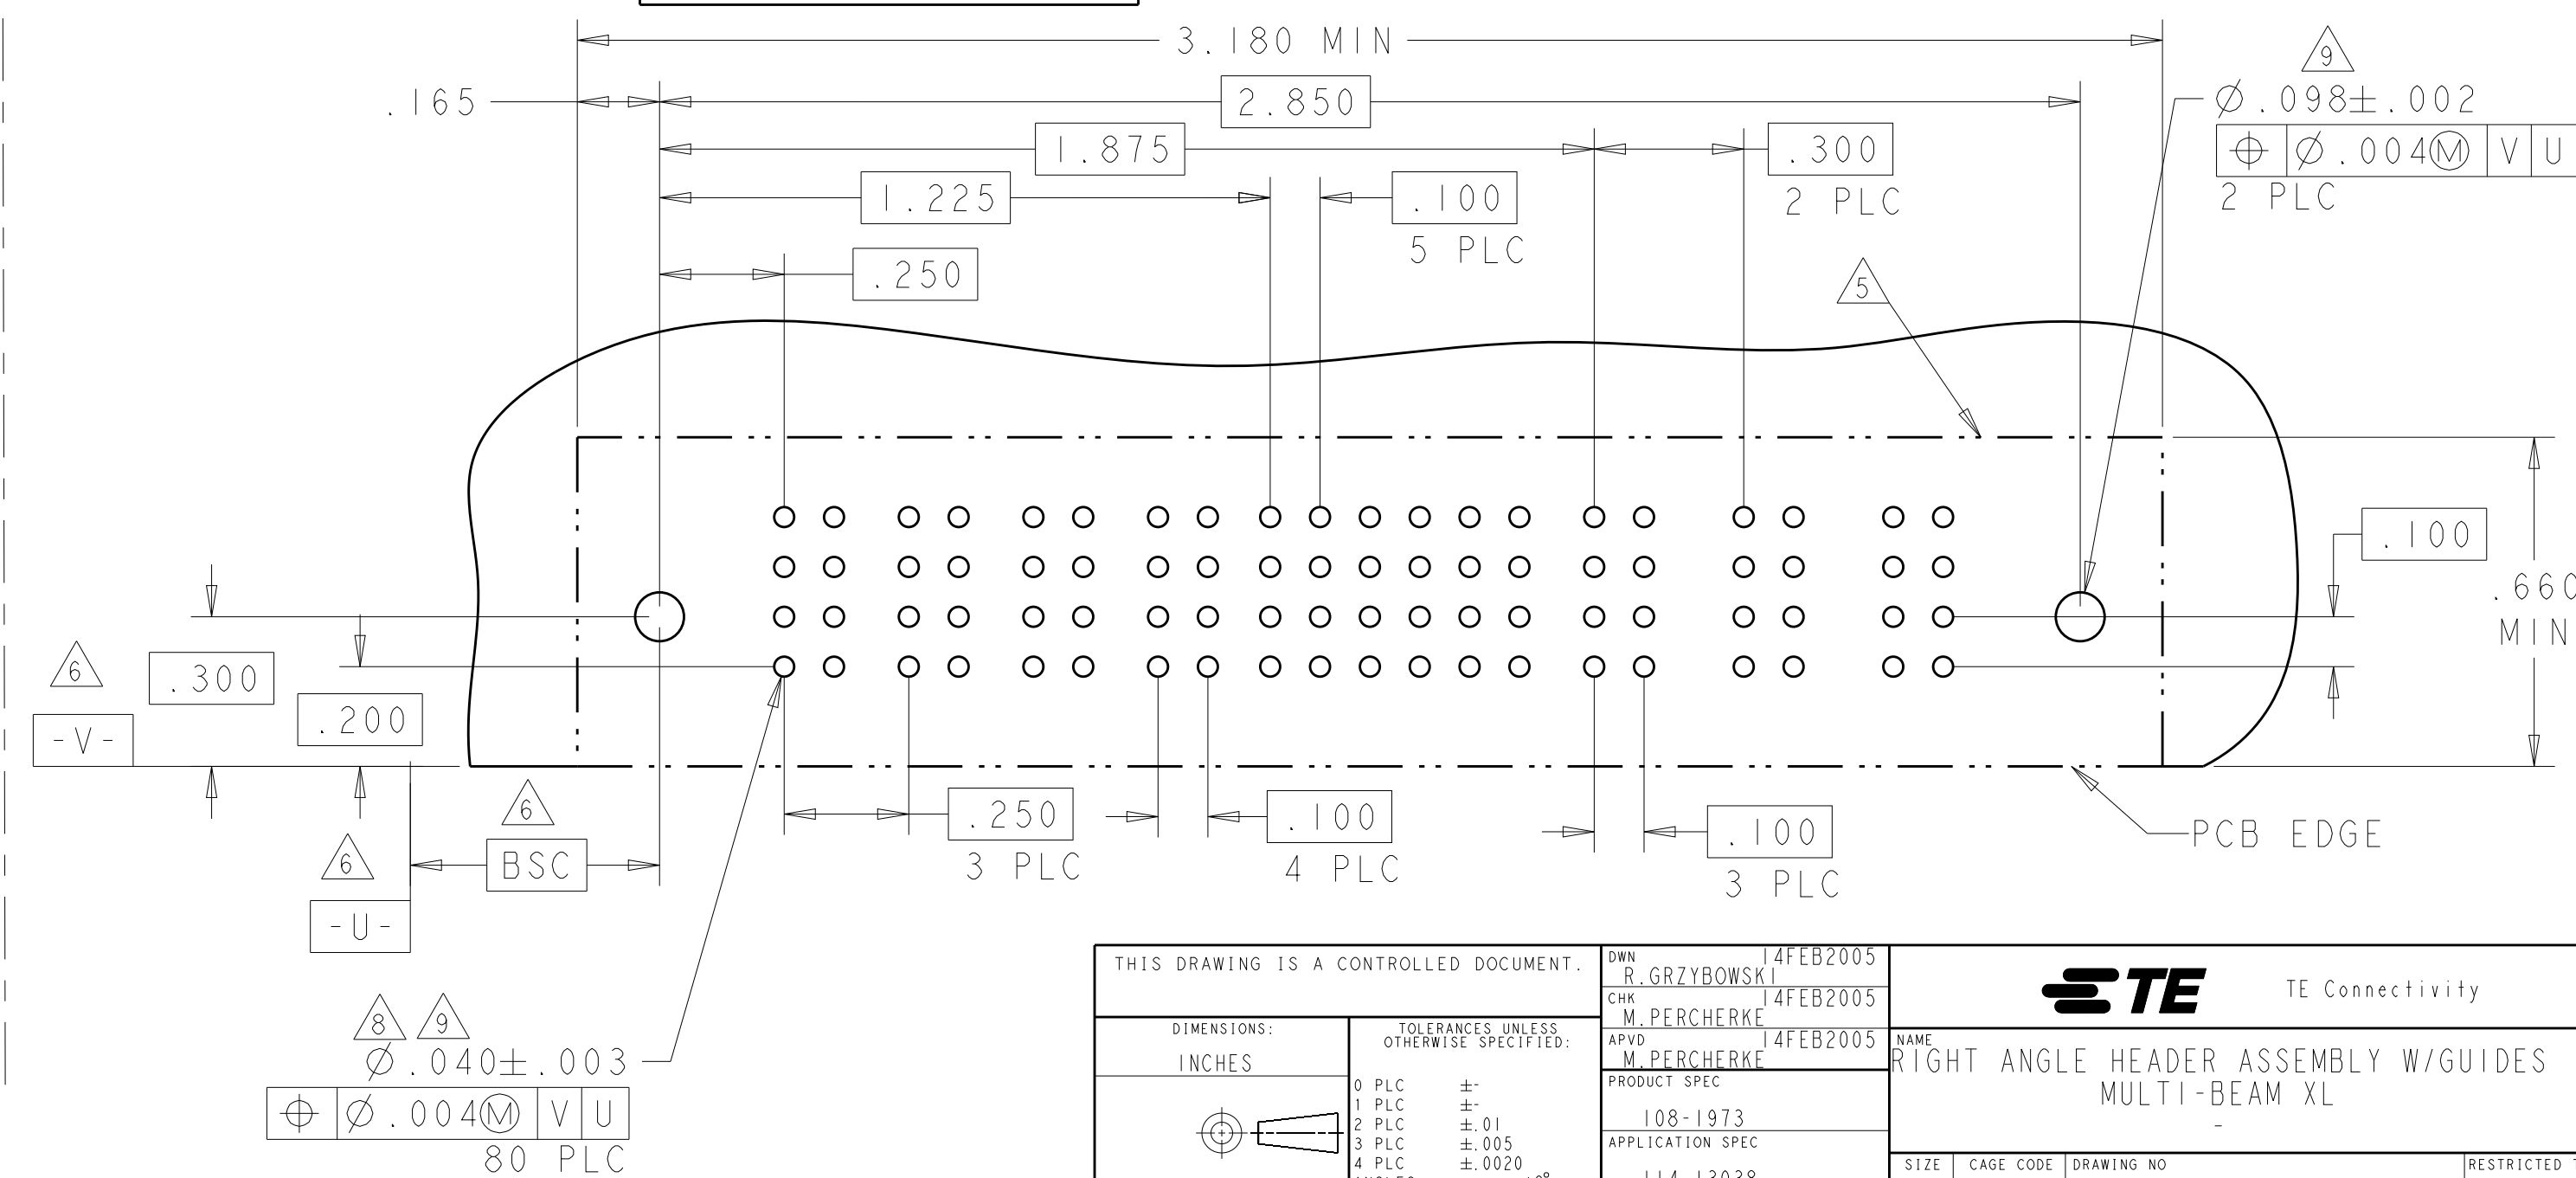4805 (3/11)

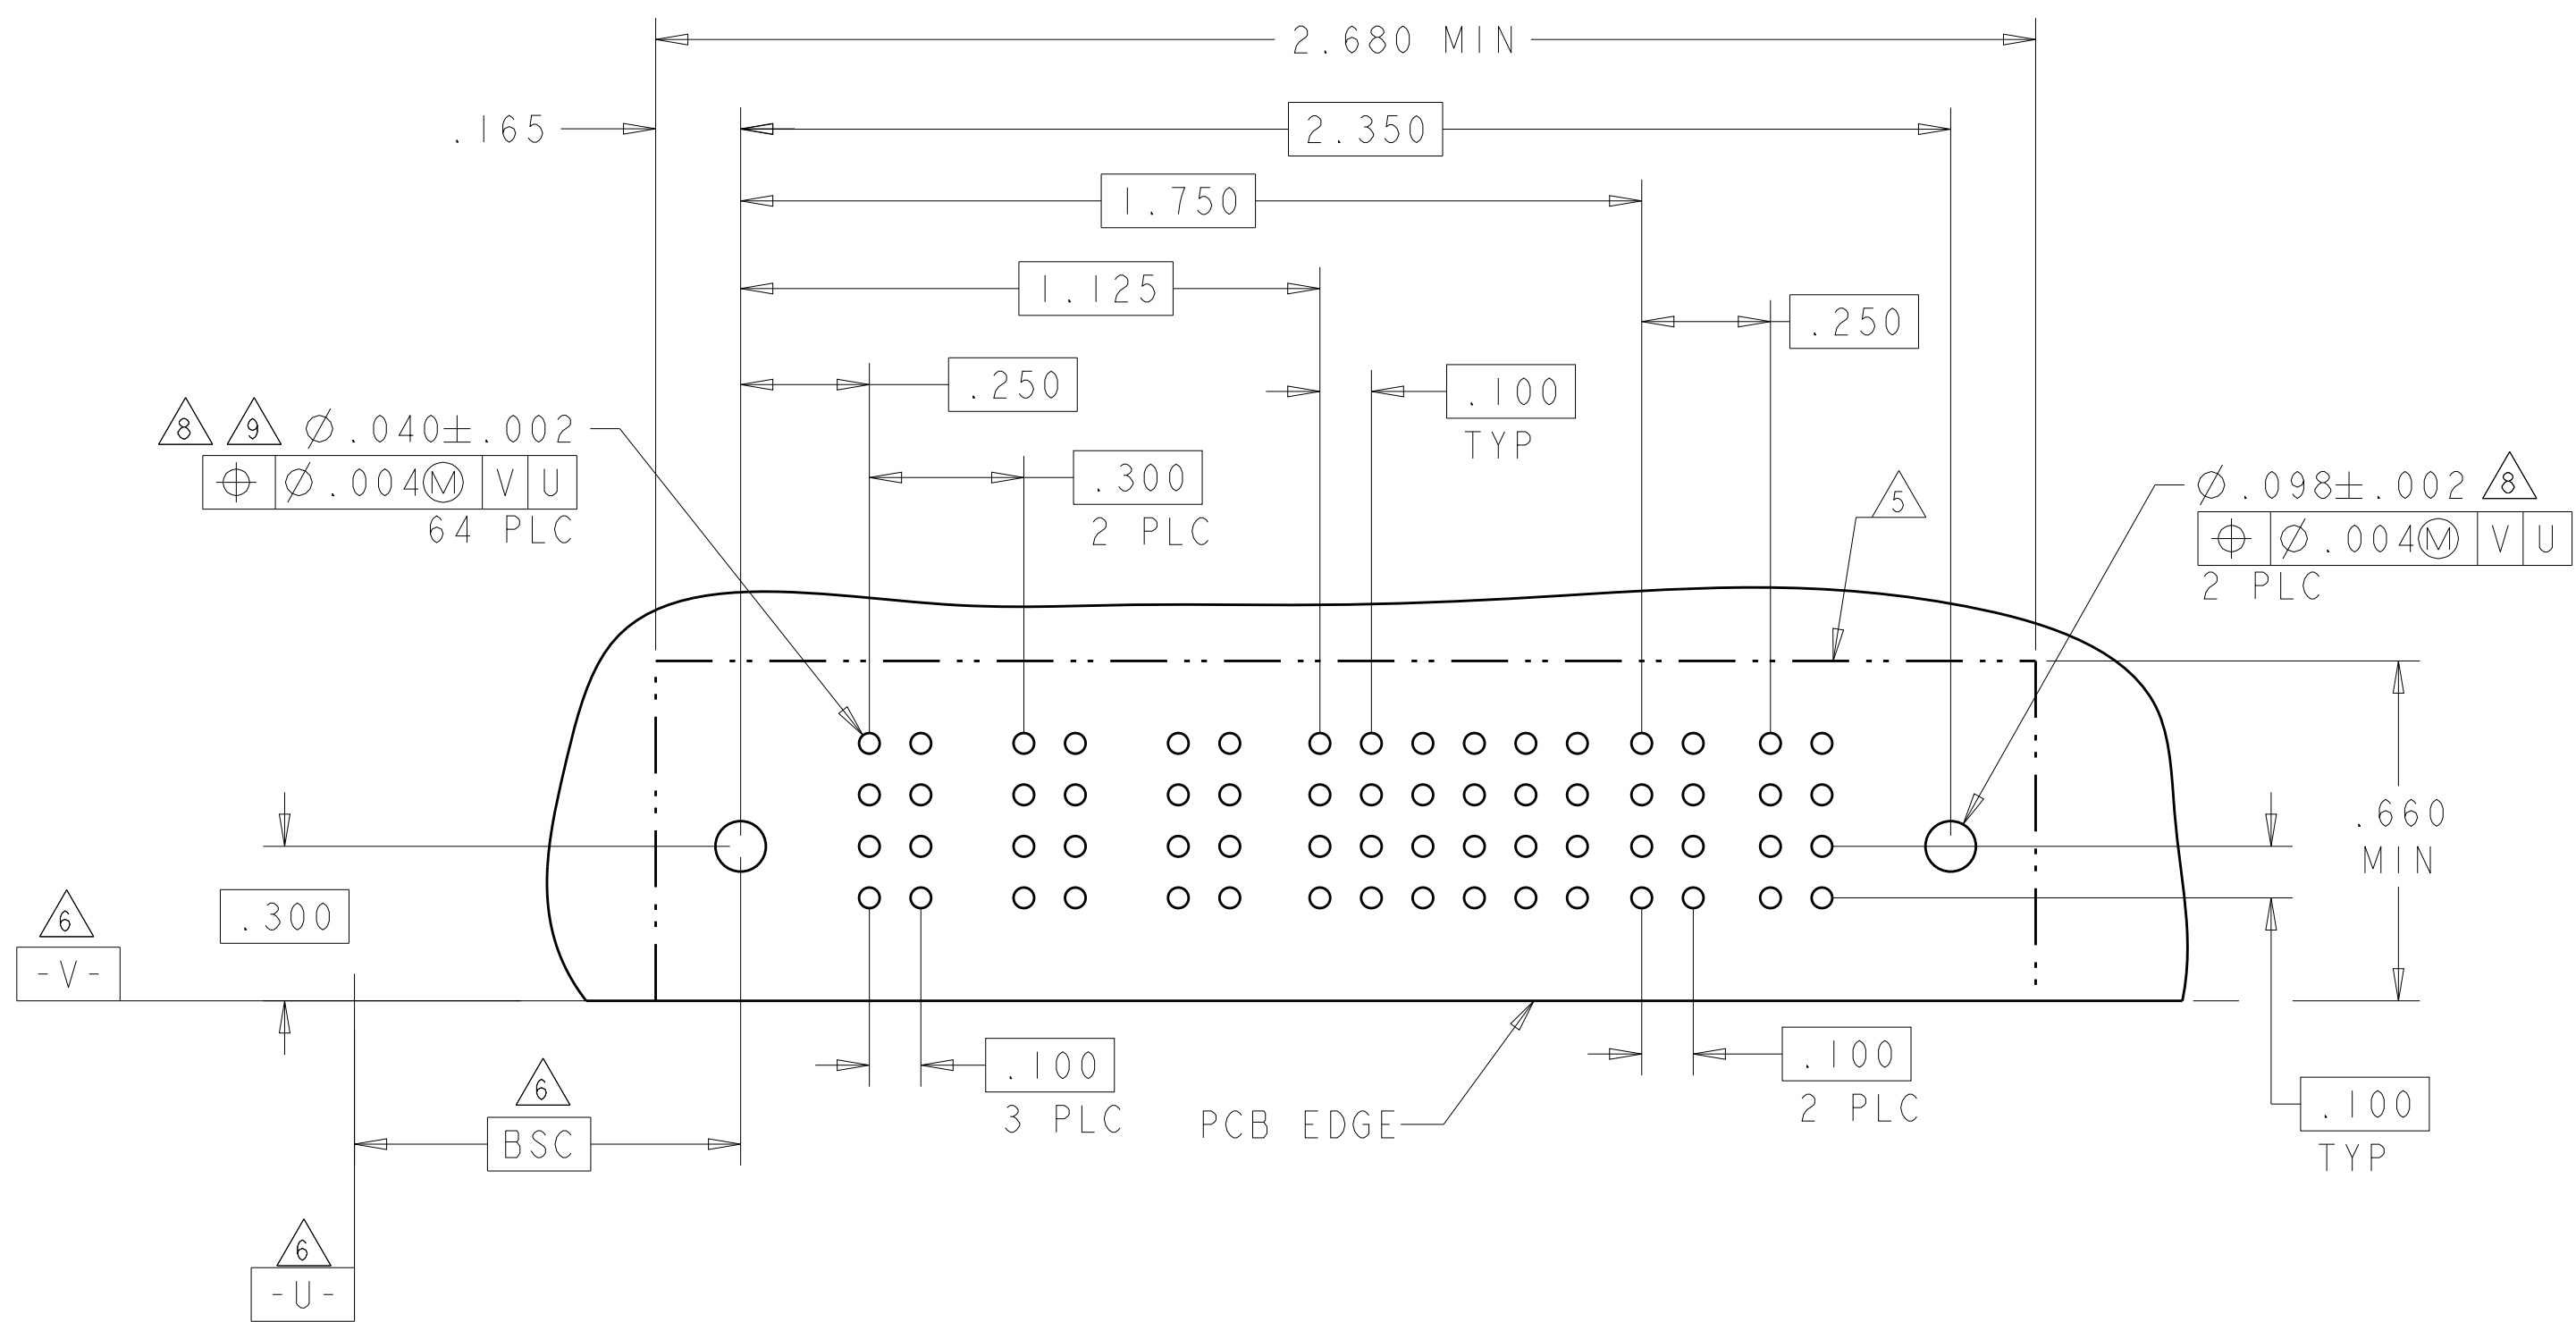[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 141EB2005 CHG GRZYBOWSKI M. PERCHERRE 141EB2005 141EB2005 M. PERCHERRE		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±0°		NAME: RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL -	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CAGE CODE DRAWING NO A100779 C6450130	
MATERIAL -		WEIGHT -		RESTRICTED TO -	
FINISH -		Customer Drawing		SCALE 4:1 SHEET 14 of 28 REV M	


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
8-6450130-6	D		PM		PM			J	J	J		PM	PM	PM	
							K	K	K						
							N	N	N						
							S	S	S						
3P + 24S + 3P															

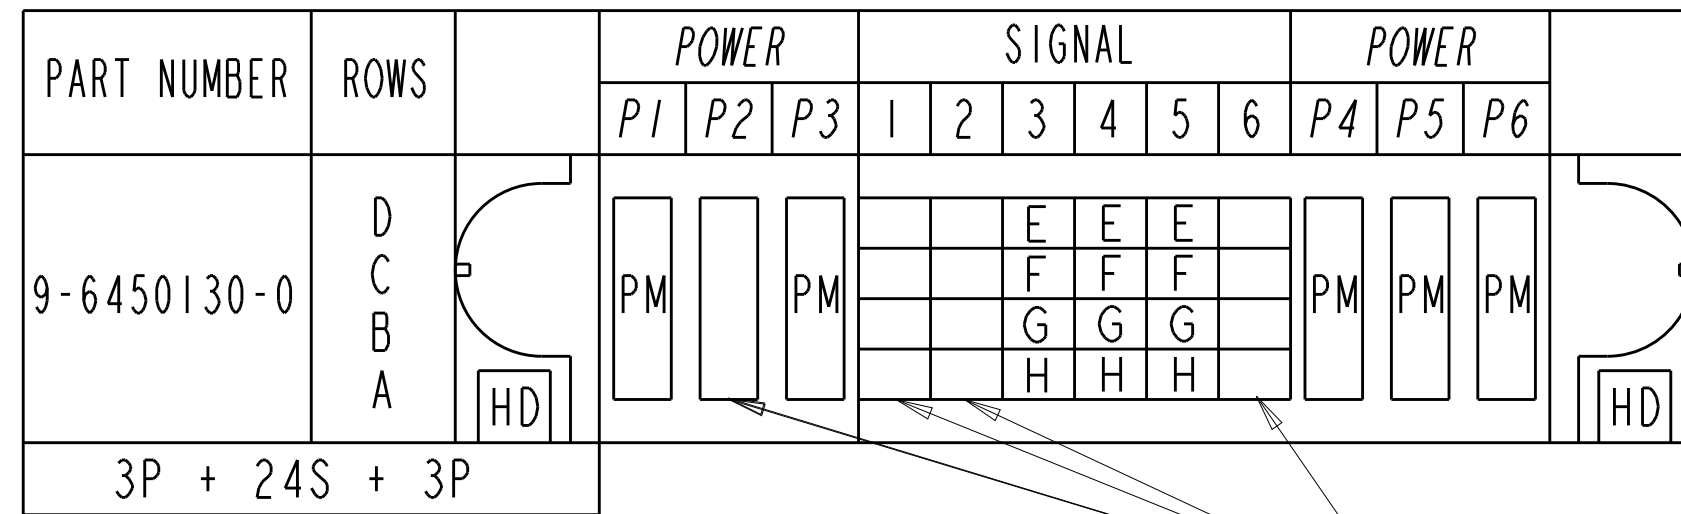

This mechanical drawing illustrates the dimensions and tolerances for a PCB layout. The overall width is 2.780 MIN. The layout includes several circular features with diameters of 0.098 ± 0.002 and 0.040 ± 0.003. The drawing also shows various material specifications and tolerances, such as 2 PLC, 52 PLC, 3 PLC, and 5. The layout is defined by a PCB EDGE and includes a BSC (Basic Size) dimension of 0.300. The drawing is a technical representation of a physical object, likely a PCB, with dimensions in inches and tolerances in mils.

4805 (3/11)



PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
2-6450130-9	D C B A	 HD	PM	PM	J	J	J	J	J	J	PM	PM	 HD
					K	K	K	K	K	F			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													



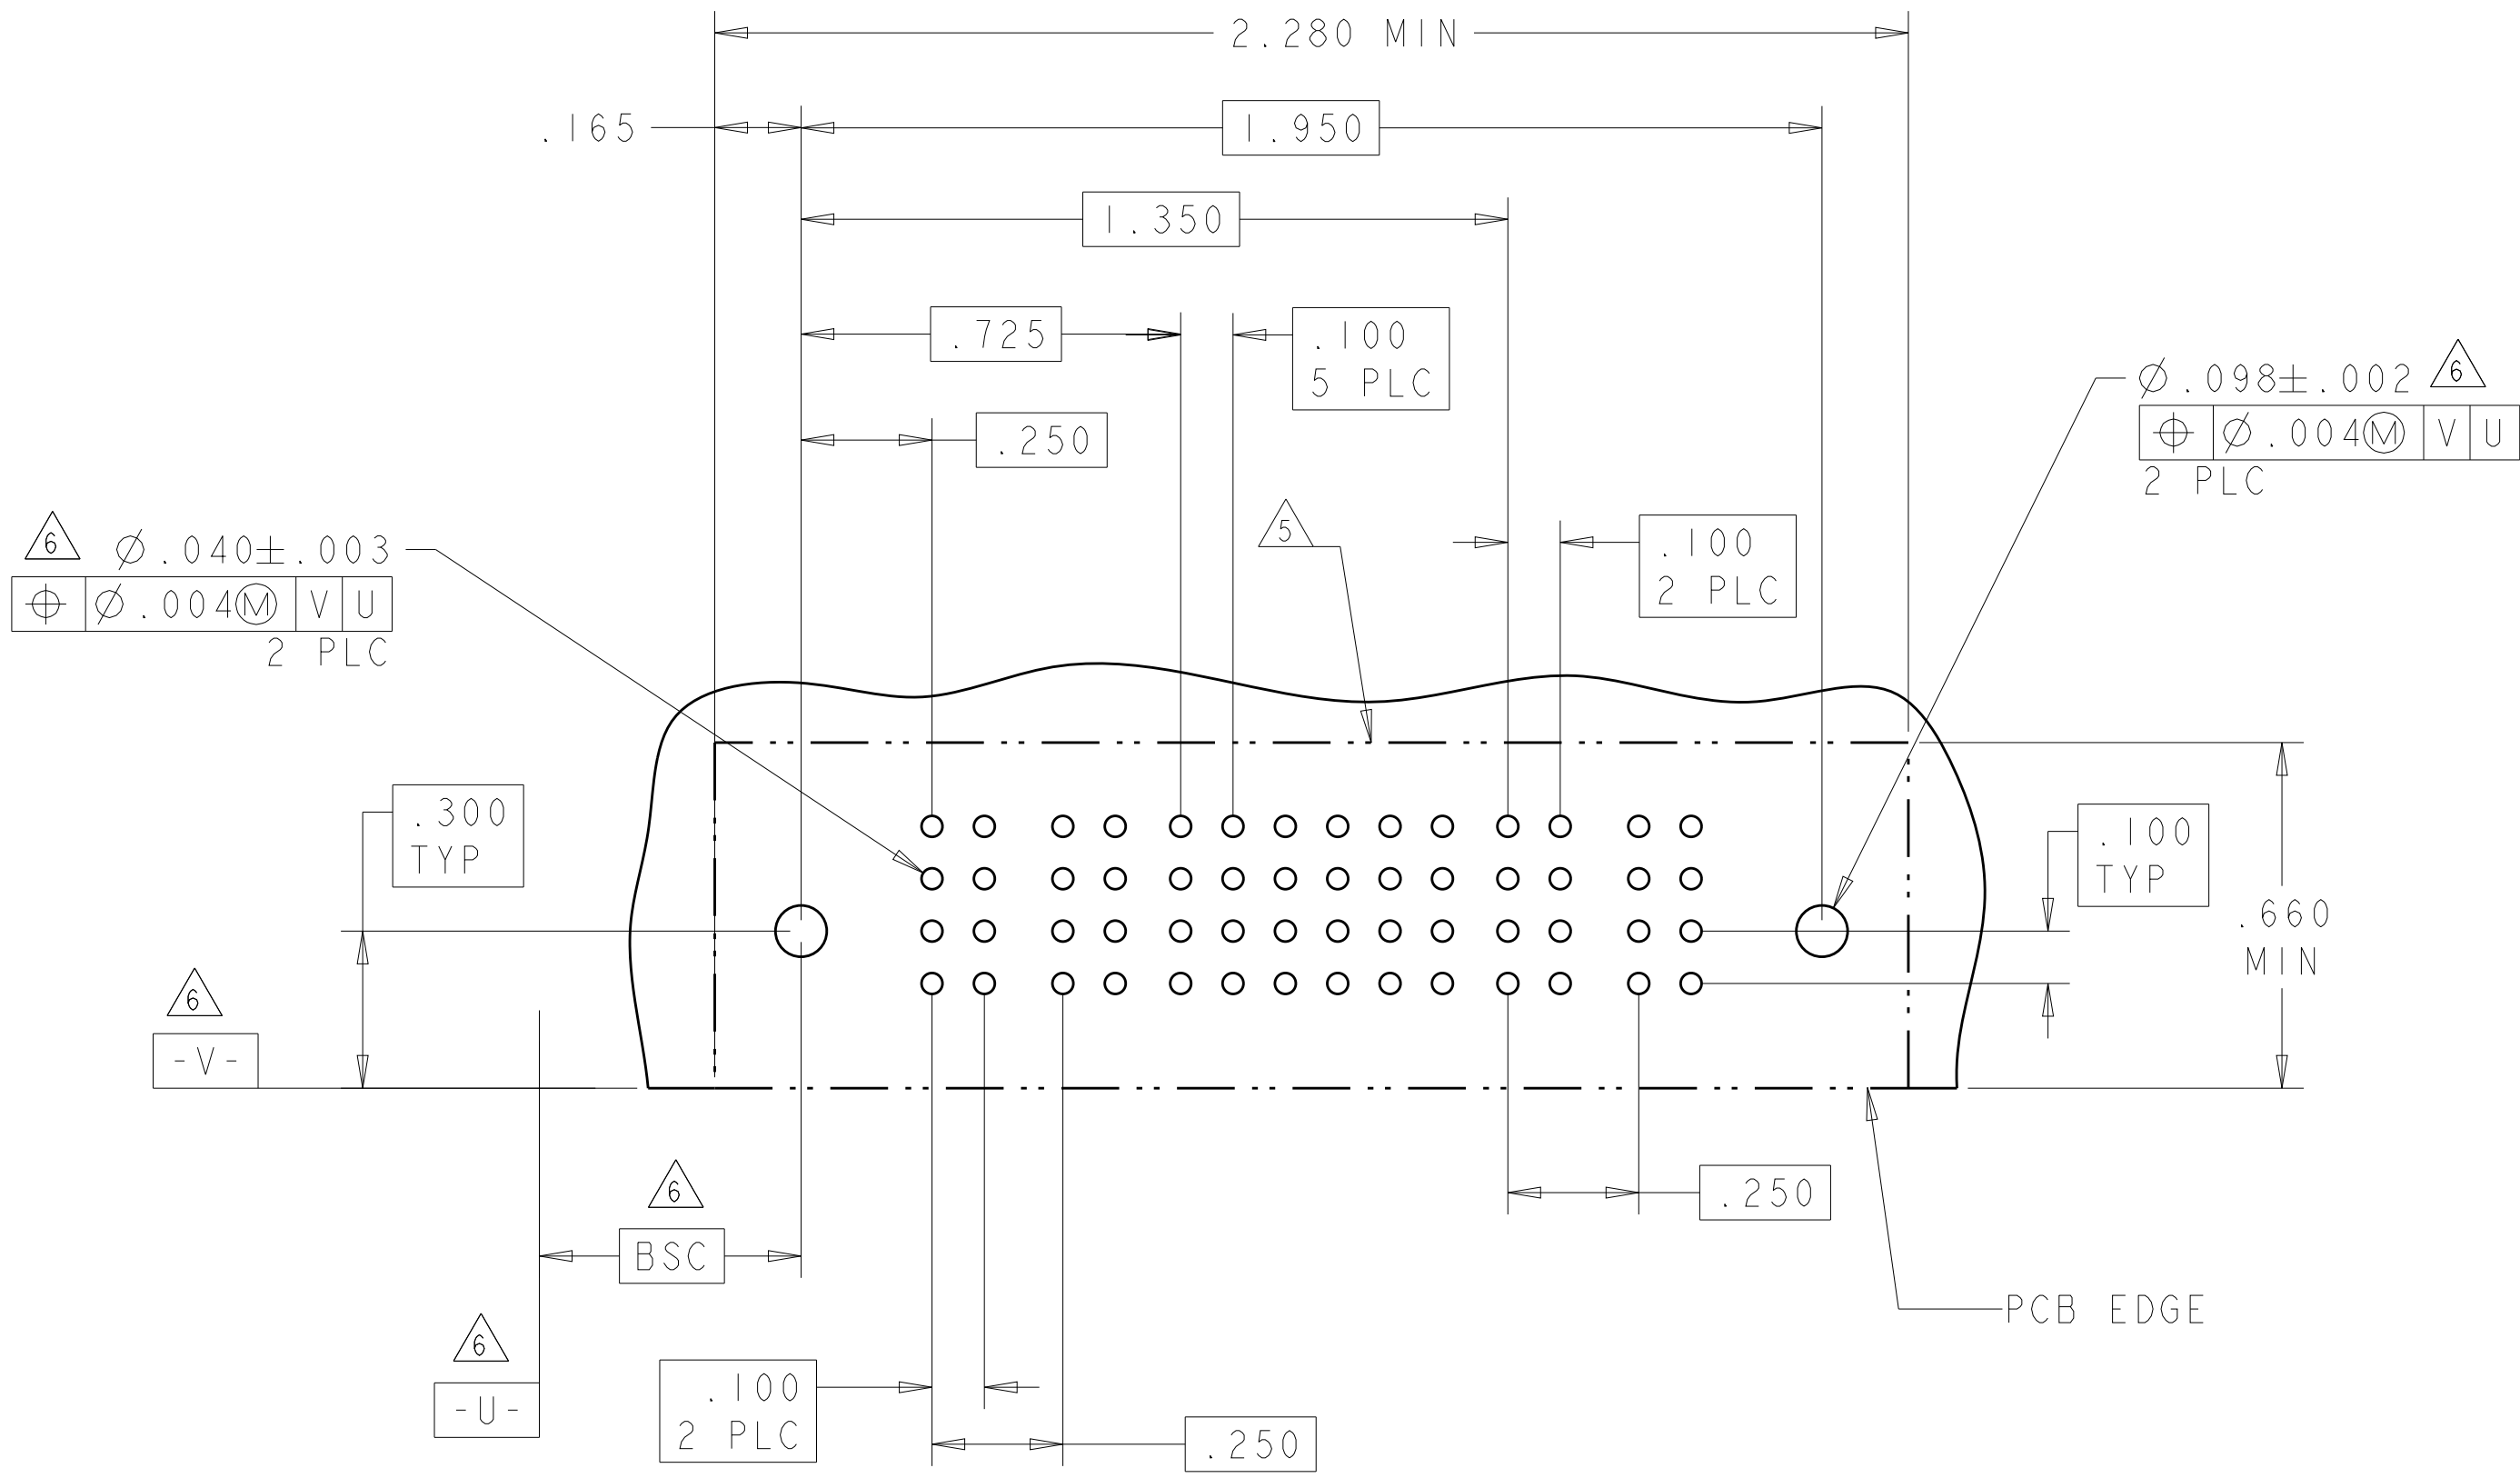
4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
4-6450130-2	D C B A		PM	PM	J	J	J	J	J	E	PM	PM	
					K	K	K	K	K	K			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6-6450130-7	D C B A		PM	PM	J	J	J	J	J	J	PM	PM	
					K	K	K	K	K	K			
					N	N	N	G	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													

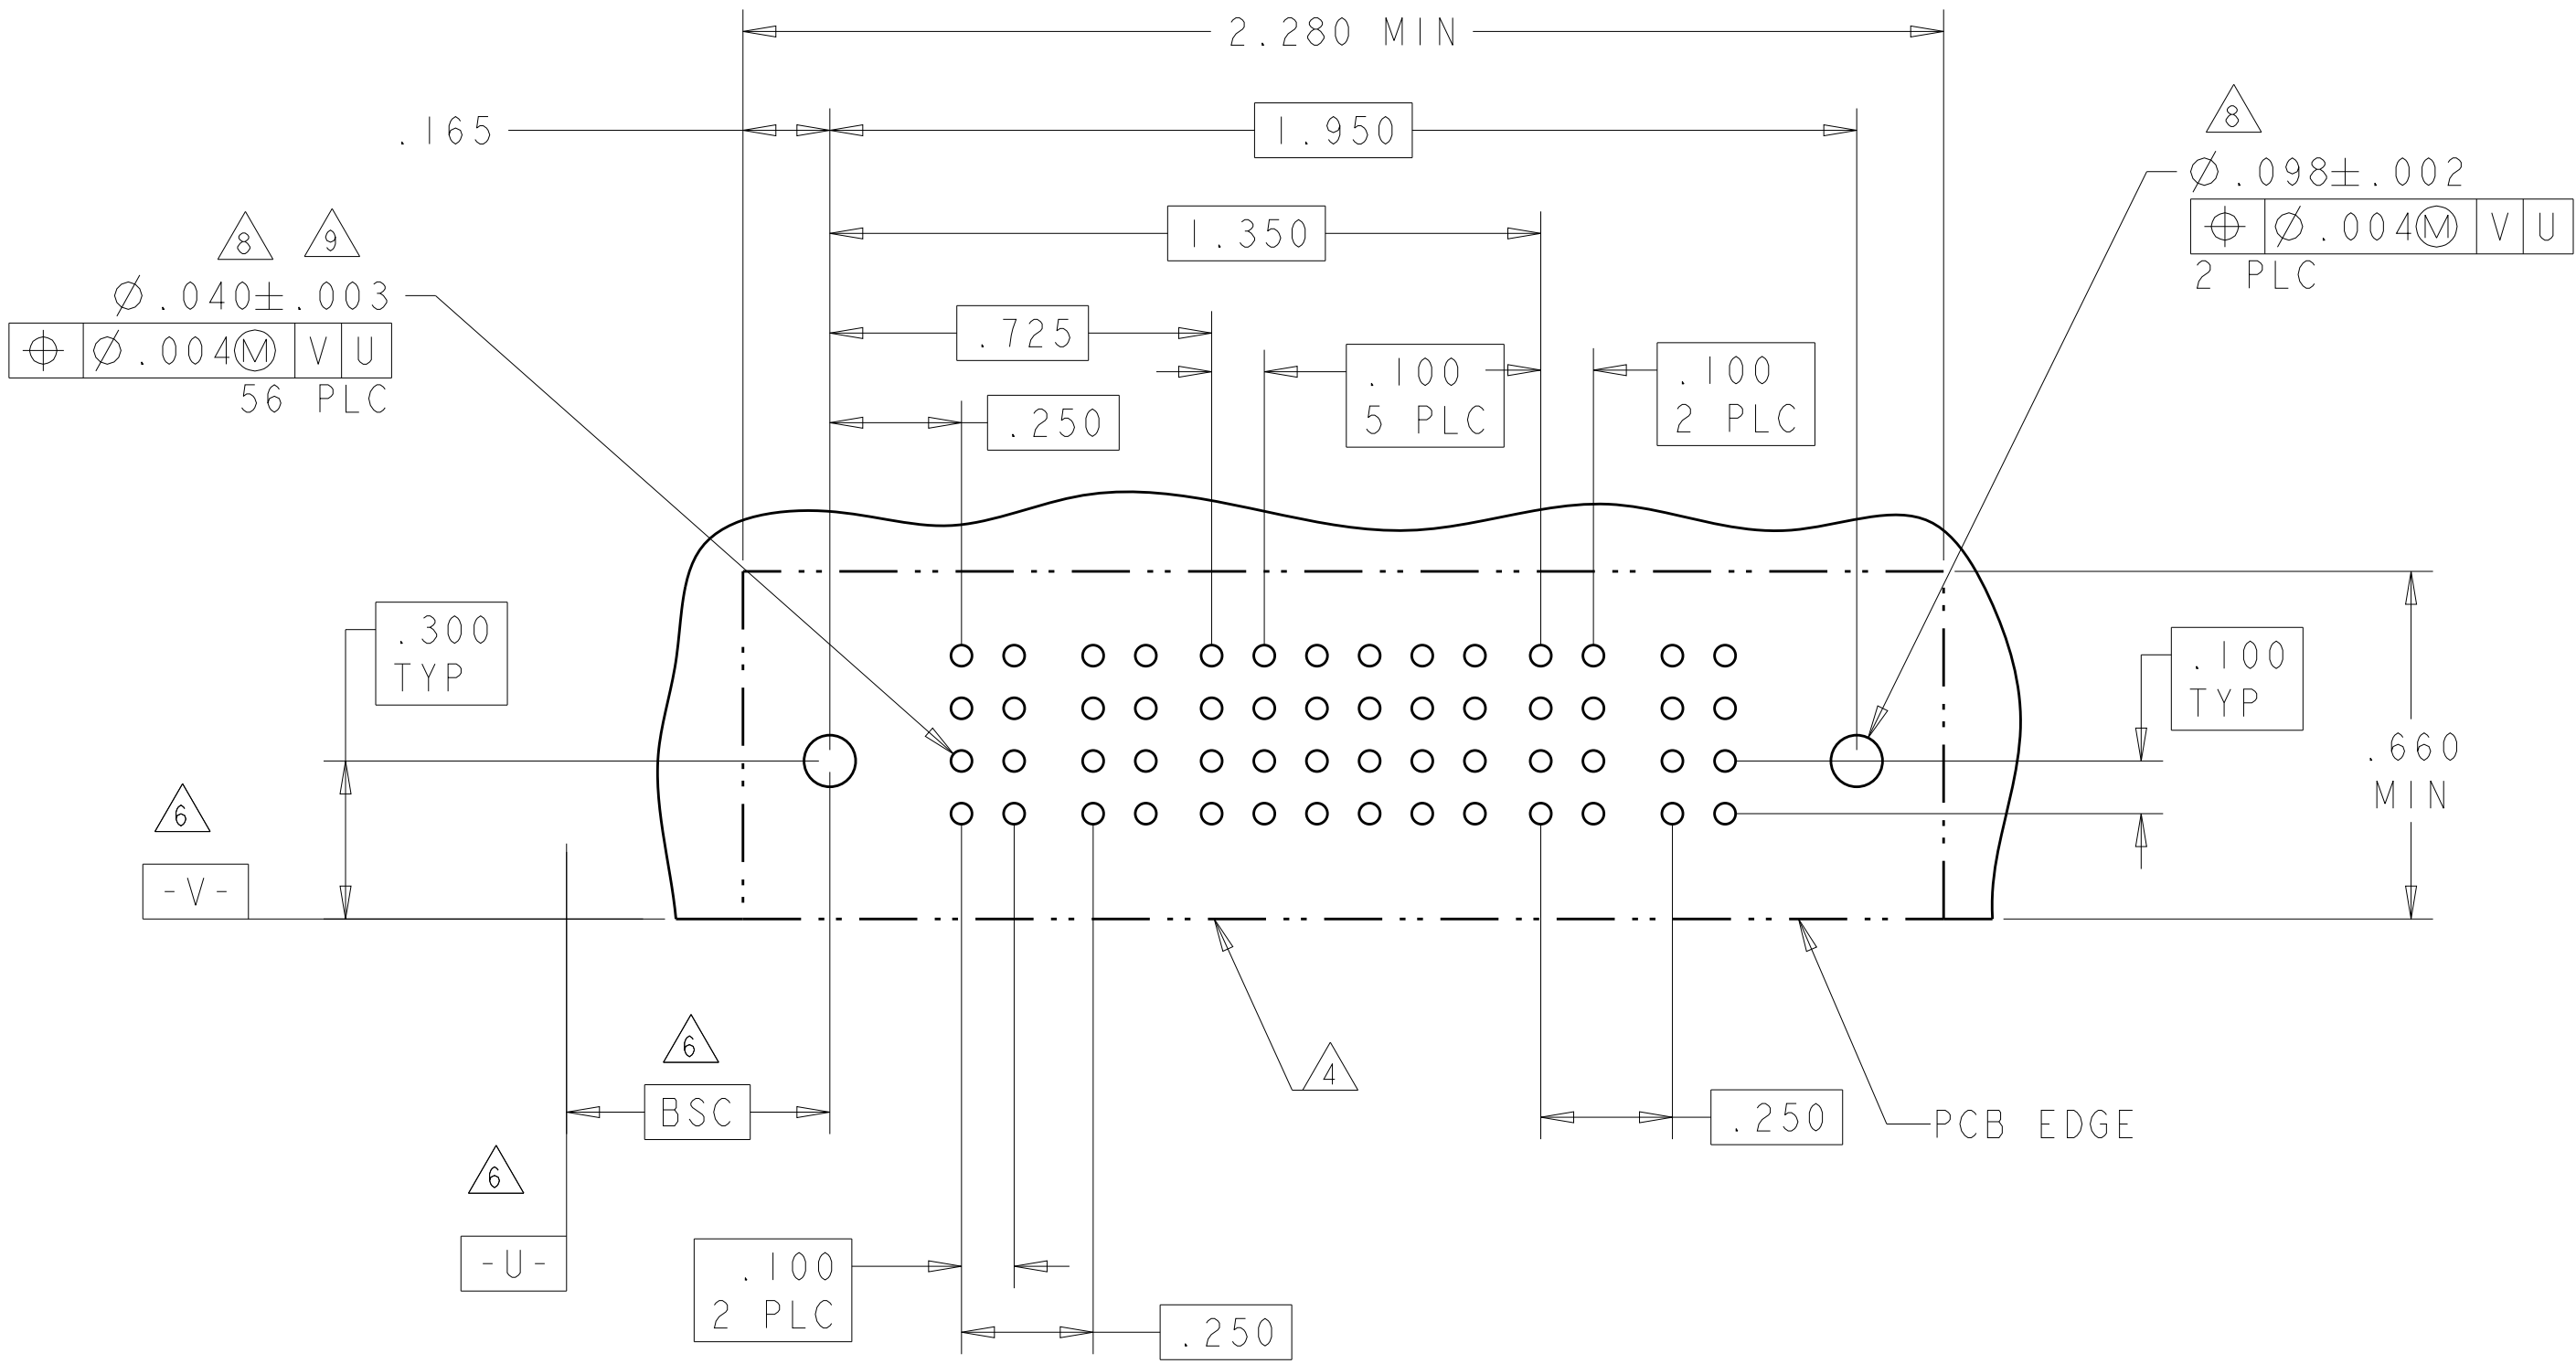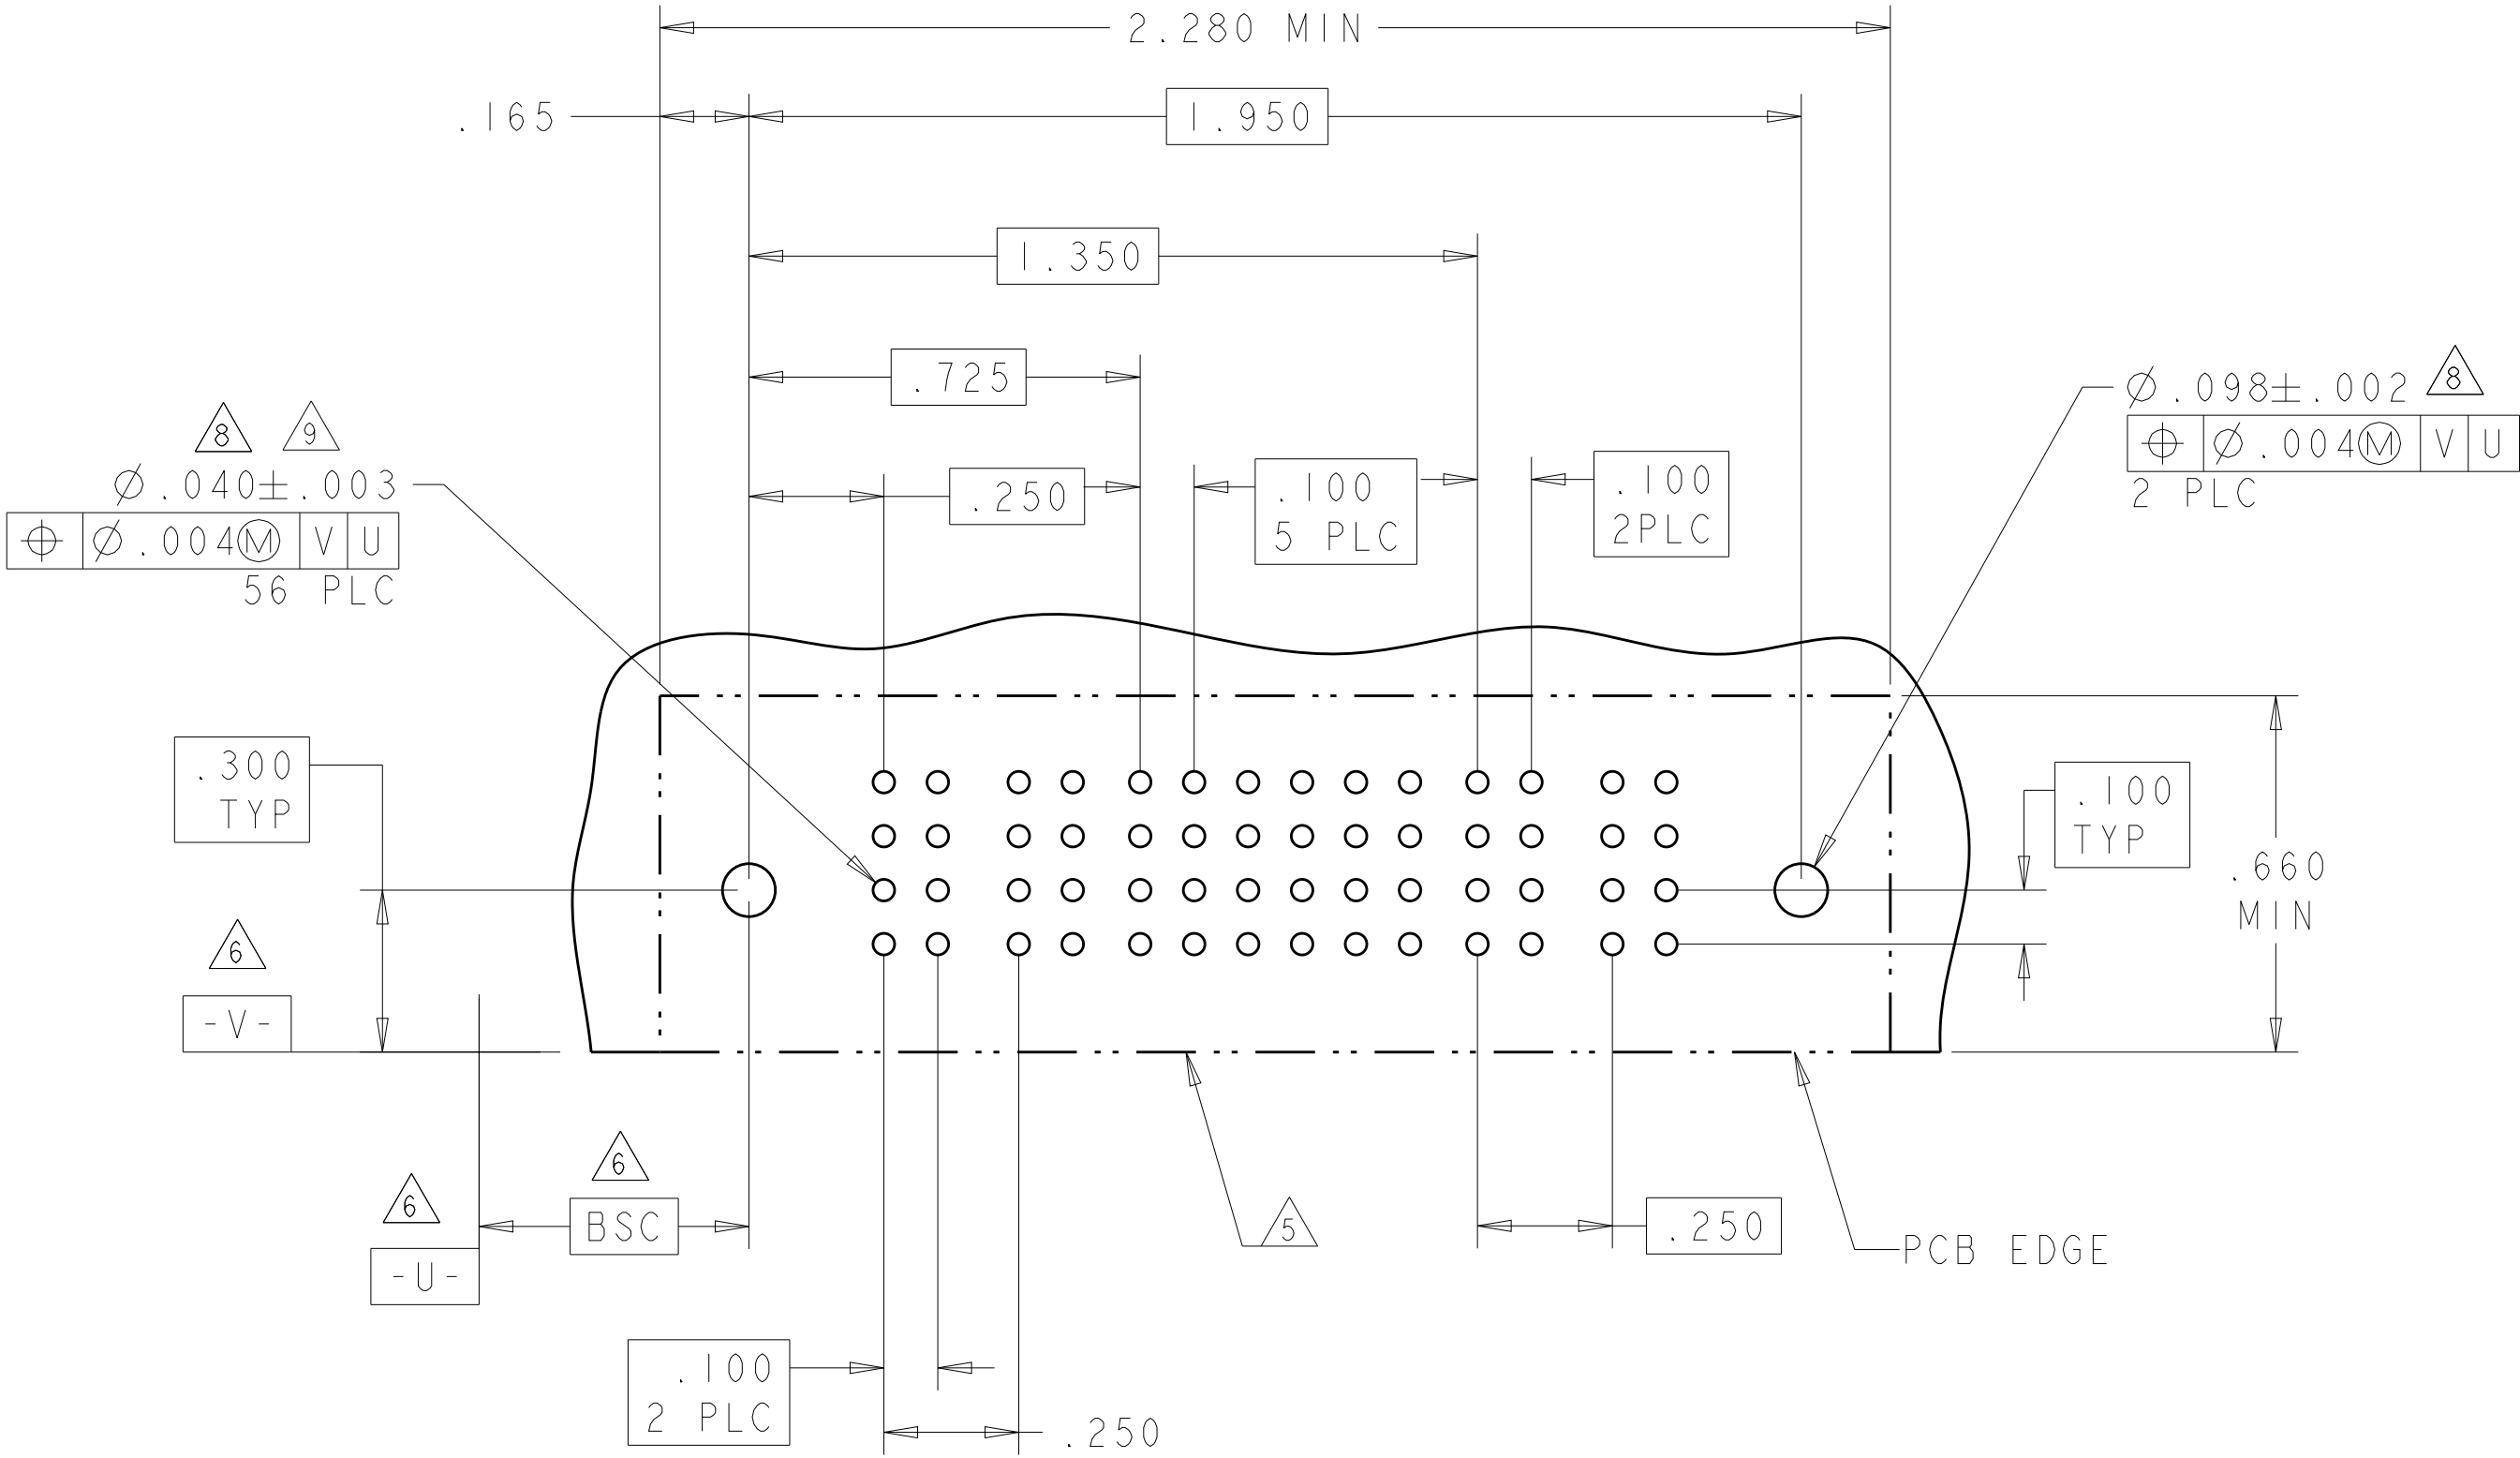

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
8-6450130-8	D C B A		PM	PM	E	E	E	E	E	E	PM	PM	
					F	F	F	F	F	F			
					G	G	G	G	G	G			
					H	H	H	H	H	S			
2P + 24S + 2P													

LAYOUT OF PART 8-6450130-8 IS SAME AS 6-6450130-7.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R.GRZYBOWSKI 14FEB2005
CHK: M.PERCHEKKE 14FEB2005
APVD: M.PERCHEKKE 14FEB2005

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

SCALE 4:1 SHEET 17 OF 28 REV M2

TE Connectivity

RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

C=6450130



-



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL			POWER					
			P1	P2	1	2	3	P3	P4	P5	P6	P7	
9-6450130-2	D		PM	PM	J	J	J	PM	PM	PM	PM	PM	
	C				K	K	K						
	B				N	N	N						
	A				S	S	S						
2P + 12S + 5P													


PART NUMBER	ROWS		POWER				SIGNAL							POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	P8	
2-6450130-4	D		PA	PA	PA	PA	A4	A4	A4	A4	A4	A4	A4	PA	PA	PA	PA	
	C						A3	A3	A3	A3	A3	A3	A3					
	B						A2	A2	A2	A2	A2	A2	A2					
	A						A1	A1	A1	A1	A1	A1	A1					
4HDP + 28S + 4HDP																		

K2

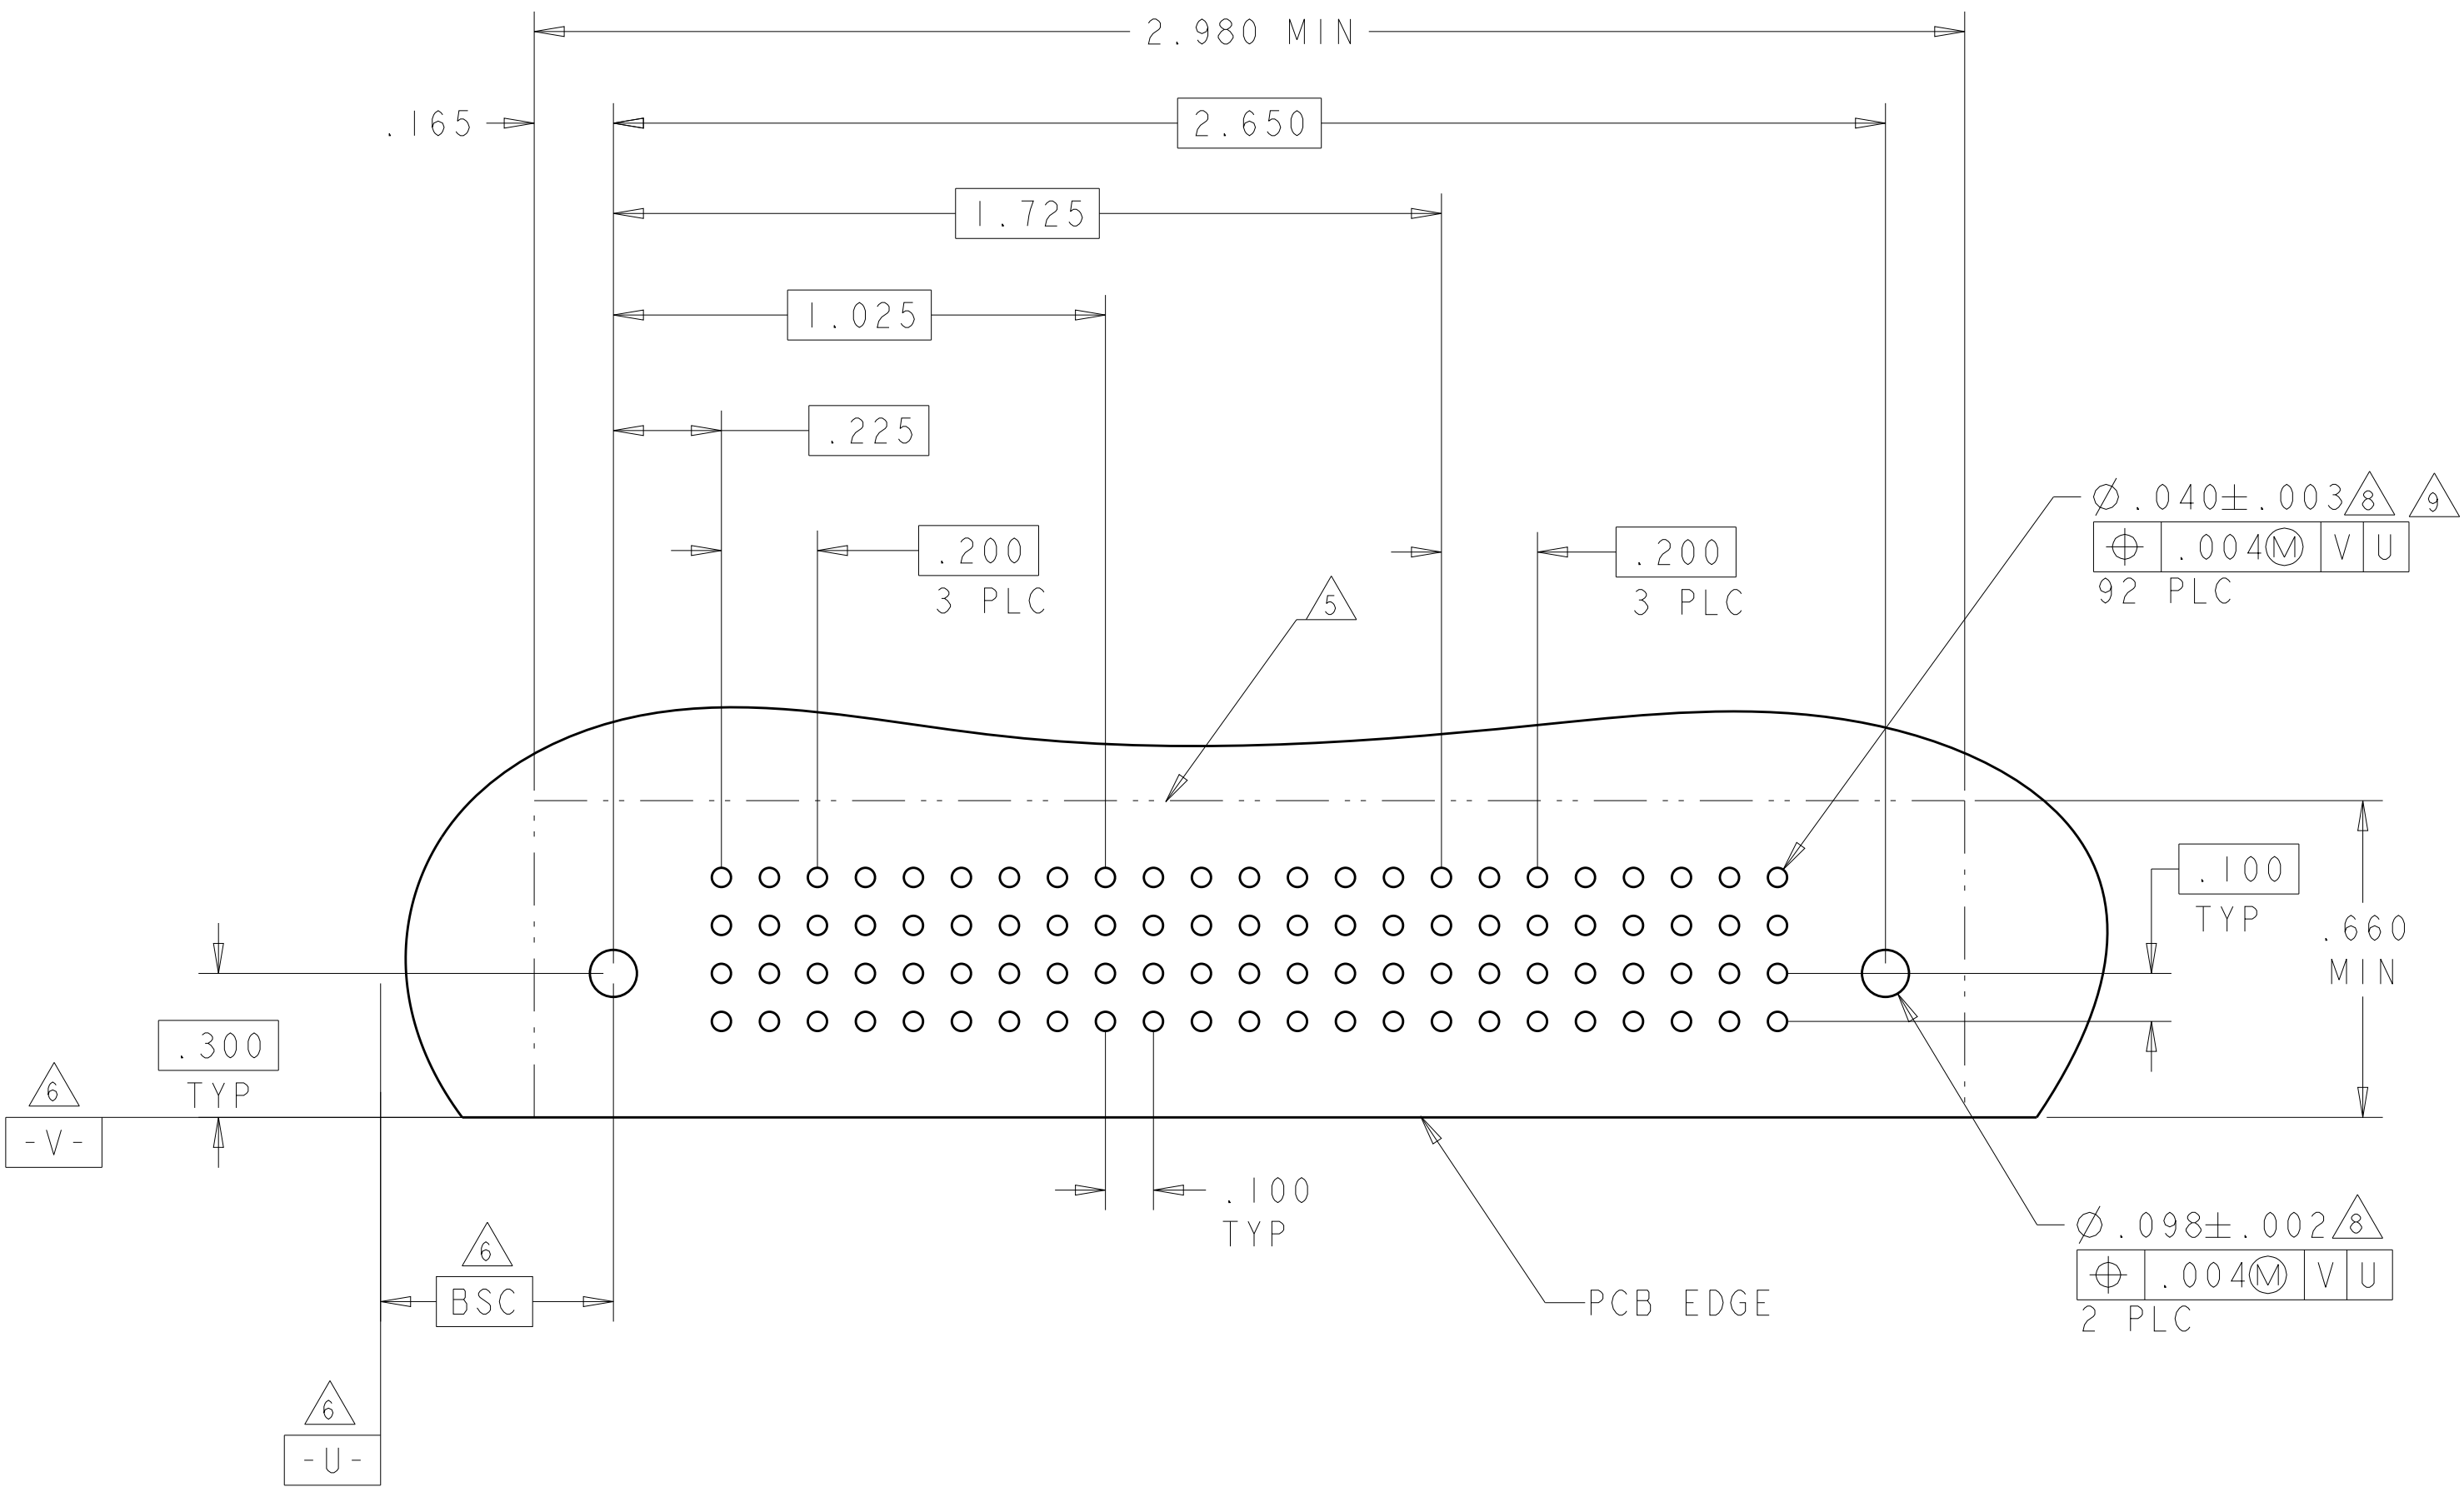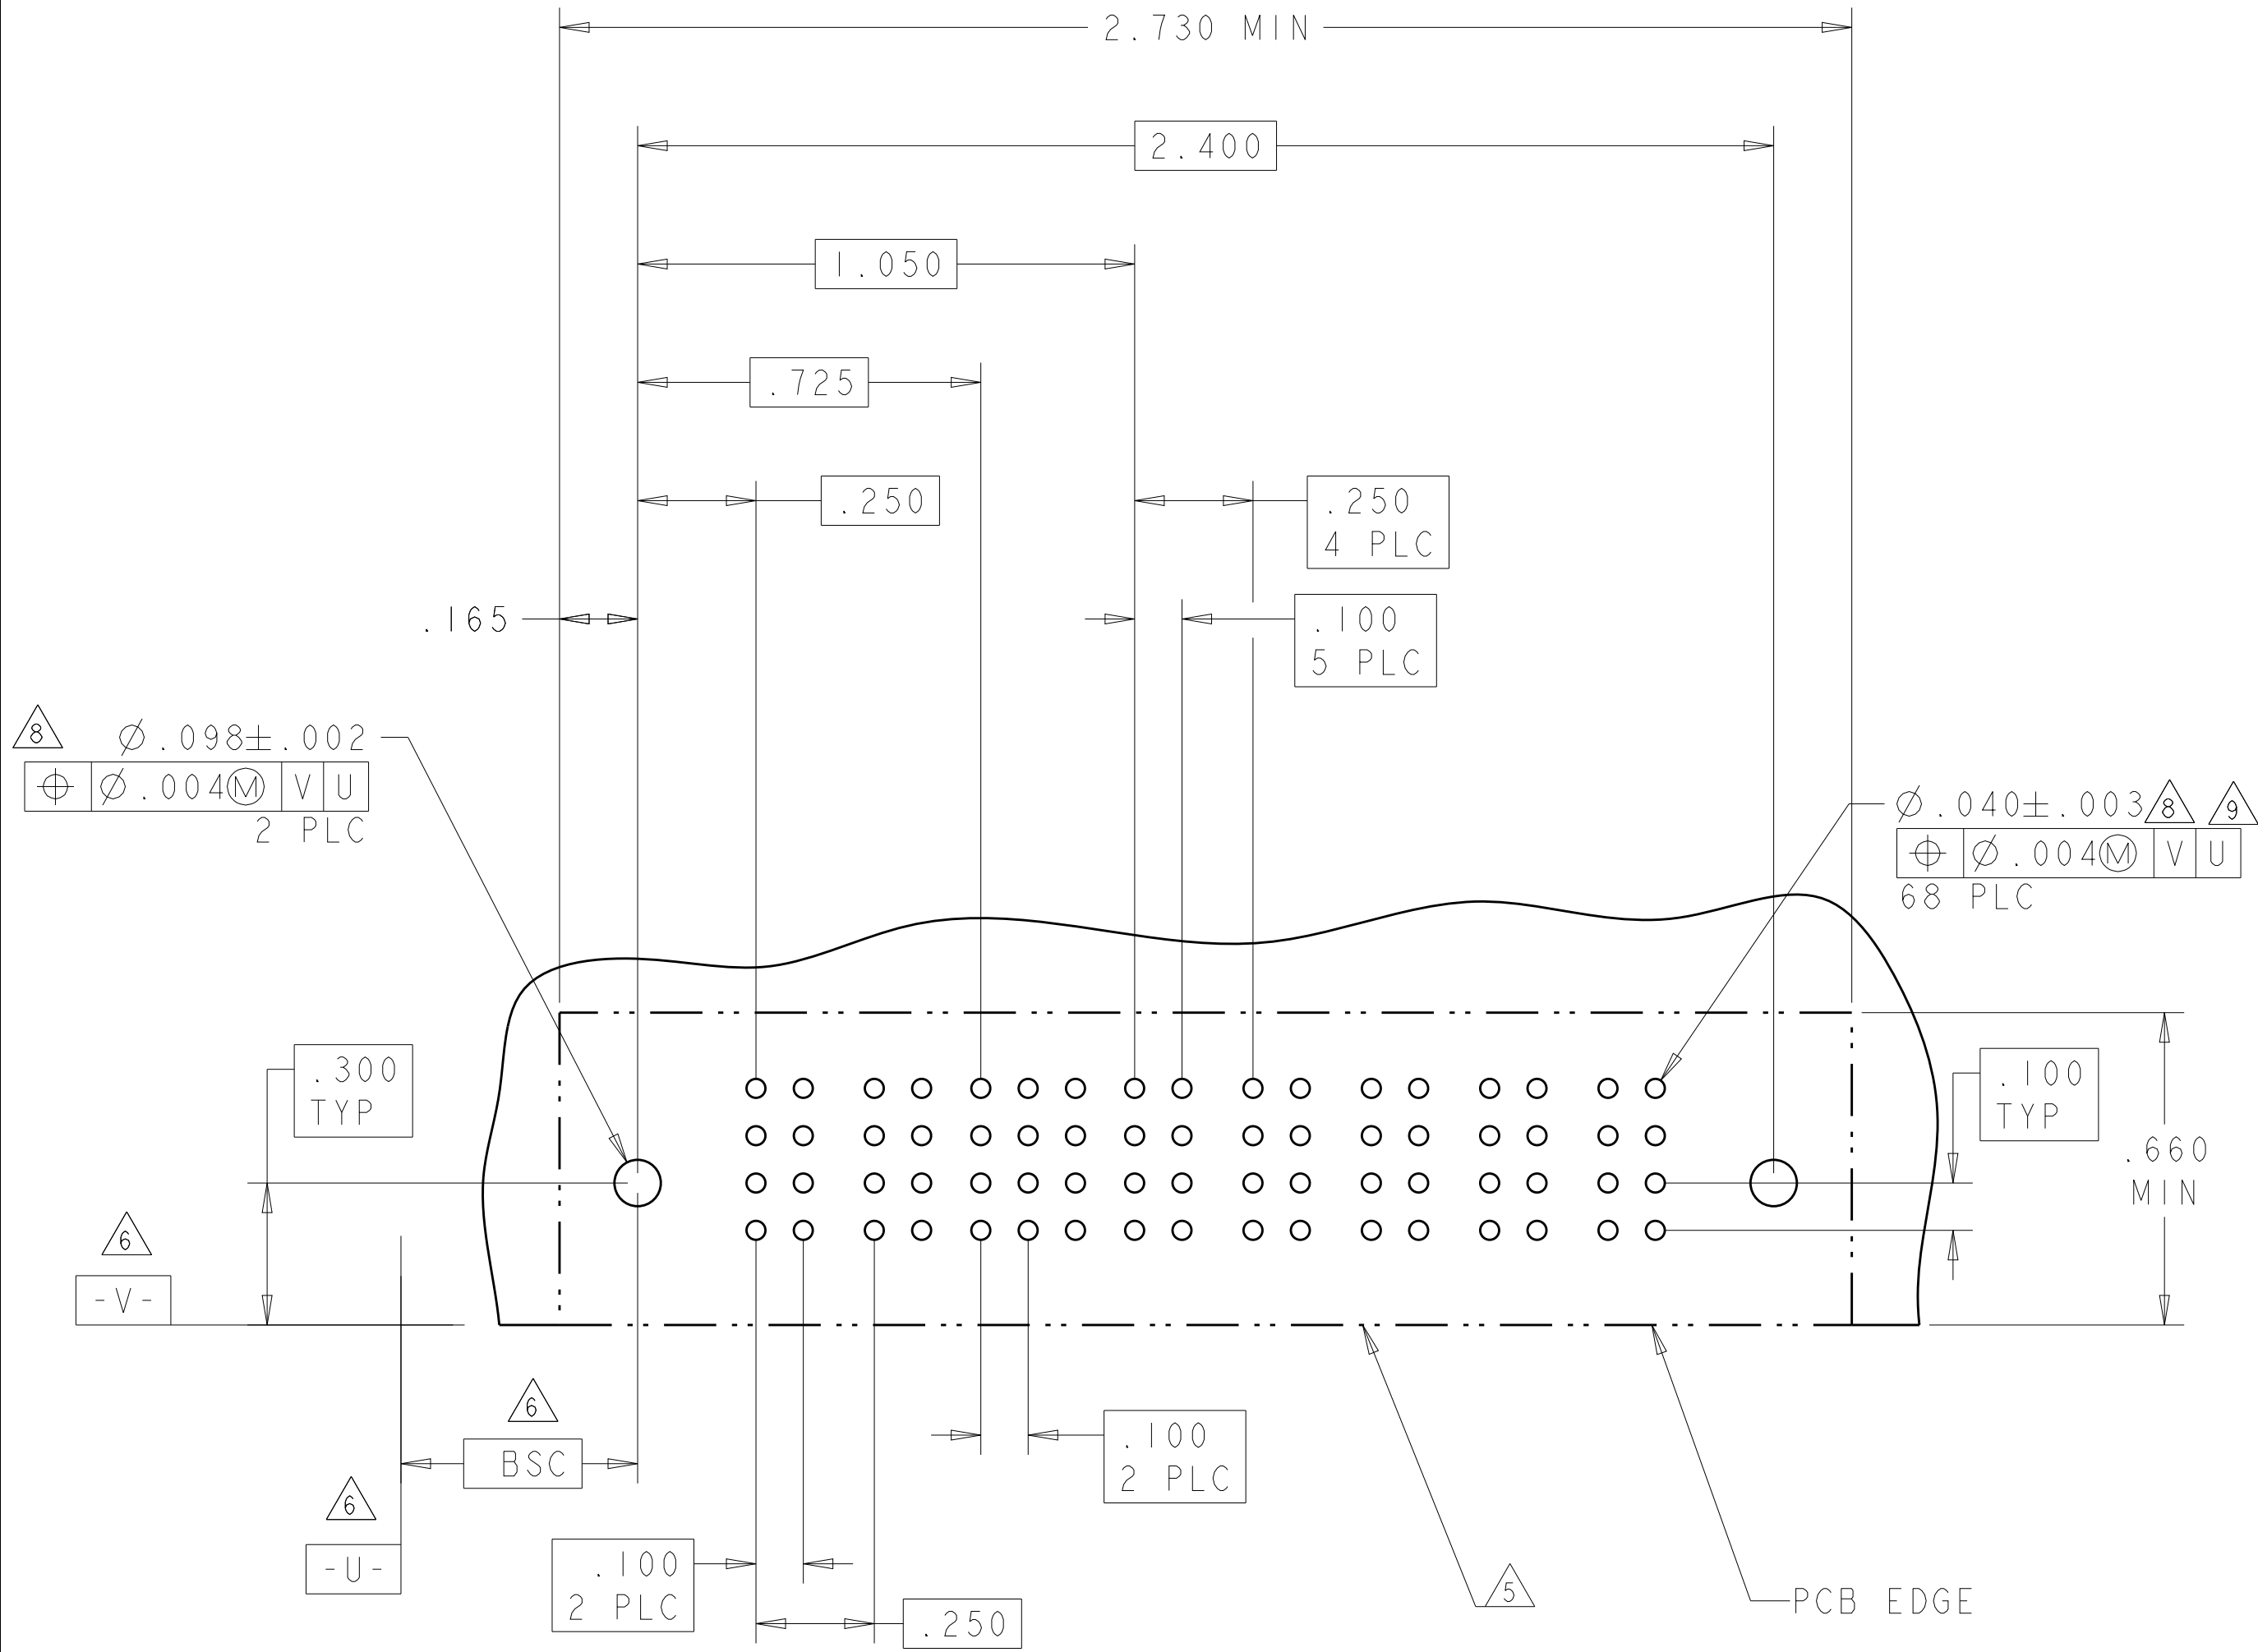

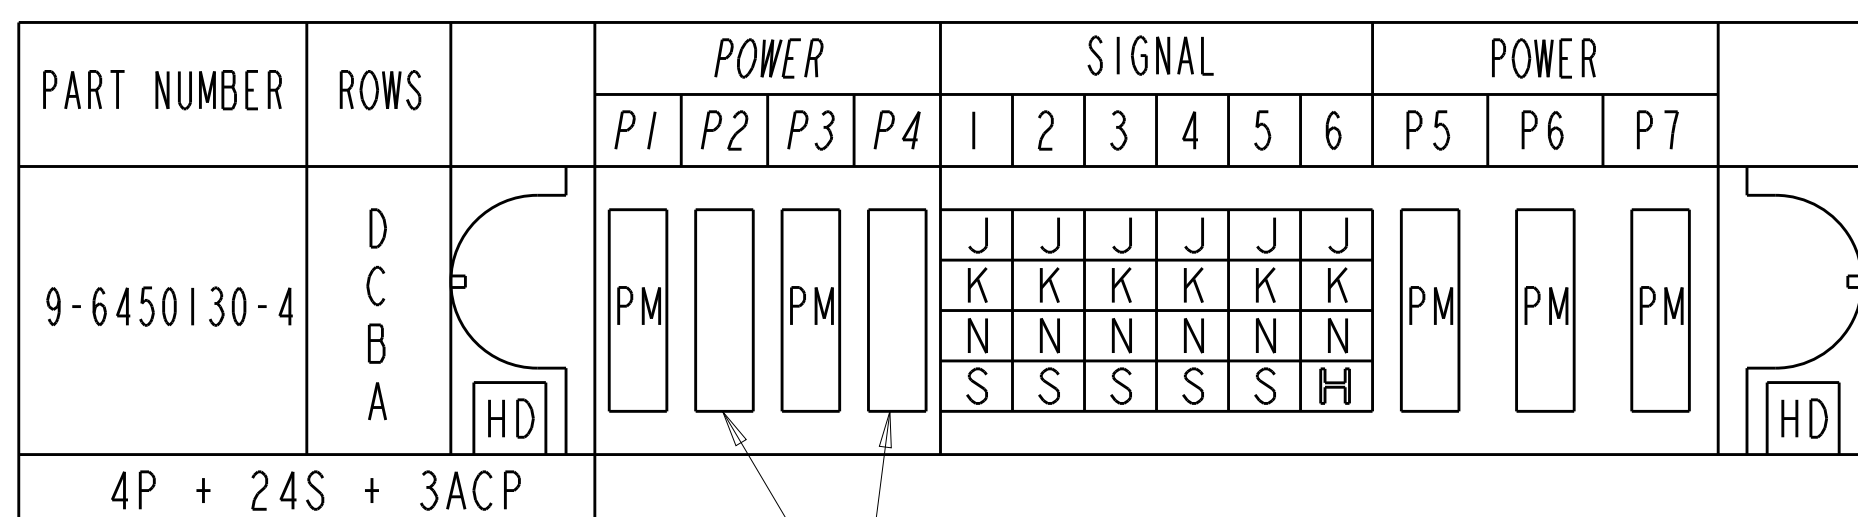



K5

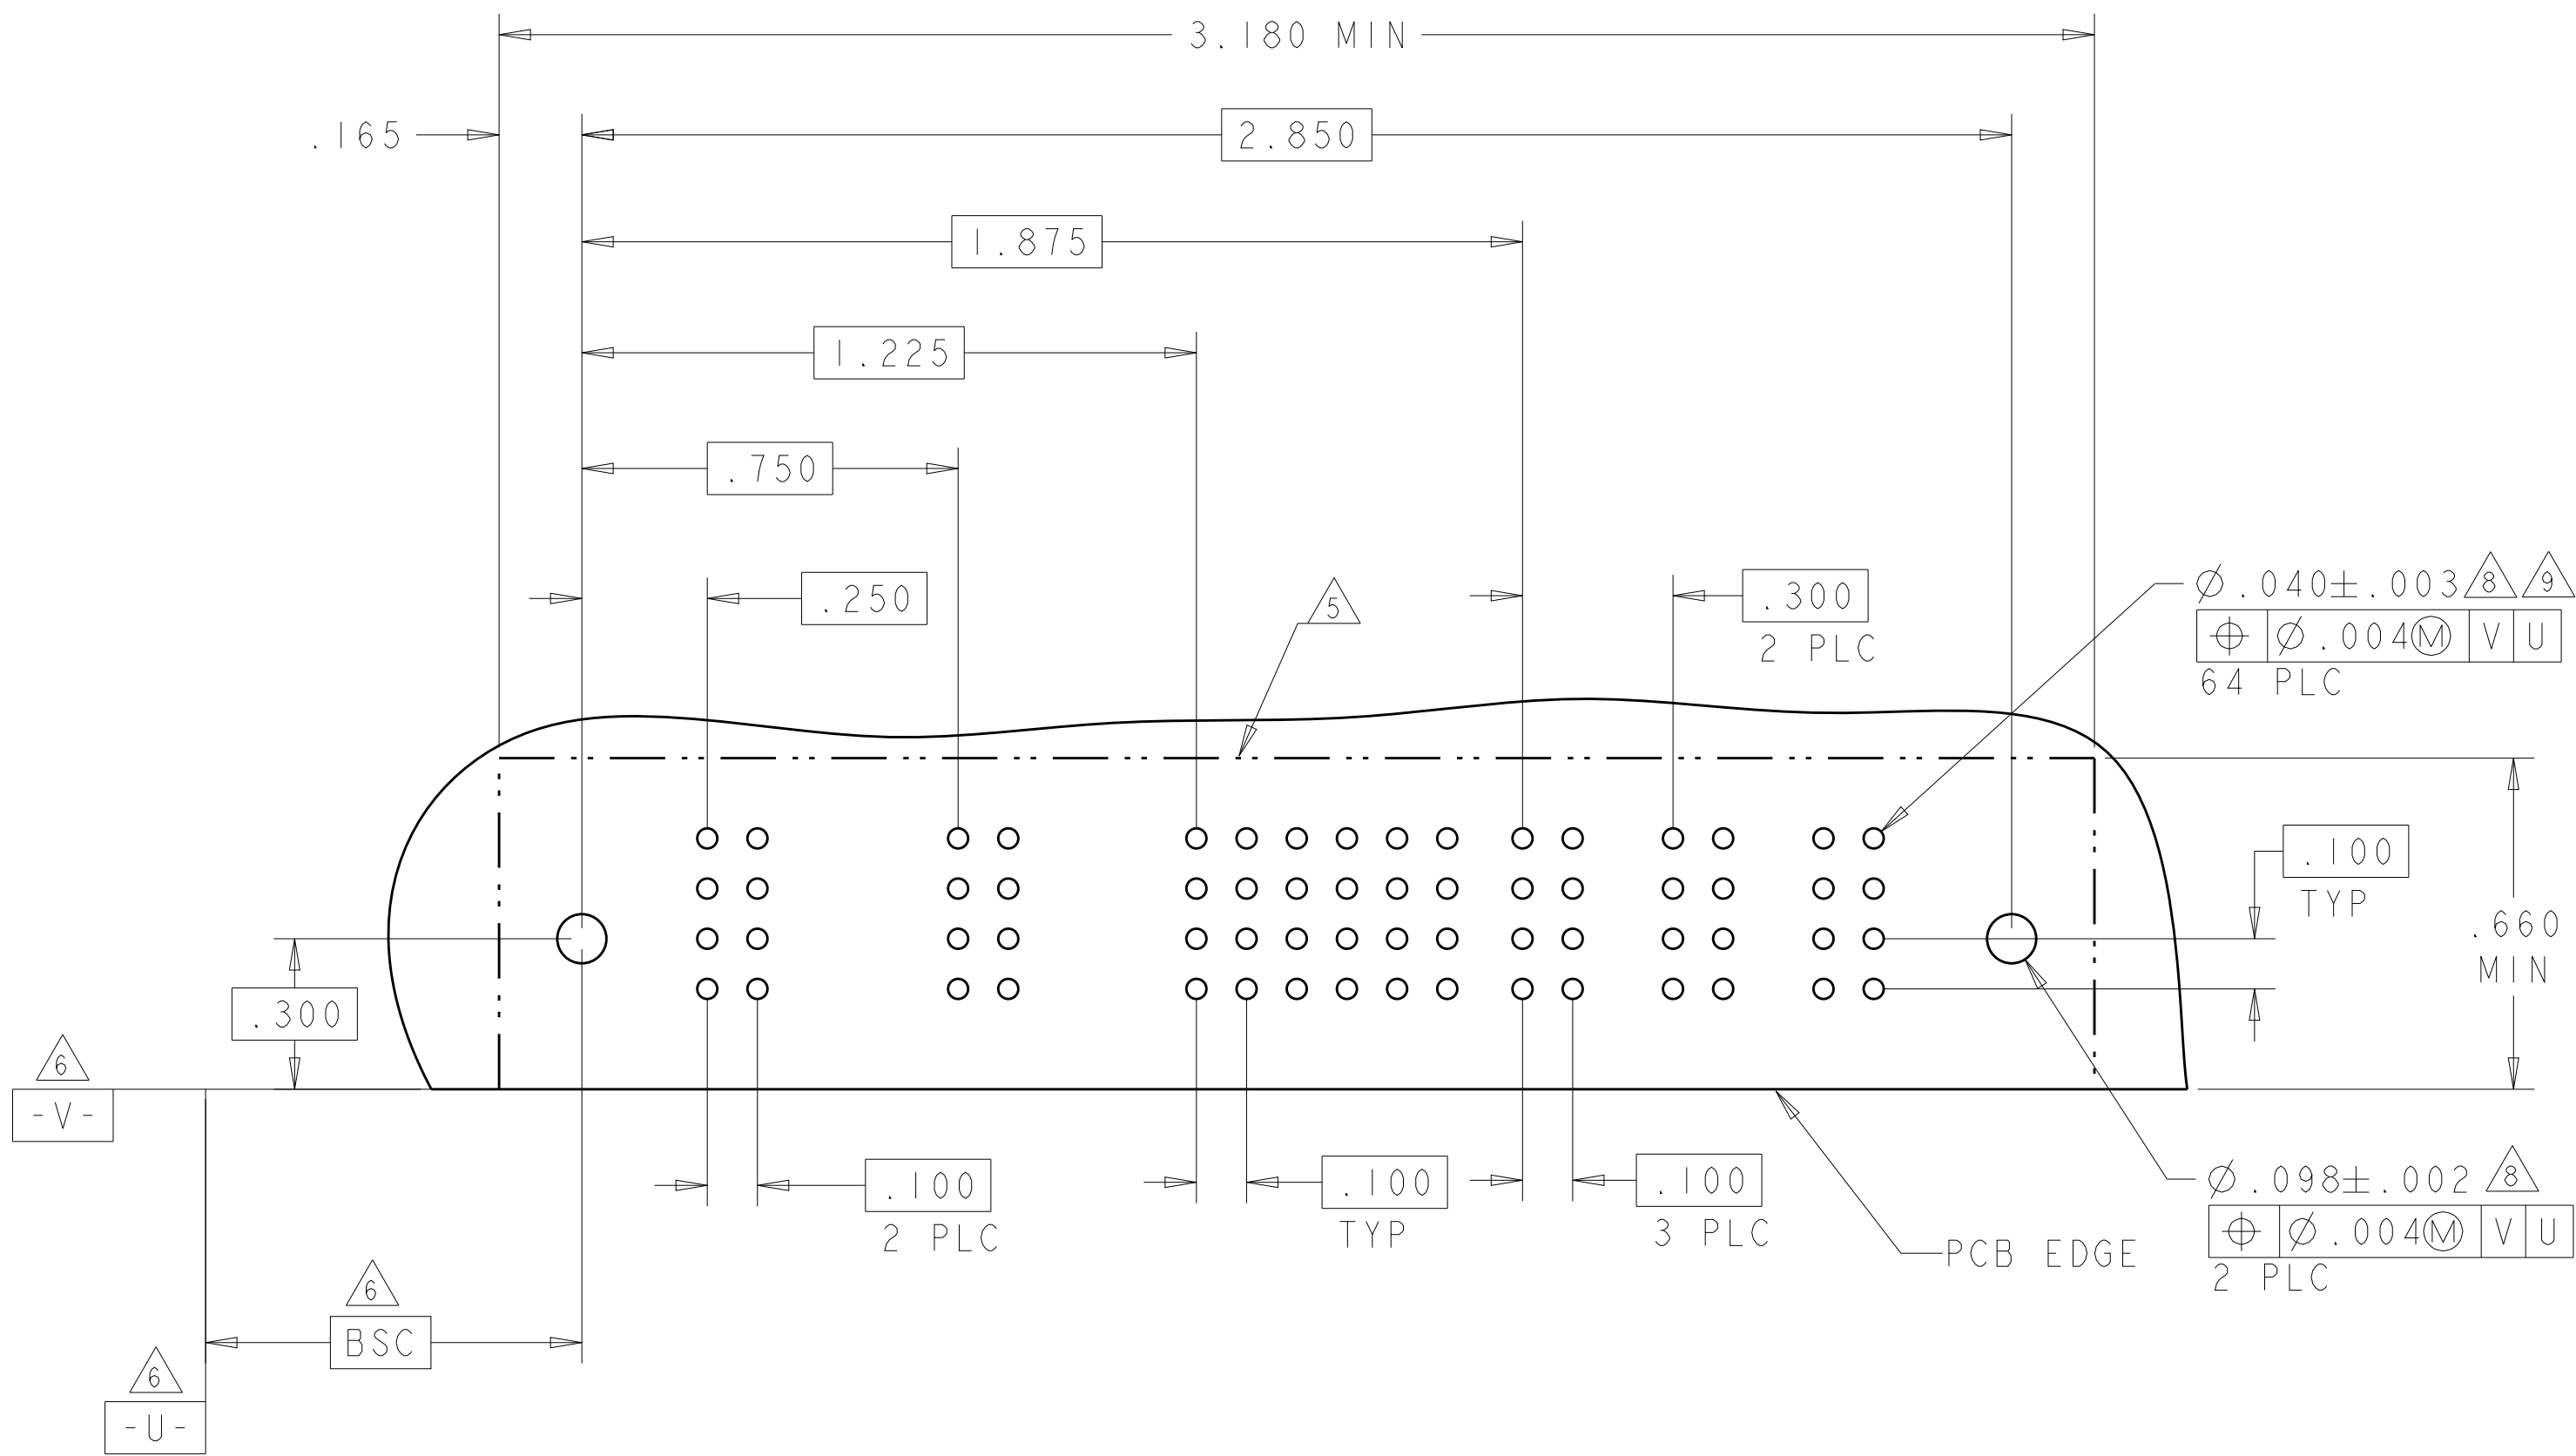

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER			SIGNAL						POWER		
			P1	P2	P3	1	2	3	4	5	6	P4	P5	
2-6450130-6	D		PM	PM	PM	J	J	J	J	J	J	PM	PM	
	C					K	K	K	K	K	K			
	B					N	N	N	N	N	N			
	A					S	S	S	S	S	S			
3ACP + 24S + 2P														

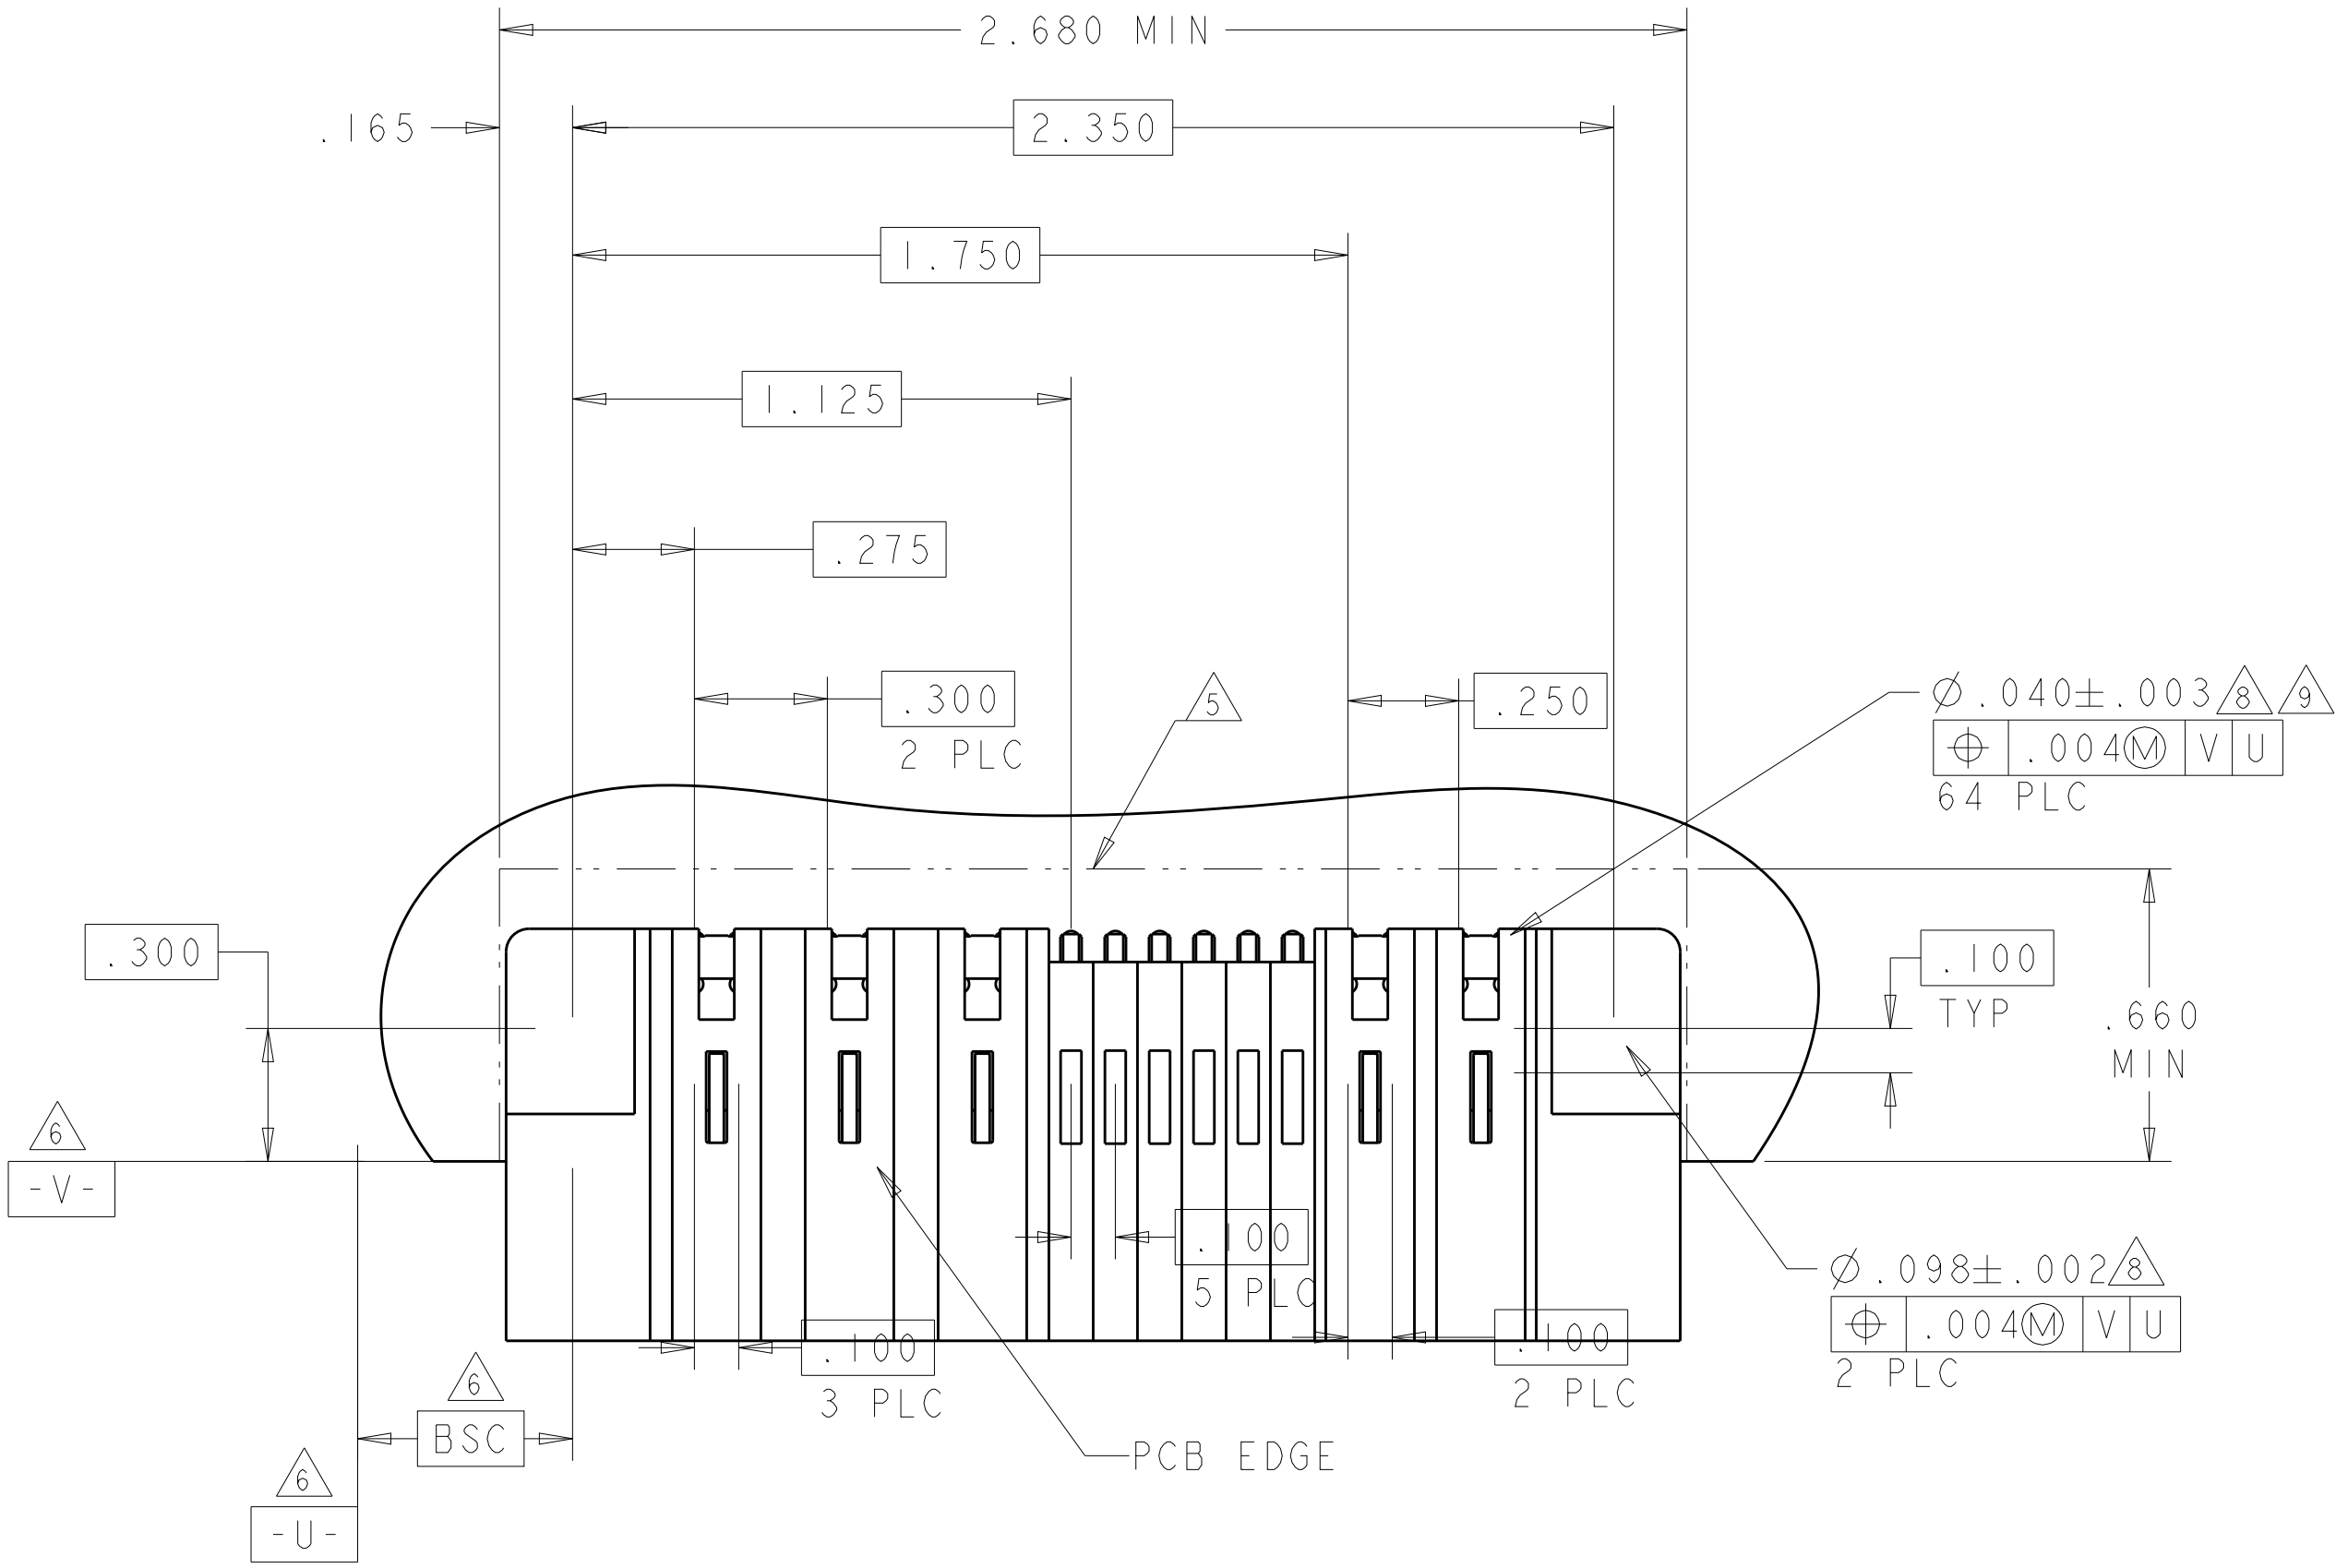

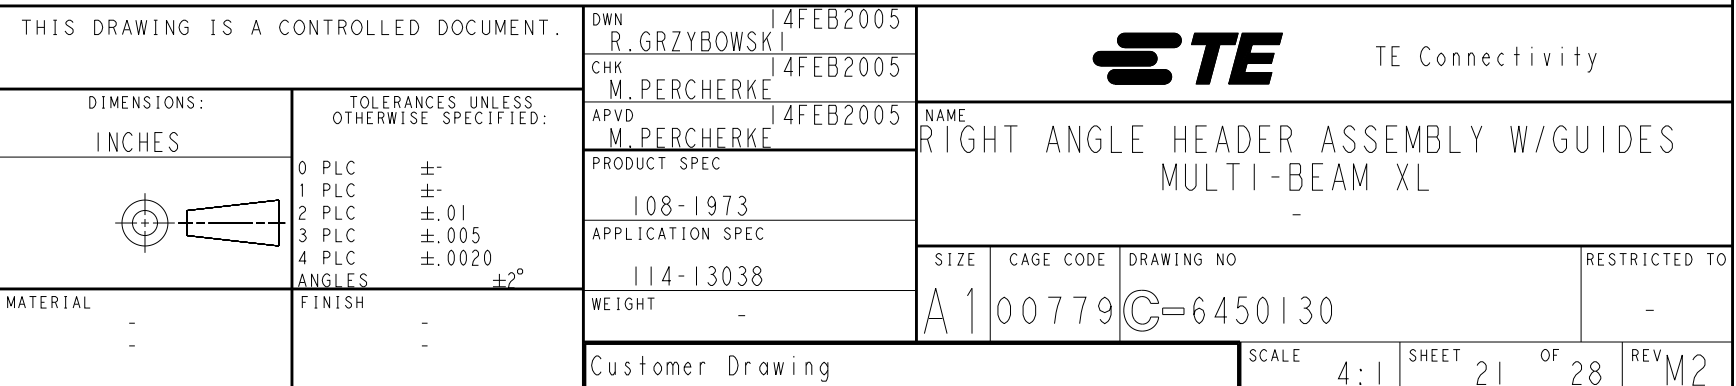

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
-	-	SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4	P5	
9-6450130-5	D		PM	PM	J	J	E	J	J	J	PM	PM	PM	
	K				K	K	K	K	K					
	N				N	G	N	N	N					
	S				S	S	S	S	S					
2P + 24S + 3ACP			HD											

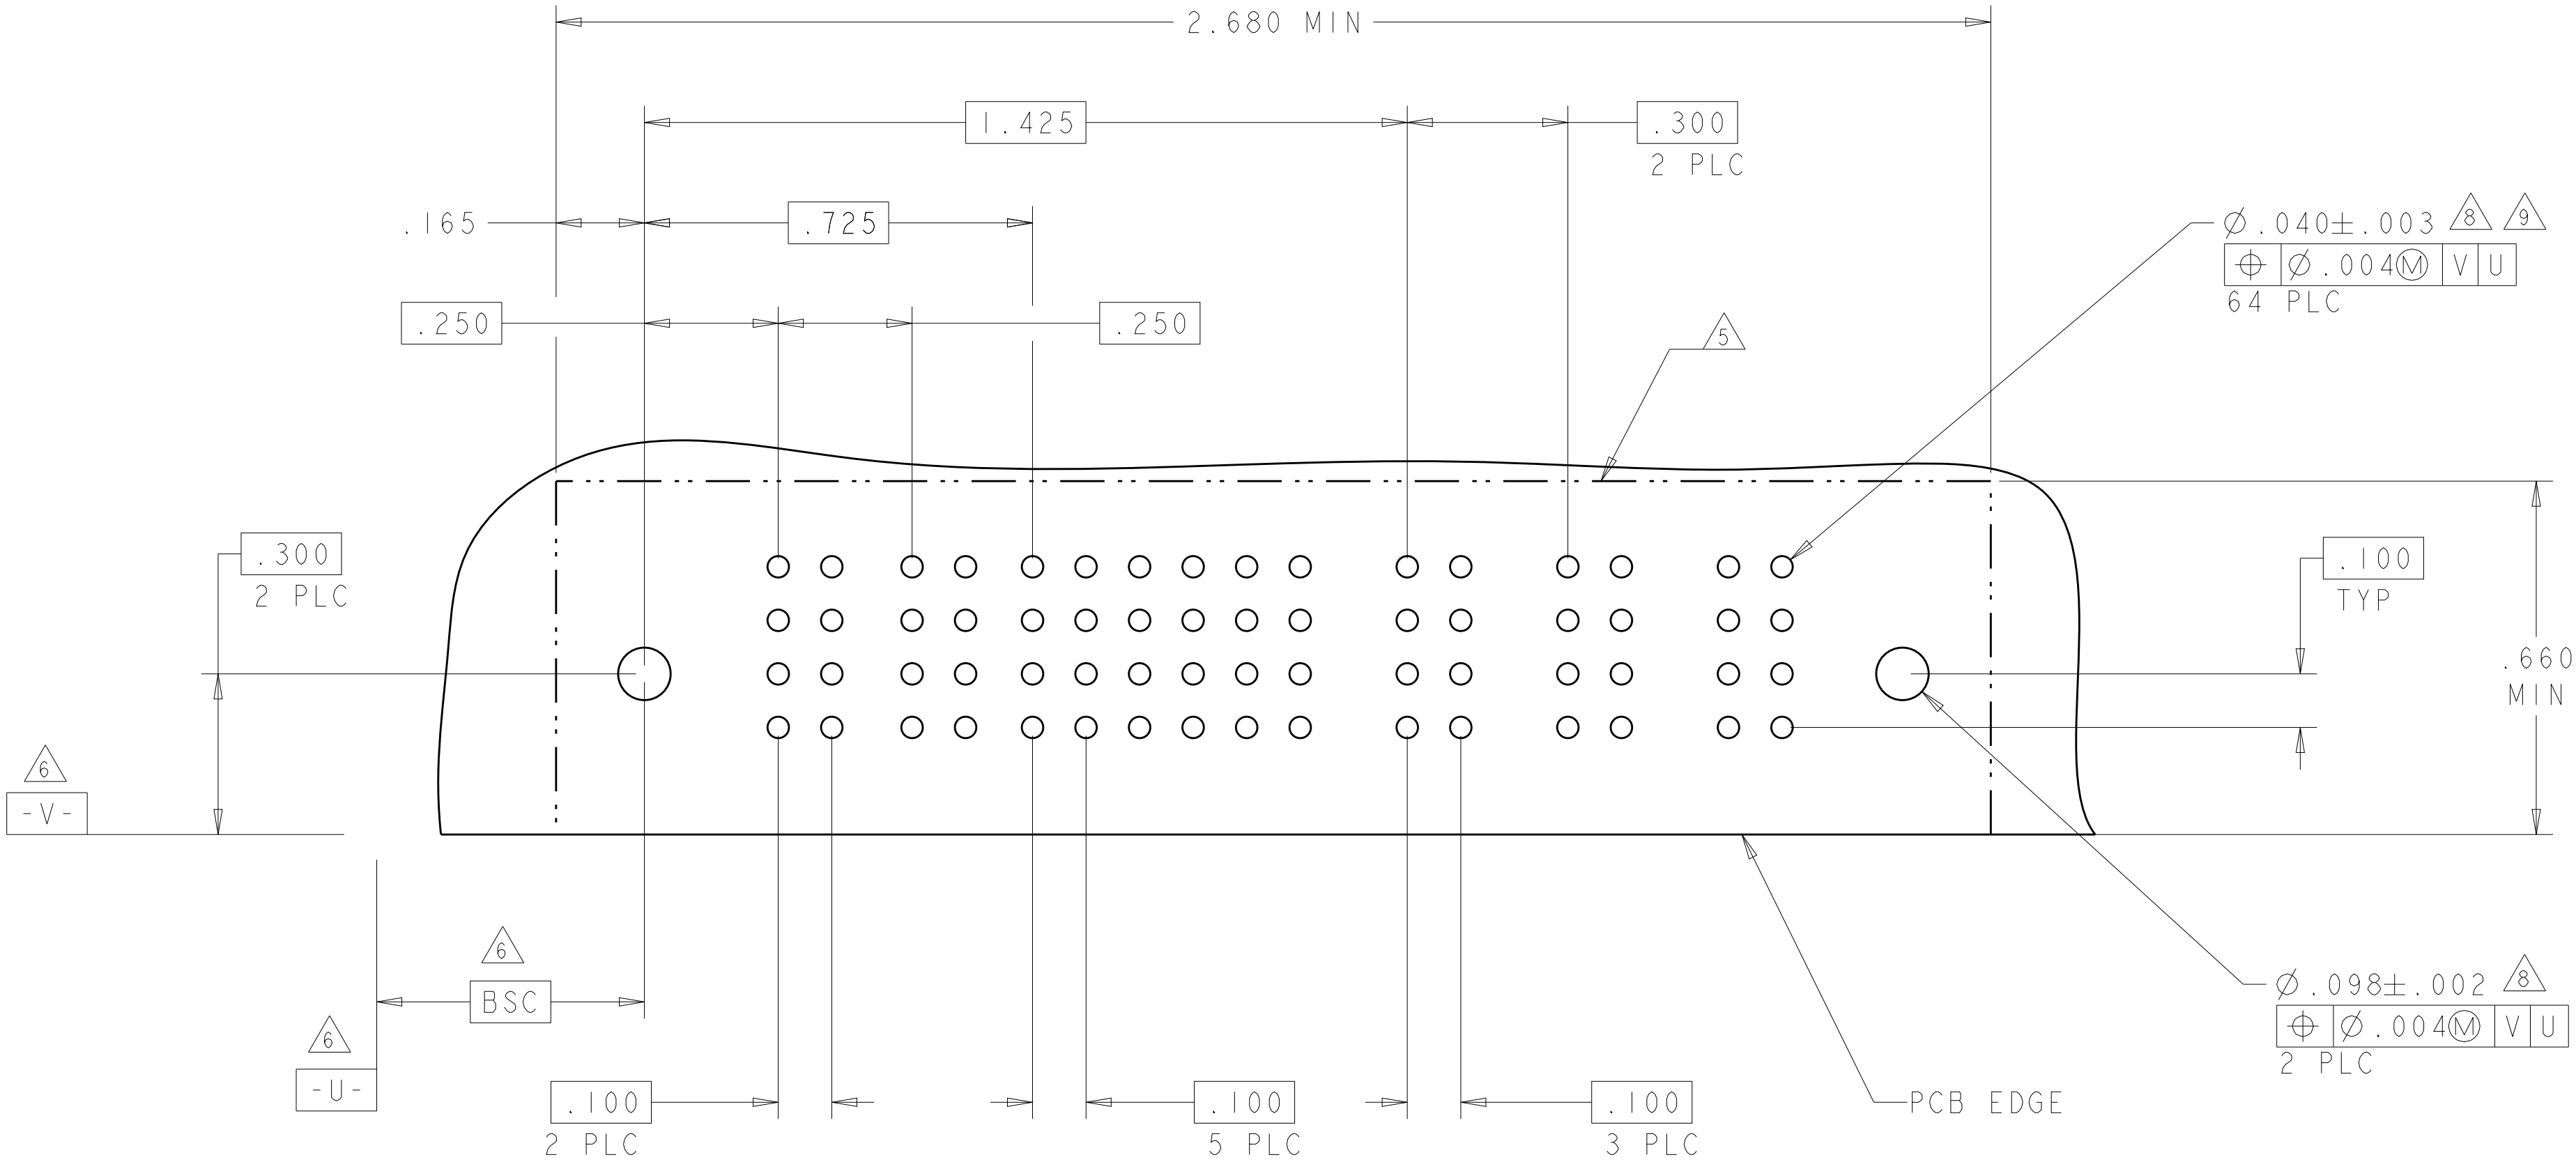


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI	4FEB2005	TE Connectivity	
		CHK M.PERCHERKE	14FEB2005		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	RIGHT ANGLE HEADER ASSEMBLY W/GUIDES MULTI-BEAM XL
		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH	$\pm .01$ $\pm .005$ $\pm .0020$ $\pm 2^\circ$ -	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038 WEIGHT -	
MATERIAL	-	Customer Drawing		SIZE A1	RESTRICTED TO -
				CAGE CODE 100779	DRAWING NO 6450130
				SCALE 4:1	SHEET 22
				OF 28	REV M2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1		1	2	3	4	5	P2		
9-6450130-6	D		PM		E	J	J		PM			
	C				K	K	K					
	B				N	N	N					
	A				S	S	S					
IP + 20S + IP												

NO CONTACTS LOADED

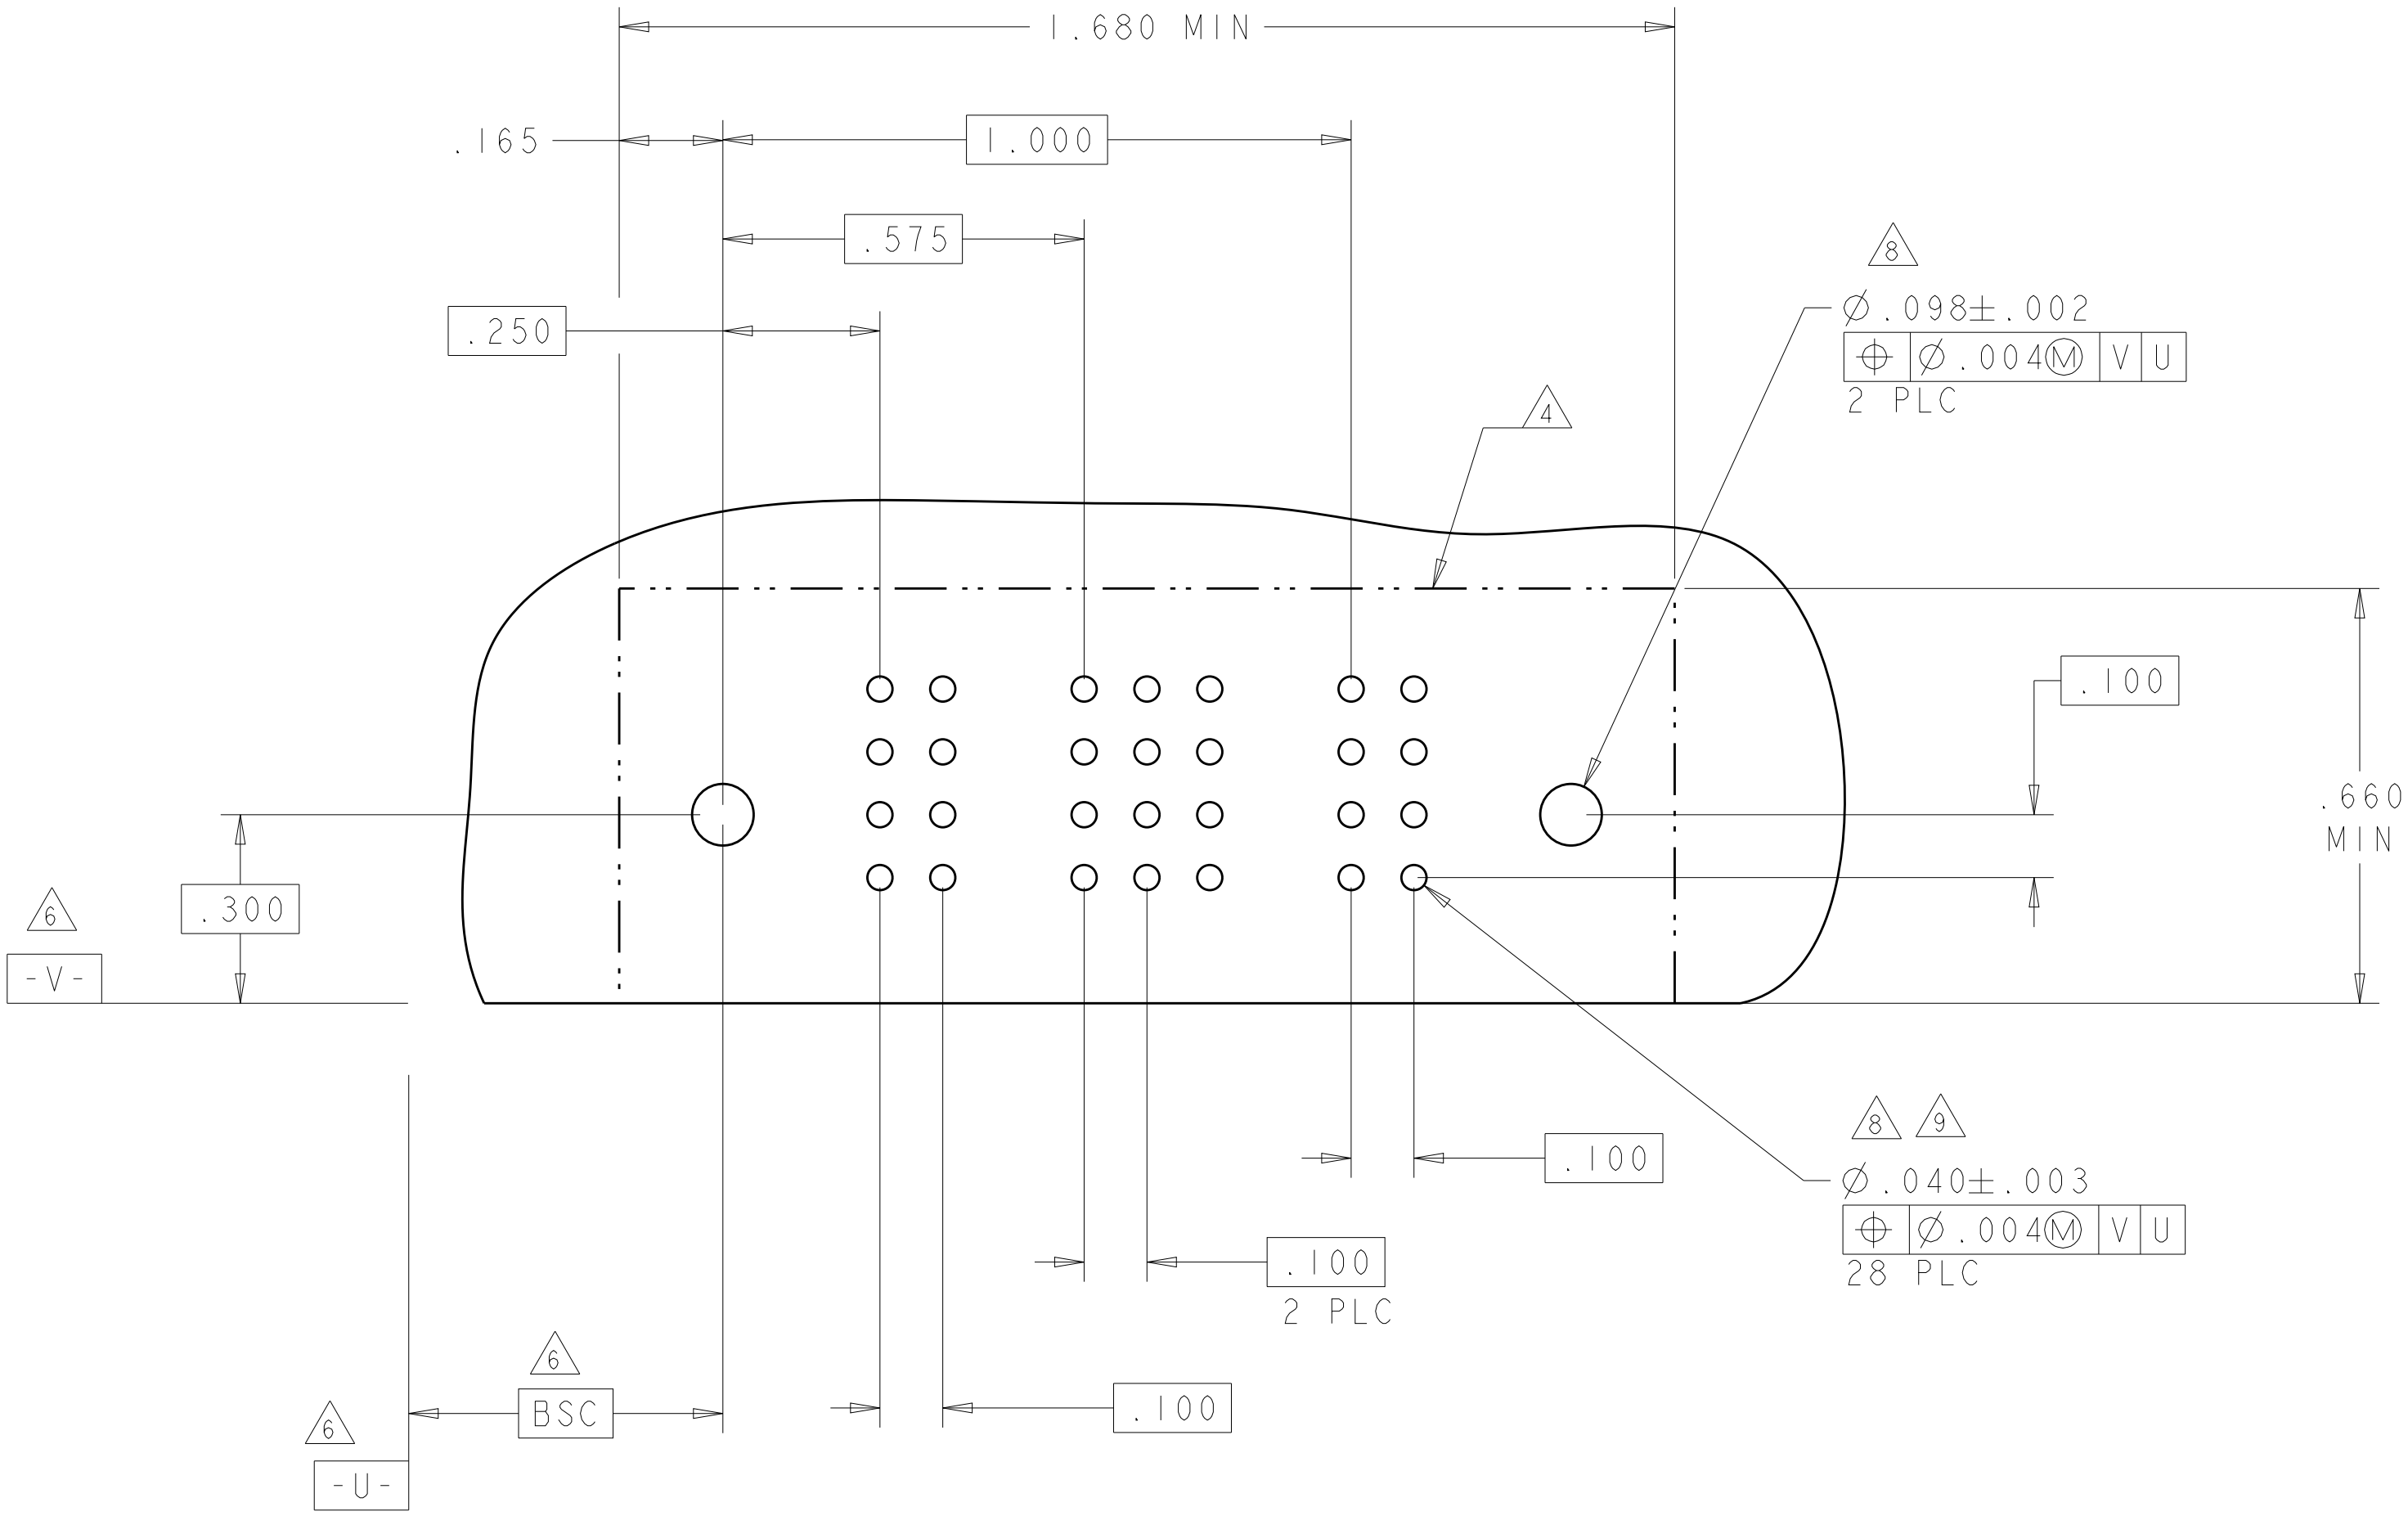

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R.GRZYBOWSKI
CHK
M.PERCHEK
APVD
M.PERCHEK

4FEB2005
14FEB2005
14FEB2005

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT

TE Connectivity

RIGHT ANGLE HEADER ASSEMBLY W/GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450130

RESTRICTED TO
-



Customer Drawing

SCALE
4:1


SHEET
23

OF
28

REV
M2

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
9-6450130-7	D														
	C														
	B														
	A														
3P + 24S + 3P															


L5

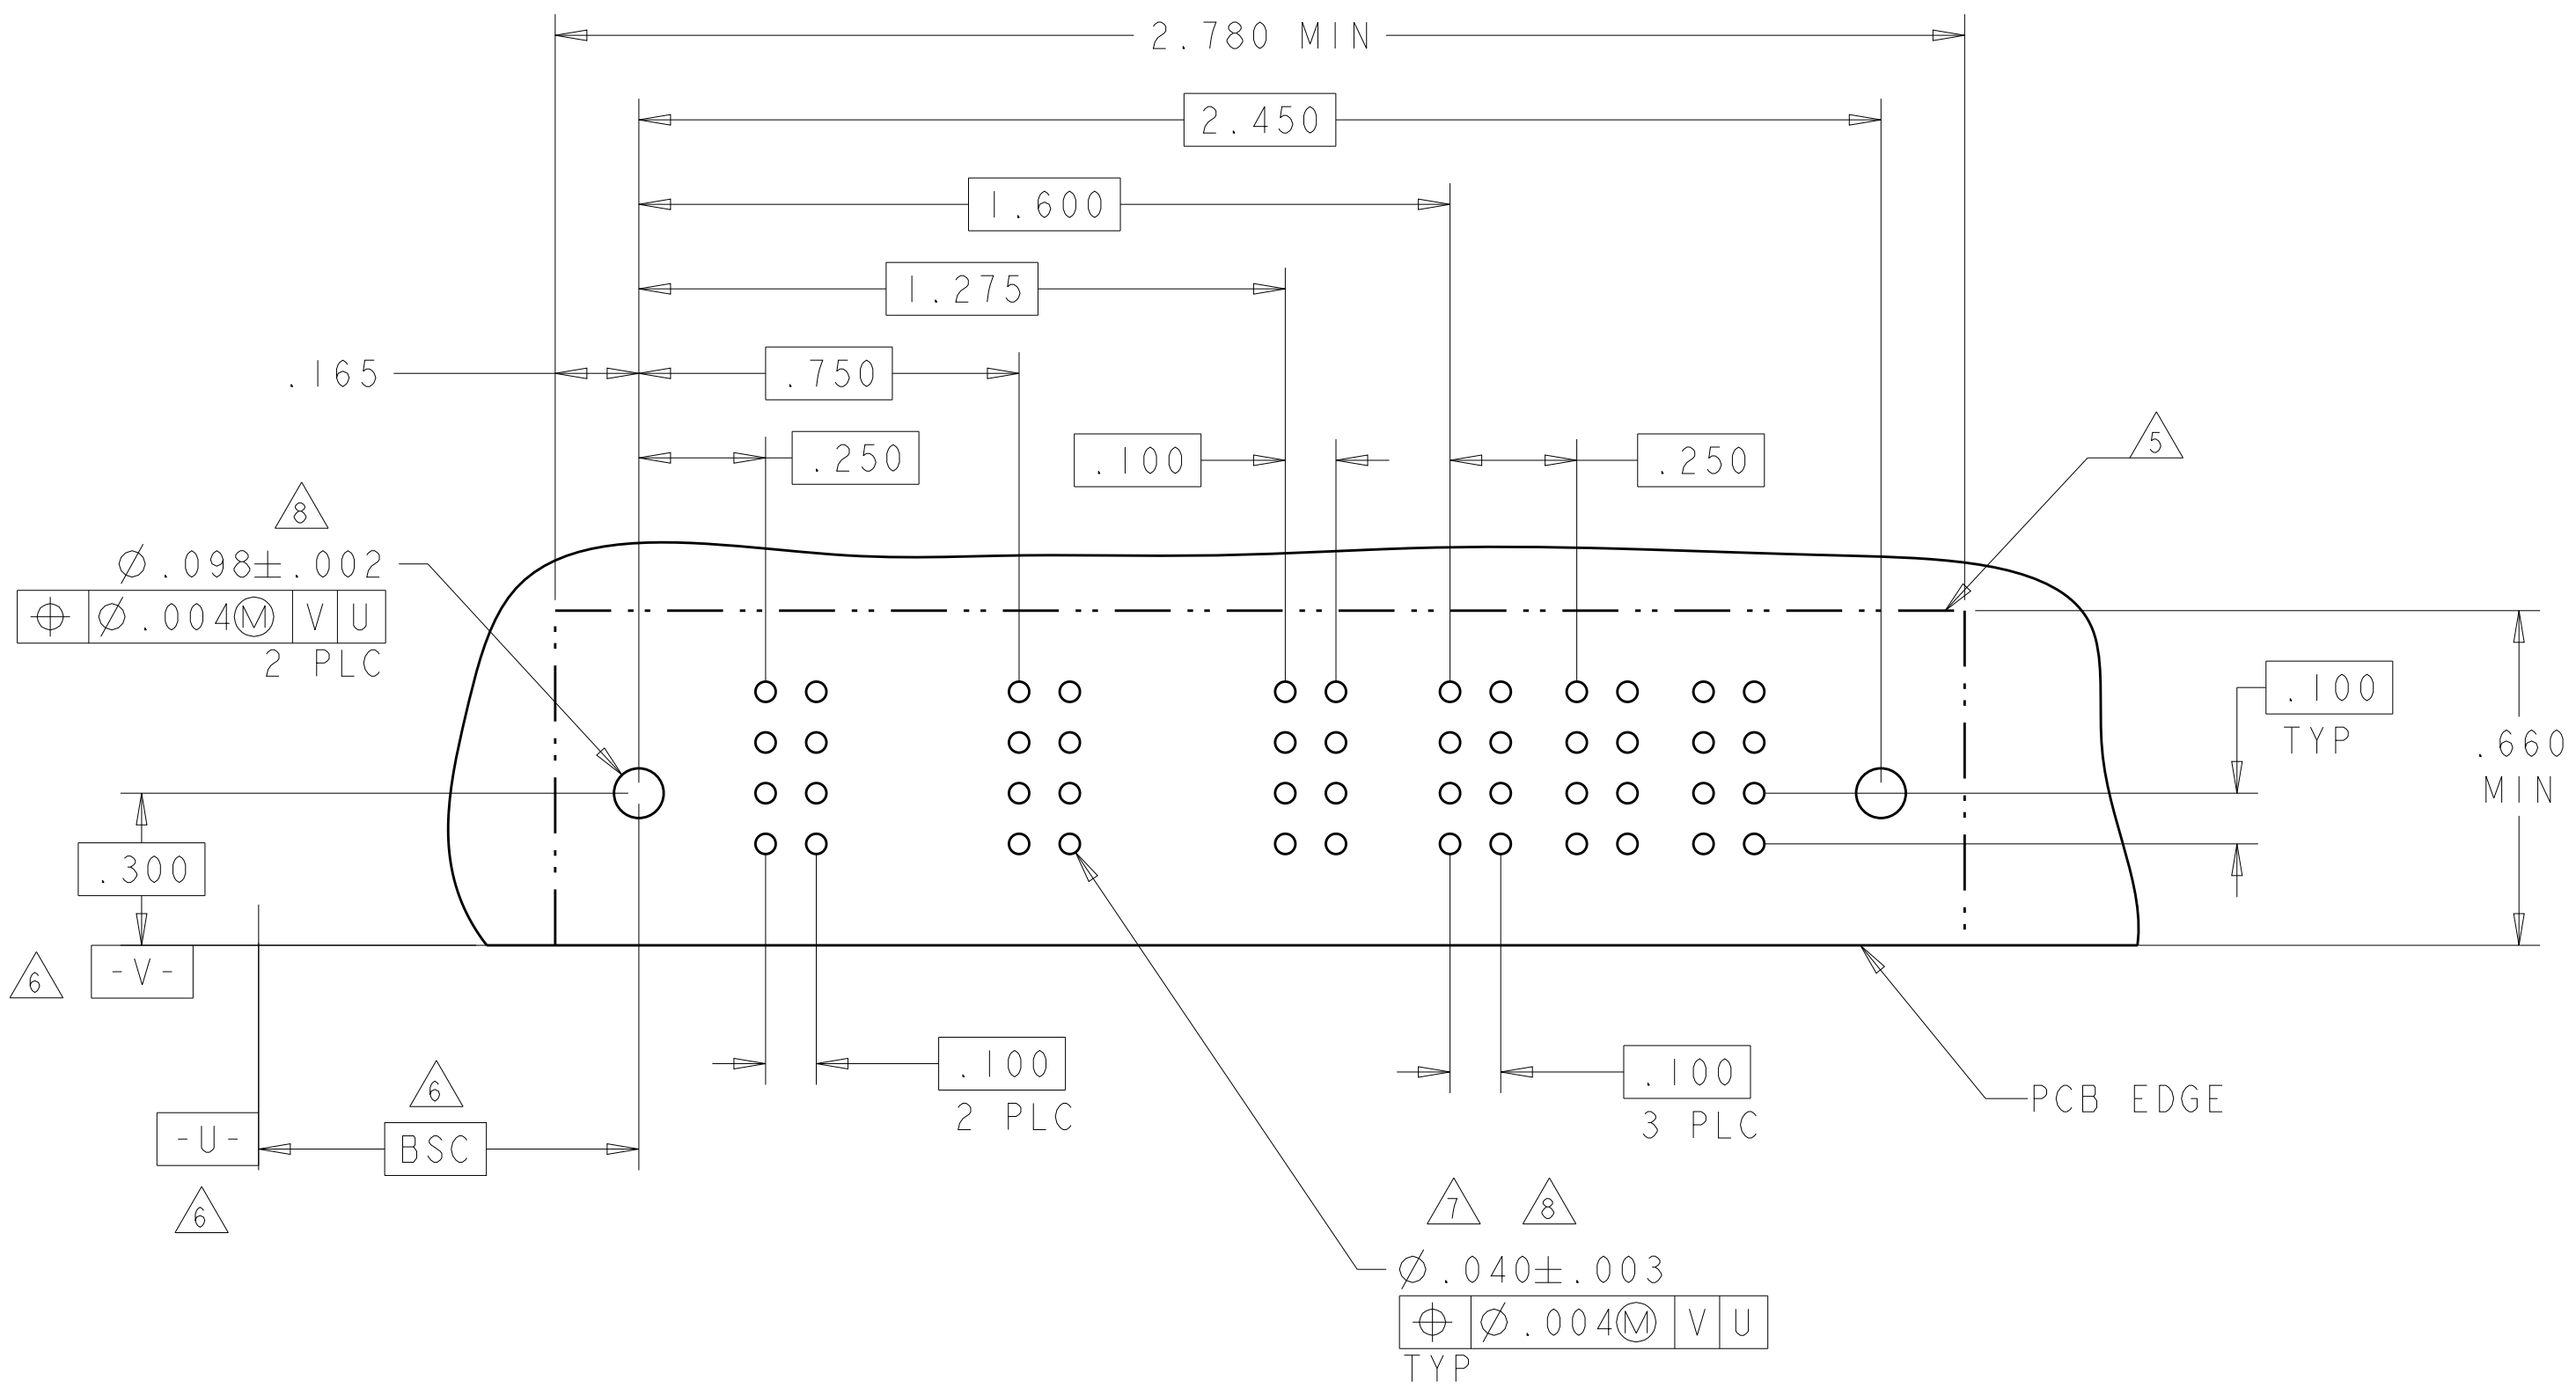
4805 (3/11)

L7

4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER		SIGNAL								POWER	
		P1		1	2	3	4	5	6	7	8	P2	
9-6450130-9	D		PM	J	J	J	J	J	J	J	J	PM	
	C			K	K	K	F	K	K	K	K		
	B			N	N	N	N	N	N	N	N		
	A			S	S	S	S	S	S	S	S		
IP + 32S + IP													

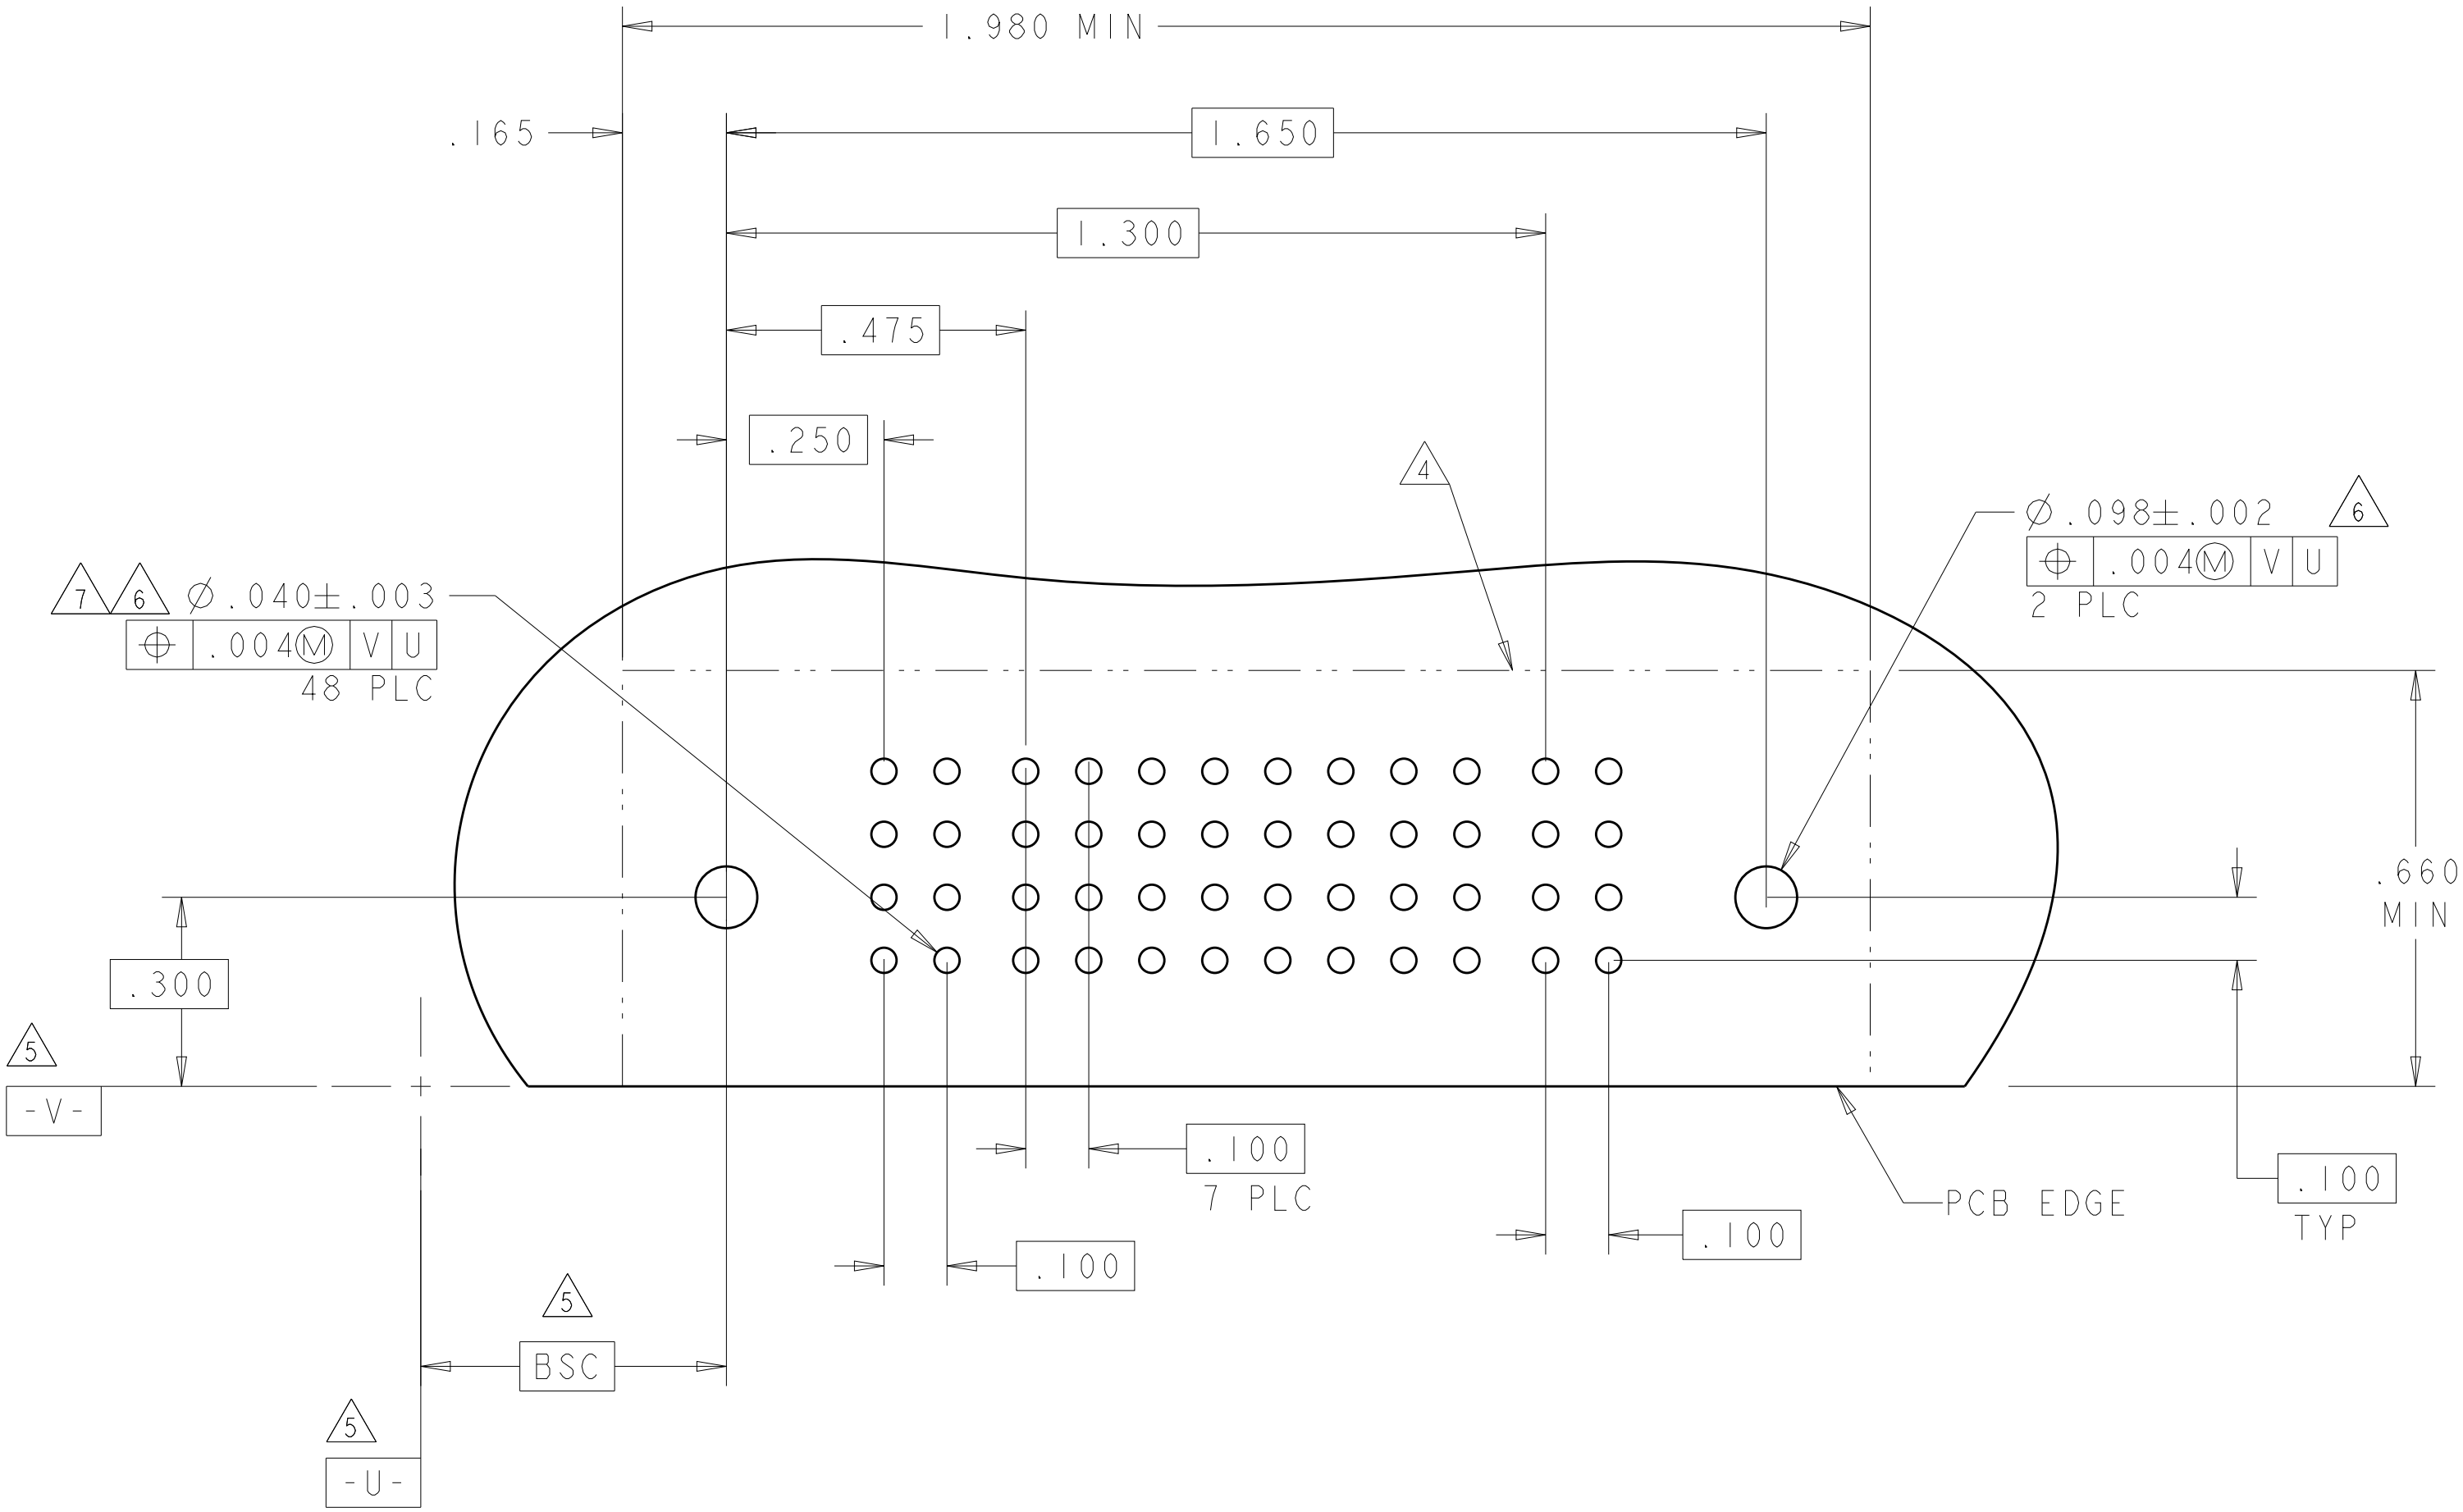

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R. GRZYBOWSKI

4FEB2005

CHK

M. PERCHERKE

14FEB2005

APVD

M. PERCHERKE

14FEB2005

TE Connectivity

RIGHT ANGLE HEADER ASSEMBLY W/GUIDES
MULTI-BEAM XL

NAME

-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

Customer Drawing

SCALE

4:1

SHEET

26

OF

28

REV

M2

DIMENSIONS:

INCHES

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±"

±.01

±.005

±.0020

#2°

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

108-1973

114-13038

-

MATERIAL

-

Customer Drawing

SCALE

4:1

SHEET


26


OF

28

REV

M2

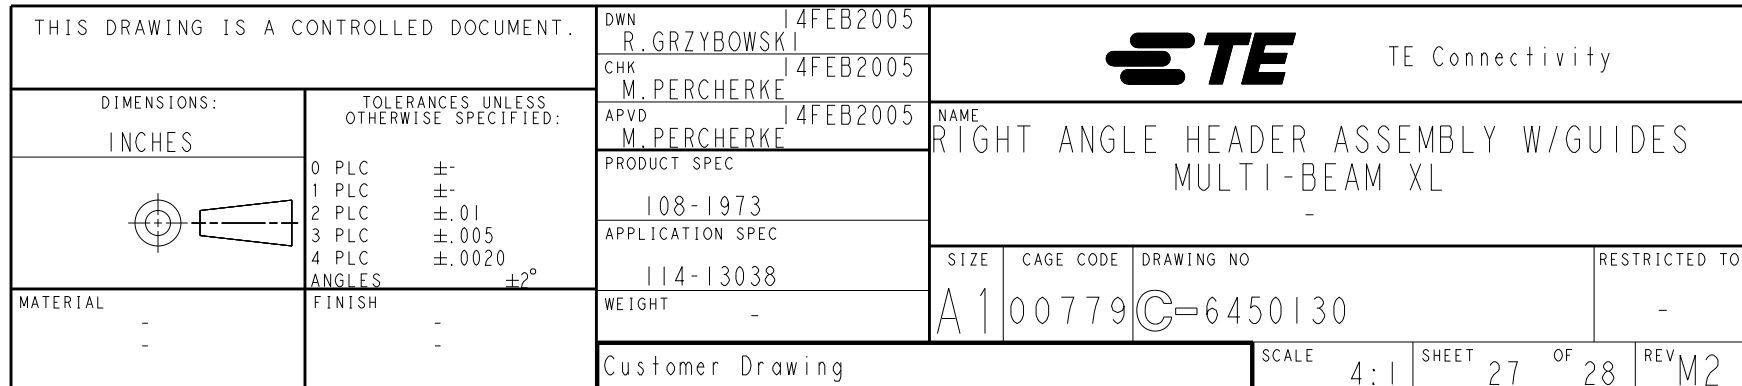

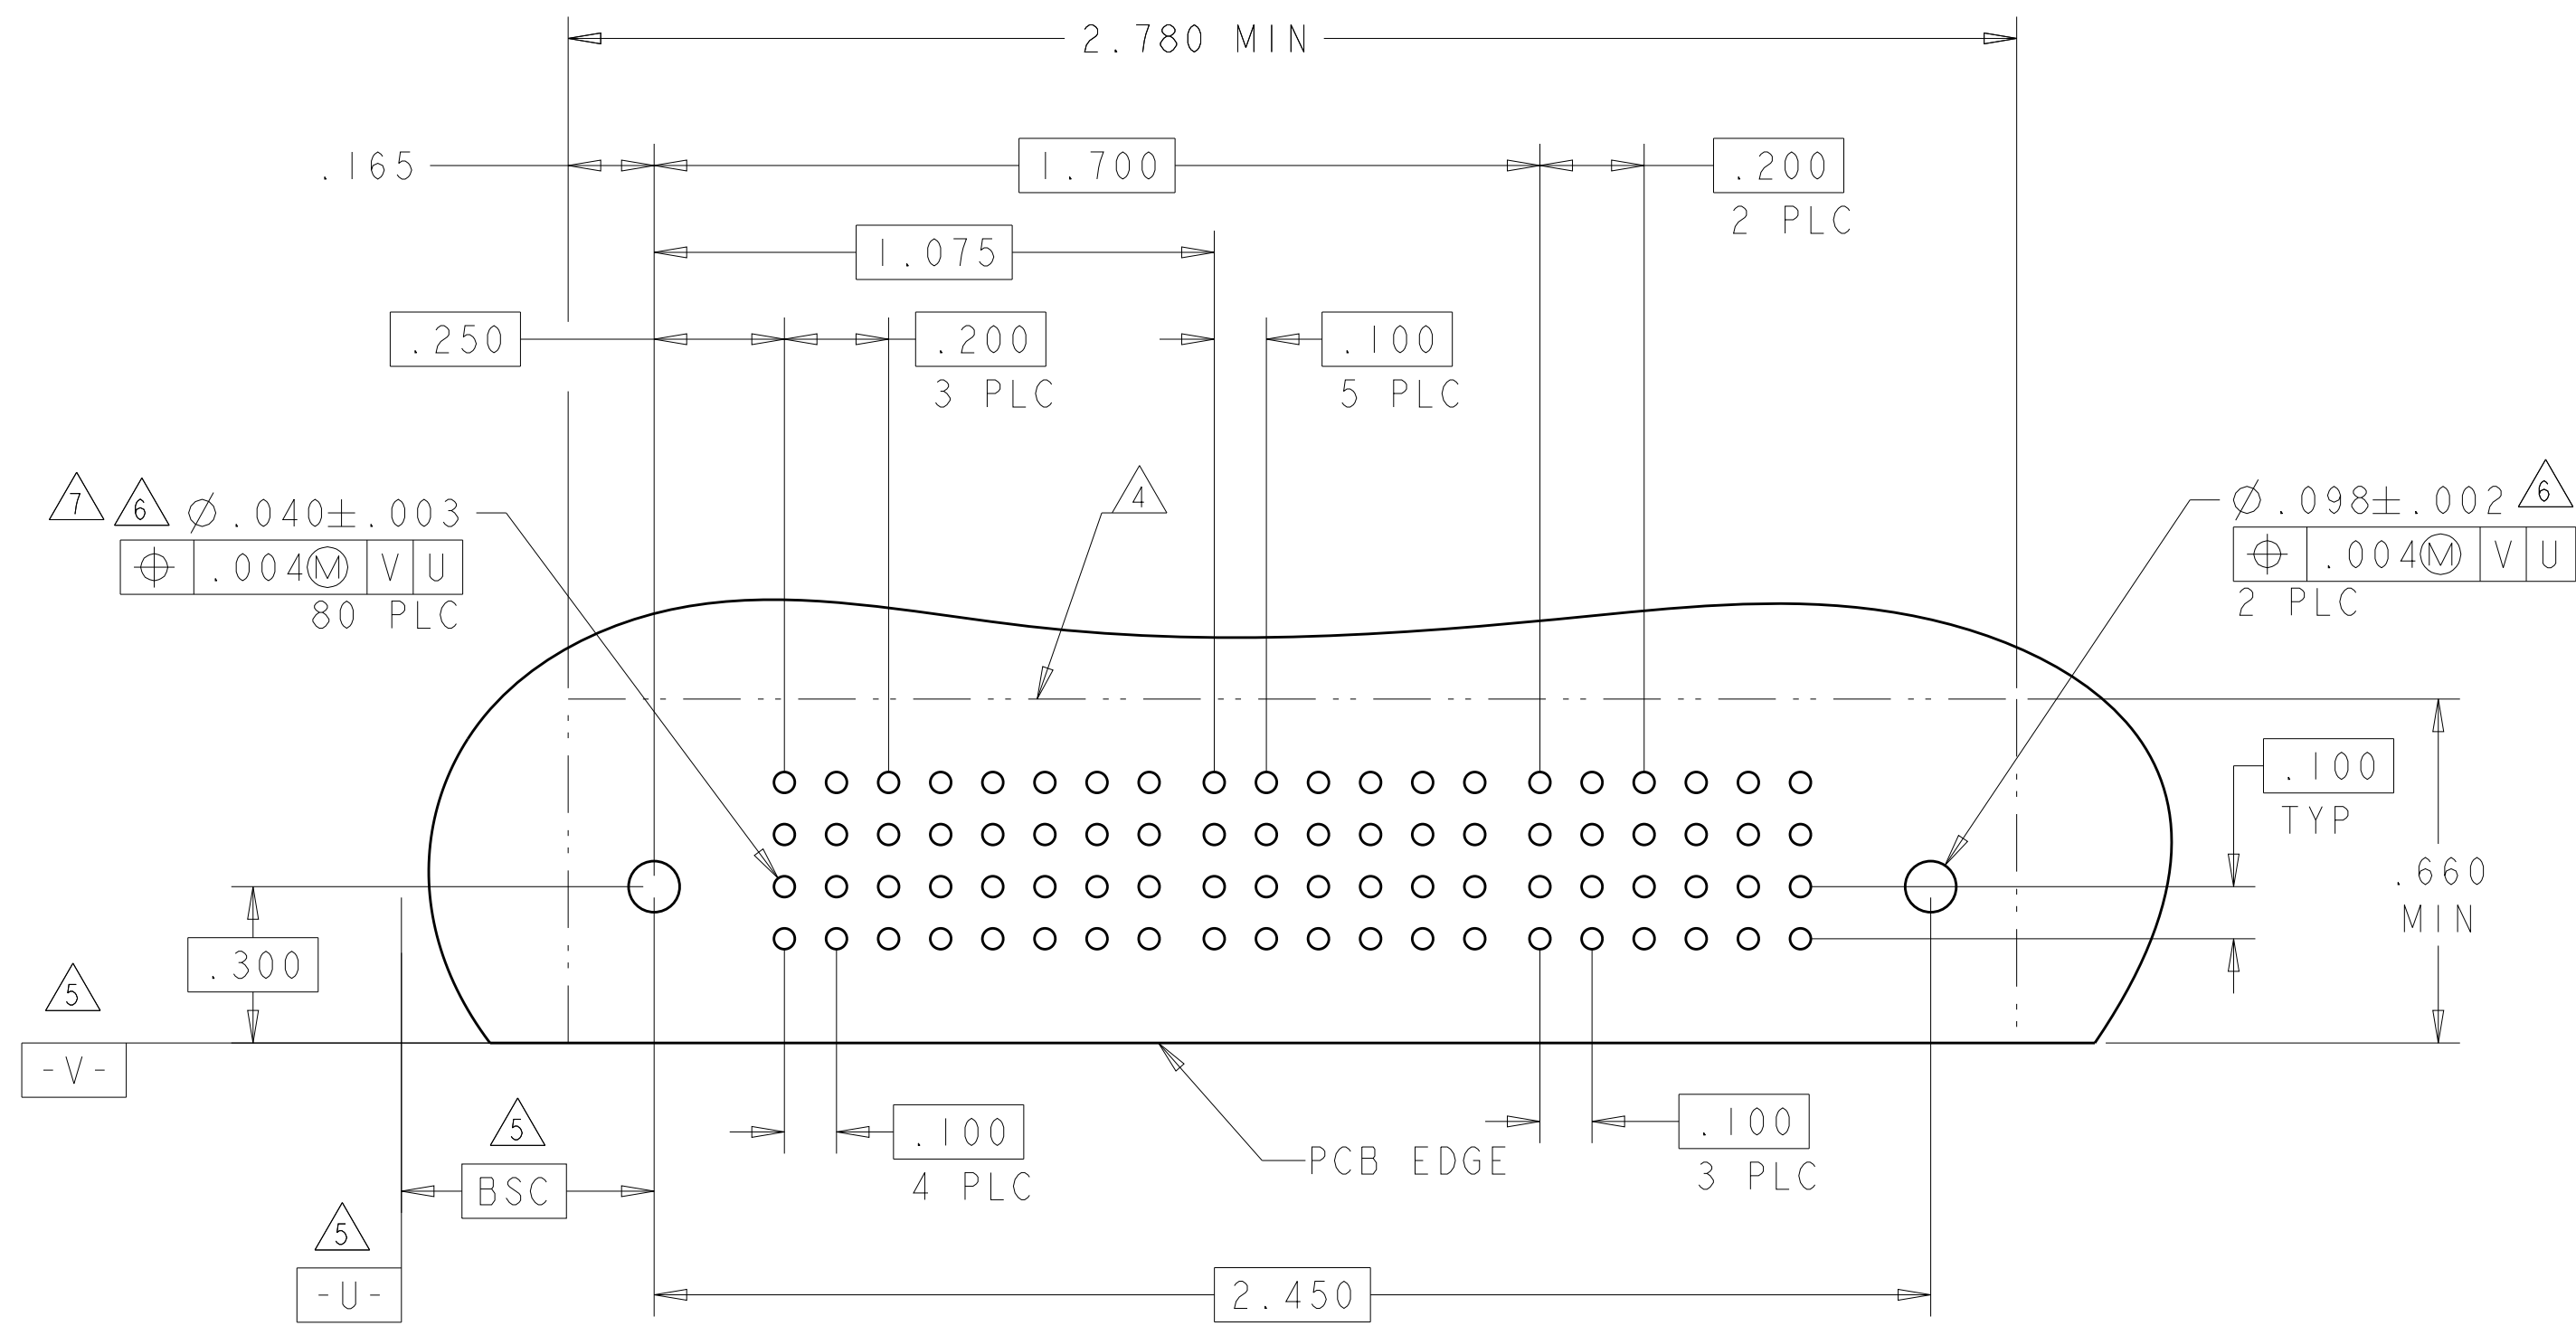[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. GRZYBOWSKI 14FEB2005 CHG M. PERCHERKE 14FEB2005 APVD M. PERCHERKE 14FEB2005		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.01 2 PLC ±.005 3 PLC ±.002 4 PLC ANGLES ±°		NAME RIGHT ANGLE HEATER ASSEMBLY W/GUIDES MULTI-BEAM XL -	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CAGE CODE DRAWING NO A100779 ©6450130	
MATERIAL -		FINISH -		RESTRICTED TO -	
		WEIGHT -		SCALE 4:1 SHEET 28 OF 28 REV M2	
		Customer Drawing			