


**KX** Snap-in Terminal Type, For Audio Equipment,  
of Switching Power Supplies  
series



- In order to get high quality sound from 105°C standard series.
- Selected materials to achieve superior acoustic sound.
- Compliant to the RoHS directive (2011/65/EU).



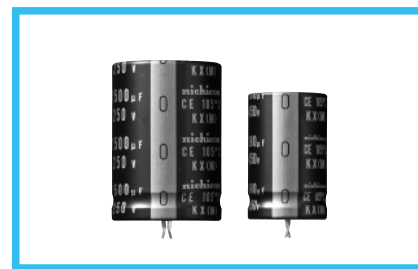


## Specifications

| Item                          | Performance Characteristics                                                                                                                                                                                                                |                 |                    |                                                   |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------------------------------------|
| Category Temperature Range    | - 40 to +105°C (200 • 250V), - 25 to + 105°C (400 • 450V)                                                                                                                                                                                  |                 |                    |                                                   |
| Rated Voltage Range           | 200 to 450V                                                                                                                                                                                                                                |                 |                    |                                                   |
| Rated Capacitance Range       | 56 to 2200μF                                                                                                                                                                                                                               |                 |                    |                                                   |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                        |                 |                    |                                                   |
| Leakage Current               | After 5 minutes' application of rated voltage, leakage current is not more than $3\sqrt{CV}$ (μA), [C: Rated Capacitance(μF), V: Voltage(V)]                                                                                               |                 |                    |                                                   |
| Tangent of loss angle (tan δ) | Rated voltage(V)                                                                                                                                                                                                                           | 200 to 400      | 450                | Measurement frequency : 120Hz at 20°C             |
|                               | tan δ (MAX.)                                                                                                                                                                                                                               | 0.15            | 0.20               |                                                   |
| Stability at Low Temperature  | Rated voltage(V)                                                                                                                                                                                                                           | 200 to 250      | 400 to 450         | Measurement frequency : 120Hz                     |
|                               | Impedance ratio                                                                                                                                                                                                                            | Z - 25°C/Z+20°C | 4                  |                                                   |
|                               | ZT/Z20(MAX.)                                                                                                                                                                                                                               | Z - 40°C/Z+20°C | 12                 |                                                   |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C.                                                                                       |                 | Capacitance change | Within ±20% of the initial capacitance value      |
|                               |                                                                                                                                                                                                                                            |                 | tan δ              | 200% or less than the initial specified value     |
|                               |                                                                                                                                                                                                                                            |                 | Leakage current    | Less than or equal to the initial specified value |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed at right. |                 | Capacitance change | Within ±15% of the initial capacitance value      |
|                               |                                                                                                                                                                                                                                            |                 | tan δ              | 150% or less than the initial specified value     |
|                               |                                                                                                                                                                                                                                            |                 | Leakage current    | Less than or equal to the initial specified value |
| Marking                       | Printed with gold color letter on black sleeve.                                                                                                                                                                                            |                 |                    |                                                   |

## Drawing

Type numbering system (Example : 400 V 120μF , Dia.φ25)

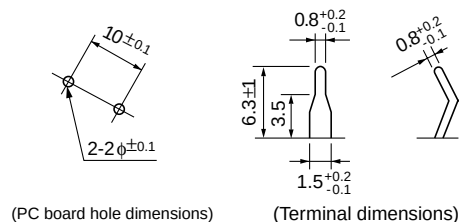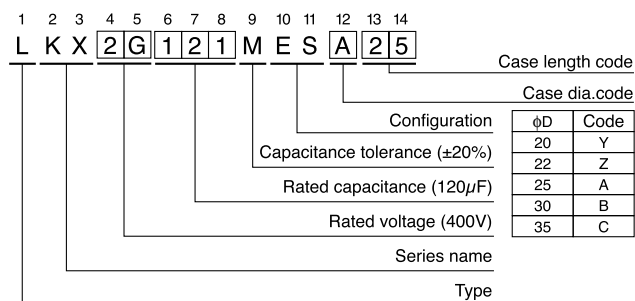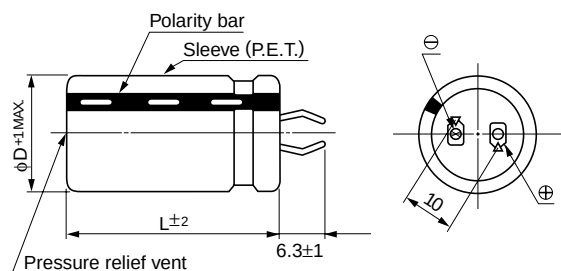

(PC board hole dimensions)

(Terminal dimensions)

## Frequency coefficient of rated ripple current

| Frequency (Hz) | 50          | 60   | 120  | 300  | 1k   | 10k  | 50k or more |
|----------------|-------------|------|------|------|------|------|-------------|
| Coeff.         | 200 to 250V | 0.81 | 0.85 | 1.00 | 1.17 | 1.32 | 1.45        |
|                | 400 to 450V | 0.77 | 0.82 | 1.00 | 1.16 | 1.30 | 1.43        |

● Dimension table in next page.

KX series

## ■ Dimensions

| 200V (2D)    |                    |                        |       |                |
|--------------|--------------------|------------------------|-------|----------------|
| Cap.<br>(μF) | Size<br>φD × L(mm) | Rated ripple<br>(Arms) | tan δ | Code           |
| 220          | 20 × 25            | 0.90                   | 0.15  | LKX2D221MESY25 |
| 270          | 20 × 30            | 0.99                   | 0.15  | LKX2D271MESY30 |
|              | 22 × 25            | 0.99                   | 0.15  | LKX2D271MESZ25 |
| 330          | 20 × 35            | 1.20                   | 0.15  | LKX2D331MESY35 |
| 390          | 20 × 40            | 1.31                   | 0.15  | LKX2D391MESY40 |
|              | 22 × 30            | 1.31                   | 0.15  | LKX2D391MESZ30 |
|              | 25 × 25            | 1.31                   | 0.15  | LKX2D391MESA25 |
| 470          | 20 × 45            | 1.48                   | 0.15  | LKX2D471MESY45 |
|              | 22 × 35            | 1.48                   | 0.15  | LKX2D471MESZ35 |
|              | 25 × 30            | 1.48                   | 0.15  | LKX2D471MESA30 |
| 560          | 20 × 50            | 1.60                   | 0.15  | LKX2D561MESY50 |
|              | 22 × 40            | 1.60                   | 0.15  | LKX2D561MESZ40 |
|              | 25 × 35            | 1.60                   | 0.15  | LKX2D561MESA35 |
| 680          | 22 × 45            | 1.75                   | 0.15  | LKX2D681MESZ45 |
|              | 25 × 40            | 1.75                   | 0.15  | LKX2D681MESA40 |
|              | 30 × 30            | 1.75                   | 0.15  | LKX2D681MESB30 |
|              | 35 × 25            | 1.75                   | 0.15  | LKX2D681MESC25 |
| 820          | 25 × 45            | 2.04                   | 0.15  | LKX2D821MESA45 |
|              | 30 × 35            | 2.04                   | 0.15  | LKX2D821MESB35 |
| 1000         | 25 × 50            | 2.30                   | 0.15  | LKX2D102MESA50 |
|              | 30 × 40            | 2.30                   | 0.15  | LKX2D102MESB40 |
|              | 35 × 30            | 2.30                   | 0.15  | LKX2D102MESC30 |
| 1200         | 30 × 45            | 2.65                   | 0.15  | LKX2D122MESB45 |
|              | 35 × 35            | 2.65                   | 0.15  | LKX2D122MESC35 |
| 1500         | 30 × 50            | 2.80                   | 0.15  | LKX2D152MESB50 |
|              | 35 × 40            | 2.80                   | 0.15  | LKX2D152MESC40 |
| 1800         | 35 × 45            | 3.08                   | 0.15  | LKX2D182MESC45 |
| 2200         | 35 × 50            | 3.48                   | 0.15  | LKX2D222MESC50 |

| 250V (2E)    |                    |                        |       |                |
|--------------|--------------------|------------------------|-------|----------------|
| Cap.<br>(μF) | Size<br>φD × L(mm) | Rated ripple<br>(Arms) | tan δ | Code           |
| 180          | 20 × 25            | 0.90                   | 0.15  | LKX2E181MESY25 |
| 220          | 20 × 30            | 1.00                   | 0.15  | LKX2E221MESY30 |
|              | 22 × 25            | 1.00                   | 0.15  | LKX2E221MESZ25 |
| 270          | 20 × 35            | 1.10                   | 0.15  | LKX2E271MESY35 |
|              | 22 × 30            | 1.10                   | 0.15  | LKX2E271MESZ30 |
| 330          | 20 × 40            | 1.20                   | 0.15  | LKX2E331MESY40 |
|              | 22 × 35            | 1.20                   | 0.15  | LKX2E331MESZ35 |
|              | 25 × 25            | 1.20                   | 0.15  | LKX2E331MESA25 |
| 390          | 20 × 45            | 1.30                   | 0.15  | LKX2E391MESY45 |
|              | 22 × 40            | 1.30                   | 0.15  | LKX2E391MESZ40 |
|              | 25 × 30            | 1.30                   | 0.15  | LKX2E391MESA30 |
| 470          | 20 × 50            | 1.40                   | 0.15  | LKX2E471MESY50 |
|              | 22 × 45            | 1.40                   | 0.15  | LKX2E471MESZ45 |
|              | 25 × 35            | 1.40                   | 0.15  | LKX2E471MESA35 |
| 560          | 30 × 25            | 1.40                   | 0.15  | LKX2E471MESB25 |
|              | 22 × 50            | 1.50                   | 0.15  | LKX2E561MESZ50 |
|              | 25 × 40            | 1.50                   | 0.15  | LKX2E561MESA40 |
|              | 30 × 30            | 1.50                   | 0.15  | LKX2E561MESB30 |
| 680          | 35 × 25            | 1.50                   | 0.15  | LKX2E561MESC25 |
|              | 25 × 50            | 1.70                   | 0.15  | LKX2E681MESA50 |
|              | 30 × 35            | 1.70                   | 0.15  | LKX2E681MESB35 |
| 820          | 30 × 40            | 2.00                   | 0.15  | LKX2E821MESB40 |
|              | 35 × 30            | 2.00                   | 0.15  | LKX2E821MESC30 |
| 1000         | 30 × 45            | 2.20                   | 0.15  | LKX2E102MESB45 |
|              | 35 × 35            | 2.20                   | 0.15  | LKX2E102MESC35 |
| 1200         | 35 × 40            | 2.30                   | 0.15  | LKX2E122MESC40 |
| 1500         | 35 × 50            | 2.50                   | 0.15  | LKX2E152MESC50 |

| 400V (2G)    |                    |                        |       |                |
|--------------|--------------------|------------------------|-------|----------------|
| Cap.<br>(μF) | Size<br>φD × L(mm) | Rated ripple<br>(Arms) | tan δ | Code           |
| 68           | 20 × 25            | 0.49                   | 0.15  | LKX2G680MESY25 |
| 82           | 20 × 30            | 0.64                   | 0.15  | LKX2G820MESY30 |
|              | 22 × 25            | 0.64                   | 0.15  | LKX2G820MESZ25 |
| 100          | 20 × 35            | 0.68                   | 0.15  | LKX2G101MESY35 |
|              | 22 × 30            | 0.73                   | 0.15  | LKX2G121MESY35 |
| 120          | 22 × 30            | 0.73                   | 0.15  | LKX2G121MESZ30 |
|              | 25 × 25            | 0.73                   | 0.15  | LKX2G121MESA25 |
| 150          | 20 × 45            | 0.85                   | 0.15  | LKX2G151MESY45 |
|              | 22 × 35            | 0.85                   | 0.15  | LKX2G151MESZ35 |
|              | 25 × 30            | 0.85                   | 0.15  | LKX2G151MESA30 |
| 180          | 20 × 50            | 0.95                   | 0.15  | LKX2G181MESY50 |
|              | 22 × 40            | 0.95                   | 0.15  | LKX2G181MESZ40 |
|              | 25 × 35            | 0.95                   | 0.15  | LKX2G181MESA35 |
| 220          | 22 × 50            | 1.10                   | 0.15  | LKX2G221MESZ50 |
|              | 25 × 40            | 1.10                   | 0.15  | LKX2G221MESA40 |
|              | 30 × 30            | 1.10                   | 0.15  | LKX2G221MESB30 |
|              | 35 × 25            | 1.10                   | 0.15  | LKX2G221MESC25 |
| 270          | 25 × 45            | 1.22                   | 0.15  | LKX2G271MESA45 |
|              | 30 × 35            | 1.22                   | 0.15  | LKX2G271MESB35 |
| 330          | 25 × 50            | 1.44                   | 0.15  | LKX2G331MESA50 |
|              | 30 × 40            | 1.44                   | 0.15  | LKX2G331MESB40 |
|              | 35 × 30            | 1.44                   | 0.15  | LKX2G331MESC30 |
| 390          | 30 × 45            | 1.55                   | 0.15  | LKX2G391MESB45 |
|              | 35 × 35            | 1.55                   | 0.15  | LKX2G391MESC35 |
| 470          | 30 × 50            | 1.68                   | 0.15  | LKX2G471MESB50 |
|              | 35 × 40            | 1.68                   | 0.15  | LKX2G471MESC40 |
| 560          | 35 × 45            | 1.90                   | 0.15  | LKX2G561MESC45 |
| 680          | 35 × 50            | 2.12                   | 0.15  | LKX2G681MESC50 |

| 450V (2W)    |                    |                        |       |                |
|--------------|--------------------|------------------------|-------|----------------|
| Cap.<br>(μF) | Size<br>φD × L(mm) | Rated ripple<br>(Arms) | tan δ | Code           |
| 56           | 20 × 25            | 0.44                   | 0.20  | LKX2W560MESY25 |
| 68           | 20 × 30            | 0.50                   | 0.20  | LKX2W680MESY30 |
| 82           | 20 × 35            | 0.64                   | 0.20  | LKX2W820MESY35 |
|              | 22 × 30            | 0.64                   | 0.20  | LKX2W820MESZ30 |
| 100          | 20 × 40            | 0.69                   | 0.20  | LKX2W101MESY40 |
|              | 22 × 30            | 0.69                   | 0.20  | LKX2W101MESZ30 |
|              | 25 × 25            | 0.69                   | 0.20  | LKX2W101MESA25 |
| 120          | 20 × 45            | 0.72                   | 0.20  | LKX2W121MESY45 |
|              | 22 × 35            | 0.72                   | 0.20  | LKX2W121MESZ35 |
|              | 25 × 30            | 0.72                   | 0.20  | LKX2W121MESA30 |
| 150          | 22 × 45            | 0.79                   | 0.20  | LKX2W151MESZ45 |
|              | 25 × 35            | 0.79                   | 0.20  | LKX2W151MESA35 |
|              | 30 × 25            | 0.79                   | 0.20  | LKX2W151MESB25 |
| 180          | 22 × 50            | 0.87                   | 0.20  | LKX2W181MESZ50 |
|              | 25 × 40            | 0.87                   | 0.20  | LKX2W181MESA40 |
|              | 30 × 30            | 0.87                   | 0.20  | LKX2W181MESB30 |
|              | 35 × 25            | 0.87                   | 0.20  | LKX2W181MESC25 |
| 220          | 25 × 45            | 1.05                   | 0.20  | LKX2W221MESA45 |
|              | 30 × 35            | 1.05                   | 0.20  | LKX2W221MESB35 |
| 270          | 30 × 40            | 1.23                   | 0.20  | LKX2W271MESB40 |
|              | 35 × 30            | 1.23                   | 0.20  | LKX2W271MESC30 |
| 330          | 30 × 45            | 1.38                   | 0.20  | LKX2W331MESB45 |
|              | 35 × 35            | 1.38                   | 0.20  | LKX2W331MESC35 |
| 390          | 35 × 40            | 1.61                   | 0.20  | LKX2W391MESC40 |
| 470          | 35 × 45            | 1.78                   | 0.20  | LKX2W471MESC45 |
| 560          | 35 × 50            | 1.99                   | 0.20  | LKX2W561MESC50 |

Rated ripple current (Arms) at 105°C 120Hz

CAT.8100C