

ACPL-W70L-000E and ACPL-K73L-000E





Single-Channel and Dual-Channel High-Speed 15-MBd CMOS Optocoupler with Glitch-Free Power-Up Feature

Data Sheet

Description

The ACPL-W70L (single-channel) and ACPL-K73L (dual-channel) are 15-MBd CMOS optocouplers in SSOIC-6 and SSOIC-8 packages, respectively. The optocouplers use the latest CMOS IC technology to achieve outstanding performance with very low power consumption. Basic building blocks of ACPL-W70L and ACPL-K73L are high-speed LEDs and CMOS detector ICs. Each detector incorporates an integrated photodiode, a high-speed transimpedance amplifier, and a voltage comparator with an output driver.

Component Image

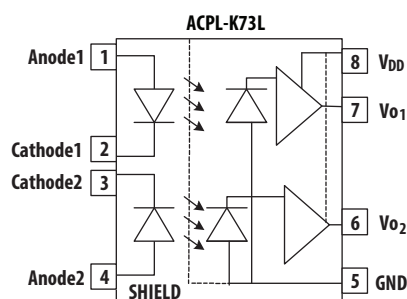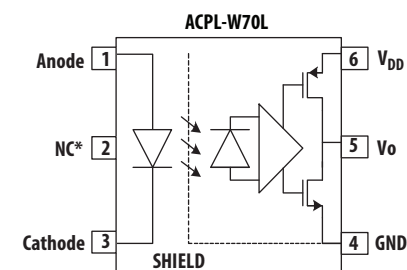

Truth Table

| LED | V _O , Output |
|-----|-------------------------|
| ON | H |
| OFF | L |

A 0.1- μ F bypass capacitor must be connected between pins V_{DD} and GND.

Features

Features

- +3.3V and 5V CMOS compatibility
- 25 ns maximum pulse width distortion
- 55 ns maximum propagation delay
- 40 ns maximum propagation delay skew
- High speed: 15 MBd minimum
- 10 kV/ μ s minimum common-mode rejection
- -40°C to +105°C temperature range
- Glitch-free power-up feature
- Safety and regulatory approvals:
 - UL recognized: 5000 V_{rms} for 1 min. per UL 1577
 - CSA component acceptance Notice #5
 - IEC/EN/DIN EN 60747-5-5 approval for Reinforced Insulation

Applications

- Digital field bus isolation:
 - CANBus, RS485, USB
- Multiplexed data transmission
- Computer peripheral interface
- Microprocessor system interface
- DC/DC converter

CAUTION

It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation that may be induced by ESD. The components featured in this data sheet are not to be used in military or aerospace applications or environments.

Ordering Information

ACPL-W70L and ACPL-K73L are UL Recognized with 5000 V_{rms} for 1 minute per UL1577.

| Part Number | Option RoHS Compliant | Package | Surface Mount | Tape & Reel | UL 5000 V _{rms} / 1 Minute Rating | IEC/EN/DIN EN 60747-5-5 | Quantity |
|-------------|-----------------------------|---------|---------------|-------------|---|----------------------------|---------------|
| ACPL-W70L | -000E | SSO-6 | X | | X | | 100 per tube |
| | -500E | | X | X | X | | 1000 per reel |
| | -060E | | X | | X | X | 100 per tube |
| | -560E | | X | X | X | X | 1000 per reel |
| ACPL-K73L | -000E | SSO-8 | X | | X | | 80 per tube |
| | -500E | | X | X | X | | 1000 per reel |
| | -060E | | X | | X | X | 80 per tube |
| | -560E | | X | X | X | X | 1000 per reel |

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.


Example:

ACPL-W70L-500E to order product of stretched SO-6 package in Tape and Reel packaging in RoHS compliant.


Option data sheets are available. Contact your Broadcom sales representative or authorized distributor for information.

Package Dimensions

ACPL-W70L (Stretched SO-6 Package)

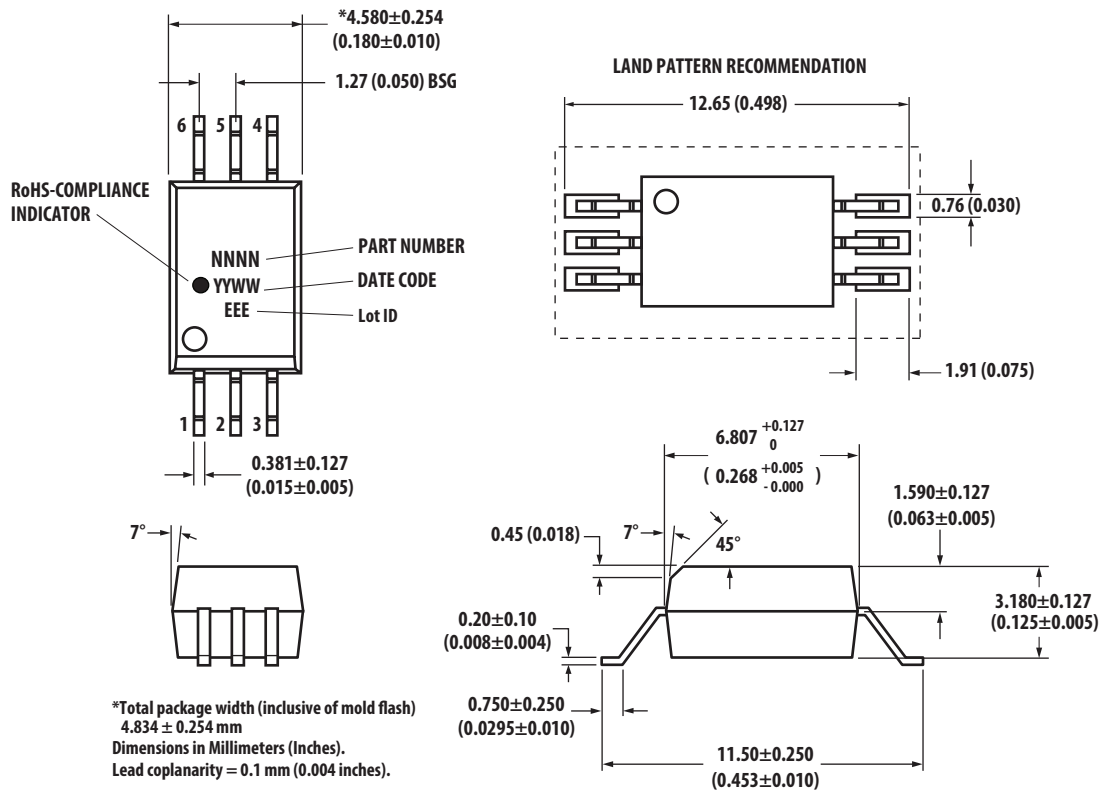

ACPL-K73L (Stretched S0-8 Package)

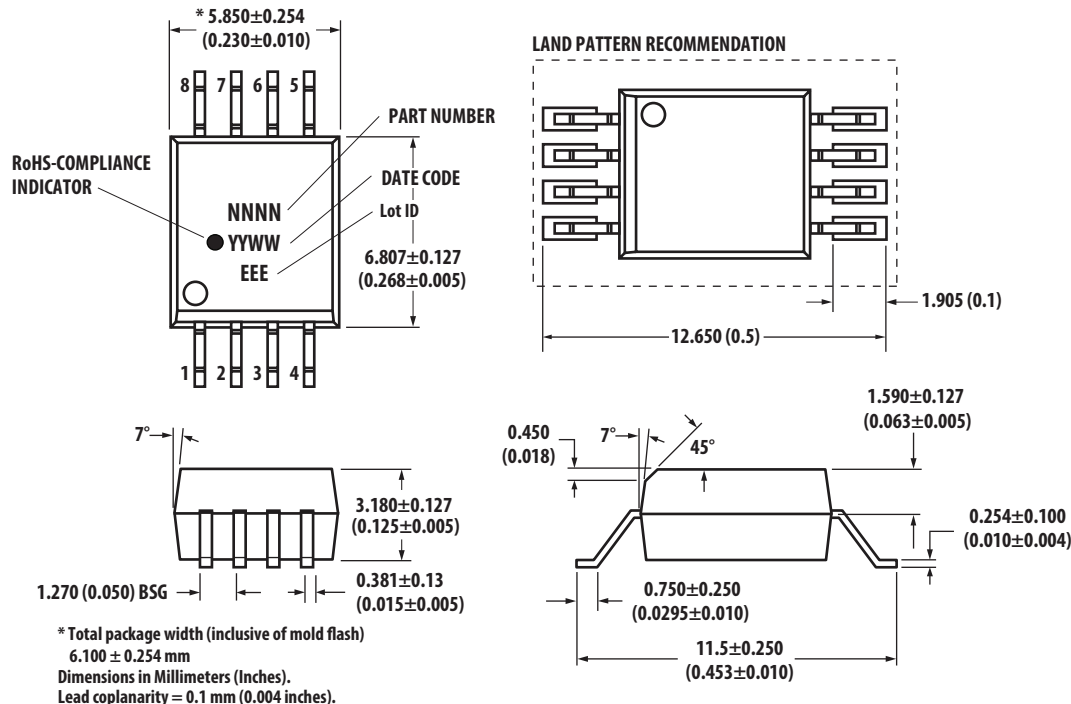

Solder Reflow Profile

The recommended reflow soldering conditions are per JEDEC Standard J-STD-020 (latest revision). Non-halide flux should be used.

Regulatory Information

The ACPL-W70L and ACPL-K73L are approved by the following organizations:

| | |
|-------------------------|---|
| UL | Recognized under UL 1577, component recognition program, File E55361. |
| CSA | Approval under CSA Component Acceptance Notice #5, File CA 88324. |
| IEC/EN/DIN EN 60747-5-5 | Approved. |

Insulation and Safety Related Specifications

| Parameter | Symbol | Value | Unit | Conditions |
|---|--------|-------|------|---|
| Minimum External Air Gap (Clearance) | L(101) | 8.0 | mm | Measured from input terminals to output terminals, shortest distance through air. |
| Minimum External Tracking (Creepage) | L(102) | 8.0 | mm | Measured from input terminals to output terminals, shortest distance path along body. |
| Minimum Internal Plastic Gap (Internal Clearance) | | 0.08 | mm | Insulation thickness between emitter and detector; also known as distance through insulation. |
| Tracking Resistance (Comparative Tracking Index) | CTI | >175 | V | DIN IEC 112/VDE 0303 Part 1. |
| Isolation Group | | IIIa | | Material Group (DIN VDE 0110, 1/89, Table 1.) |

All Broadcom data sheets report the creepage and clearance inherent to the optocoupler component itself. These dimensions are needed as a starting point for the equipment designer when determining the circuit insulation requirements. However, once mounted on a printed circuit board, minimum creepage and clearance requirements must be met as specified for individual equipment standards. For creepage, the shortest distance path along the surface of a printed circuit board between the solder fillets of the input and output leads must be considered.

There are recommended techniques such as grooves and ribs that can be used on a printed circuit board to achieve desired creepage and clearances. Creepage and clearance distances also change depending on factors such as pollution degree and insulation level.

IEC/EN/DIN EN 60747-5-5 Insulation Characteristics^a

| Description ^a | Symbol | Option 060 | Unit |
|--|--|---|-------------------------|
| Installation Classification per DIN VDE 0110/1.89, Table 1 for rated mains voltage $\leq 150 V_{rmsa}$ for rated mains voltage $\leq 300 V_{rms}$ for rated mains voltage $\leq 450 V_{rms}$ for rated mains voltage $\leq 600 V_{rms}$ for rated mains voltage $\leq 1000 V_{rms}$ | | I – IV I – IV I – IV I – IV I – III | |
| Climatic Classification | | 55/105/21 | |
| Pollution Degree (DIN VDE 0110/1.89) | | 2 | |
| Maximum Working Insulation Voltage | V_{IORM} | 1140 | V_{peak} |
| Input to Output Test Voltage, Method b ^b $V_{IORM} \times 1.875 = V_{PR}$, 100% Production Test with $t_m = 1s$, Partial Discharge $< 5 pC$ | V_{PR} | 2137 | V_{peak} |
| Input to Output Test Voltage, Method a ^b $V_{IORM} \times 1.6 = V_{PR}$, Type and Sample Test, $t_m = 10s$, Partial Discharge $< 5 pC$ | V_{PR} | 1824 | V_{peak} |
| Highest Allowable Overvoltage (Transient Overvoltage $t_{ini} = 60s$) | V_{IOTM} | 8000 | V_{peak} |
| Safety-limiting Values – Maximum Values Allowed in the Event of a Failure Case Temperature Input Current ^b Output Power ^b | T_S $I_{S, INPUT}$ $P_{S, OUTPUT}$ | 175 230 600 | $^{\circ}C$ mA mW |
| Insulation Resistance at T_S , $V_{IO} = 500V$ | R_{IO} | $>10^9$ | Ω |

- Isolation characteristics are guaranteed only within the safety maximum ratings, which must be ensured by protective circuits in application. Surface mount classification is class A in accordance with CECC00802.
- Refer to the optocoupler section of the Isolation and Control Components Designer's Catalog, under Product Safety Regulations section IEC/EN/DIN EN 60747-5-5, for a detailed description of Method a and Method b partial discharge test profiles.

NOTE These optocouplers are suitable for safe electrical isolation only within the safety limit data. Maintenance of the safety data must be ensured by means of protective circuits. The surface mount classification is Class A in accordance with CECC 00802.

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit |
|-----------------------------------|--|------|----------------|------|
| Storage Temperature | T_S | -55 | +125 | °C |
| Ambient Operating Temperature | T_A | -40 | +105 | °C |
| Supply Voltage | V_{DD} | 0 | 6 | V |
| Output Voltage | V_O | -0.5 | $V_{DD} + 0.5$ | V |
| Average Forward Input Current | I_F | — | 10 | mA |
| Average Output Current | I_O | — | 10 | mA |
| Lead Solder Temperature | 260°C for 10 sec, 1.6 mm below seating plane | | | |
| Solder Reflow Temperature Profile | See Solder Reflow Profile . | | | |

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|---------------------------------------|----------|-----|------|------|
| Ambient Operating Temperature | T_A | -40 | +105 | °C |
| Supply Voltages | V_{DD} | 4.5 | 5.5 | V |
| | | 3.0 | 3.6 | V |
| Input Current (ON) | I_F | 4 | 8 | mA |
| Supply Voltage Slew Rate ^a | SR | 0.5 | 500 | V/ms |

a. Slew rate of supply voltage ramping is recommended to ensure no glitch more than 1V to appear at the output pin.

Electrical Specifications

Over recommended temperature ($T_A = -40^{\circ}\text{C}$ to $+105^{\circ}\text{C}$), $3.0\text{V} \leq V_{DD} \leq 3.6\text{V}$ and $4.5\text{V} \leq V_{DD} \leq 5.5\text{V}$.

All typical specifications are at $T_A = +25^{\circ}\text{C}$, $V_{DD} = +3.3\text{V}$.

| Parameter | Symbol | Part Number | Min | Typ | Max | Unit | Test Conditions |
|---------------------------------|-----------|-------------|--------------|----------------|------|------|---|
| Input Forward Voltage | V_F | | 1.2 | 1.5 | 1.85 | V | $I_F = 6\text{ mA}$ |
| Input Reverse Breakdown Voltage | BV_R | | 5.0 | — | — | V | $I_R = 10\text{ }\mu\text{A}$ |
| Logic High Output Voltage | V_{OH} | | $V_{DD} - 1$ | $V_{DD} - 0.3$ | — | V | $I_F = 6\text{ mA}$, $I_O = -4\text{ mA}$, $V_{DD} = 3.3\text{V}$ |
| | | | $V_{DD} - 1$ | $V_{DD} - 0.2$ | — | V | $I_F = 6\text{ mA}$, $I_O = -4\text{ mA}$, $V_{DD} = 5\text{V}$ |
| Logic Low Output Voltage | V_{OL} | | — | 0.2 | 0.8 | V | $I_F = 0\text{ mA}$, $I_O = 4\text{ mA}$, $V_{DD} = 3.3\text{V}$ |
| | | | — | 0.2 | 0.8 | V | $I_F = 0\text{ mA}$, $I_O = 4\text{ mA}$, $V_{DD} = 5\text{V}$ |
| Input Threshold Current | I_{TH} | | — | 1 | 3 | mA | $I_{OL} = 20\text{ }\mu\text{A}$ |
| Logic Low Output Supply Current | I_{DDL} | ACPL-W70L | — | 4.1 | 6.5 | mA | $I_F = 0\text{ mA}$ |
| | | ACPL-K73L | — | 8.2 | 13 | mA | $I_F = 0\text{ mA}$ |
| Logic Low Output Supply Current | I_{DDH} | ACPL-W70L | — | 3.8 | 6 | mA | $I_F = 6\text{ mA}$ |
| | | ACPL-K73L | — | 7.6 | 12 | mA | $I_F = 6\text{ mA}$ |

Switching Specifications

Over recommended temperature ($T_A = -40^{\circ}\text{C}$ to $+105^{\circ}\text{C}$), $3.0\text{V} \leq V_{DD} \leq 3.6\text{V}$ and $4.5\text{V} \leq V_{DD} \leq 5.5\text{V}$.

All typical specifications are at $T_A = +25^{\circ}\text{C}$, $V_{DD} = +3.3\text{V}$.

| Parameter | Symbol | Min | Typ | Max | Unit | Test Conditions |
|--|------------------|------|-----|-----|-------------------|---|
| Propagation Delay Time to Logic Low Output ^a | t_{PHL} | — | 23 | 55 | ns | $I_F = 6\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Propagation Delay Time to Logic High Output ^a | t_{PLH} | — | 27 | 55 | ns | $I_F = 6\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Pulse Width | t_{PW} | 66.7 | — | — | ns | — |
| Pulse Width Distortion ^b | $ \text{PWD} $ | 0 | 4 | 25 | ns | $I_F = 6\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Propagation Delay Skew ^c | t_{PSK} | — | — | 40 | ns | $I_F = 6\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Output Rise Time (10% to 90%) | t_R | — | 3.5 | — | ns | $I_F = 6\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Output Fall Time (90% to 10%) | t_F | — | 3.5 | — | ns | $I_F = 0\text{ mA}$, $C_L = 15\text{ pF}$ CMOS Signal Levels |
| Common-Mode Transient Immunity at Logic High Output ^d | $ \text{CM}_H $ | 10 | 15 | — | kV/ μs | $V_{\text{CM}} = 1000\text{V}$, $T_A = 25^{\circ}\text{C}$, $I_F = 6\text{ mA}$ |
| Common-Mode Transient Immunity at Logic Low Output ^e | $ \text{CM}_L $ | 10 | 15 | — | kV/ μs | $V_{\text{CM}} = 1000\text{V}$, $T_A = 25^{\circ}\text{C}$, $I_F = 0\text{ mA}$ |

- t_{PHL} propagation delay is measured from the 50% level on the rising edge of the input pulse to the 50% level on the falling edge of the V_O signal.
 t_{PLH} propagation delay is measured from the 50% level on the falling edge of the input pulse to the 50% level on the rising edge of the V_O signal.
- PWD is defined as $|t_{\text{PHL}} - t_{\text{PLH}}|$.
- t_{PSK} is equal to the magnitude of the worst-case difference in t_{PHL} and/or t_{PLH} that is seen between units at any given temperature within the recommended operating conditions.
- CM_H is the maximum tolerable rate of rise of the common-mode voltage to assure that the output remains in a high logic state.
- CM_L is the maximum tolerable rate of fall of the common-mode voltage to assure that the output remains in a low logic state.

Package Characteristics

All typical at $T_A = 25^{\circ}\text{C}$.

| Parameter | Symbol | Min | Typ | Max | Unit | Test Conditions |
|--|------------------|------|-----------|-----|------------------|---|
| Input-Output Insulation | $I_{\text{I-O}}$ | — | — | 1.0 | μA | 45% RH, $t = 5\text{ s}$ $V_{\text{I-O}} = 3\text{ kV dc}$ $T_A = 25^{\circ}\text{C}$ |
| Input-Output Momentary Withstand Voltage | V_{ISO} | 5000 | — | — | V_{rms} | RH $\leq 50\%$, $t = 1\text{ min.}$ $T_A = 25^{\circ}\text{C}$ |
| Input-Output Resistance | $R_{\text{I-O}}$ | — | 10^{12} | — | Ω | $V_{\text{I-O}} = 500\text{V dc}$ |
| Input-Output Capacitance | $C_{\text{I-O}}$ | — | 0.6 | — | pF | $f = 1\text{ MHz}$, $T_A = 25^{\circ}\text{C}$ |

Figure 1 Typical Input Diode Forward Characteristic

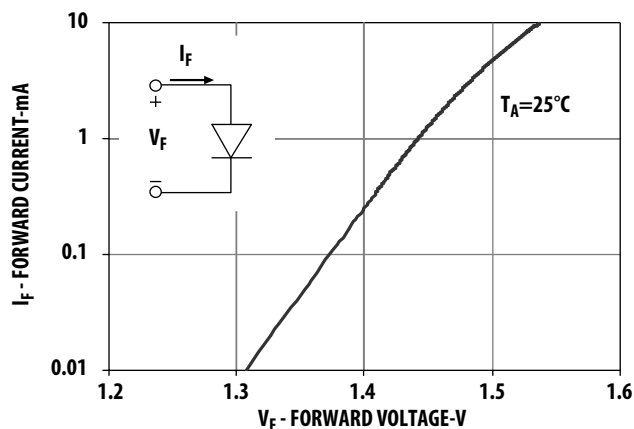


Figure 2 Typical Input Threshold Current vs. Temperature

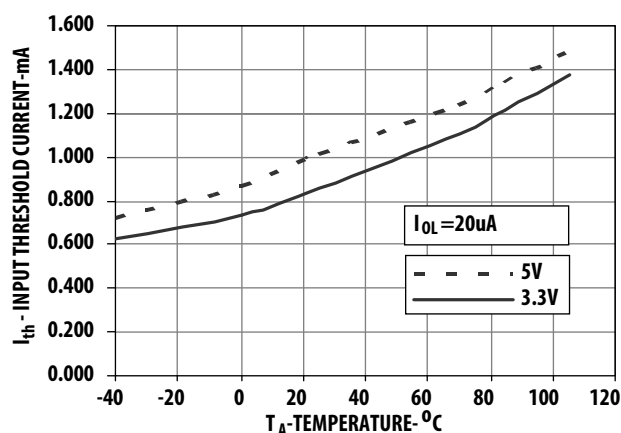


Figure 3 Typical Logic High Output Supply Current vs. Temperature for Dual Channel (ACPL-K73L)

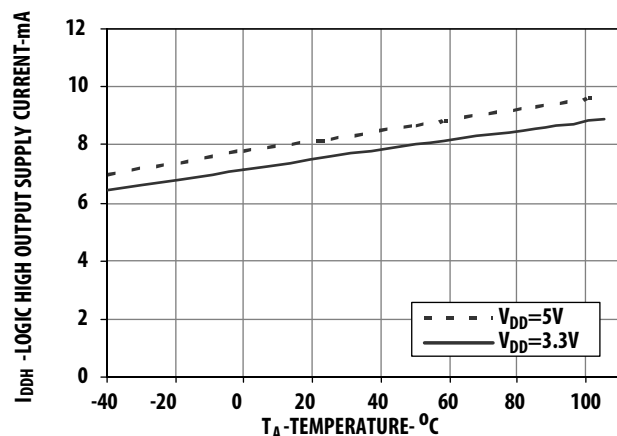


Figure 4 Typical Logic Low Output Supply Current vs. Temperature for Dual Channel (ACPL-K73L)

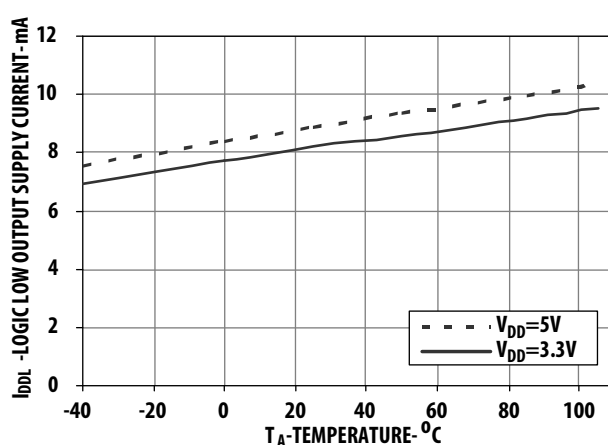


Figure 5 Typical Switching Speed vs. Pulse Input Current at 5V Supply Voltage

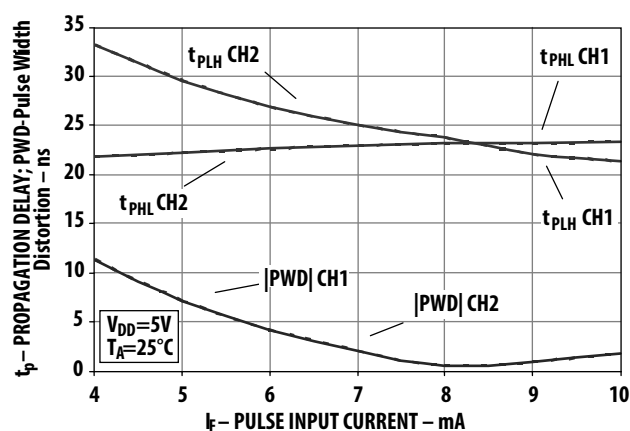


Figure 6 Typical Switching Speed vs. Pulse Input Current at 3.3V Supply Voltage

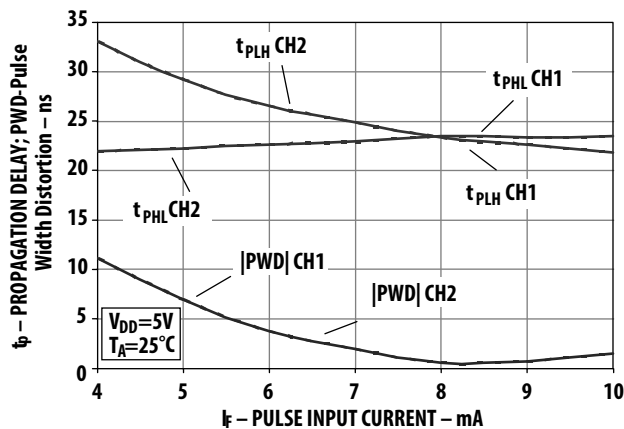
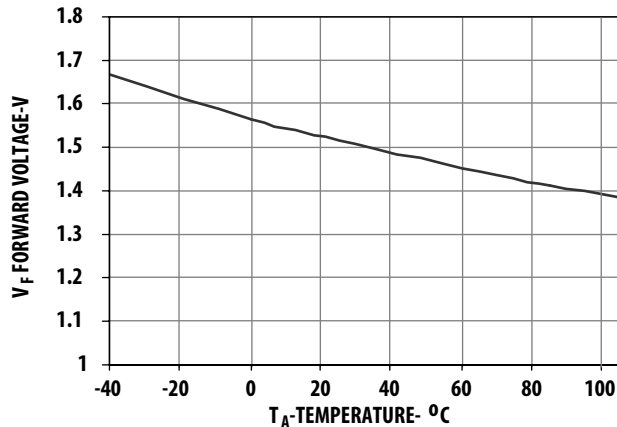


Figure 7 Typical V_F vs. Temperature

Bypassing and PC Board Layout

The ACPL-W70L and ACPL-K73L optocouplers are extremely easy to use. ACPL-W70L and ACPL-K73L provide CMOS logic output due to the high-speed CMOS IC technology used.

The external components required for proper operation are the input limiting resistor and the output bypass capacitor. Capacitor values should be between 0.01 μ F and 0.1 μ F.

For each capacitor, the total lead length between both ends of the capacitor and the power-supply pins should not exceed 20 mm.

Propagation Delay, Pulse-Width Distortion, and Propagation Delay Skew

Propagation delay is a figure of merit that describes how quickly a logic signal propagates through a system. The propagation delay from low to high (t_{PLH}) is the amount of time required for an input signal to propagate to the output, causing the output to change from low to high.

Similarly, the propagation delay from high to low (t_{PHL}) is the amount of time required for the input signal to propagate to the output, causing the output to change from high to low (see Figure 9).

Pulse-width distortion (PWD) results when t_{PLH} and t_{PHL} differ in value. PWD is defined as the difference between t_{PLH} and t_{PHL} . This parameter determines the maximum data rate capability of a transmission system. PWD can be expressed in percent by dividing the PWD (in ns) by the minimum pulse width (in ns) being transmitted. Typically, PWD on the order of 20% to 30% of the minimum pulse width is tolerable; the exact figure depends on the particular application (RS232, RS422, T-1, etc.).

Propagation delay skew, t_{PSK} , is an important parameter to consider in parallel data applications where synchronization of signals on parallel data lines is a concern. If the parallel data is being sent through a group of optocouplers, differences in propagation delays cause the data to arrive at the outputs of the optocouplers at different times. If this difference in propagation delays is large enough, it determines the maximum rate at which parallel data can be sent through the optocouplers.

Propagation delay skew is defined as the difference between the minimum and maximum propagation delays, either t_{PLH} or t_{PHL} , for any given group of optocouplers that are operating under the same conditions (i.e., the same supply voltage, output load, and operating temperature). As illustrated in Figure 10, if the inputs of a group of optocouplers are switched either ON or OFF at the same time, t_{PSK} is the difference between the shortest propagation delay, either t_{PHL} or t_{PLH} , and the longest propagation delay, either t_{PHL} or t_{PLH} . As mentioned earlier, t_{PSK} can determine the maximum parallel data transmission rate.

Figure 10 is the timing diagram of a typical parallel data application with both the clock and the data lines being sent through optocouplers. The figure shows data and clock signals at the inputs and outputs of the optocouplers. To obtain the maximum data transmission rate, both edges of the clock signal are being used to clock the data; if only one edge were used, the clock signal would need to be twice as fast.

Propagation delay skew represents the uncertainty of where an edge might be after being sent through an optocoupler. Figure 10 shows that there is uncertainty in both the data and the clock lines. It is important that these two areas of uncertainty not overlap; otherwise, the clock signal might arrive before all of the data outputs have settled, or some of the data outputs might start to change before the clock signal has arrived.

With these considerations, the absolute minimum pulse width that can be sent through optocouplers in a parallel application is twice t_{PSK} . A cautious design should use a slightly longer pulse width to ensure that any additional uncertainty in the rest of the circuit does not cause a problem.

The t_{PSK} specified optocouplers offer the advantages of guaranteed specifications for propagation delays, pulse-width distortion, and propagation delay skew over the recommended temperature and power supply ranges.

Figure 8 Recommended Printed Circuit Board Layout

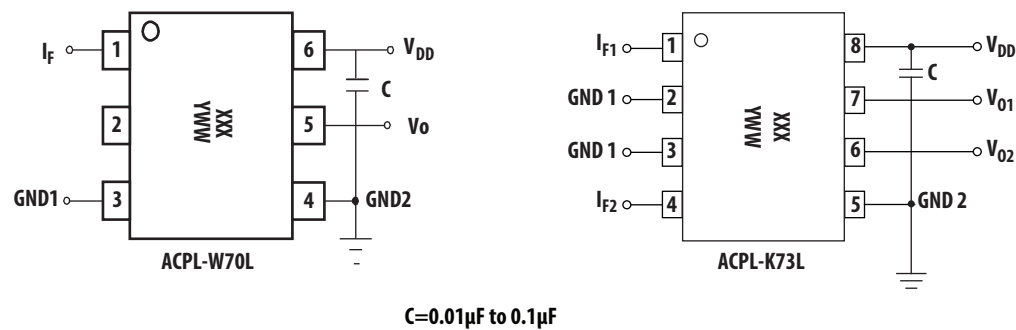


Figure 9 Propagation Delay Skew Waveform


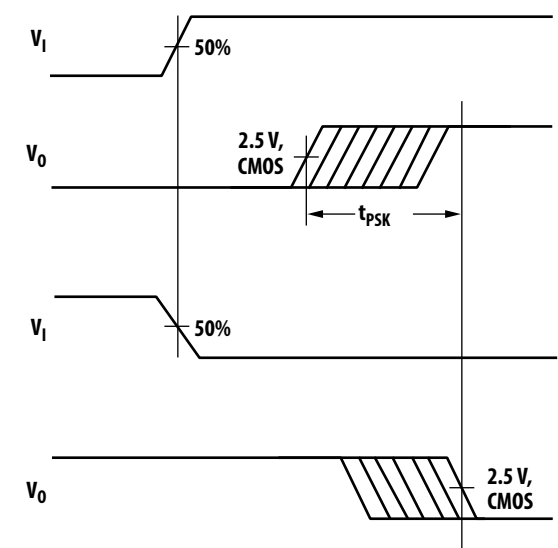


Figure 10 Parallel Data Transmission Example

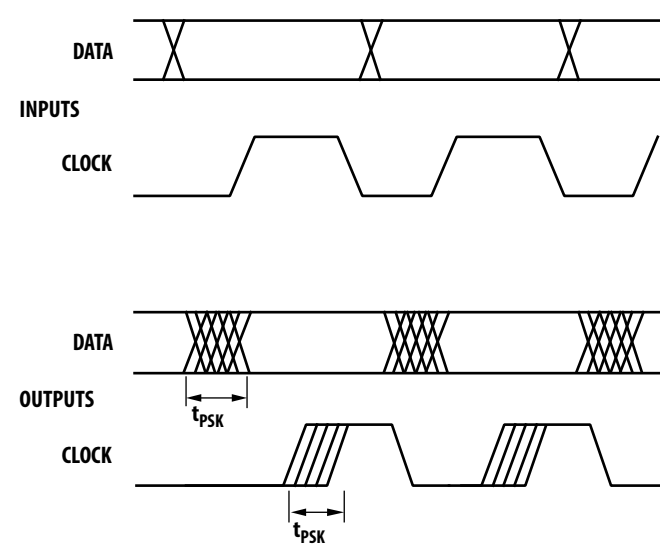


Powering Sequence

V_{DD} must achieve a minimum level of 3V before powering up the output connecting component.

Input Limiting Resistor

The ACPL-W70L and ACPL-K73L are direct current driven (Figure 8), and thus eliminate the need for input power supply. To limit the amount of current flowing through the LED, it is recommended that a 530 Ω resistor is connected in series with anode of LED (that is, Pin 1 for ACPL-W70L, Pin 1 and P4 for ACPL-K73L) at 5V input signal. At 3.3V input signal, it is recommended to connect a 250 Ω resistor in series with anode of LED. The recommended limiting resistor is based on the assumption that the driver output impedance is 50 Ω (as shown in Figure 11).


Figure 11 Connection of Peaking Capacitor (C_{peak}) in Parallel of the Input Limiting Resistor (R_{limit}) to Improve Speed Performance

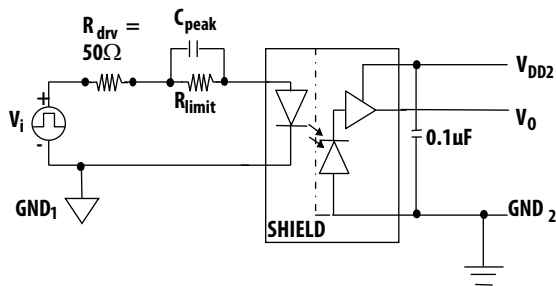


Speed Improvement

A peaking capacitor can be placed across the input current limit resistor (Figure 11) to achieve enhanced speed performance. The value of the peaking cap is dependent on the rise and fall time of the input signal and supply voltages and LED input driving current (I_F). Figure 12 shows significant improvement of propagation delay and pulse width distortion with added 100-pF peak capacitor at driving current of 6 mA and 5V power supply.

Figure 12 Improvement of t_p and PWD with Added 100-pF Peaking Capacitor in Parallel of Input Limiting Resistor

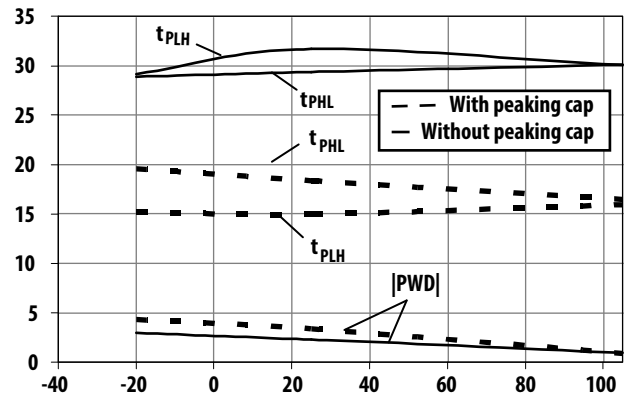

(i) $V_{DD2} = 5V$, $C_{peak} = 100 \text{ pF}$, $R_{limit} = 530\Omega$

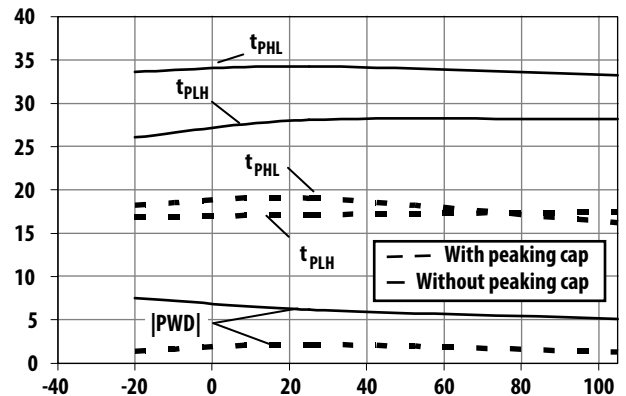

(ii) $V_{DD2} = 3.3V$, $C_{peak} = 100 \text{ pF}$, $R_{limit} = 250\Omega$

Common-Mode Rejection for ACPL-W70L AND ACPL-K73L

Figure 13 shows the recommended driving circuit for the ACPL-W70L and ACPL-K73L for optimal common-mode rejection performance. Two LED-current setting resistors are used instead of one. This is to balance the common-mode impedance at LED anode and cathode. Common-mode transients can capacitively couple from the LED anode (or cathode) to the output-side ground causing current to be shunted away from the LED (which can be bad if the LED is on) or conversely cause current to be injected into the LED (bad if the LED is meant to be off). Figure 14 shows the parasitic capacitances that exist between LED anode/cathode and output ground (C_{LA} and C_{LC}). Also shown in Figure 14 on the input side is an AC-equivalent circuit.

Table 1 indicates the directions of I_{LP} and I_{LN} flow depending on the direction of the common-mode transient. For transients occurring when the LED is on, common-mode rejection (CM_L , since the output is in the low state) depends upon the amount of LED current drive (I_F).

For conditions where I_F is close to the switching threshold (I_{TH}), CM_L also depends on the extent that I_{LP} and I_{LN} balance each other. In other words, any condition where common-mode transients cause a momentary decrease in I_F (i.e., when $dV_{CM}/dt > 0$ and $|I_{FP}| > |I_{FN}|$, referring to Table 1) causes common-mode failure for transients that are fast enough.

Likewise, for common-mode transients that occur when the LED is off (i.e., CM_H , since the output is high), if an imbalance between I_{LP} and I_{LN} results in a transient I_F equal to or greater than the switching threshold of the optocoupler, the transient *signal* can cause the output to spike below 2V (which constitutes a CM_H failure).

By using the recommended circuit in Figure 13, good CM_R can be achieved. The resistors recommended in Figure 13 include both the output impedance of the logic driver circuit and the external limiting resistor. The balanced I_{LED} -setting resistors help equalize the common-mode voltage change at anode and cathode to reduce the amount by which I_{LED} is modulated from transient coupling through C_{LA} and C_{LC} .

Figure 13 Recommended Drive Circuit for ACPL-W70L and ACPL-K73L for High- CM_R

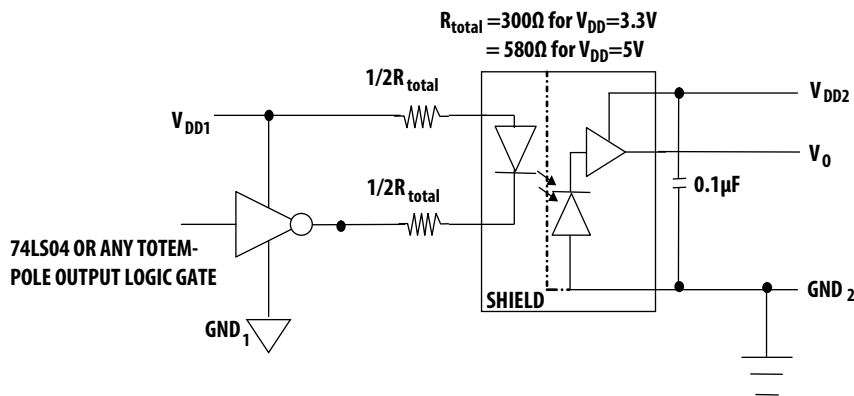


Figure 14 AC Equivalent of ACPL-W70L and ACPL-K73L

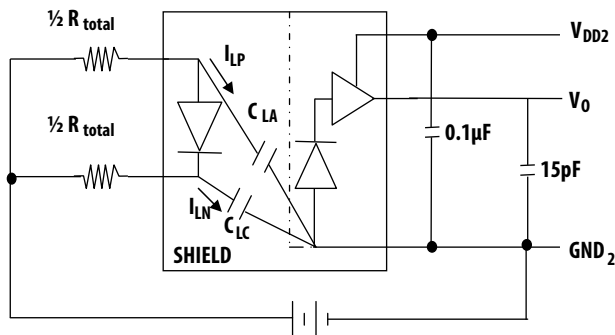


Table 1 Effects of Common-Mode Pulse Direction on Transient I_{LED}

| If dV_{CM}/dt Is: | Then I_{LP} Flows: | And I_{LN} Flows: | If $ I_{LP} < I_{LN} $, LED I_F Current Is Momentarily: | If $ I_{LP} > I_{LN} $, LED I_F Current Is Momentarily: |
|---------------------|---|---|---|---|
| Positive (>0) | Away from LED anode through C_{LA} | Away from LED cathode through C_{LC} | Increased | Decreased |
| Negative (<0) | Toward LED anode through C_{LA} | Toward LED cathode through C_{LC} | Decreased | Increased |

CMR with Other Drive Circuits

CMR performance with drive circuits other than that shown in Figure 13 can be enhanced by following these guidelines:

1. Use of drive circuits where current is shunted from the LED in the LED OFF state (as shown in Figure 15 and Figure 16). This is beneficial for good CM_H .
2. Use of typical $I_{FH} = 6$ mA per data sheet recommendation.

Using any one of the drive circuits in Figure 15, Figure 16, and Figure 17 with $I_F = 6$ mA results in a typical CMR of 10 kV/s for ACPL-W70L and ACPL-K73L, as long as the PC board layout practices are followed. Figure 15 shows a circuit that can be used with any totem-pole-output TTL/LSTTL/HCMOS logic gate. The buffer PNP transistor allows the circuit to be used with logic devices that have low current-sinking capability. It also helps maintain the driving-gate power-supply current at a constant level to minimize ground shifting for other devices connected to the input-supply ground.

Figure 15 TTL Interface Circuit for the ACPL-W70L Families

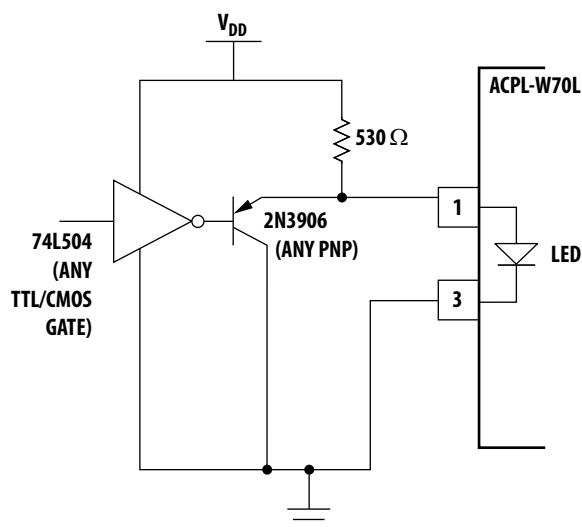


Figure 16 TTL Open-Collector/Open Drain Gate Drive Circuit for ACPL-W70L Families




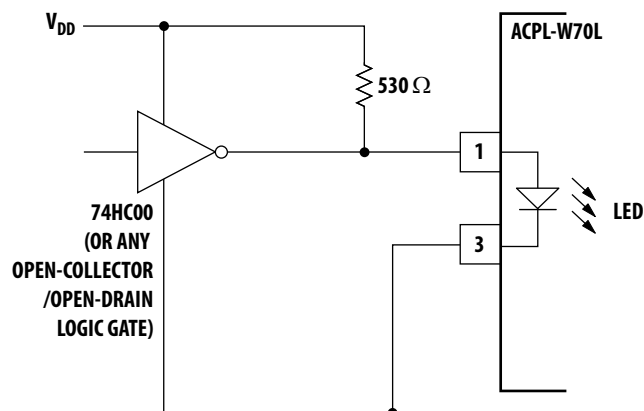


Figure 17 CMOS Gate Drive Circuit for ACPL-W70L Families

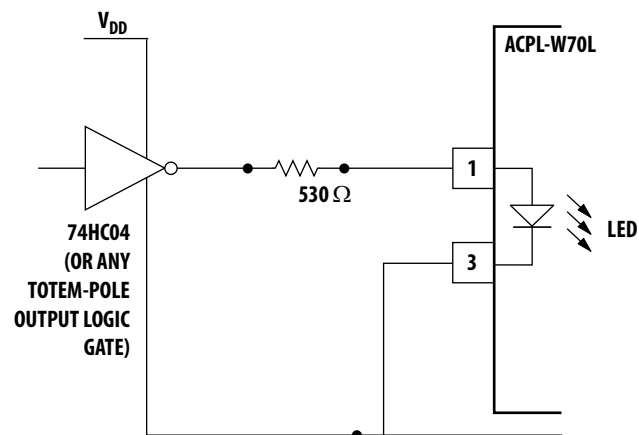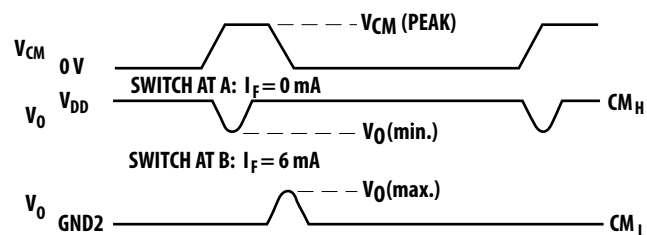

When using an open-collector TTL or open-drain CMOS logic gate, the circuit in [Figure 16](#) can be used. When using a CMOS gate to drive the optocoupler, the circuit shown in [Figure 17](#), where the resistor is recommended to connect to the anode of the LED, can be used.

Figure 18 Test Circuit for Common-Mode Transient Immunity and Typical Waveforms

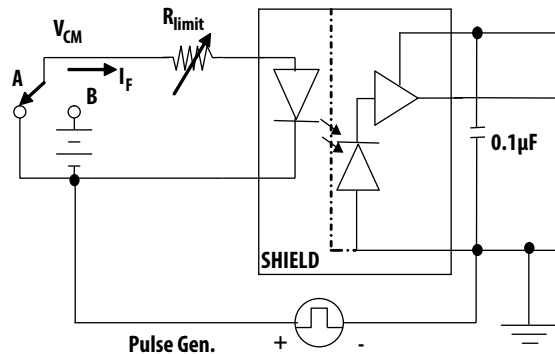

For product information and a complete list of distributors, please go to our web site: www.broadcom.com.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom in the United States, certain other countries and/or the EU.

Copyright © 2016–2017 Broadcom. All Rights Reserved.

The term "Broadcom" refers to Broadcom Limited and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design.

Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

AV02-1267EN – May 11, 2017

