

1. Scope

The present specifications shall apply to an FMC-28UA.

2. Outline

Type	Silicon Rectifier Diode
Structure	Resin Molded
Applications	High Frequency Rectification, etc.

3. Flammability

UL94V-0(Equivalent)



4. Absolute maximum ratings

No.	Item	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	V_{RSM}	V	1600	
2	Peak Reverse Voltage	V_{RM}	V	1600	
3	Average Forward Current	$I_{F(AV)}$	A	3.0	Refer to derating curve in Section 7
4	Peak Surge Forward Current	I_{FSM}	A	50	10ms. Half sine wave, one shot
5	I^2t Limiting Value	I^2t	A^2s	12.5	$1ms \leq t \leq 10ms$
6	Junction Temperature	T_j	°C	-40 to +150	
7	Storage Temperature	T_{sig}	°C	-40 to +150	


5. Electrical characteristics (Ta=25°C, unless otherwise specified)

No.	Item	Symbol	Unit	Rating	Conditions
1	Forward Voltage Drop	V_F	V	6.0 max.	$I_F=3.0A$
2	Reverse Leakage Current	I_R	μA	100 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	mA	500 max.	$V_R=V_{RM}$, $T_j=150^\circ C$
4	Reverse Recovery Time	trr1	ns	70 max.	$I_F=I_{RP}=500mA$ 90% Recovery point, $T_j=25^\circ C$
		trr2	ns	35 max.	$I_F=0.5A$, $I_{RP}=1A$ 75% Recovery point, $T_j=25^\circ C$
5	Thermal Resistance	$R_{th(j-c)}$	°C/W	4.0 max.	Between Junction and case

6. Characteristics

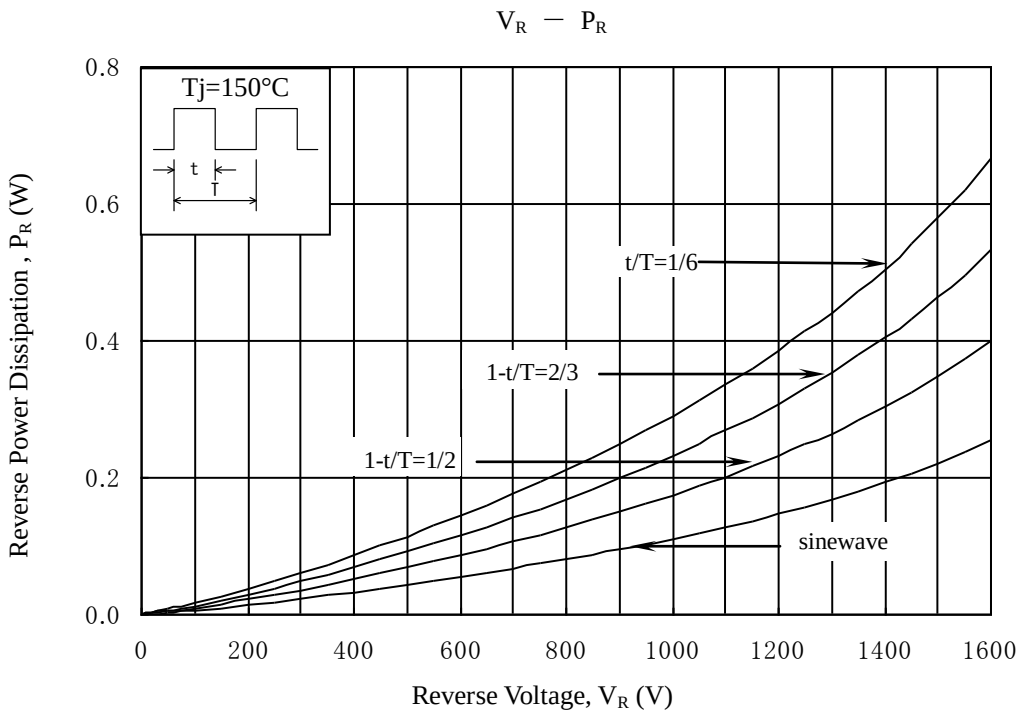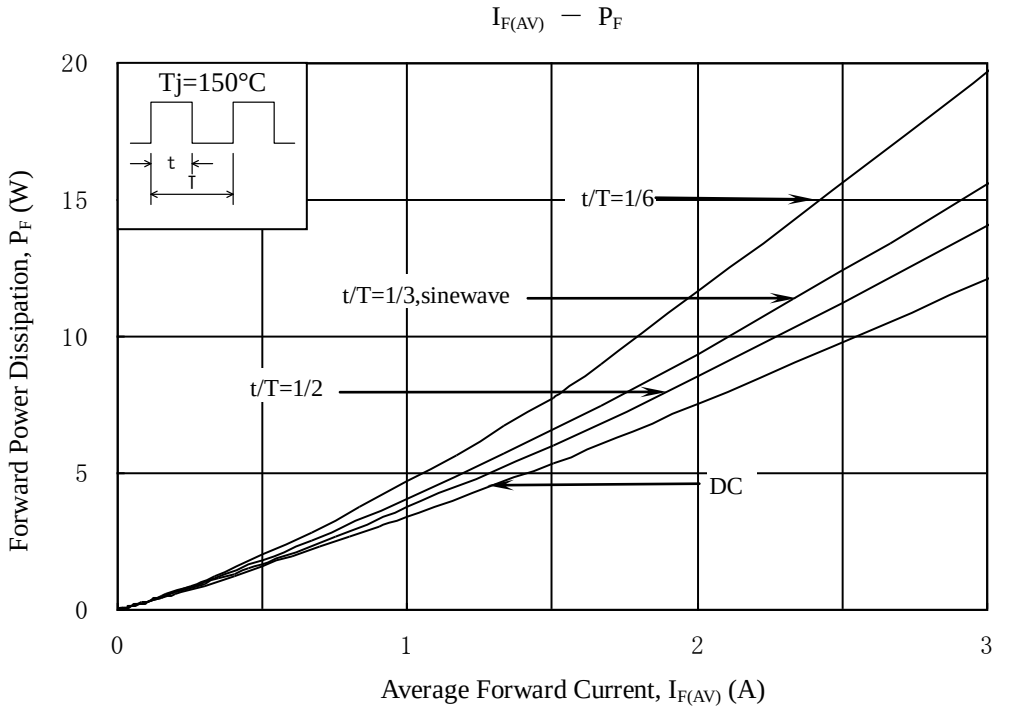


7. Derating

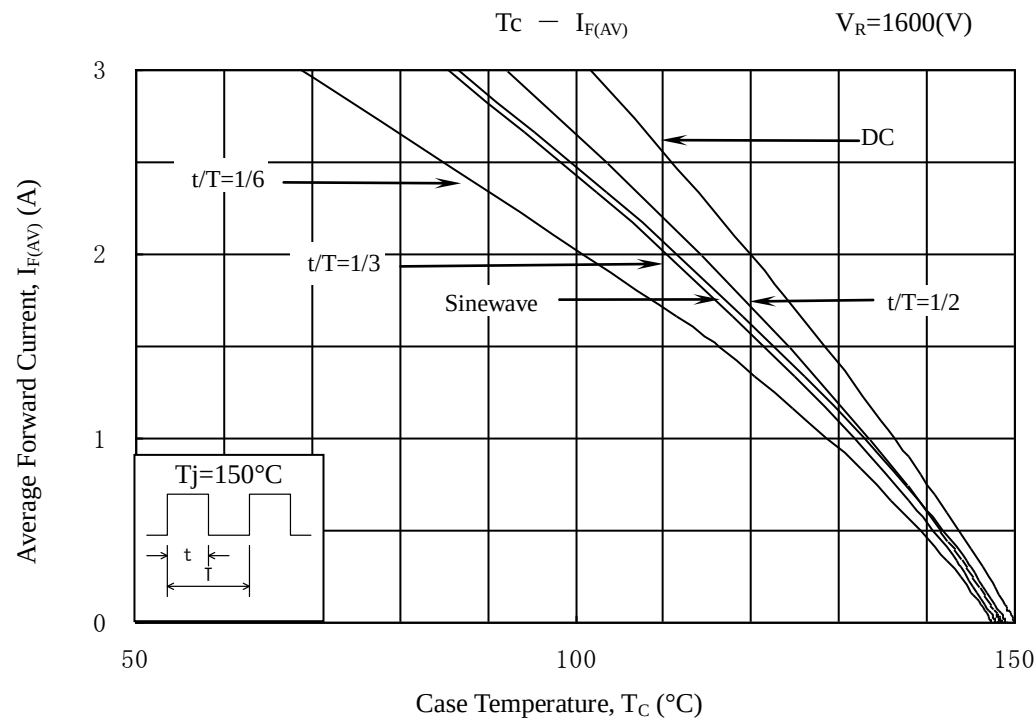

8. Package information

8-1 Package type, physical dimensions and material

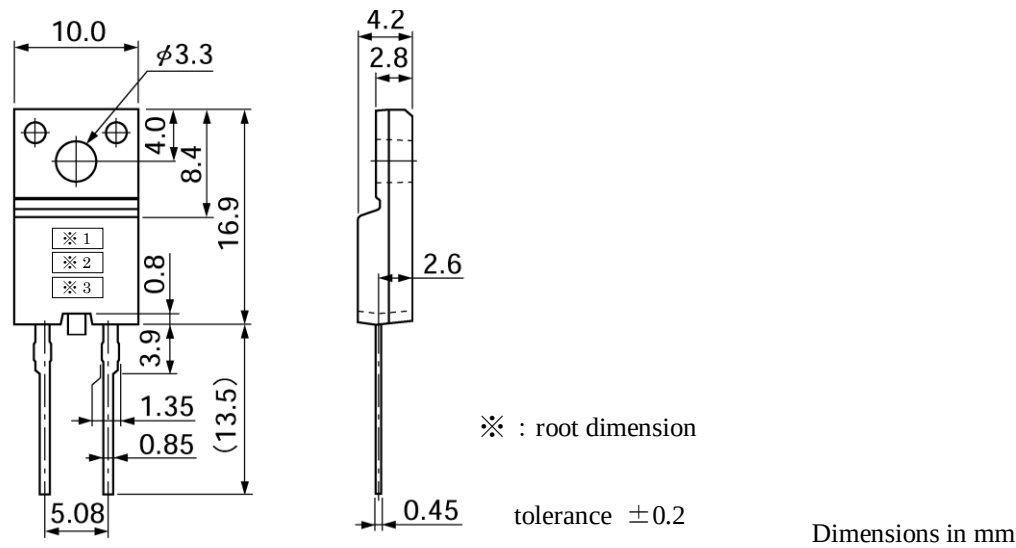

8-2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

8-3 Marking

Type Name	Marking		
	*1 is type name	*2 is polarity	*3 is lot number
FMC-28UA	FMC28U		1st letter: Last digit of year 2nd letter: Month From 1 to 9 for Jan. to Sep., O for Oct., N for Nov., D for Dec. 3rd & 4th letter: Day ex. 5421 (April.21, 2005)