


SPECIFICATION CONTROL DRAWING

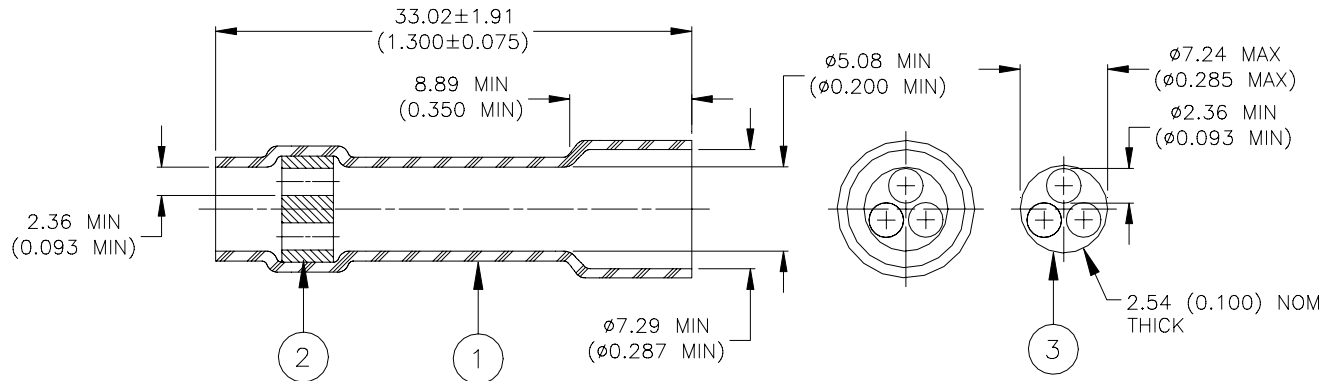

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. INTEGRAL THREE WIRE SEAL: Immersion resistant thermoplastic.
3. SEPARATE THREE WIRE SEAL: Immersion resistant thermoplastic.

APPLICATION

1. This part is designed to provide an immersion resistant seal on 2 or 3 to 2 or 3 splices made with Raychem D-609 series crimp splices in wires having insulations rated for 125°C min.
2. Sealing sleeve shall consist of an insulation sleeve with an integral seal and a separate three wire seal.
3. This part will meet the requirements of MIL-S-81824.

tyco Electronics 307 Constitution Drive Menlo Park, CA 94025, USA		Wire and Harnessing Products	TITLE: SEALING SLEEVE, MULTI-WIRE SPLICE WITH SEPARATE THREE WIRE SEAL				
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.			DOCUMENT NO.: D-436-95				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D010336		REPLACES: N/A		
DRAWN BY: M. FORONDA	DATE: 8-May-01	PROD. REV. F	DOC ISSUE: 0	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-436-95](#)