

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## 74HC/HCT163

Presetable synchronous 4-bit  
binary counter; synchronous reset

Product specification  
File under Integrated Circuits, IC06

December 1990

# Presettable synchronous 4-bit binary counter; synchronous reset

## 74HC/HCT163

### FEATURES

- Synchronous counting and loading
- Two count enable inputs for n-bit cascading
- Positive-edge triggered clock
- Synchronous reset
- Output capability: standard
- I<sub>CC</sub> category: MSI

### GENERAL DESCRIPTION

The 74HC/HCT163 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL (LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT163 are synchronous presettable binary counters which feature an internal look-ahead carry and can be used for high-speed counting. Synchronous operation is provided by having all flip-flops clocked simultaneously on the positive-going edge of the clock (CP).

The outputs (Q<sub>0</sub> to Q<sub>3</sub>) of the counters may be preset to a HIGH or LOW level. A LOW level at the parallel enable input ( $\overline{PE}$ ) disables the counting action and causes the data at the data inputs (D<sub>0</sub> to D<sub>3</sub>) to be loaded into the counter on the positive-going edge of the clock (providing that the set-up and hold time requirements for  $\overline{PE}$  are met).

Preset takes place regardless of the levels at count enable inputs (CEP and CET).

For the "163" the clear function is synchronous.

A LOW level at the master reset input ( $\overline{MR}$ ) sets all four outputs of the flip-flops (Q<sub>0</sub> to Q<sub>3</sub>) to LOW level after the next positive-going transition on the clock (CP) input (provided that the set-up and hold time requirements for  $\overline{MR}$  are met). This action occurs regardless of the levels at  $\overline{PE}$ , CET and CEP inputs.

This synchronous reset feature enables the designer to modify the maximum count with only one external NAND gate.

The look-ahead carry simplifies serial cascading of the counters. Both count enable inputs (CEP and CET) must be HIGH to count. The CET input is fed forward to enable the terminal count output (TC). The TC output thus enabled will produce a HIGH output pulse of a duration approximately equal to a HIGH level output of Q<sub>0</sub>. This pulse can be used to enable the next cascaded stage.

The maximum clock frequency for the cascaded counters is determined by the CP to TC propagation delay and CEP to CP set-up time, according to the following formula:

$$f_{\max} = \frac{1}{t_{P(\max)}(\text{CP to TC}) + t_{\text{SU}}(\text{CEP to CP})}$$

### QUICK REFERENCE DATA

GND = 0 V; T<sub>amb</sub> = 25 °C; t<sub>r</sub> = t<sub>f</sub> = 6 ns

| SYMBOL                              | PARAMETER  | CONDITIONS                                       | TYPICAL        |                | UNIT           |
|-------------------------------------|--|--|----------------|----------------|----------------|
|                                     |  |  | HC             | HCT            |                |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CP to Q <sub>n</sub><br>CP to TC<br>CET to TC | C <sub>L</sub> = 15 pF;<br>V <sub>CC</sub> = 5 V | 17<br>21<br>11 | 20<br>25<br>14 | ns<br>ns<br>ns |
| f <sub>max</sub>                    | maximum clock frequency  |  | 51             | 50             | MHz            |
| C <sub>I</sub>                      | input capacitance  |  | 3.5            | 3.5            | pF             |
| C <sub>PD</sub>                     | power dissipation<br>capacitance per package                       | notes 1 and 2                                    | 33             | 35             | pF             |

### Notes

1. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W):  

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$$

where:  
f<sub>i</sub> = input frequency in MHz  
f<sub>o</sub> = output frequency in MHz  
 $\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs  
C<sub>L</sub> = output load capacitance in pF  
V<sub>CC</sub> = supply voltage in V
2. For HC the condition is  
V<sub>I</sub> = GND to V<sub>CC</sub>  
For HCT the condition is  
V<sub>I</sub> = GND to V<sub>CC</sub> – 1.5 V

Presettable synchronous 4-bit binary counter; synchronous reset




74HC/HCT163

ORDERING INFORMATION

See “74HC/HCT/HCU/HCMOS Logic Package Information”.


PIN DESCRIPTION

| PIN NO.        | SYMBOL                           | NAME AND FUNCTION                         |
|----------------|----------------------------------|---|
| 1              | $\overline{\text{MR}}$           | synchronous master reset (active LOW)     |
| 2              | CP                               | clock input (LOW-to-HIGH, edge-triggered) |
| 3, 4, 5, 6     | D <sub>0</sub> to D <sub>3</sub> | data inputs                               |
| 7              | CEP                              | count enable input                        |
| 8              | GND                              | ground (0 V)                              |
| 9              | $\overline{\text{PE}}$           | parallel enable input (active LOW)        |
| 10             | CET                              | count enable carry input                  |
| 14, 13, 12, 11 | Q <sub>0</sub> to Q <sub>3</sub> | flip-flop outputs                         |
| 15             | TC                               | terminal count output                     |
| 16             | V <sub>CC</sub>                  | positive supply voltage                   |

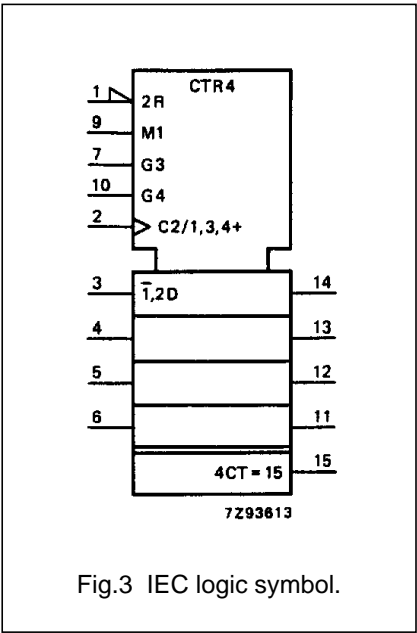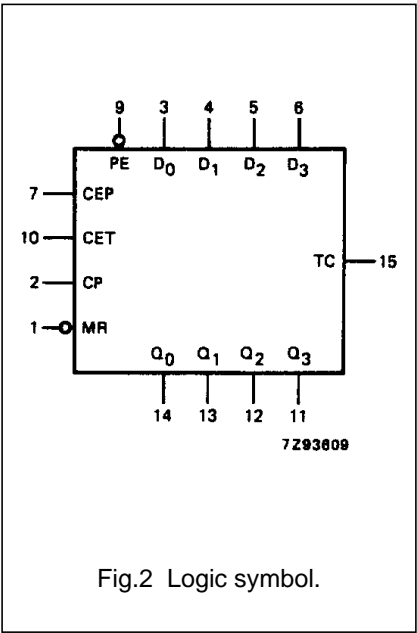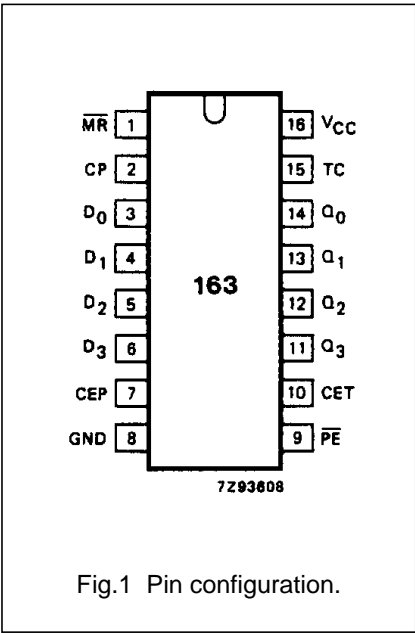

Presetable synchronous 4-bit binary counter; synchronous reset

74HC/HCT163

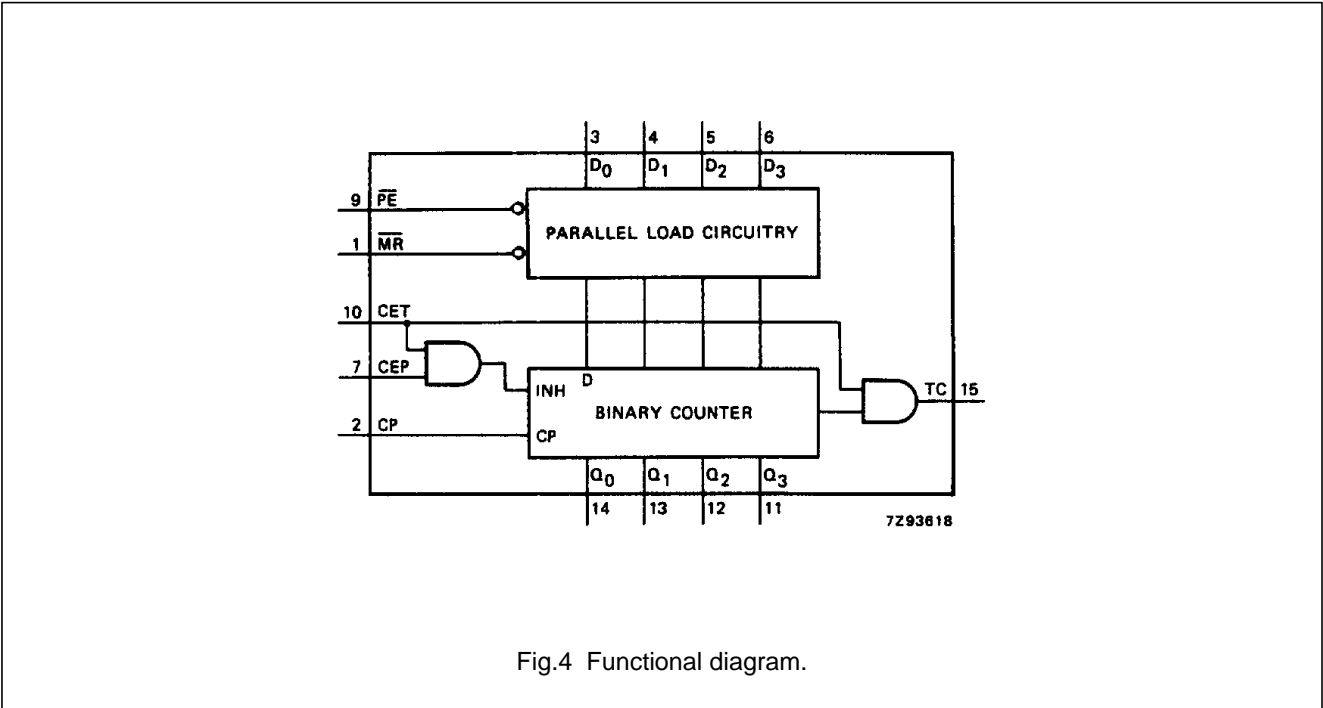

FUNCTION TABLE

| OPERATING MODE       | INPUTS                 |            |     |     |                        |              | OUTPUTS      |     |
|----------------------|------------------------|------------|-----|-----|------------------------|--------------|--------------|-----|
|                      | $\overline{\text{MR}}$ | CP         | CEP | CET | $\overline{\text{PE}}$ | $\text{D}_n$ | $\text{Q}_n$ | TC  |
| reset (clear)        | L                      | $\uparrow$ | X   | X   | X                      | X            | L            | L   |
| parallel load        | h                      | $\uparrow$ | X   | X   | L                      | L            | L            | L   |
|                      | h                      | $\uparrow$ | X   | X   | L                      | h            | H            | (1) |
| count                | h                      | $\uparrow$ | h   | h   | h                      | X            | count        | (1) |
| hold<br>(do nothing) | h                      | X          | L   | X   | h                      | X            | $q_n$        | (1) |
|                      | h                      | X          | X   | L   | h                      | X            | $q_n$        | L   |

Notes

1. The TC output is HIGH when CET is HIGH and the counter is at terminal count (HHHH).
- H = HIGH voltage level
- h = HIGH voltage level one set-up time prior to the LOW-to-HIGH CP transition
- L = LOW voltage level
- L = LOW voltage level one set-up time prior to the LOW-to-HIGH CP transition
- q = lower case letters indicate the state of the referenced output one set-up time prior to the LOW-to-HIGH CP transition
- X = don't care
- $\uparrow$  = LOW-to-HIGH CP transition

# Presettable synchronous 4-bit binary counter; synchronous reset

74HC/HCT163

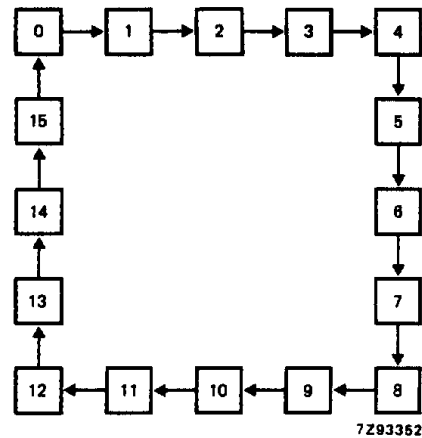


Fig.5 State diagram.

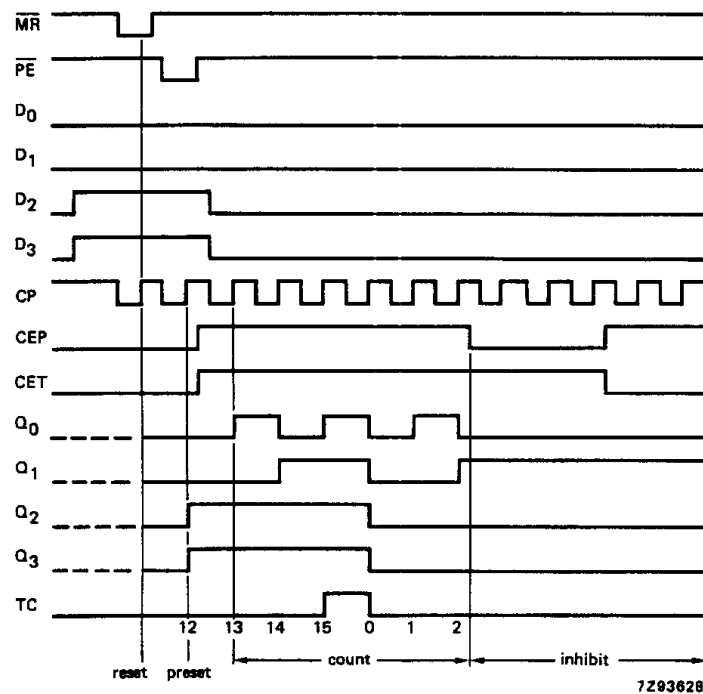


Fig.6 Typical timing sequence: reset outputs to zero; preset to binary twelve; count to thirteen, fourteen, fifteen, zero, one and two; inhibit.

# Presettable synchronous 4-bit binary counter; synchronous reset

74HC/HCT163

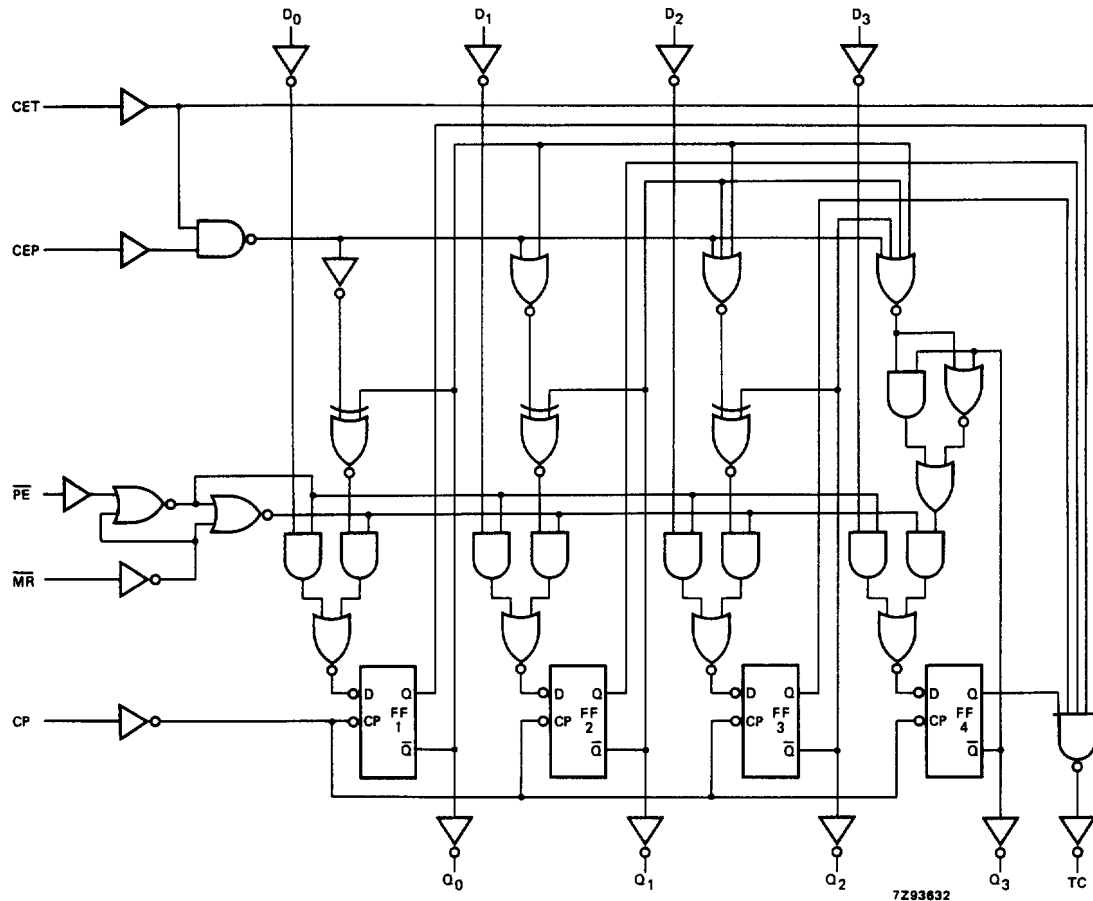


Fig.7 Logic diagram.

# Presettable synchronous 4-bit binary counter; synchronous reset

## 74HC/HCT163

### DC CHARACTERISTICS FOR 74HC

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: standard

I<sub>CC</sub> category: MSI

### AC CHARACTERISTICS FOR 74HC

GND = 0 V; t<sub>r</sub> = t<sub>f</sub> = 6 ns; C<sub>L</sub> = 50 pF

| SYMBOL                              | PARAMETER   | T <sub>amb</sub> (°C) |                 |                 |                 |                 |                 |                 | UNIT | TEST CONDITIONS        |                    |
|-------------------------------------|---|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|------------------------|--------------------|
|                                     |   | 74HC                  |                 |                 |                 |                 |                 |                 |      | V <sub>CC</sub><br>(V) | WAVEFORMS          |
|                                     |   | +25                   |                 |                 | −40 to +85      |                 | −40 to +125     |                 |      |                        |                    |
|                                     |   | min.                  | typ.            | max.            | min.            | max.            | min.            | max.            |      |                        |                    |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CP to Q <sub>n</sub>               |                       | 55<br>20<br>16  | 185<br>37<br>31 |                 | 230<br>46<br>39 |                 | 280<br>56<br>48 | ns   | 2.0<br>4.5<br>6.0      | Fig.8              |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CP to TC                           |                       | 69<br>25<br>20  | 215<br>43<br>37 |                 | 270<br>54<br>46 |                 | 320<br>65<br>55 | ns   | 2.0<br>4.5<br>6.0      | Fig.8              |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CET to TC                          |                       | 36<br>13<br>10  | 120<br>24<br>20 |                 | 150<br>30<br>26 |                 | 180<br>36<br>31 | ns   | 2.0<br>4.5<br>6.0      | Fig.9              |
| t <sub>THL</sub> / t <sub>TLH</sub> | output transition time                                  |                       | 19<br>7<br>6    | 75<br>15<br>13  |                 | 95<br>19<br>16  |                 | 110<br>22<br>19 | ns   | 2.0<br>4.5<br>6.0      | Figs 8 and 9       |
| t <sub>W</sub>                      | clock pulse width<br>HIGH or LOW                        | 80<br>16<br>14        | 17<br>6<br>5    |                 | 100<br>20<br>17 |                 | 120<br>24<br>20 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.8              |
| t <sub>su</sub>                     | set-up time<br>MR, D <sub>n</sub> to CP                 | 80<br>16<br>14        | 17<br>6<br>5    |                 | 100<br>20<br>17 |                 | 120<br>24<br>20 |                 | ns   | 2.0<br>4.5<br>6.0      | Figs 10 and 11     |
| t <sub>su</sub>                     | set-up time<br>PE to CP                                 | 80<br>16<br>14        | 22<br>8<br>6    |                 | 100<br>20<br>17 |                 | 120<br>24<br>20 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.10             |
| t <sub>su</sub>                     | set-up time<br>CEP, CET to CP                           | 175<br>35<br>30       | 58<br>21<br>17  |                 | 220<br>44<br>37 |                 | 265<br>53<br>45 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.12             |
| t <sub>h</sub>                      | hold time<br>D <sub>n</sub> , PE, CEP,<br>CET, MR to CP | 0<br>0<br>0           | −14<br>−5<br>−4 |                 | 0<br>0<br>0     |                 | 0<br>0<br>0     |                 | ns   | 2.0<br>4.5<br>6.0      | Figs 10, 11 and 12 |
| f <sub>max</sub>                    | maximum clock pulse<br>frequency                        | 5<br>27<br>32         | 15<br>46<br>55  |                 | 4<br>22<br>26   |                 | 4<br>18<br>21   |                 | MHz  | 2.0<br>4.5<br>6.0      | Fig.8              |

---

# Presetable synchronous 4-bit binary counter; synchronous reset

---

## 74HC/HCT163

### DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: standard

I<sub>CC</sub> category: MSI

### Note to HCT types

The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given in the family specifications. To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in the table below.

| INPUT           | UNIT LOAD COEFFICIENT |
|-----------------|-----------------------|
| $\overline{MR}$ | 0.95                  |
| CP              | 1.10                  |
| CEP             | 0.25                  |
| D <sub>n</sub>  | 0.25                  |
| CET             | 0.75                  |
| $\overline{PE}$ | 0.30                  |



# Presettable synchronous 4-bit binary counter; synchronous reset

## 74HC/HCT163

### AC CHARACTERISTICS FOR 74HCT

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

| SYMBOL                              | PARAMETER   | T <sub>amb</sub> (°C) |      |      |            |      |             |      | UNIT | TEST CONDITIONS        |                    |
|-------------------------------------|---|-----------------------|------|------|------------|------|-------------|------|------|------------------------|--------------------|
|                                     |   | 74HCT                 |      |      |            |      |             |      |      | V <sub>CC</sub><br>(V) | WAVEFORMS          |
|                                     |   | +25                   |      |      | −40 to +85 |      | −40 to +125 |      |      |                        |                    |
|                                     |   | min.                  | typ. | max. | min.       | max. | min.        | max. |      |                        |                    |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CP to Q <sub>n</sub>               |                       | 23   | 39   |            | 49   |             | 59   | ns   | 4.5                    | Fig.8              |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CP to TC                           |                       | 29   | 49   |            | 61   |             | 74   | ns   | 4.5                    | Fig.8              |
| t <sub>PHL</sub> / t <sub>PLH</sub> | propagation delay<br>CET to TC                          |                       | 17   | 32   |            | 44   |             | 48   | ns   | 4.5                    | Fig.9              |
| t <sub>THL</sub> / t <sub>TLH</sub> | output transition time                                  |                       | 7    | 15   |            | 19   |             | 22   | ns   | 4.5                    | Figs 8 and 9       |
| t <sub>W</sub>                      | clock pulse width<br>HIGH or LOW                        | 20                    | 6    |      | 25         |      | 30          |      | ns   | 4.5                    | Fig.8              |
| t <sub>su</sub>                     | set-up time<br>MR, D <sub>n</sub> to CP                 | 20                    | 9    |      | 25         |      | 30          |      | ns   | 4.5                    | Figs 10 and 11     |
| t <sub>su</sub>                     | set-up time<br>PE to CP                                 | 20                    | 11   |      | 25         |      | 30          |      | ns   | 4.5                    | Fig.10             |
| t <sub>su</sub>                     | set-up time<br>CEP, CET to CP                           | 40                    | 24   |      | 50         |      | 60          |      | ns   | 4.5                    | Fig.12             |
| t <sub>h</sub>                      | hold time<br>D <sub>n</sub> , PE, CEP,<br>CET, MR to CP | 0                     | −5   |      | 0          |      | 0           |      | ns   | 4.5                    | Figs 10, 11 and 12 |
| f <sub>max</sub>                    | maximum clock pulse<br>frequency                        | 26                    | 45   |      | 21         |      | 17          |      | MHz  | 4.5                    | Fig.8              |

# Presettable synchronous 4-bit binary counter; synchronous reset

74HC/HCT163

## AC WAVEFORMS

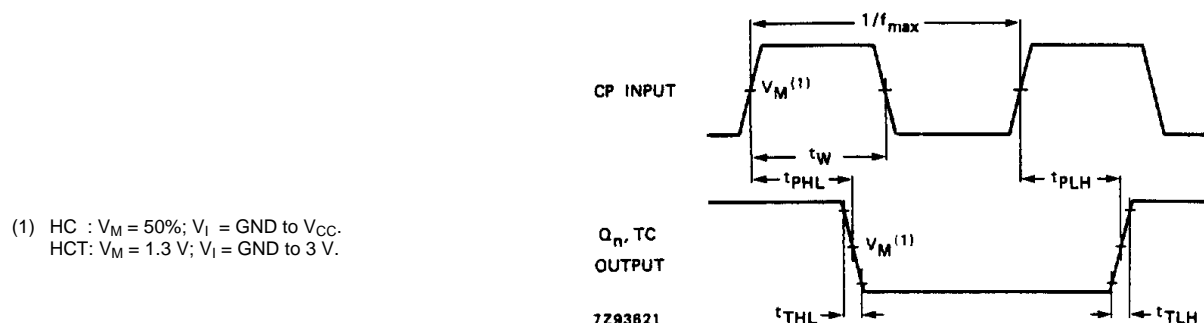


Fig.8 Waveforms showing the clock (CP) to outputs ( $Q_n$ , TC) propagation delays, the clock pulse width, the output transition times and the maximum clock frequency.

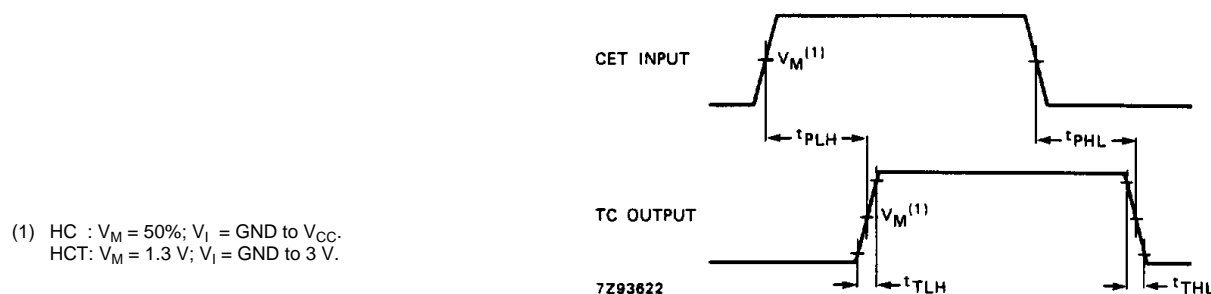


Fig.9 Waveforms showing the input (CET) to output (TC) propagation delays and output transition times.

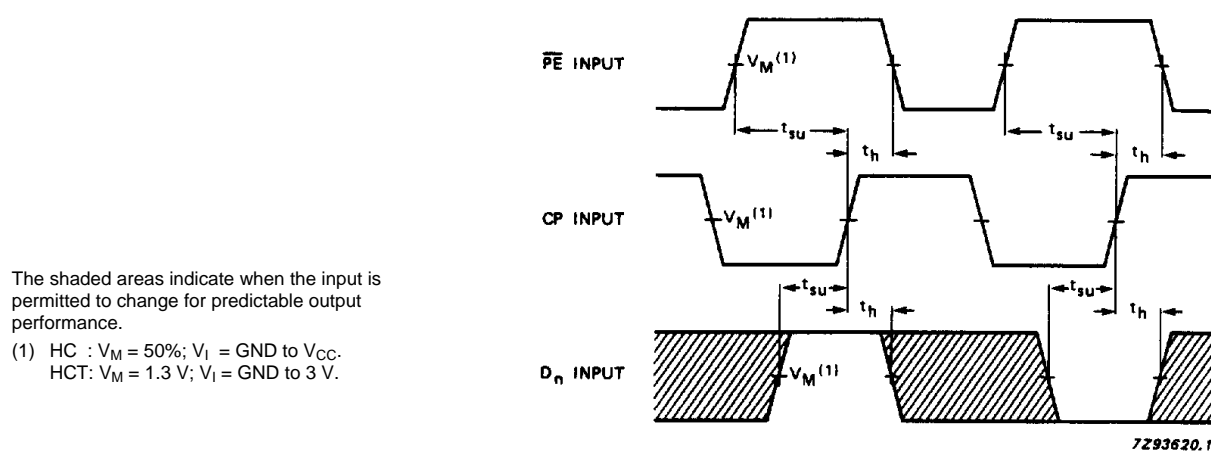



Fig.10 Waveforms showing the set-up and hold times for the input ( $D_n$ ) and parallel enable input ( $\overline{PE}$ ).

# Presettable synchronous 4-bit binary counter; synchronous reset

74HC/HCT163

The shaded areas indicate when the input is permitted to change for predictable output performance.

- (1) HC :  $V_M = 50\%$ ;  $V_I = \text{GND to } V_{CC}$ .  
HCT:  $V_M = 1.3 \text{ V}$ ;  $V_I = \text{GND to } 3 \text{ V}$ .

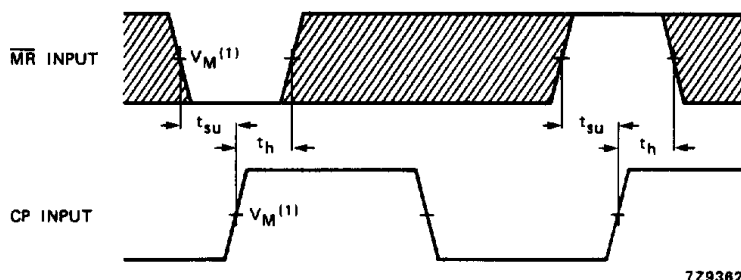


7293624

Fig.11 Waveforms showing the  $\overline{\text{MR}}$  set-up and hold times.

The shaded areas indicate when the input is permitted to change for predictable output performance.

- (1) HC :  $V_M = 50\%$ ;  $V_I = \text{GND to } V_{CC}$ .  
HCT:  $V_M = 1.3 \text{ V}$ ;  $V_I = \text{GND to } 3 \text{ V}$ .

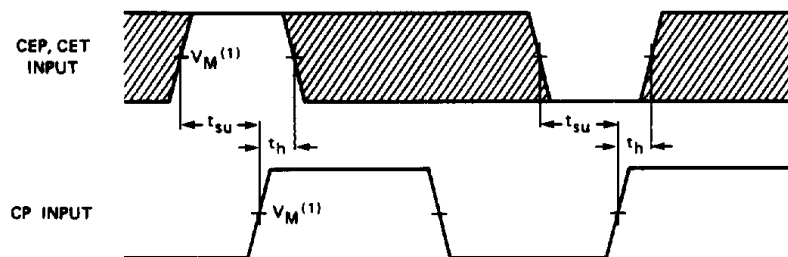


7293619

Fig.12 Waveforms showing the CEP and CET set-up and hold times.


## APPLICATION INFORMATION

The HC/HCT163 facilitate designing counters of any modulus with minimal external logic. The output is glitch-free due to the synchronous reset.

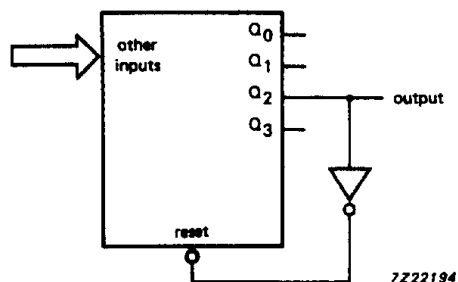

7222194

Fig.13 Modulo-5 counter.

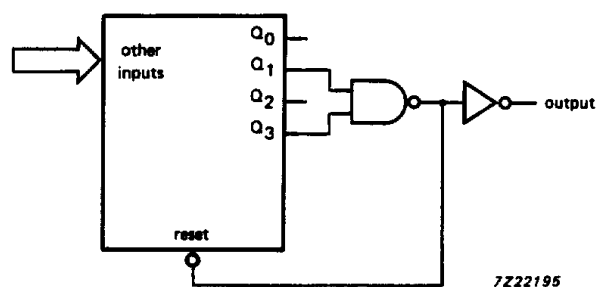

7222195

Fig.14 Modulo-11 counter.

## PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NXP:](#)

[74HC163D-T](#) [74HC163DB-T](#) [74HC163PW-T](#) [74HCT163D-T](#) [74HCT163DB-T](#) [74HCT163PW-T](#)