



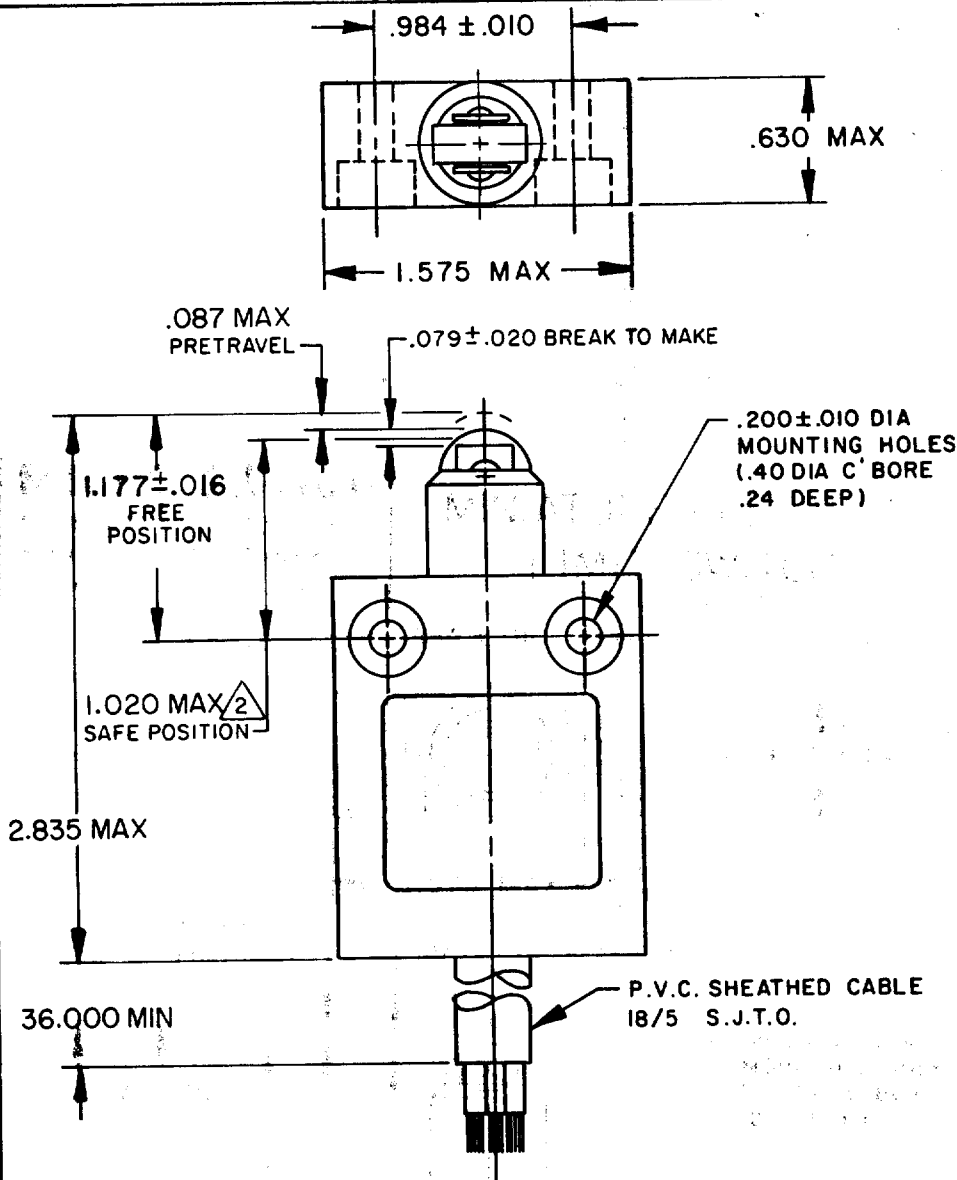

NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - - - 5.1 LB MAX

OVERTRAVEL - - - - - .039 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T D B

10A - 250 VAC
1/3HP-125 OR 250 VAC

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES


APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X	0.01/0.05
ONE PLACE	X.X	0.4/.016	X.X	0.38/.016
TWO PLACES	X.XX	0.19/.008	X.XX	0.19/.008
THREE PLACES	X.XXX		X.XXX	0.19/.008

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT

- 1 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY
- 4 - SIDE EXIT CABLE



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - - - 5.1 LB MAX

OVERTRAVEL - - - - - .039 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T D B

10A - 250 VAC
1/3HP-125 OR 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	± .030
TWO PLACE	(.00)	± .015
THREE PLACE	(.000)	± .005
ANGLES		±

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[924CE2-S3](#)