

Technical Data Sheet

0805 Package Chip LED (0.8mm Height)

17-215/G6C -FN2P2B/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain with in RoHS compliant version

Descriptions

- The 17-215 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

Everlight Electronics Co., Ltd.

David Na	Chip	E:44 - J. C-1	Resin Color	
Part No.	Material	Emitted Color		
17-215/G6C-FN1P2B/3T	AlGaInP	Brilliant Yellow Green	Water Clear	



Device No.: SZDSE-175-G14 Prepared date: 27-Oct-2007 Prepared by: Zhouhua

http://www.everlight.com


Rev.2


Page: 1 of 10


EVERLIGHT ELECTRONICS CO.,LTD.

17-215/G6C-FN2P2B/3T


Package Outline Dimensions








For reflow soldering (propose)



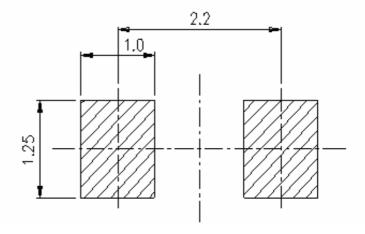

Note: The tolerances unless mentioned are ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: SZDSE-175-G14

http://www.everlight.com

Prepared date: 27-Oct-2007

Rev.2

Page: 2 of 10

Prepared by: Zhouhua



Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_F	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	60	mA	
Power Dissipation	Pd	60	mW	
Electrostatic Discharge(HBM)	ESD	2000	V	
Operating Temperature	T _{opr}	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	T_{stg}	-40 ~ +90	$^{\circ}$	
Soldering Temperature	T_{sol}	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{\rm v}$	36.0		72.0	mcd	
Viewing Angle	$2 heta_{ ext{1/2}}$		130		deg	
Peak Wavelength	λp		575		nm	
Dominant Wavelength	λd	570.0		574.5	nm	$I_F = 20 \text{mA}$
Spectrum Radiation Bandwidth	Δλ		20		nm	
Forward Voltage	V_{F}	1.75		2.35	V	
Reverse Current	I_R			10	μΑ	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 3 of 10



Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
	CC2	570.5	571.5		
F	CC3	571.5	573.0	nm	$I_F = 20mA$
	CC4	573.0	574.5		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
N2	36.0	45.0		
P1	45.0	57.0	mcd	I _F =20mA
P2	57.0	72.0		

Bin Range Of Luminous Voltage


Group	Bin	Min	Max	Unit	Condition	
	0	1.75	1.95			
В	1	1.95	2.15	\mathbf{v}	$I_F = 20 \text{mA}$	
	2	2.15	2.35			


Notes:


- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 4 of 10


Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 5 of 10

Label explanation

CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank


REF: Forward Voltage Rank



Rev.2

Page: 6 of 10

Reel Dimensions

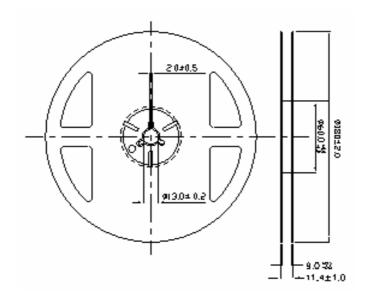


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com




Carrier Tape Dimensions: Loaded quantity 3000PCS per reel

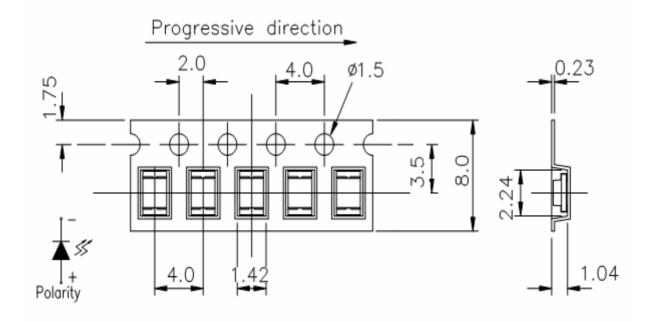

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

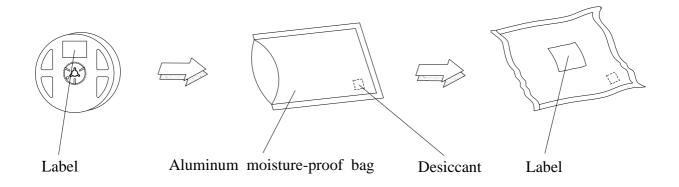

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 8 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

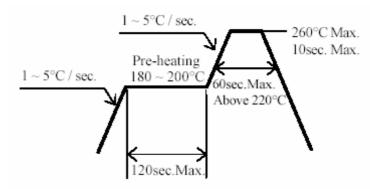

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

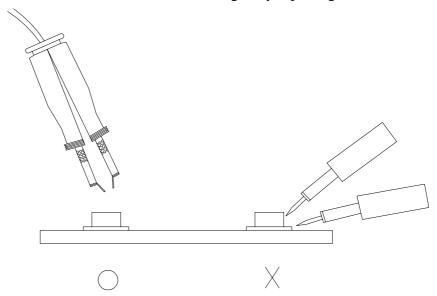

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.2 Page: 10 of 10