

Distributed by:

**JAMECO<sup>®</sup>**  
**ELECTRONICS**


[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.

H  
G  
F  
E  
D  
C  
B  
A

8 7 6 5 4 3 2 1

Top View

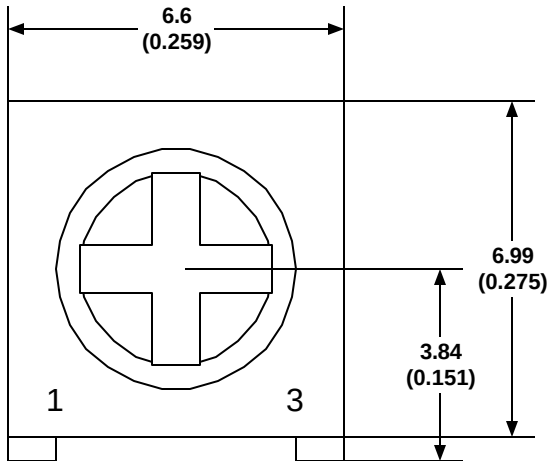


Resistance Table



| Resistance Code | Resistance (ohms) | Resistance Code | Resistance (ohms) |
|-----------------|-------------------|-----------------|-------------------|
| 500             | 50                | 203             | 20k               |
| 101             | 100               | 253             | 25k               |
| 201             | 200               | 503             | 50k               |
| 501             | 500               | 104             | 100k              |
| 102             | 1k                | 204             | 200k              |
| 202             | 2k                | 504             | 500k              |
| 502             | 5k                | 105             | 1M                |
| 103             | 10k               | 205             | 2M                |

**Resistance Range:** 50 ohms - 2M ohms  
**Resistance Tolerance:** +/- 10%  
**Terminal Resistance:** <= 1%  
**Contact Resistance Variation:** <= 3%  
**Insulation Resistance (500V max.):** 1G ohms  
**Withstanding Voltage:** 700VAC  
**Limit current contact:** 100mA  
**Rated Power (160V max.):** 0.25W@70°C; 0W@125°C  
**Temperature Range:** -55°C - +125°C  
**Temperature Coefficient:** +/-250ppm/°C  
**Nominal Angle:** 250°  
**Torque:** <= 30mN.m

Side View

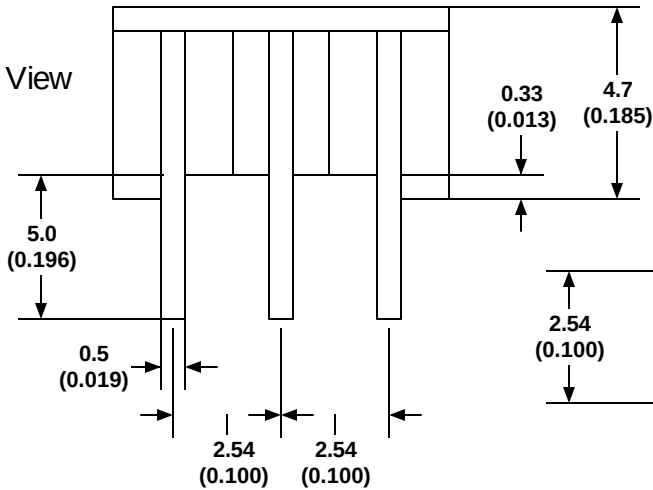

Bottom View

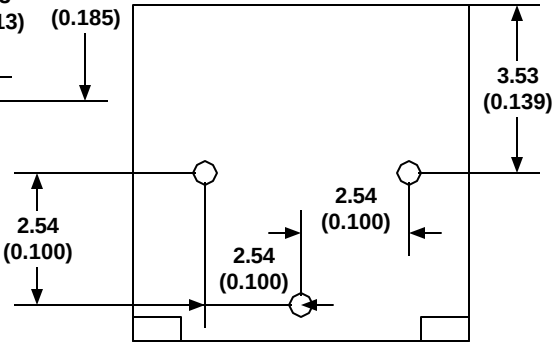

**3362P Series Trimming  
Potentiometer**

**Units of Measurement: mm (in.)**

**Jameco Part Number 254115**

**1/2W 1/4" Square Single Turn Cerment Potentiometer  
Top Adjustment**

**3362P-105**

| SIZE  | FSCM NO | DWG NO | REV |
|-------|---------|--------|-----|
| SCALE | SHEET   |        |     |

H  
G  
F  
E  
D  
C  
B  
A

8 7 6 5 4 3 2 1