
## **Product Brief**



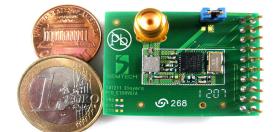

# SM1211

## **Ultra Low Power Integrated UHF Transceiver Module**

### **General Description:**

The purpose of this module is to provide a development platform of the SX1211. User can build his application prototype by simply connecting the module to his target microcontroller and start developing his application software. The SM1211 module integrates the SX1211 reference design (chip + external components) plus miscellaneous useful connectors.

SX1211 is a low cost single-chip transceiver operating in the frequency ranges from 863-870, 902-928 MHz and 950-960 MHz. The SX1211 is optimized for very low power consumption (3 mA in receiver mode). It incorporates a baseband modem with data rates up to 150 kb/s. Data handling features include a sixty-four byte FIFO, packet handling, automatic CRC generation and data whitening. Its highly integrated architecture allows for minimum external component count while maintaining design flexibility.

All major RF communication parameters are programmable and most of them may be dynamically set. It complies with European (ETSI EN 300-220 V2.1.1) and North American (FCC part 15.247 and 15.249) regulatory standards.

Note: This module is also used for the SX1211 Starter Kit.

### **Key Product Features:**

- Small form factor design footprint <150 mm<sup>2</sup>
  Optimized Low-cost design 2 layers PC-board
- · Low Rx power consumption: 3 mA
- Low Tx power consumption: 25 mA @ +10 dBm
- Good reception sensitivity: down to -107 dBm at 25 kb/s in FSK, -113 dBm at 2 kb/s in OOK
- Programmable RF output power: up to +12.5 dBm in 8 steps
- Packet handling feature with data whitening and automatic CRC generation
- RSSI (Received Signal Strength Indicator) range from Rx noise floor to 0 dBm
- · Bit rates up to 200 kb/s, NRZ coding
- · On-chip frequency synthesizer
- FSK and OOK modulation
- Incoming sync word recognition
- Built-in bit-synchronizer for incoming data and clock synchronization and recovery

#### **Applications:**

- Active RFID PHY
- Battery powered remote sensors
- · Wireless alarm and security systems
- Automated meter reading
- · Home and building automation
- Industrial monitoring and control
- Remote wireless control



# **Product Brief**

### SM1211 - Ultra-Low Power Integrated UHF Transceiver Module

| Davamatav                      | Min    | Time | Max   | Unit  | Condition  |
|--------------------------------|--------|------|-------|-------|--|
| Parameter                      | IVIIII | Тур  | IVIAX | Unit  | Condition  |
| Operating Conditions           |        |      |       |       |  |
| Operating temperature range    | -20    |      | +85   | °C    |  |
| Operating supply voltage       | 2.1    |      | 3.6   | V     |  |
| Digital input level high - VIH | 75     |      |       | %     | Percentage of Vdd  |
| Digital input level low - VIL  |        |      | 25    | %     | Percentage of Vdd  |
| Current Consumption            |        |      |       |       |  |
| Max current consumption        |        | 30   |       | mA    | Tx Power = $+12.5$ dbm RLoad= $50 \Omega$                  |
| Rx mode current consumption    |        | 3    |       | mA    | All modules active   |
| Sleep mode current consumption |        | 0.1  |       | μΑ    | SPI port active  |
| RF Characteristics             |        |      |       |       |  |
| Frequency range                | 863    |      | 870   | MHz   | Freq. and Channel BW are programmable 860-960 Mhz          |
|                                | 902    | 1    | 902   | IVITZ | Freq. and Charmer BW are programmable 800-900 Minz         |
| Max input power                |        |      | 0     | dBm   | At the antenna port  |
| Data rate                      | 1.56   |      | 200   | kbps  | FSK Mode   |
|                                | 1.56   |      | 32    | kbps  | OOK Mode   |
| Frequency deviation            | 33     | 50   | 200   | Khz   | FSK Mode   |
| Spurious emission              |        |      | -47   | dBc   | Offset = 200 - 600 kHz, unmodulated carrier, Fdev = 50 kHz |
| R <sub>X</sub> sensitivity     |        | -107 |       | dBm   | 868 MHz, BR=25 kb/s, Fdev=50 kHz, fc=100 kHz               |
| RSSI dynamic range             |        | 70   |       | dB    | Ranging from sensitivity                                   |
| Adjacent channel rejection     |        | 27   |       | dB    | Offset = 300 Khz   |
| Blocking immunity              |        | -48  |       | dBm   | Offset = 1 Mhz   |

Conditions: Temp =  $25^{\circ}$ C, VDD = 3.3 V, crystal frequency = 12.8 MHz, unless otherwise specified.


### **Pin Configuration**

| Pin # | Signal     | Pin # | Signal      |
|-------|------------|-------|-------------|
| 1     | SCK        | 2     | VDD (3.3 V) |
| 3     | MOSI       | 4     | GND         |
| 5     | IRQ_1      | 6     | PLL_LOCK    |
| 7     | NSS_CONFIG | 8     | MISO        |
| 9     | CLKOUT     | 10    |             |
| 11    |            | 12    | IRQ_0       |
| 13    |            | 14    |             |
| 15    | IRQ_1      | 16    |             |
| 17    | DATA       | 18    |             |
| 19    | NSS_DATA   | 20    |             |

## **Ordering Information**

| Part Number | Pin Package       |  |  |
|-------------|-------------------|--|--|
| SM1211-C915 | 40 Pin Pil Handar |  |  |
| SM1211-C868 | 10 Pin DIL Header |  |  |

### Module layout

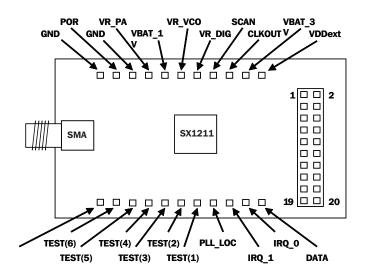

Visit our website to locate the most current product specifications, datasheets and contact information for your local Semtech Field Applications Engineer.

