


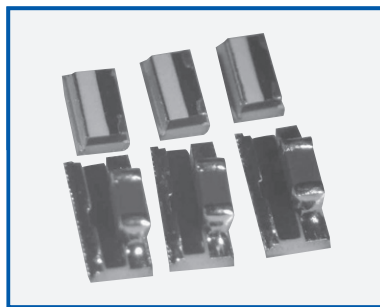

Temperature compensated chip attenuators

P * V series

Features

- For simplifying temperature drift compensation of GaAs high frequency amplifiers
- Excellent high frequency characteristics

Applications

- Base station and others




* Except for Chinese RoHS

Specifications


* All made to order.

Dimensions


PXV1220S




PBV1632S

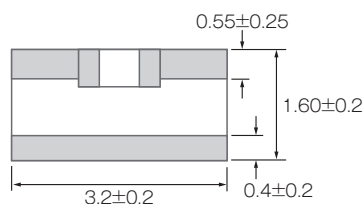

Front side




Back side



(unit:mm)

Equivalent circuits



Electrical characteristics

Series name	PXV1220S	PBV1632S
Attenuation	1, 2, 3, 4, 5, 6, 7, 8, 9, 10dB	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 16dB
Attenuation tolerance	±0.5dB (@25°C, no load)	
Impedance	50Ω	
VSWR	1.3max.	
Temperature coefficient of attenuation	ex : 6dB N1 0.0119dB/dB*°C N2 0.0088dB/dB*°C N3 0.0062dB/dB*°C N4 0.0047dB/dB*°C N5 0.0041dB/dB*°C N6 0.0035dB/dB*°C N7 0.0026dB/dB*°C N8 0.0019dB/dB*°C	
Operating frequency	DC ~ 3GHz	
Rated power	63mW	100mW
Operating temperature	-40°C ~ +100°C	
Packaging	100pcs/bag 1,000pcs/reel	min.20pcs/bag 1,000pcs/reel

· Refer to the data book for details.

Part numbering system

PXV 1220S -06dB N1-T

Packaging (T=Tape, B=Bulk)
 Temperature coefficient of attenuation
 Attenuation
 Size
 Product code

Not for shipment to or sale in the United States

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Susumu:

[PXV1220S-1DBN1-T02](#) [PXV1220S-1DBN2-T02](#) [PXV1220S-1DBN3-T02](#) [PXV1220S-2DBN1-T02](#) [PXV1220S-2DBN2-T02](#) [PXV1220S-2DBN3-T02](#) [PXV1220S-3DBN1-T02](#) [PXV1220S-3DBN2-T02](#) [PXV1220S-3DBN3-T02](#) [PXV1220S-4DBN1-T02](#) [PXV1220S-4DBN2-T02](#) [PXV1220S-4DBN3-T02](#) [PXV1220S-5DBN1-T02](#) [PXV1220S-5DBN2-T02](#) [PXV1220S-5DBN3-T02](#) [PXV1220S-6DBN1-T02](#) [PXV1220S-6DBN2-T02](#) [PXV1220S-6DBN3-T02](#) [PXV1220S-7DBN1-T02](#) [PXV1220S-7DBN2-T02](#) [PXV1220S-7DBN3-T02](#)