



# Lötstifte Picots pour C.I. Soldering lugs for PCB

Werkstoff/Matière/Material  
.2 = Bronze/bronze  
.6 = Messing/laiton/brass

■ = Oberflächen/Surface/Surface-plating  
Seite/page/page 5.011

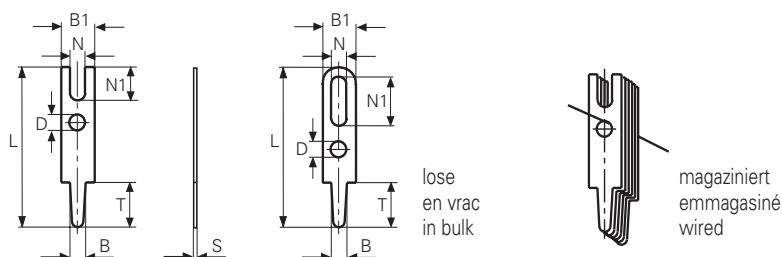

Federschlagwerkzeug / Appareil à percuter / Hand tool No. 1035

|                                               |  |  |  |  |  |
|-----------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Artikelnummer<br>Numéro d'article<br>Part-No. | <b>1001w.6</b>                                                                    | <b>01001w.6</b>                                                                   | <b>1004c.6</b>                                                                    | <b>01004c.6</b>                                                                     | <b>1006h.6</b>                                                                      |
| Bohrung/Trou/Hole                             | Ø 0.9<br>T 3<br>L 10<br>B1 2.8<br>N 1.2<br>N1 1<br>øD 1.2x3.0<br>B 0.9<br>S 0.6   | Ø 0.9<br>T 3<br>L 10<br>B1 2.8<br>N 1.2<br>N1 1<br>øD 1.2x3<br>B 0.9<br>S 0.6     | Ø 0.9<br>T 3<br>L 10<br>B1 2.4<br>N 1<br>N1 1.3<br>øD 1.2<br>B 1<br>S 0.6         | Ø 0.9<br>T 3<br>L 10<br>B1 2.4<br>N 1<br>N1 1.3<br>øD 1.2<br>B 1<br>S 0.6           | Ø 0.9<br>T 3<br>L 23<br>B1 2<br>N 0.5<br>N1 3.4<br>øD 0.8<br>B 1<br>S 0.6           |
| Werkzeuge<br>Outils<br>Toolings               | <b>5</b>                                                                          | <b>1040w</b>                                                                      | <b>19</b>                                                                         | <b>1050k</b>                                                                        | <b>67</b>                                                                           |

|                                               |  |  |  |  |  |  |
|-----------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Artikelnummer<br>Numéro d'article<br>Part-No. | <b>1001u.2</b>                                                                      | <b>01001u.2</b>                                                                     | <b>1002q.6</b>                                                                      | <b>01002q.6</b>                                                                      | <b>1001v.2</b>                                                                        | <b>01001v.2</b>                                                                       |
| Bohrung/Trou/Hole                             | Ø 0.9<br>T 3.1<br>L 7.1<br>B1 1.9<br>N 0.8<br>N1 1<br>øD 0.9<br>B 0.9<br>S 0.5      | Ø 0.9<br>T 3.1<br>L 7.1<br>B1 1.9<br>N 0.8<br>N1 1<br>øD 0.9<br>B 0.9<br>S 0.5      | Ø 0.9<br>T 3.8<br>L 6.9<br>B1 2.8<br>N<br>N1<br>øD 0.8<br>B <b>0.9</b><br>S 0.5     | Ø 0.9<br>T 3.8<br>L 6.9<br>B1 2.8<br>N<br>N1<br>øD 0.8<br>B <b>0.9</b><br>S 0.5      | Ø 0.9<br>T 4<br>L 6.9<br>B1 1.9<br>N 0.8<br>N1 0.7<br>øD 0.8<br>B 0.9<br>S 0.5        | Ø 0.9<br>T 4<br>L 6.9<br>B1 1.9<br>N 0.8<br>N1 0.7<br>øD 0.8<br>B 0.9<br>S 0.5        |
| Werkzeuge<br>Outils<br>Toolings               | <b>4</b>                                                                            | <b>1040u</b>                                                                        | <b>54</b>                                                                           | <b>1040q</b>                                                                         | <b>4</b>                                                                              | <b>1040v</b>                                                                          |