

NP0G3D3

Silicon PNP epitaxial planar transistor (Tr1)
Silicon NPN epitaxial planar transistor (Tr2)

For digital circuits

■ Features

- Two elements incorporated into one package
- Suitable for high density package and downsizing of the equipment
- Automatic insertion with the taping is possible


■ Basic Part Number of Element

- UNR31A3 × UNR32AT

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$


	Parameter	Symbol	Rating	Unit
Tr1	Collector to base voltage	V_{CBO}	-50	V
	Collector to emitter voltage	V_{CEO}	-50	V
	Collector current	I_C	-80	mA
Tr2	Collector to base voltage	V_{CBO}	50	V
	Collector to emitter voltage	V_{CEO}	50	V
	Collector current	I_C	80	mA
Overall	Total power dissipation *	P_T	125	mW
	Junction temperature	T_j	125	°C
	Storage temperature	T_{stg}	-55 to +125	°C

Note) *: Measuring on substrate at 17 mm × 10 mm × 1 mm

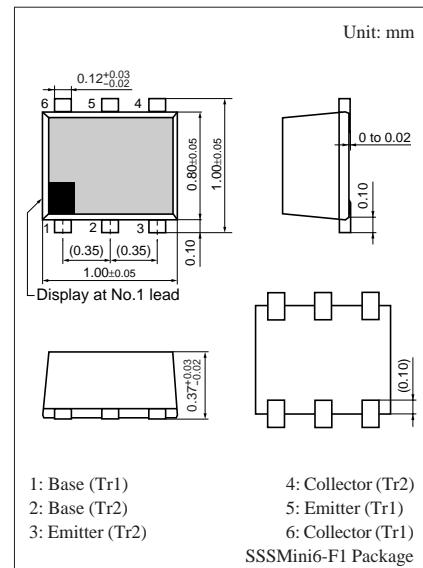

Marking Symbol: 3H

Internal Connection

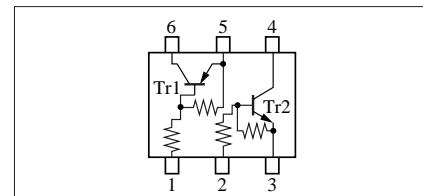

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$


• Tr1

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector to base voltage	V_{CBO}	$I_C = -10 \mu\text{A}, I_E = 0$	-50			V
Collector to emitter voltage	V_{CEO}	$I_C = -2 \text{ mA}, I_B = 0$	-50			V
Collector cutoff current	I_{CBO}	$V_{\text{CB}} = -50 \text{ V}, I_E = 0$			-0.1	μA
	I_{CEO}	$V_{\text{CE}} = -50 \text{ V}, I_B = 0$			-0.5	
Emitter cutoff current	I_{EBO}	$V_{\text{EB}} = -6 \text{ V}, I_C = 0$			-0.1	mA
Forward current transfer ratio	h_{FE}	$V_{\text{CE}} = -10 \text{ V}, I_C = -5 \text{ mA}$	80			—
Collector to emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_C = -10 \text{ mA}, I_B = -0.3 \text{ mA}$			-0.25	V
High level output voltage	V_{OH}	$V_{\text{CC}} = -5 \text{ V}, V_B = -0.5 \text{ V}, R_L = 1 \text{ k}\Omega$	-4.9			V
Low level output voltage	V_{OL}	$V_{\text{CC}} = -5 \text{ V}, V_B = -3.5 \text{ V}, R_L = 1 \text{ k}\Omega$			-0.2	V
Input resistance	R_1		-30%	47	+30%	k Ω
Resistance ratio	R_1 / R_2		0.8	1.0	1.2	—
Gain bandwidth product	f_T	$V_{\text{CB}} = -10 \text{ V}, I_E = 1 \text{ mA}, f = 200 \text{ MHz}$		80		MHz







• Tr2

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector to base voltage	V_{CBO}	$I_C = 10 \mu\text{A}, I_E = 0$	50			V
Collector to emitter voltage	V_{CEO}	$I_C = 2 \text{ mA}, I_B = 0$	50			V
Collector cutoff current	I_{CBO}	$V_{\text{CB}} = 50 \text{ V}, I_E = 0$			0.1	μA
	I_{CEO}	$V_{\text{CE}} = 50 \text{ V}, I_B = 0$			0.5	
Emitter cutoff current	I_{EBO}	$V_{\text{EB}} = 6 \text{ V}, I_C = 0$			0.2	mA
Forward current transfer ratio	h_{FE}	$V_{\text{CE}} = 10 \text{ V}, I_C = 5 \text{ mA}$	80		400	—
Collector to emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_C = 10 \text{ mA}, I_B = 0.3 \text{ mA}$			0.25	V
High level output voltage	V_{OH}	$V_{\text{CC}} = 5 \text{ V}, V_B = 0.5 \text{ V}, R_L = 1 \text{ k}\Omega$	4.9			V
Low level output voltage	V_{OL}	$V_{\text{CC}} = 5 \text{ V}, V_B = 2.5 \text{ V}, R_L = 1 \text{ k}\Omega$			0.2	V
Input resistance	R_1		-30%	22	+30%	k Ω
Resistance ratio	R_1 / R_2			0.47		—
Gain bandwidth product	f_T	$V_{\text{CB}} = 10 \text{ V}, I_E = -2 \text{ mA}, f = 200 \text{ MHz}$		150		MHz







Common characteristics chart

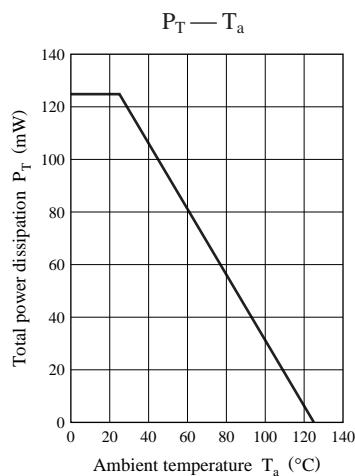

Characteristics charts of Tr1

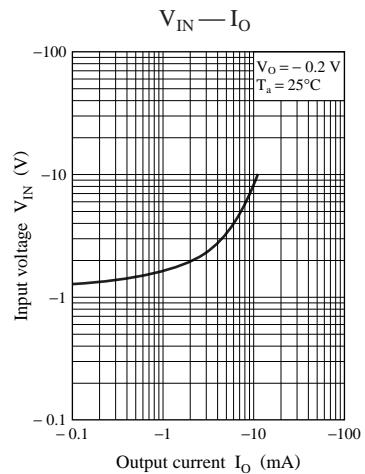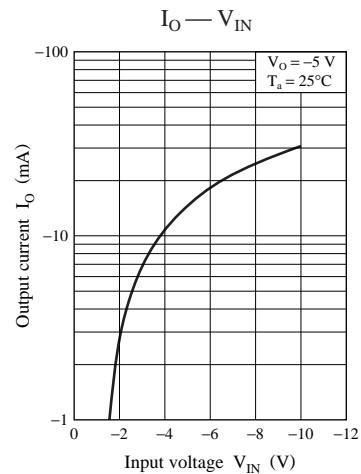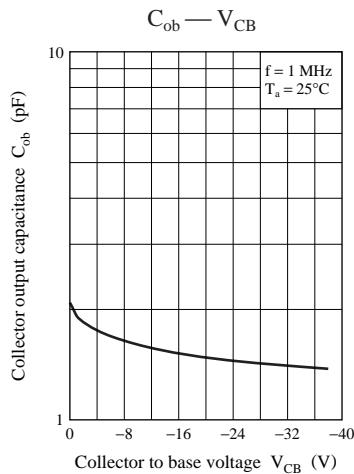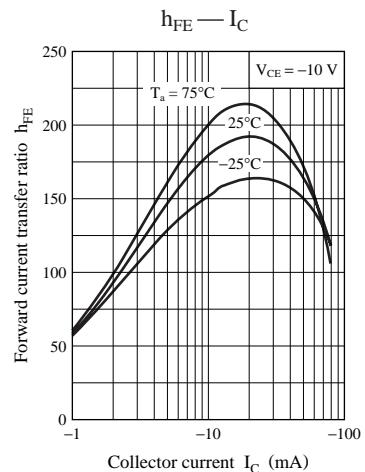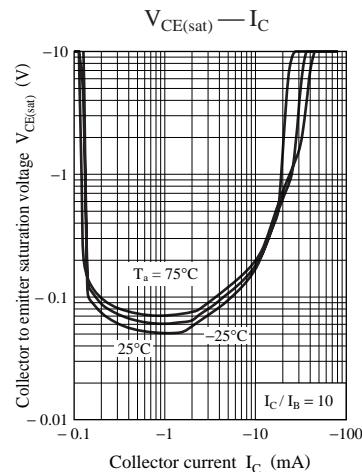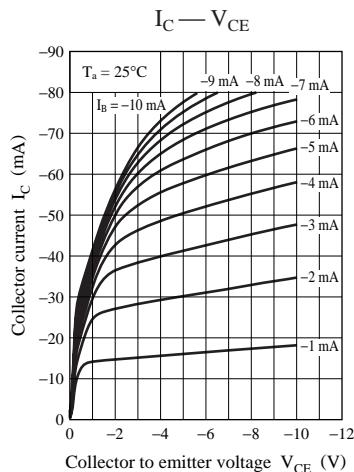

Characteristics charts of Tr2

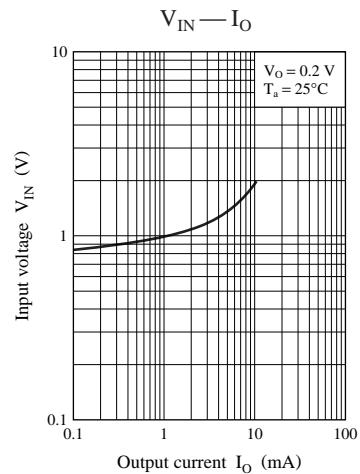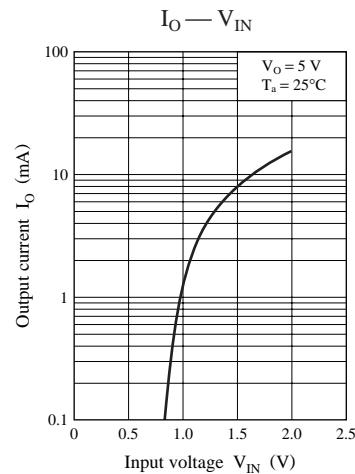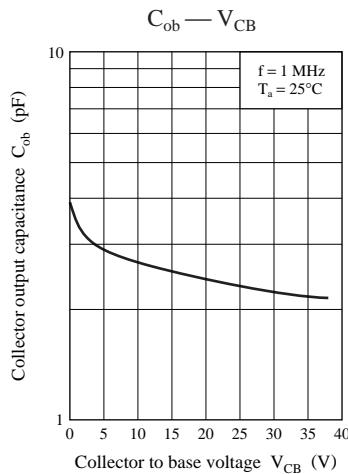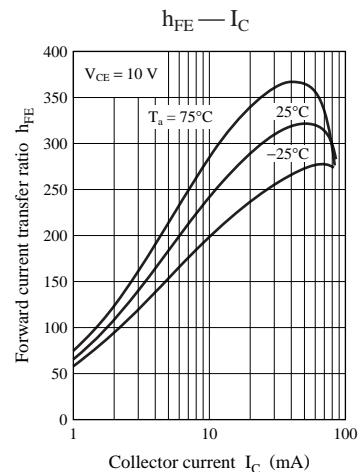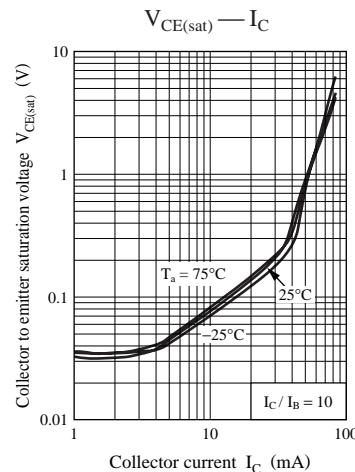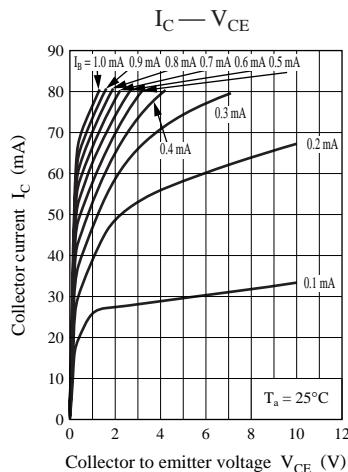

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.