

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-12-006972	23AUG2012	KH	JE

- 2

PHOSPHOR BRONZE
- 3

LCP, UL94V-0
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE; APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING.
- 5






CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7


APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

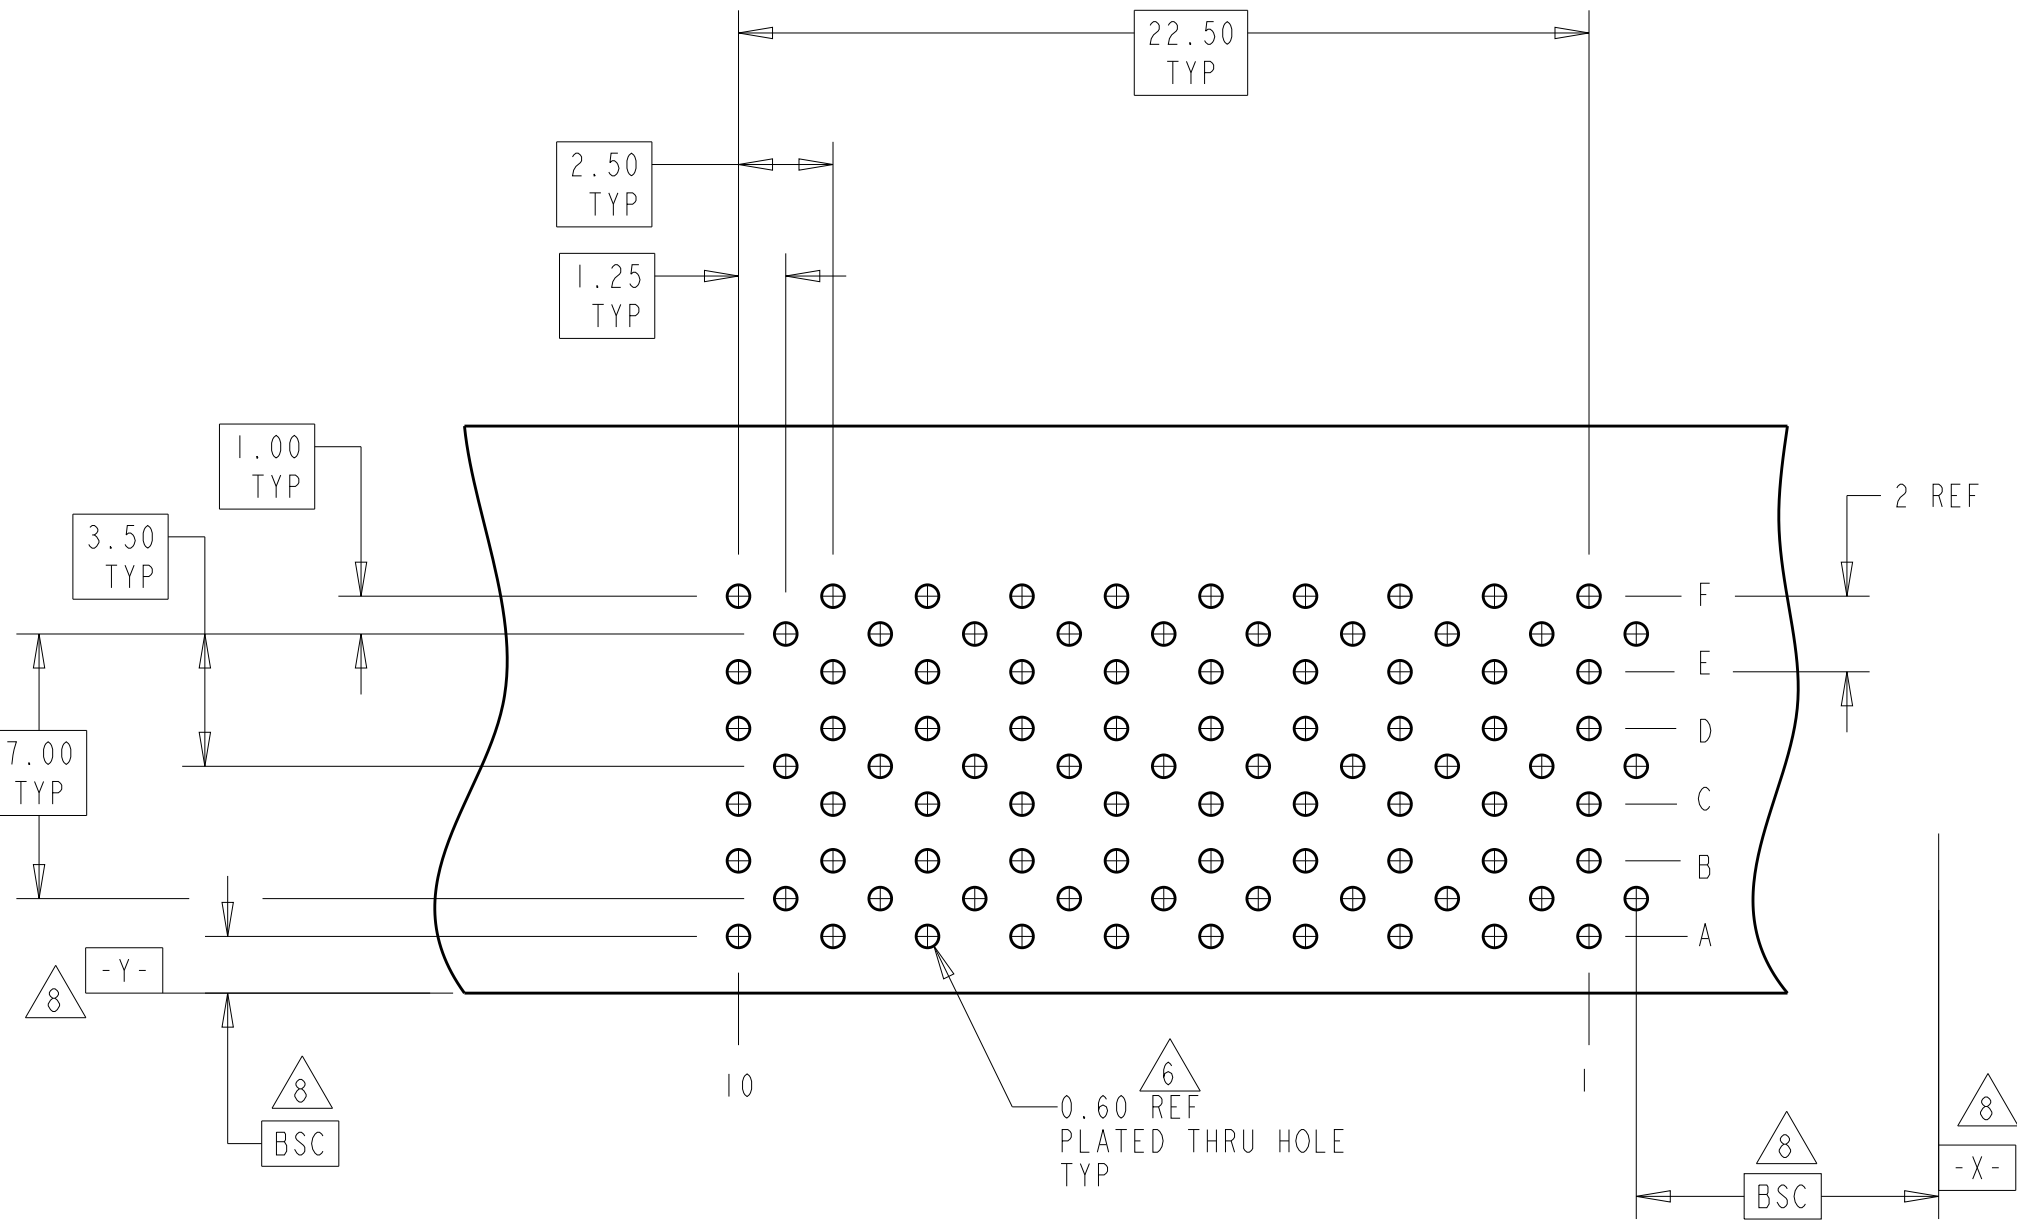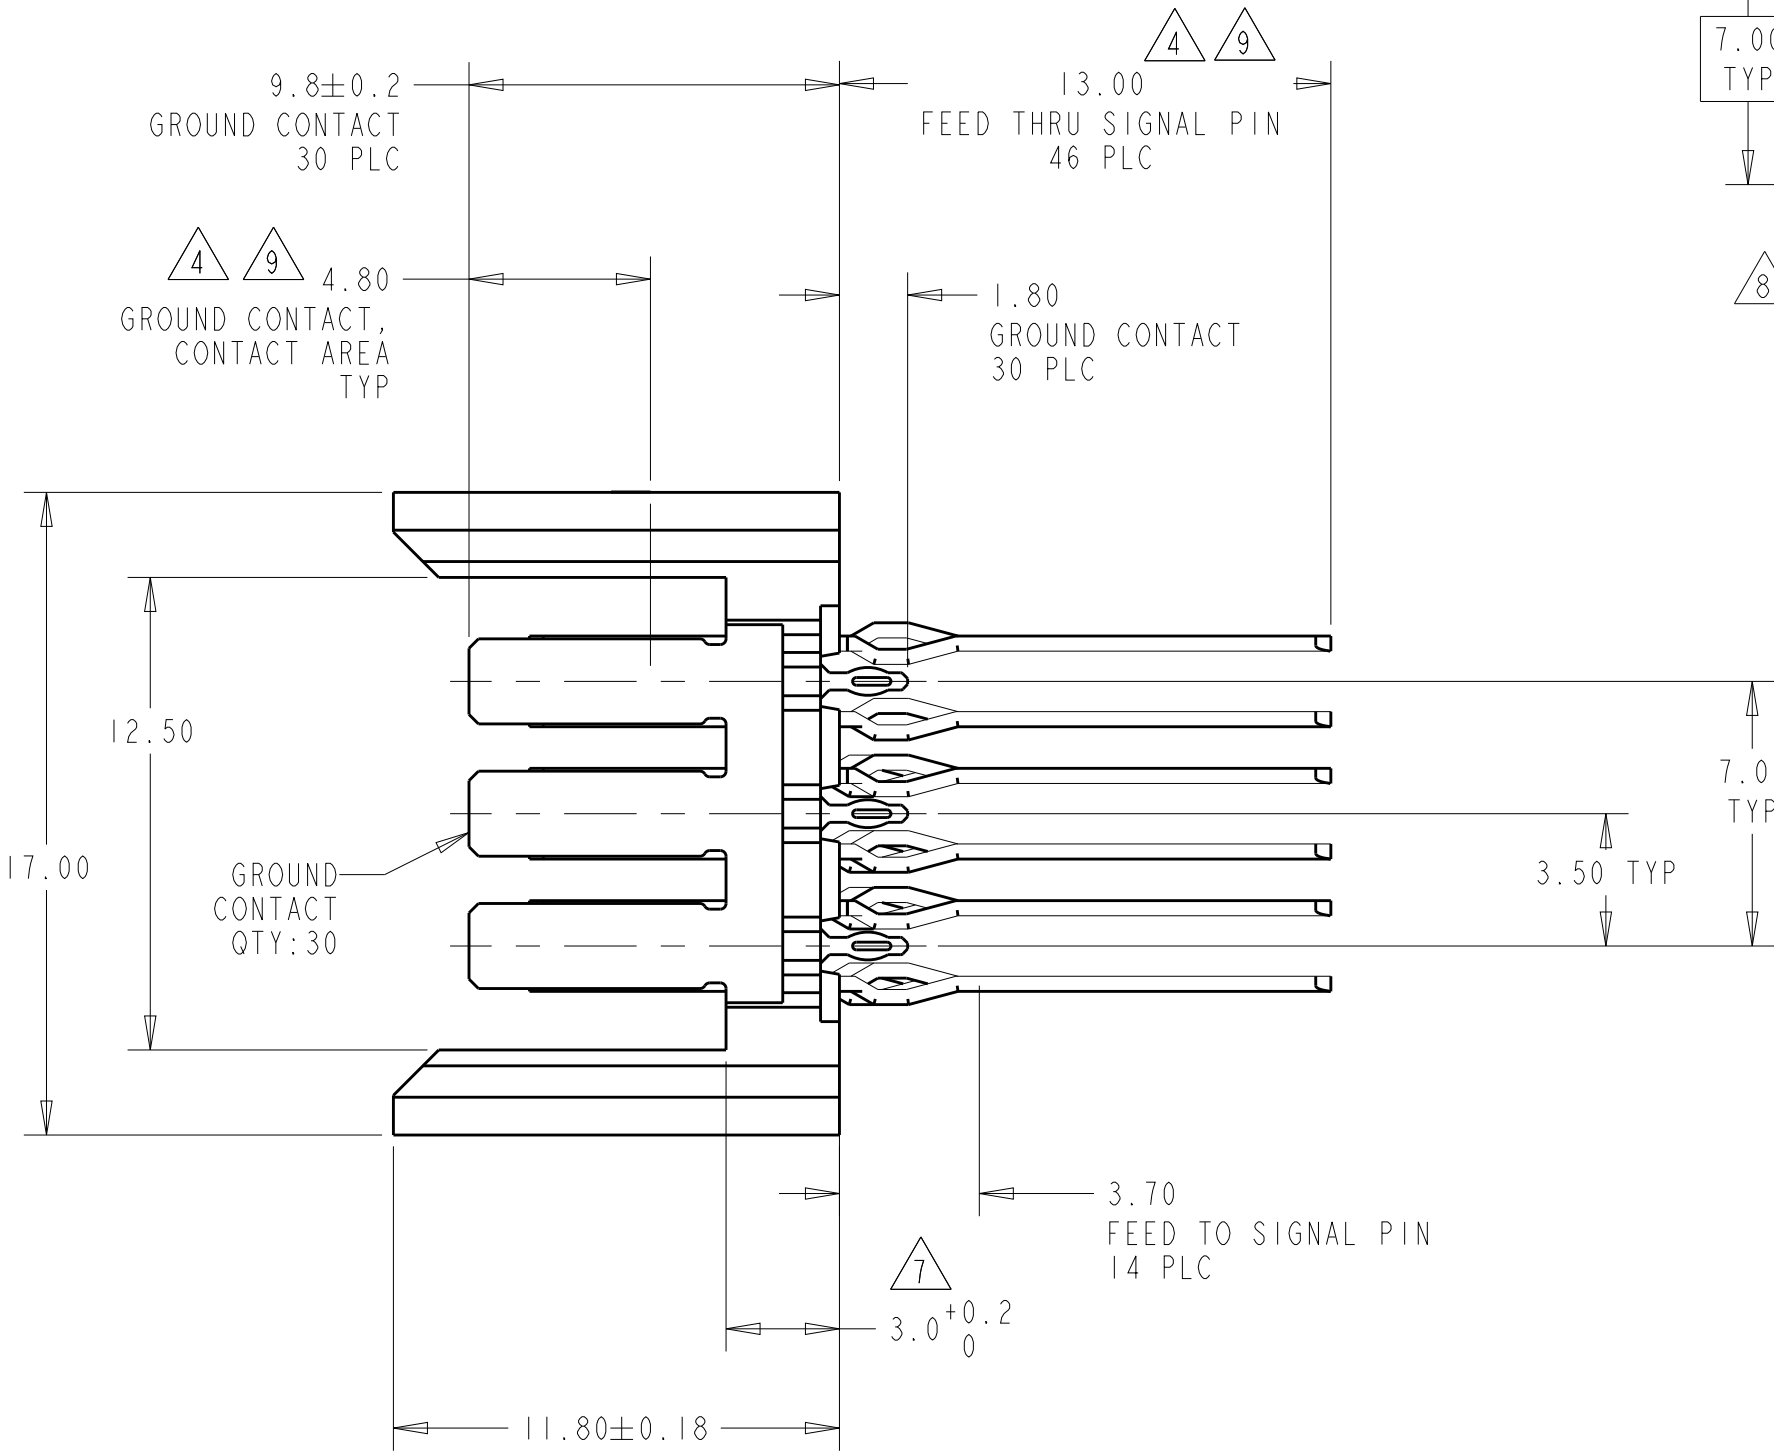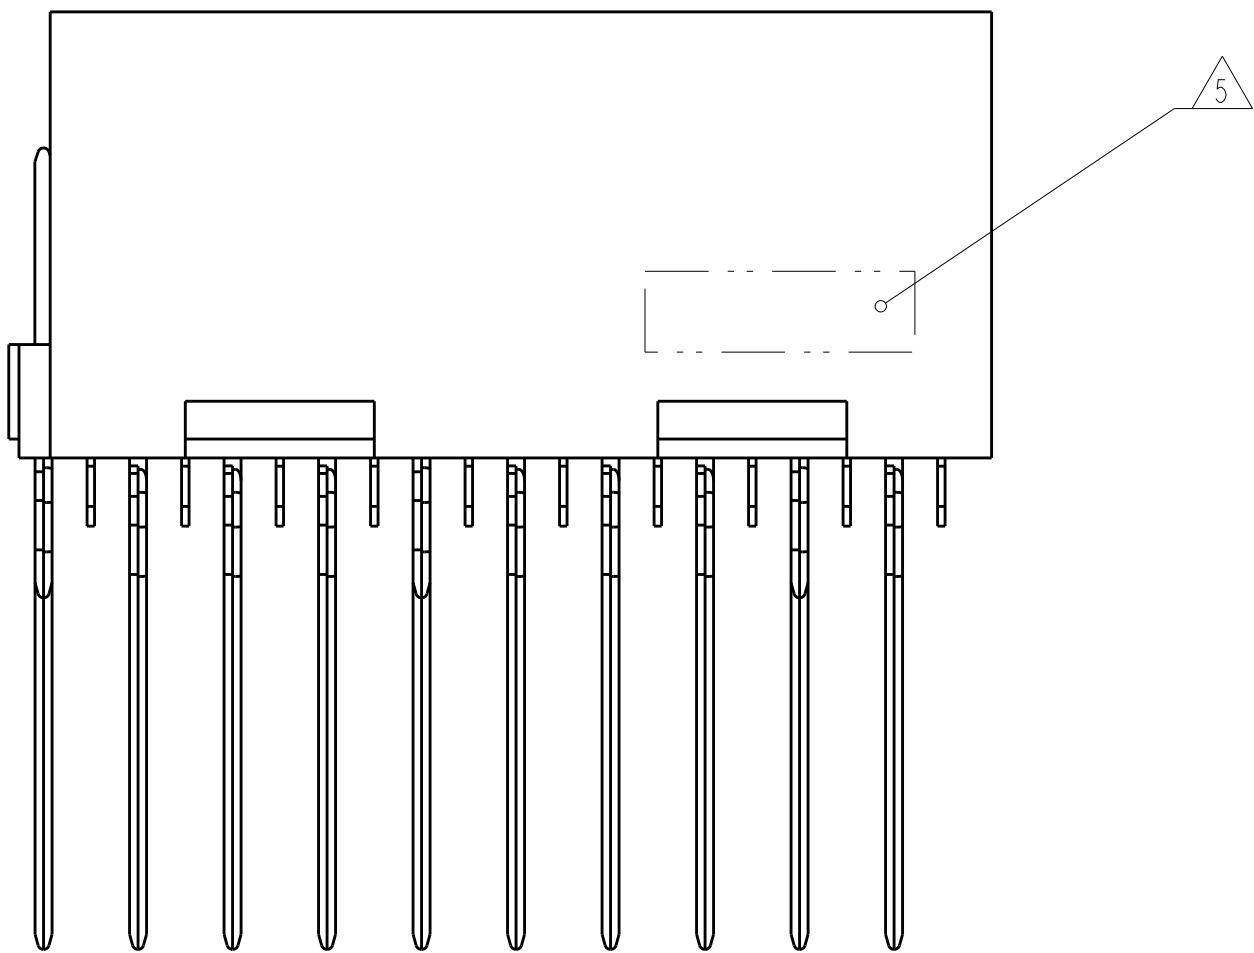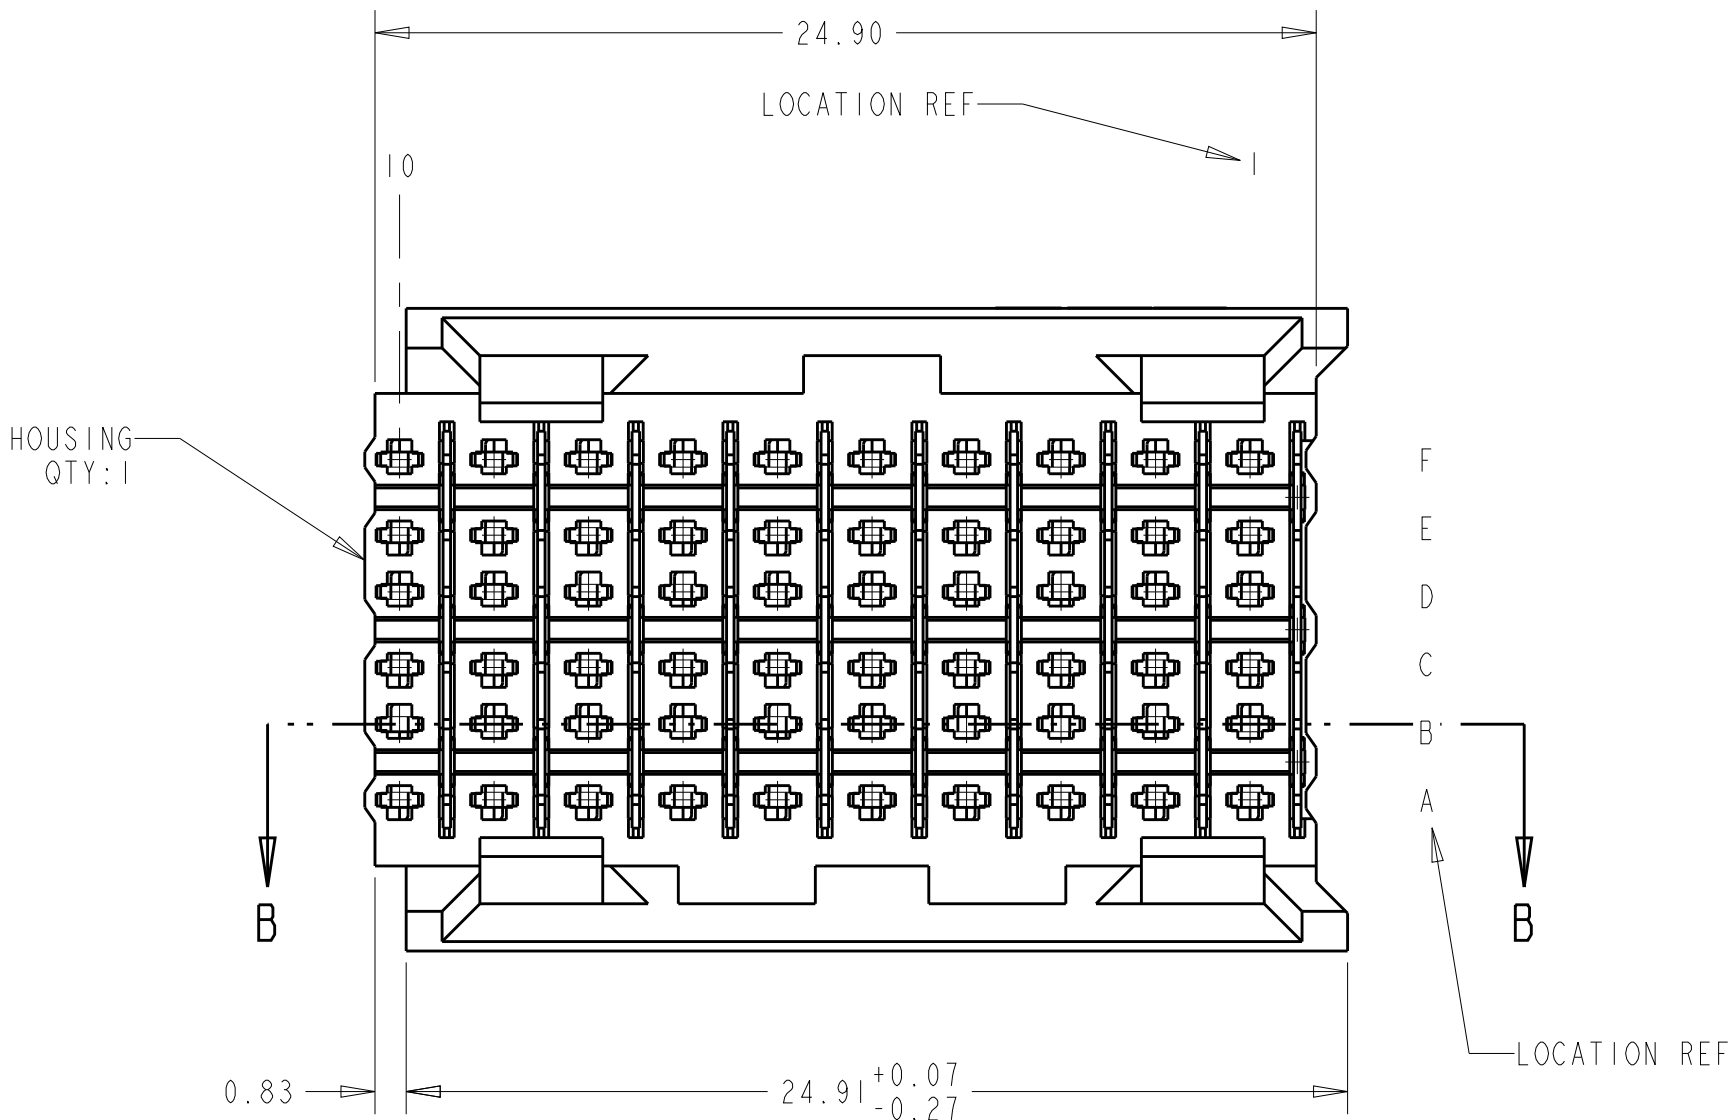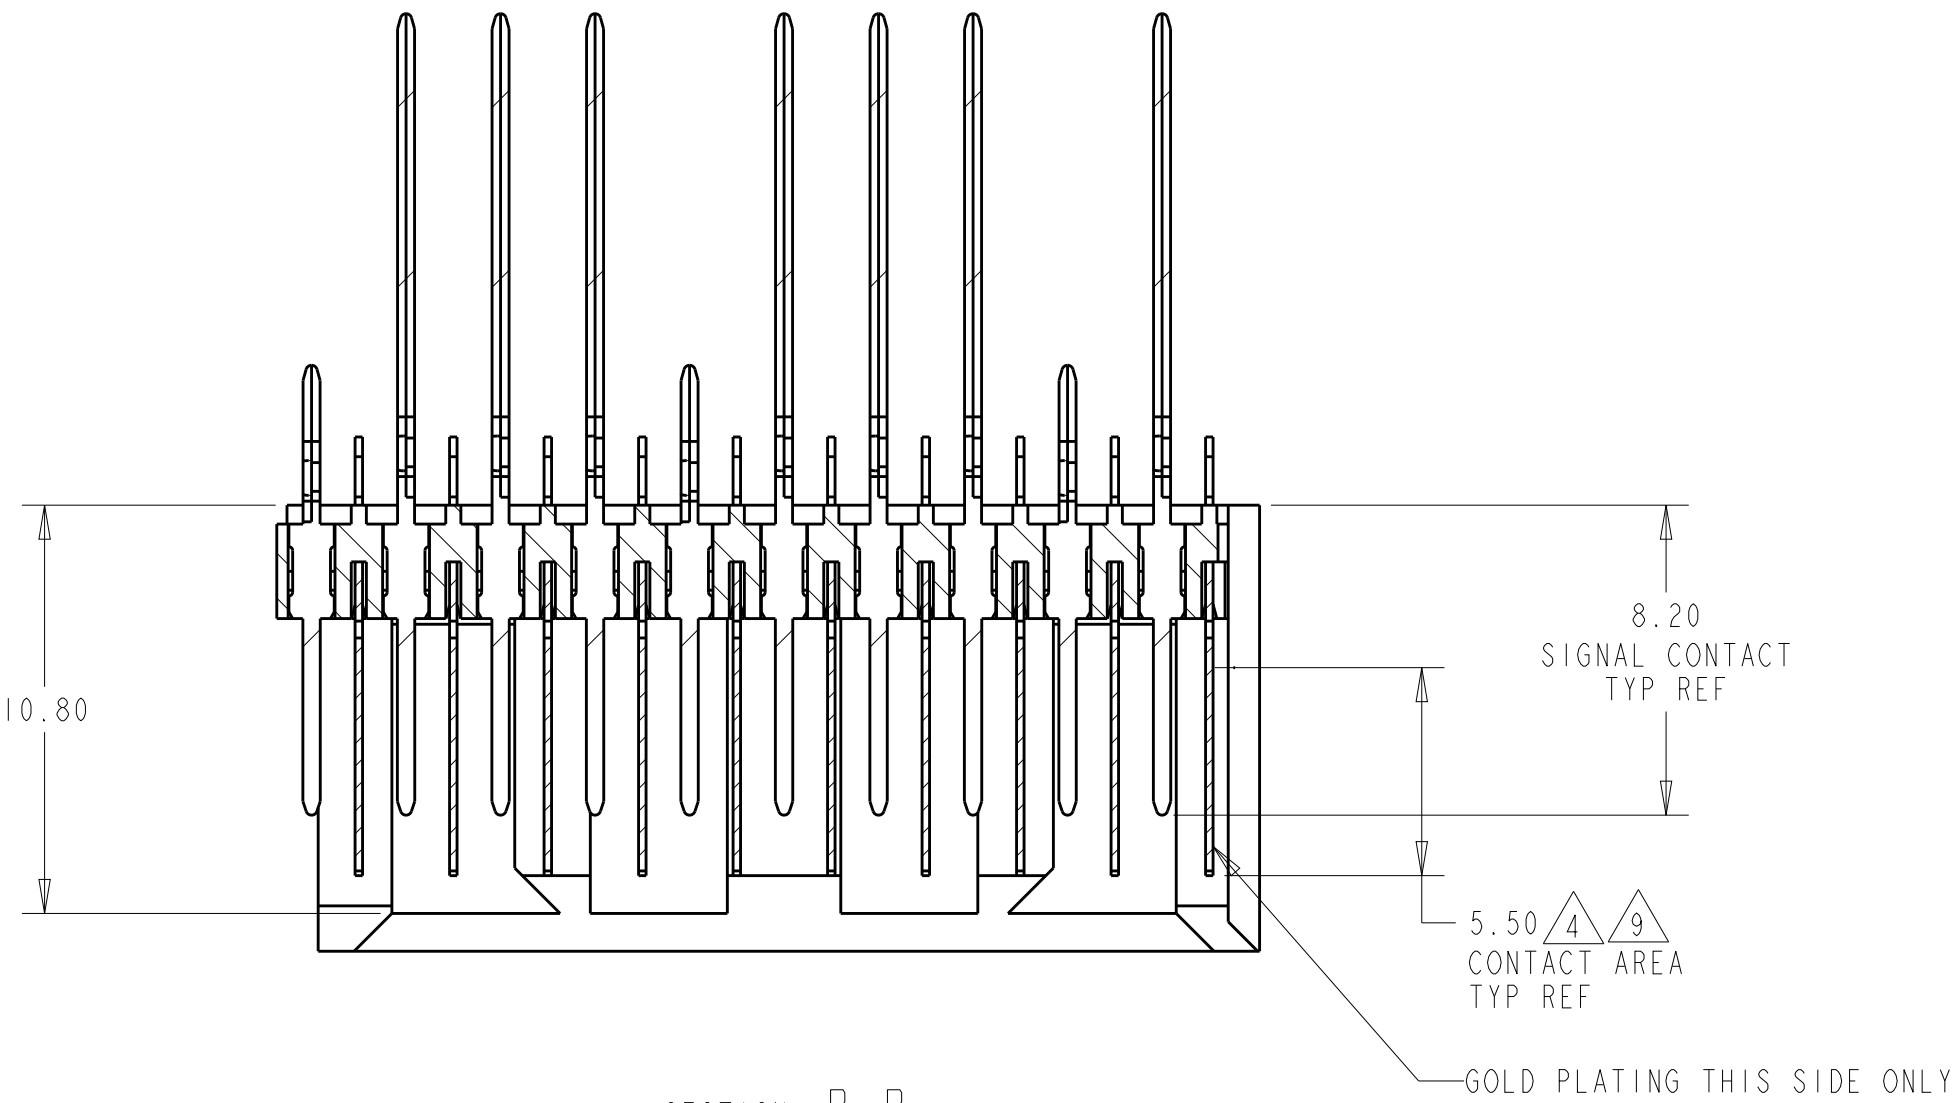

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

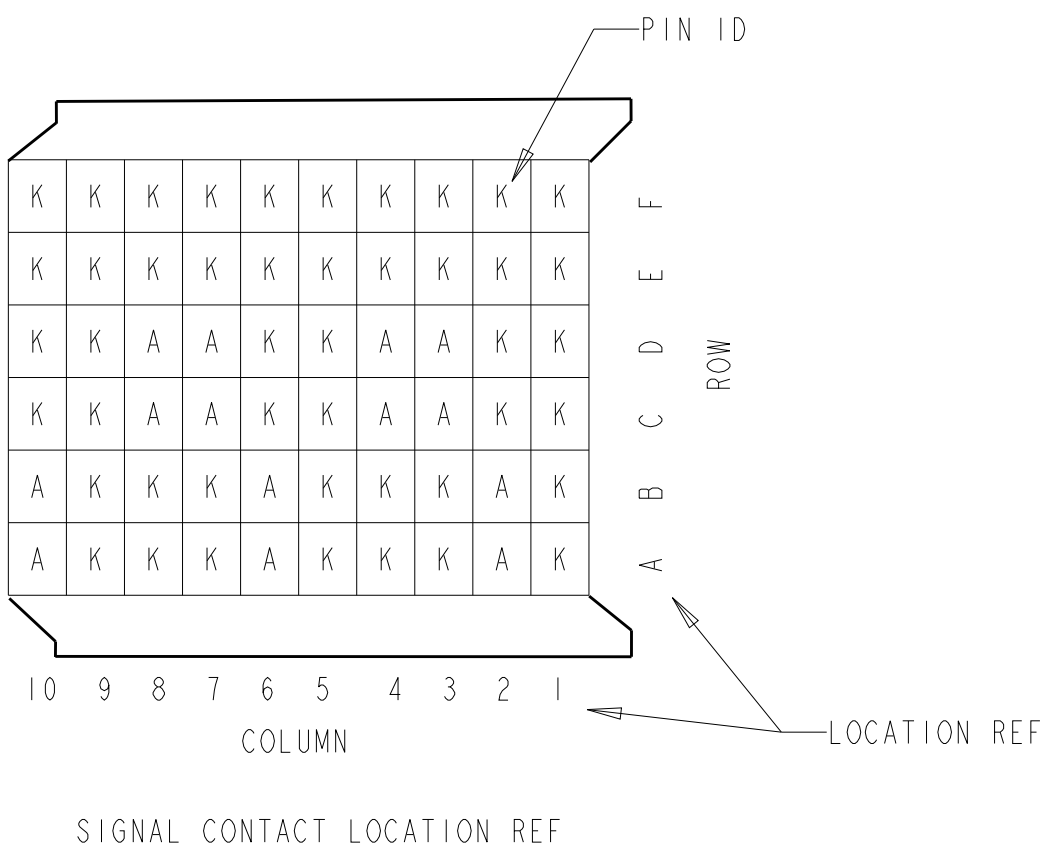

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 19FEB2007	120995-1	
DIMENSIONS:		CHK R. PATTERSON 19FEB2007	PART NUMBER	
mm		APVD R. PATTERSON 9FEB2007	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	NAME HEADER ASSEMBLY, 60 POSITION, 6 ROW, FEED THROUGH, BACKPLANE CONNECTOR, Z-PACK HS3	
0 PLC ±		APPLICATION SPEC	SIZE A1	
1 PLC ±0.13		WEIGHT	CAGE CODE 00779	
2 PLC ±0.05		CUSTOMER DRAWING	DRAWING NO 120995	
3 PLC ±		SCALE 5:1	SHEET 1 OF 1	
4 PLC ±		REV C		
ANGLES				
FINISH				
MATERIAL				
HOUSING: 3				
CONTACTS: 2				
SIGNAL CONTACT: 4				