

CMB-Series

THERMAL CIRCUIT PROTECTORS

Rating:

3 to 20A, 125-250VAC, 32VDC

Approvals:

UL, CUL, CSA, TUV, CE
UL1500/ISO8846 for ignition
protection/marine

Dielectric Strength:

2500 VAC/1 minute

Interrupting capacity:

2500 amps @ 32 VDC

Insulation Resistance:

100M ohms

Operating Temperature:

-10°C to 60°C

Voltage drop:

< 0.25 V

Applications:

Household Appliances
Transportation
Marine
Power Strips
Medical Equipment
Audio Visual Equipment
Power Supplies

ROHS Compliant

A COMPACT, SINGLE POLE, PUSH-TO-RESET
FAMILY OF THERMAL CIRCUIT BREAKERS

Dimensional Specifications:

Carling Technologies®

Innovative Designs. Powerful Solutions.

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue • Plainville, CT 06062-1177
Phone: (860) 793-9281 • Fax: (860) 793-9231
Email: sales@carlingtech.com • www.carlingtech.com

CMB — **10** **3** — **11** **C** **3** **N** — **B** — **A** /**10**


1 Series 2 Rating 3 Voltage 4 Mounting Hole 5 Bushing Type 6 Mounting Nut 7 Indicator Plate 8 Button 9 Terminal 10 Button Marking

1 SERIES
CMB


3 VOLTAGE
3 125-250VAC/ 32 VDC

2 RATING		10	10 amp
03	3 amp	12	12 amp
04	4 amp	13	13 amp
05	5 amp	14	14 amp
06	6 amp	15	15 amp
07	7 amp	16	16 amp
08	8 amp	20	20 amp


4 MOUNTING HOLE
11¹ M11
12² M12
00³ Snap In Style
27⁹ 3/8" 27 UNS
28¹² 3/8" 27 UNS
(double flatted)

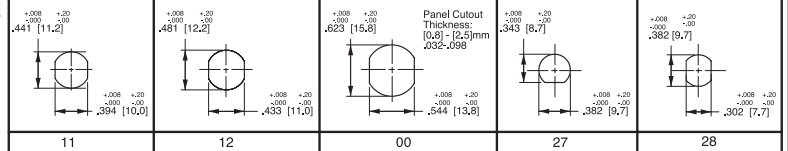

5 BUSHING
PLASTIC
C⁴ Type C
D⁴ Type D
E⁵ Type E
G⁸ Type G
H⁶ Type H
K¹³ Type K
METAL
J⁸ Type J

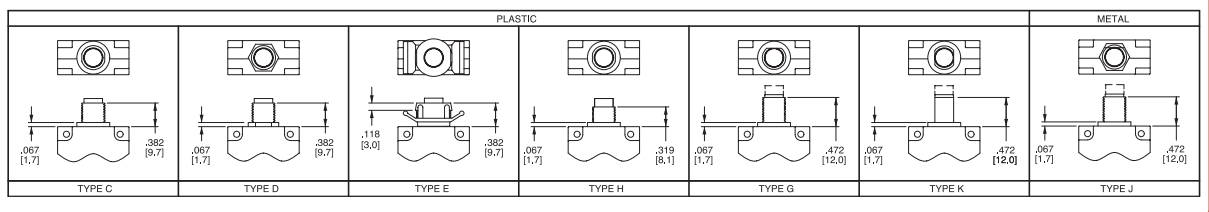


6 MOUNTING NUT⁷
N None
1 Type 1
2 Type 2
3¹¹ Type 3
4 Type 4
5 Type 5
6¹⁴ Type 6
7⁹ Type 7
8⁹ Type 8

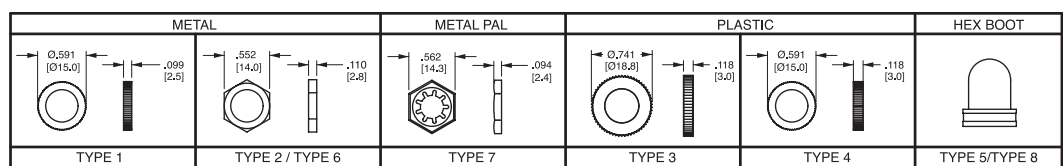

NOTE: Type 5 is clear hex boot. Type 8 is black hex boot (available for bushings G, J & K only); Type 3 nut includes molded in "PRESS TO RESET" marking.

7 INDICATOR PLATE⁷
N None
A Embossed Legend
B Silver Printing
on Black

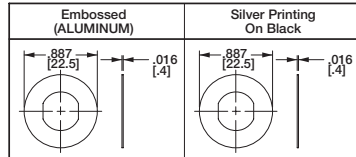

All indicator plates are marked
"Suppl. Prot. press to reset".


Notes: All dimensions are in [mm]. Tolerance ± 0.05 [1.27] unless otherwise specified.

- | | |
|--|---|
| 1 Used with bushing C or D only. | 9 Available with G, J or K bushing only. |
| 2 Used with H bushing only. | 10 Amp rating must match button marking
(ex: 20 will be marked on the button of
CMB-203-27G3N-W-A/20) |
| 3 Used with bushing E only. | 11 Includes molded in "PRESS TO RESET"
marking. |
| 4 Used with M11 mounting hole only. | 12 Available with K bushing only. |
| 5 Used with mounting hole 00 only. | 13 Available with mounting hole 28 only. |
| 6 Used with M12 mounting hole only. | 14 Thickness is 3.0 mm, .118 in. |
| 7 All hardware available separately.
Consult factory. | |
| 8 Available with mounting hole 27 only. | |

8 BUTTON
B Black **R** Red **W** White

9 TERMINAL
A Type A
B Type B
C Type C
D Type D
E Type E
F Type F
G Type G
H Type H
J Type J


F,G,H,J TERMINALS ARE 8-32 UNC

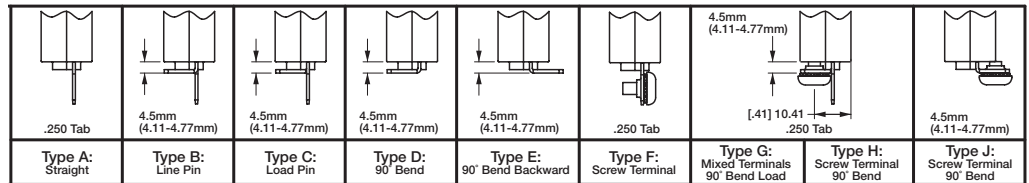

10 BUTTON MARKING (IF BLANK, NO MARKING.)¹⁰ Button Marking Orientation: line (20) load

03	3 amp	05	5 amp	07	7 amp	10	10 amp	13	13 amp	15	15 amp	20	20 amp
04	4 amp	06	6 amp	08	8 amp	12	12 amp	14	14 amp	16	16 amp		

Time Delay

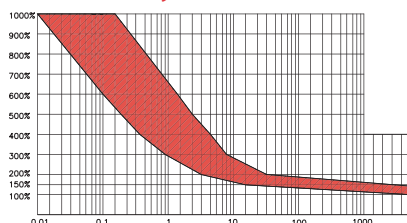

DERATING FACTOR	
-10°C	X1.70
-5°C	X1.60
0°C	X1.50
5°C	X1.40
10°C	X1.30
15°C	X1.20
20°C	X1.10
25°C	X1.00

DERATING FACTOR	
30°C	X0.90
35°C	X0.85
40°C	X0.80
45°C	X0.75
50°C	X0.70
55°C	X0.65
60°C	X0.60

OVERLOAD		TRIP TIME	
100 %		NO TRIP	
150 %		TRIP IN 1 HR	
200 %		4.0~40 sec	
300 %		0.9~8.0 sec	
400 %		0.42~5.0 sec	
500 %		0.25~3.0 sec	
600 %		0.1~1.8 sec	

Notes:

Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.

- 1 To adjust the breaker rating for ambient temperature multiply the breaker rating by the factor. (ex: 5 amp rating at 0°C: 5 x .67 = 3.3 amp. Select 3 amp rating.)