Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Main features

- Carbon resistive element.
- Dust proof enclosure.
- Polyester substrate.
- Wiper positioned at initial, 50% or fully clockwise.

Also upon request:

- Available in magazines for automatic insertion.
- Long life model for low-cost control potentiometer applications.
- Self extinguishable plastic UL 94V-0.
- Cut track option (open circuit).
- Special tapers.
- Mechanical detents.
- Low torque version.
- Special switch option.
- 3% Linearity and 100K cycles mechanical life.

Mechanical specifications

Mechanical rotation angle [1]		235° ± 5°
Electrical rotation angle [2]		220° ± 20°
Torque	rotational	0.4 to 2 Ncm. (0.6 to 2.7 in-oz)
	stop	› 5 Ncm. (‹7 in-oz)
Life [3]		up to 100K cycles

[1] 360° version available: ST10 [2] 333° version available: ST10 [3] Others: check availability.

Electrical specifications

Range of values [1]		100Ω ≤ Rn ≤ 5MΩ (Decad. 1.0 - 2.0 - 2.2 - 2.5 - 4.7 - 5.0)
Tolerance [1]	100Ω ≤ Rn ≤ 1MΩ	± 20%
	1MΩ ≤ Rn ≤ 5MΩ	± 30%
Max. voltage		200 VDC (lin) 100 VDC (no lin)
Nominal power 50°C (122°F) [3]		0.15 W (lin) 0.07 W (no lin)
Taper		Linear ; Log; Alog. (Log. & Alog. only Rn ≥1K)
Residual resistance		≤ 0.5% Rn (5Ω min.)
Equivalent noise resistance		≤ 3% Rn (3Ω min.)
Operating temperature [2,3]		-25°C to +70°C (-13°F to + 158°F)

[1] Others: check availability. [2] Up to 85°C depending on application.

[3] For higher specifications please visit our PTC10 series.

For reflow soldering capable models please see our PS10 datasheet.

Description

The PT10 potentiometer offers control where frequent adjustment is required. The shaftless design allows for employment of different engagement mechanisms, such as a customized shaft, a motor control or a human interface adjustment.

This potentiometer can also control variable outputs including frequency, change in motor speed or volume.

Typical applications include test and measurement equipment, consumer electronics, appliances, small engines, robotics, motion controllers, and medical equipment control panels.

This datasheet shows you the basics of the PT10 potentiometer that is quite versatile and easy to taylor. Do not hesitate to contact Piher for advice.

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

How to order

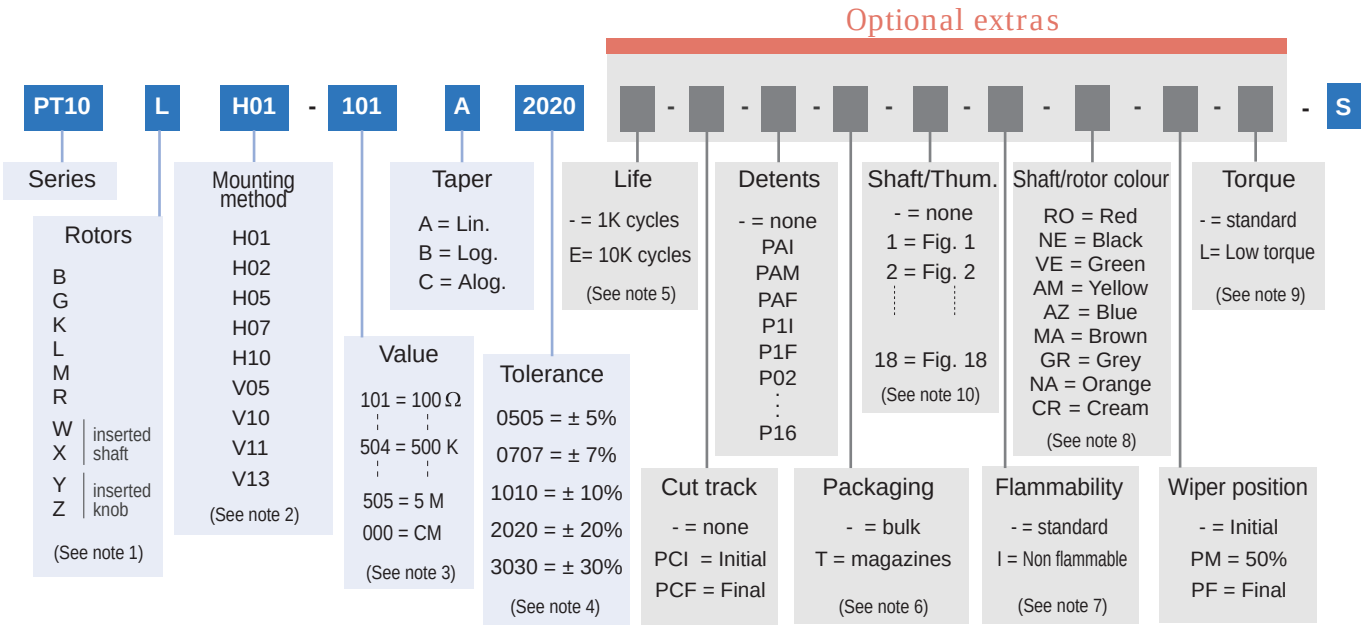

NOTES:

(1) "Z" adjustment only available on "H" versions. Rotor "G" only available in purple color (shaft/rotor color code "VI").

(2) V05 terminals material: only brass. SMD versions available (PS10 series). Endles rotation version available (ST10).

(3) Value Example: Code: 10 1 → 100 Ω (10: First two digits of the value; 1: Numb of zeros) 000 = CM = Switch version (contact us)

(4) Other tolerances: check availability. Example: +7% -5% Code: 07 05 (07: positive tolerance; 05: negative tolerance)
High and low ohmic values may not allow all tolerances: check availability.

(5) Standard: 1000 cycles. Long life "E": 10.000 cycles. Others: check availability..

(6) Magazines: not available with the H10, V05 and V13 models, nor with adjustment types X, W, Y, Z.

(7) Non flammable: housing, rotor and shaft. According to UL 94V-0

(8) Colour shaft/rotor: • Potentiometer without shaft: only rotor • Potentiometer with shaft: only shaft

(9) Low Torque: ≤ 1 Ncm
No detent option available for low torque models.

(10) If you wish to use your own custom plastic shaft/knob/actuator please contact Piher for advice about compatible materials.

How to order examples

PT10LH01-103A2020-S
10mm potentiometer with rotor "L" (arrow shape), H01 mounting method (horizontal adjustment), 10K value and 20% resistive tolerance.

PT10WV05-104A1010-9-NE-S
10mm potentiometer with rotor W (factory pre-inserted shaft), V05 mounting method (vertical adjustment), 100K value,10% resistive tolerance and black shaft.

Standard default options

Life	1000 cycles
Cut track	No
Detents	None
Packing	Bulk
Non flammable	No
Rotor colour	White
Shaft colour	Natural (not coloured)
Wiper send position	Initial
Torque	0.4 to 2 Ncm.

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10



Rotors (Default delivery is at initial position. Wipers are shown positioned at 50% for the picture)

Without shaft or knob.

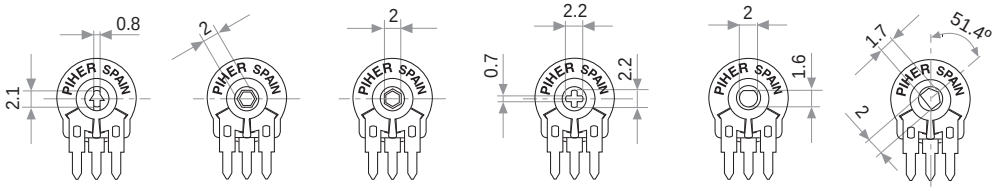

L = Screwdriver **M** = Hexagonal **G** = Hexagonal **K** = Cross slot **R** **B**

All rotors are thru-hole.

With inserted shaft.



X = Adjustable from collector side

W = Adjustable from terminal side

With knob/humbwheel inserted

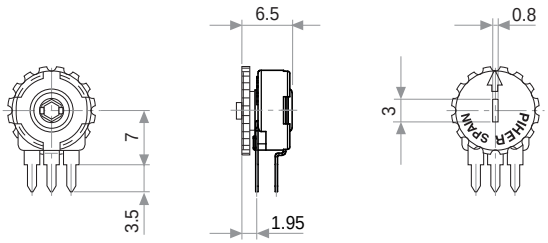

Y = Adjustable from terminal side (default knob is 5034).

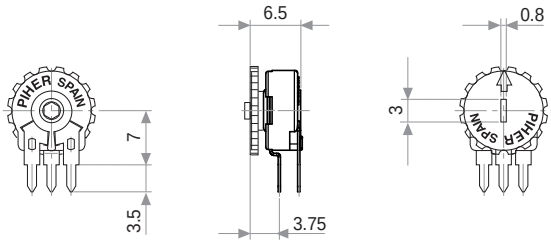

Z = Adjustable from collector side (default knob is 5034).

Mounting methods. Dimensions

V = horizontal mounting – vertical adjustment

V05

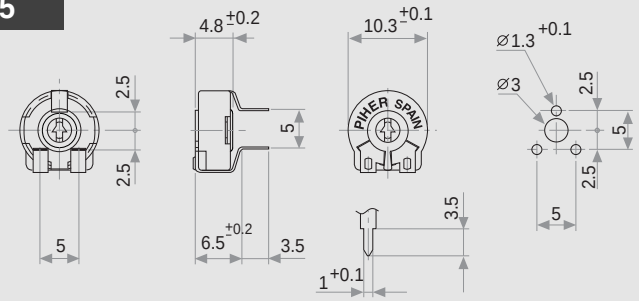

H = vertical mounting – horizontal adjustment

V10

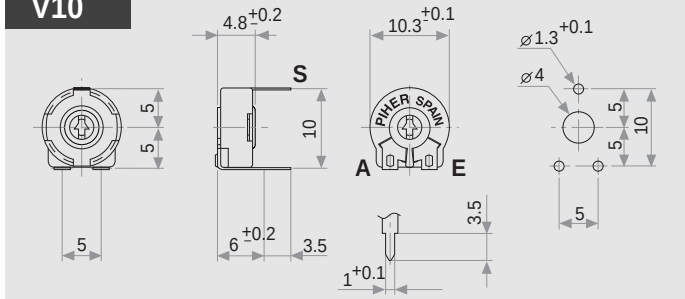

V11

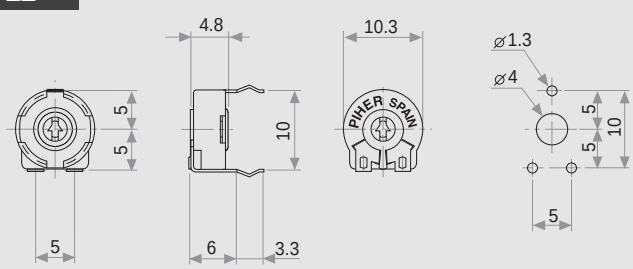

V13

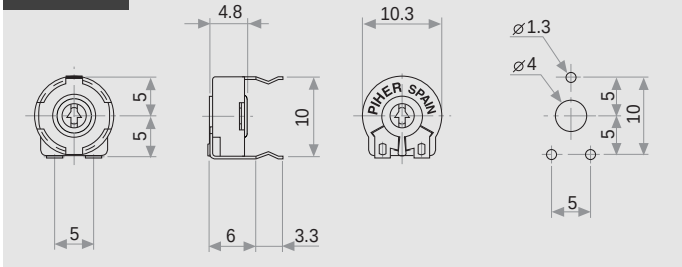

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Mounting methods. Dimensions

V = horizontal mounting – vertical adjustment

H = vertical mounting – horizontal adjustment

H01

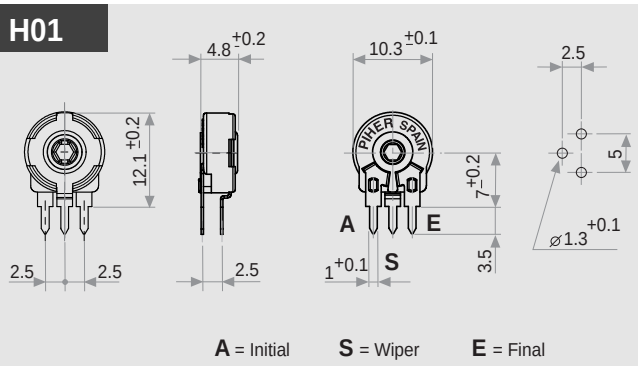

A = Initial **S** = Wiper **E** = Final

H02

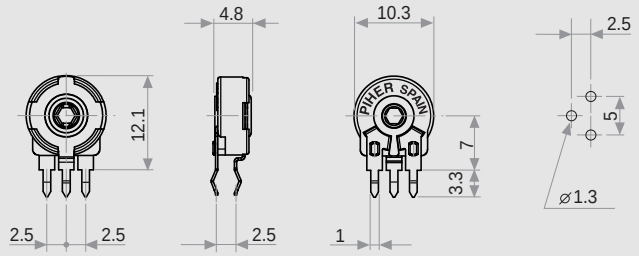

H05

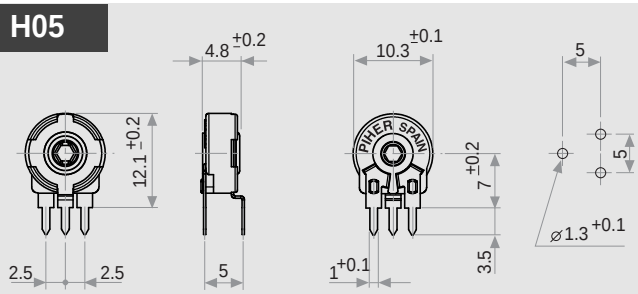

H07

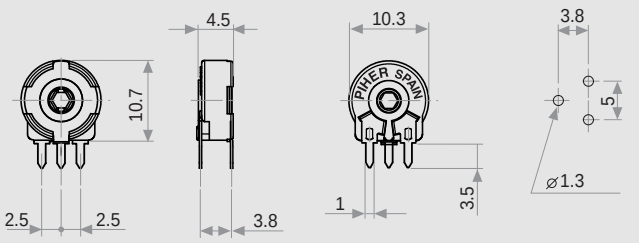

SMD versions (see PS10 datasheet)



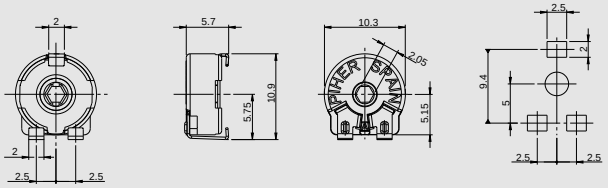

H10

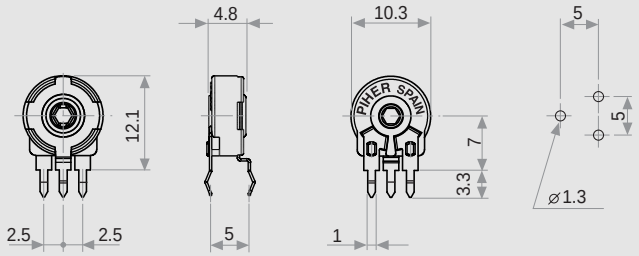

Crimped terminals - detail

V11, V13, H02, H10 models feature “crimped” terminals that provide greater stability during the soldering process.

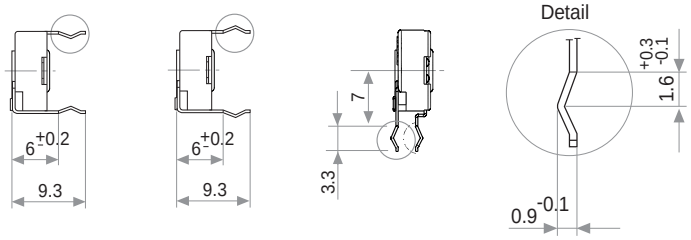

check availability

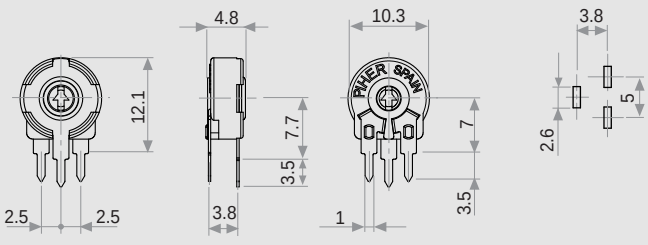

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Standard values - tolerances

Resistance Ω	100	200	220	250	470	500	1K	2K	2.2K	2.5K	4.7K	5K	10K	20K	22K	25K	47K	50K	100K	200K	220K	250K	470K	500K	1M	2M	2.5M	4.7M	5M
How to order code	101	201	221	251	471	501	102	202	222	252	472	502	103	203	223	253	473	503	104	204	224	254	474	504	105	205	255	475	505
Standard tolerance	20%																									30%			

Tapers





Special custom taper example.
(contact at sales@piher.net)

Detents

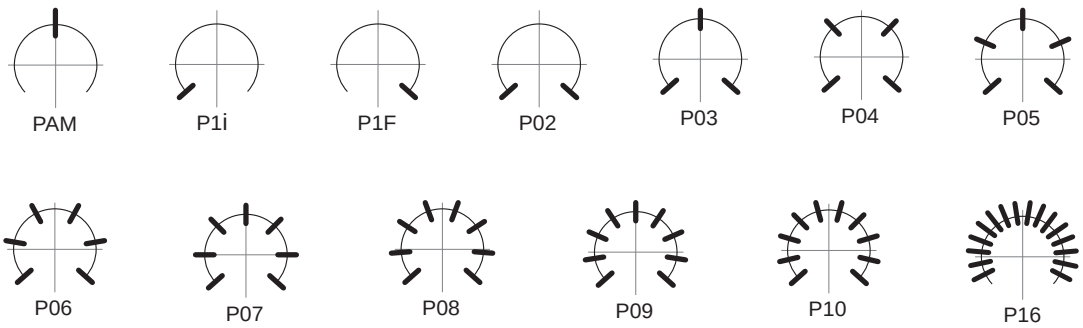

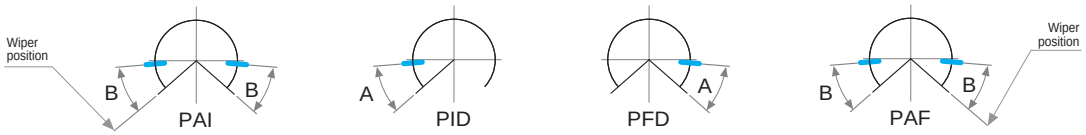

(wiper positioned at initial)

A= 26º B= 27.5º

(wiper positioned at final)

Detents detail. (7 detents example)

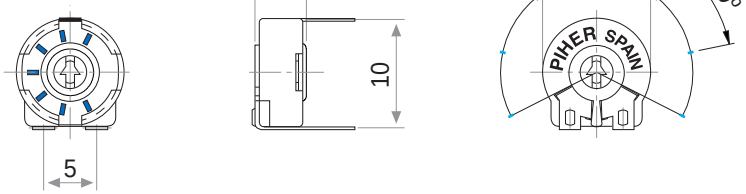

- Relative detent positions along the total mechanical travel.
  Unless otherwise specified the detents are evenly spaced (using the end points as reference)

Standard mechanical life is 500 cycles.

Long life versions are available under request and have the following characteristics at Tª:

- Potentiometers with 1 to 3 detents: up to 10K cycles
- Potentiometers with 4 and more detents: up to 5K cycles

Please consult your nearest Piher supplier if unique non-overlapping values at each detent position or LOG/ALOG tapers are required.

Different output voltage values can be matched at each detent position (see next page).

Detent torque can vary from 1.2 to 2.5 times the standard potentiometer torque.

For V05 mounting: check availability.

For more than 16 detents versions please contact your nearest PIHER authorised distributor.

For custom voltage outputs in any detent position see page 6.

Automotive / Appliance control - sensor

10 mm carbon potentiometer PT10

Stepped outputs

Constant value zones can be combined with strategically located stops matching the flat areas of the output.
If you require this feature, please, send us your requirements to sales@piher.net

Stepped outputs version example (10 steps version):

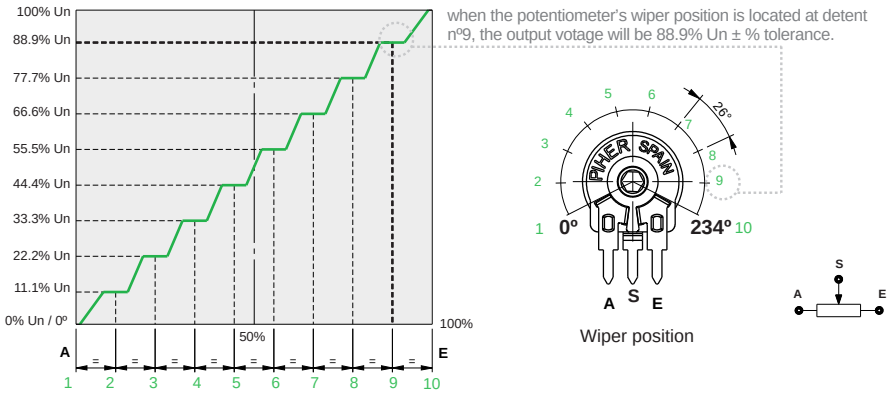



Improved repeatability

By combining the constant value zones with the detents, engineers can align the same voltage values with each of the detent stops when rotating the control both forward and backward.

This provides clear mechanical positions that are not only repeatable, but perfectly aligned electrical outputs at each of the (detent) angles.

Piher's detents also prevent output values from changing due to vibration or accidental rotor movements, furthering reliable control consistency.

Stepped outputs

PIHER's potentiometers can feature special stepped outputs or 'constant voltage zones' for the 10mm and 15mm product families.

These constant voltage zones can be combined with PIHER's mechanical detents to provide exact alignment between the electrical output (flat areas) and the mechanical detent position. The result is a higher level of precision in controlling lighting, temperature, motor or other electronic control systems.

In addition to established catalogue detent configurations, we will design and manufacture any other configuration on our tried-and-tested carbon/cermet & THM/SMD potentiometer technology and processes.

With its precise control capabilities, our 10mm and 15mm potentiometers series are well suited for many consumer applications such as lighting (dimmers), power hand tools, relays, timers and HVAC systems.

Design tip. Cost-effectiveness

Absolute encoders can easily be replaced connecting the potentiometer to the microprocessor's analogue input.

Main advantages

- ✓ Unique, non-overlapping values at each stop (detent position)
- ✓ It prevents changes in the output value due to light vibration or accidental rotor micro-movements
- ✓ Fully customisable according to customer´s needs
- ✓ Cost effective replacement for absolute encoders

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Shafts

For G and M rotor types, top view.

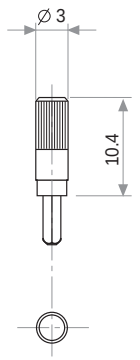

Fig. 1 / Ref. 5016

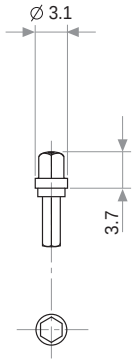

Fig. 2 / Ref. 5053

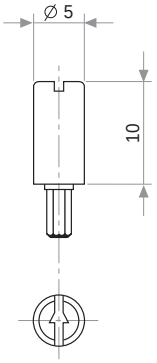

Fig. 3 / Ref. 5012

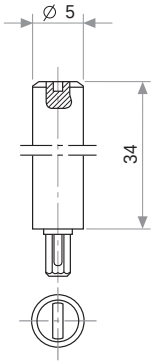

Fig. 4 / Ref. 6053

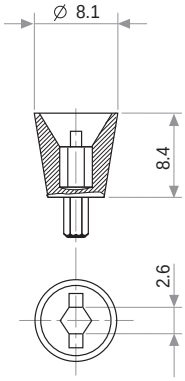

Fig. 6 / Ref. 5035

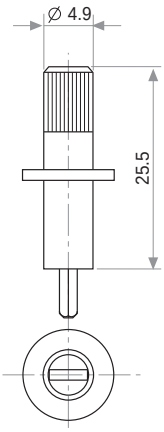

Fig. 7 / Ref. 5115

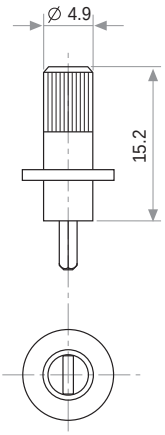

Fig. 8 / Ref. 5116

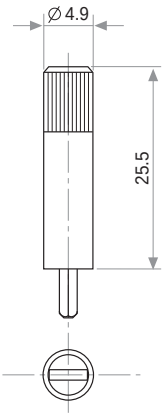

Fig. 9 / Ref. 5119

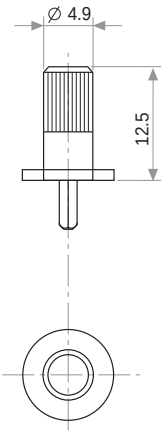

Fig. 10 / Ref. 5120

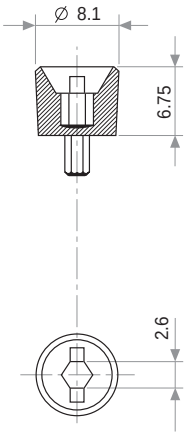

Fig. 11 / Ref. 5027

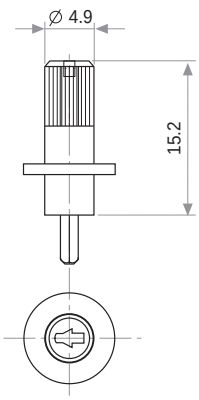

Fig. 12 / Ref. 6052



Fig. 13 / Ref. 5121



Fig. 14 / Ref. 5055

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Knobs/thumbwheels

For G and M rotor types, top view.

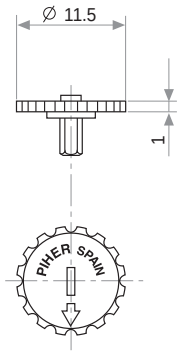

Fig. 5 / Ref. 5034

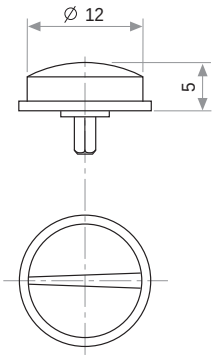

Fig. 15 / Ref. 6008



Fig. 16 / Ref. 5039



Fig. 17 / Ref. 5062

2- GANG Plastic Knob/ Plastic Shaft

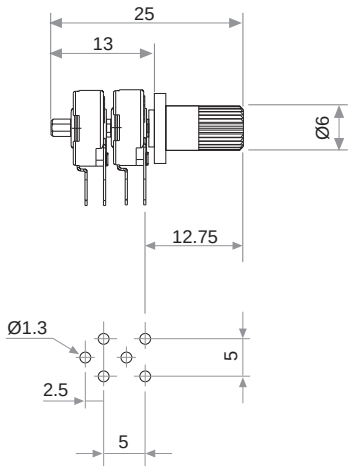

Fig. 18 / Ref. 6064

Numbered Thumbweel



Marking: configurable number of positions
Example of four positions marking pictured

For R rotor type only

Upon request.

By default, shafts, knobs & thumweels are delivered unassembled.

Mounted shafts, knobs & thumbweels can be delivered at specific positions (a drawing must be provided by the customer).

If you need the shaft or knob to be delivered assembled from the factory, please select the appropriate rotor in the part number: X, W, Y or Z.

The plastic color can be stated in the part number. Non flammable plastic can be ordered too.

If the potentiometer is ordered with non flamable plastic materials (UL 94V0) then the shaft or knob will be delivered with non flamable plastic too.

If you wish to use your own plastic shaft/knob/actuator, please, contact Piher for advice about compatible materials.

Positioning

Std. Position = CCW. Other delivery positions upon request.

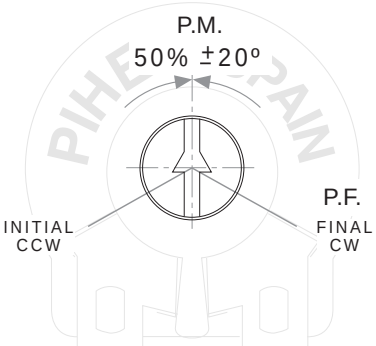

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Switch versions

They can be delivered with or withouth detents/stops.

D48 Switch code example

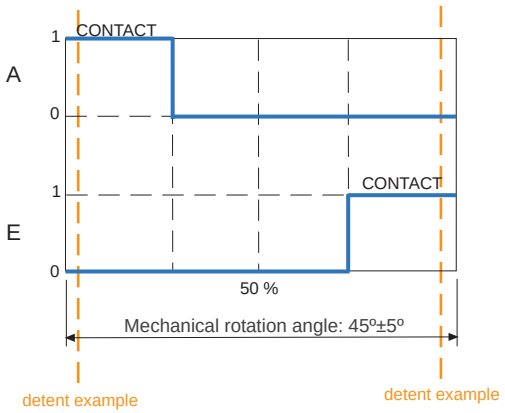

A80 Switch code

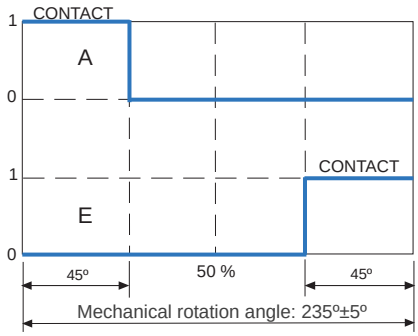

Switch standard specs.

Power Rating:
24V / 15mA
ON position resistance:
≤ 5 Ω
Insulation Resistance:
≥ 30 MΩ



(D48, rotor shown at final position)



Cut track (open circuit feature)

CCW on-off (A)



PCI
Cut track at the beginning of the travel.



PCF
Cut track at the end of the travel



CW on-off (E)

A = Initial S = Wiper E = Final. Other configurations available upon request.

Packaging

Default packaging is bulk (boxes).

Model	Units per box
Without shaft	1000 (80 x 85 x 185 mm.)
With thumbwheel	800 (80 x 85 x 185 mm.)
With shaft	400 (80 x 85 x 185 mm.)

Magazines for automatic insertion are available with 50pcs per magazine.

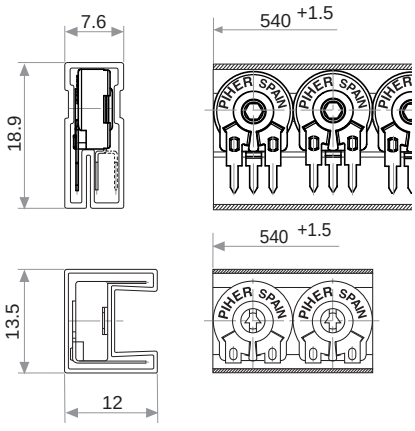

Magazines for PT10 H01 and H05
Also crimped term. H02

Magazines for PT10 V
Also crimped term. V11

Automotive / Appliance control - sensor

10 mm carbon potentiometer
PT10

Tests

		Typical variations
Electrical life	1000 h. @ 50ºC; 0.15 W	±5 %
Mechanical life (cycles)	1000 @ 10 CPM ...15 CPM	±3 % (Rn < 1 MΩ)
Temperature coefficient	–25ºC; +70ºC	±300 ppm (Rn <100 KΩ)
Thermal cycling	16 h. @ 85ºC; 2h. @ -25ºC	±2.5 %
Damp heat	500 h. @ 40ºC @ 95% HR	±5 %
Vibration (for each plane x,y,z)	2 h. @ 10 Hz. ... 55 Hz.	±2 %

Out of range values may not comply with these results.
For other tests or the full range of tests, please, contact us.

Disclaimer

The product information in this catalogue is for reference purposes. Please consult for the most up to date and accurate design information.

Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Piher”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.

Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher’s terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.

No licence, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorised Piher personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher International Corp. Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

Piher is an Amphenol™ company.

Online product configurator

Note: Piher products can be adapted to meet customer’s requirements.
Due to continuous process improvement, specifications are subject to change without notice.

rev150518

Recommended connections

Recommended connection scheme for Piher´s position sensors
(voltage divider)

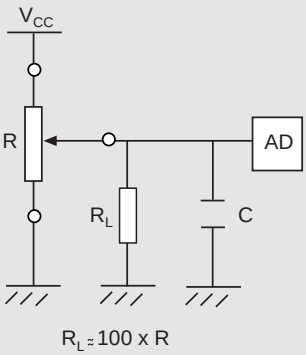

Power rating curve



For higher nominal power please visit our PTC-10 cermet potentiometer.

Contact

Piher Sensors & Controls SA
Polígono Industrial Municipal
Vial T2, 22,
31500 Tudela - Spain.
t. +34-948-820450
f. +34-948-824050

sales@piher.net

www.piher.net

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Piher:

PT10WH01-505A2020 01 CR PT10LH01-472A2020 PT10LV10-502A2020 PT10MH2.5-68KA PT10TH01-103A20205CM 5116 (CREAM) PT10YV10252A2020 PT10MH01-204A2020 PT10LV05-103A2020E PT10YV10502A2020 PT10MV10-503A2020 PT10MH01254A2020 PT10LH01-00039 PT10YV10-473A2020 PT10LH01-205A3030 PT10MH01-253A2020 PT10MH01-101A2020 PT10LH01-201A2020 PT10MV10-255A3030 PT10MV10-252A2020 PT10WH2.5-10K-A9 PT10MH01-202A2020 PT10MH01-205A3030 PT10LH01-474A2020 PT10LH01-255A3030 PT10LH01-252A2020 PT10MH01-102A2020 PT10MH01-505A3030 PT10MH01-105A2020 PT10MV10-204A2020 PT10LV20KC PT10MV10-104A2020 PT10LH01-204A2020 PT10MV10-251A2020 PT10MV10-201A2020 PT10XH01505A303001NE PT10LV 220A PT10LV10-251A2020 PT10LV10-201A2020 5116NEI (BLACK) PT10XV103A2020-9NE PT10MV10-501A2020 PT10YV11 254A2020 PT10LH01-223A2020 PT10LH01-254A2020 PT10WH01-253A2020-1CRPM PT10MH01-504A2020 PT10MH01-505A3050 JPEPL5012NE PT10MH01-223A2020 PT10MH01-203A2020 PT10MV10-101A2020 PT10MH01-501A2020 PT10LV10-00258-PT10LV10-502A2020 PT10LV10-473A2020 PT10MV10-103A2020 PT10YV11 253A2020 PT10LH01-00037-PT10LH01-503A2020 PT10MH01-201A2020 5115CR PT10MH01-251A2020 PT10WH01505A303001NE PT10WH01-504A2020-1CRPM PT10MH01205A3030 PT10WH01-505A3050 01 CR PT10LV10K PT10MV10-203A2020 PT10MV10-223A2020 PT10MV10-202A2020 PT10MV10-505A3030 PT10MV10-502A2020 PT10MV10-205A3030 PT10MH01-252A2020 PT10MH01-255A3030 PT10WH01-505A3030 01 CR PT10YV11 502A2020 PT10MH01-503A2020 PT10LH01-503A2020 PT10MV10-253A2020 PT10MV10-102A2020 PT10MV10-105A2020 PT10MH01-103A2020 5034CR PT10MV10-151A2020 PT10YV10-105A2020-5NE PT10YV10-105A2020-5CR PT10MV10-504A2020 PT10MV10-224A2020 PT10MV10-254A2020 PT10YV10103A2020 PT10LV05-202A2020E PT10MH01-151A2020 PT10LH01-251A2020 PT10YV10203A2020 PT10WH2.5-5KA-1 PT10MH01-224A2020 PT10LH01-103B2020 PT10LV10-225A3030 PT10V10-223A2020 PT10YV11 101A2020