


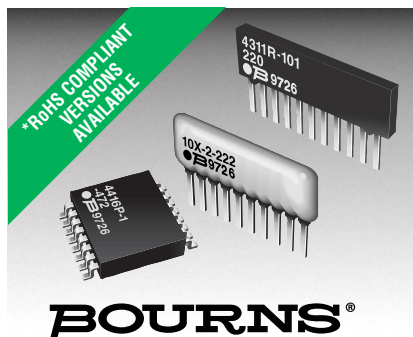

Features

- Resistance range: 100 ohms to 1 megohm
- SIP and DIP packages
- Surface mount and through-hole available
- RoHS compliant* (see How to Order "Termination" option)

For information on R/2R Thick Film Networks, download Bourns' R/2R Application Note.

R/2R Series Thick Film Networks

Product Characteristics

Resistance Range

Models 4100, 4300, 4400 & 4800

..... 100 ohms to 100K ohms

Model 4600...100 ohms to 1 megohm

Standard Tolerance $\pm 2\%$

See applicable model data sheet for complete list of product characteristics.

Environmental Characteristics

See applicable model data sheet for complete list of environmental characteristics.

Physical Characteristics

See applicable model data sheet for complete list of physical characteristics.

How To Order

4116R - R2R - 501

Model _____
(See "Available Models")

Electrical Configuration _____

R2R = Standard R/2R**

121 = Reversed R/2R***

Resistance Code (for value of R)

- First 2 digits are significant; third digit represents the number of zeros to follow.

- 2R is double the value of R in circuit.

Terminations

LF = Tin-coated (RoHS compliant version)
(Model 4416P is ONLY available in the RoHS compliant version.)

Blank = Tin/Lead

(Model 4416P is not available with tin/lead terminations.)


**Standard R2R Electrical Configuration not available for Model 4600H Series.

***Reversed R/2R Electrical Configuration not available for Model 4600H, 4600M or 4600X Series.

For Standard Values Used in Capacitors, Inductors, and Resistors, [click here](#).


Typical Part Marking

Represents total content. Layout may vary.






Resistor Schematic


R2R Circuit

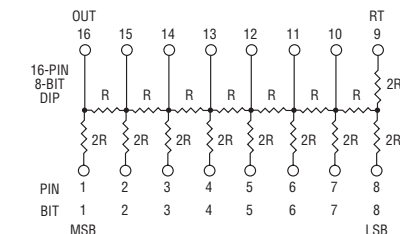

121 Circuit

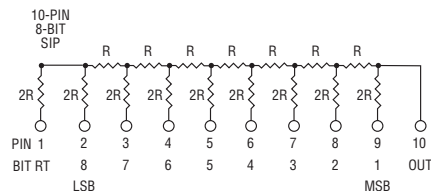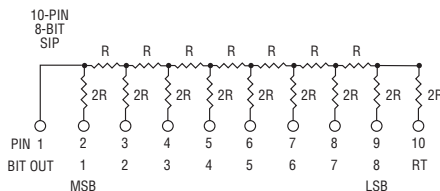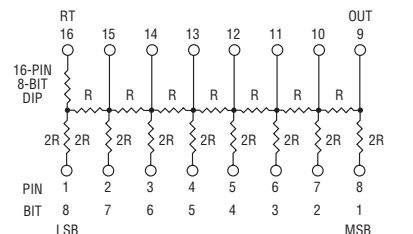

Power Derating Curve

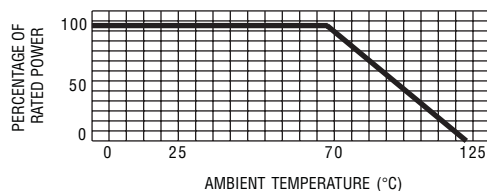

Power Rating per Resistor

Model

4100R, 4300R, 4400P, 4600X***, 4800P.....	0.125
4300M, 4600M***	0.170
4300H.....	0.200

Power per Resistor (Watts)

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex. Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.