
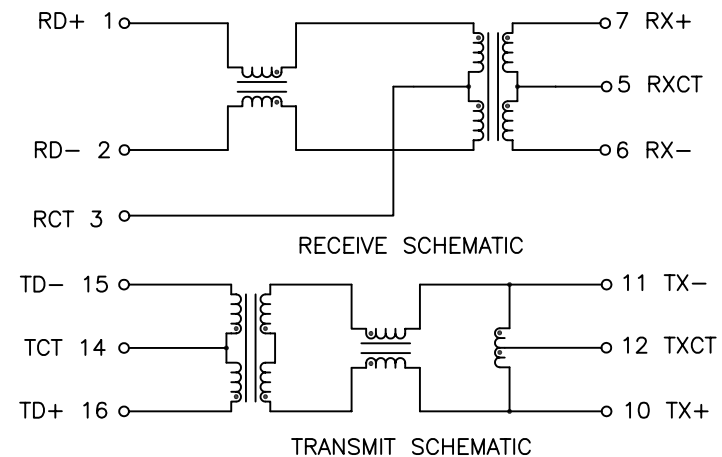


NOTES: UNLESS OTHERWISE SPECIFIED

- | | |
|---------|--|
| NOTICE: | THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER. |
| RoHS |  |
- PLASTIC: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- SOLDERABILITY: CONFORMS TO ANSI/J-STD-002, IPC/EIA J-STD-003A.
- OPERATING TEMPERATURE: 0°C TO +70°C
- STORAGE TEMPERATURE: -20°C TO +125°C
- JEDEC MOISTURE: LEVEL 1.
- DIMENSIONS ARE IN INCHES, TOLERANCES:
.XX = ± 0.01 .XXX = ± 0.005

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHERWISE SPECIFIED
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION.)

PARAMETER	SPECIFICATIONS			
OPERATING TEMP	0°C - 70°C			
URNS RATIO	1.00 $\pm$ 2%			
POLARITY	PER SCHEMATIC			
INSERTION LOSS	100 KHz	32-62 MHz	100 MHz	140 MHz
	-1.2 dB MAX	-1 dB MAX	-1.6 dB MAX	-3 dB MAX
RETURN LOSS (Z OUT = 100 OHM $\pm$ 15%)	1-30 MHz	40 MHz	50 MHz	60-80 MHz
	-16 dB MIN	-13.5 dB MIN	-11.5 dB MIN	-10 dB MIN
CROSSTALK, ADJACENT CHANNELS	32 MHz	62-100 MHz		
	-40 dB MIN	-38 dB MIN		
DIFFERENTIAL TO COMMON MODE REJECTION RATIO	32 MHz	62 MHz	100 MHz	200 MHz
	-42 dB MIN	-37 dB MIN	-33 dB MIN	-25 dB MIN
DC RESISTANCE 1/2 WINDING	.60 OHMS MAX			
DC RESISTANCE IMBALANCE	± 0.065 OHMS MAX (CENTER TAP SYMMETRY)			
INPUT - OUTPUT ISOLATION	1500 VRMS MIN @ 60 SECONDS			

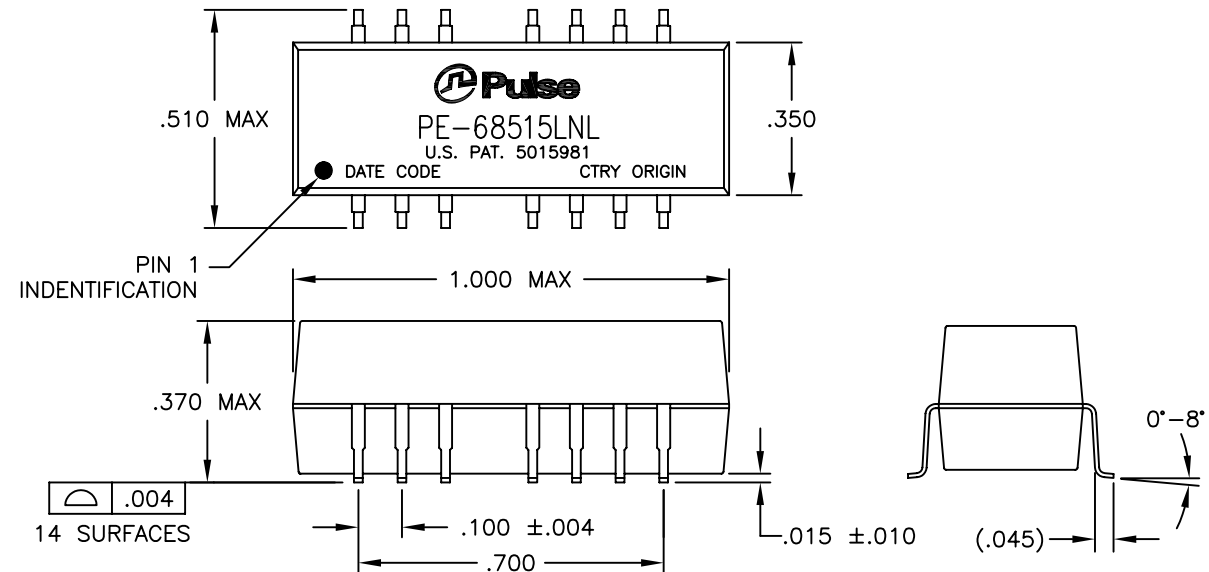

© Copyright, 2010. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (01/18/11)

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
	MDL,SIN,100D,1:1,SM,TU	-	1	PE-68515LNL	M11