


Energy Management Smart Modular Power Analyzer Type WM30 96

CARLO GAVAZZI

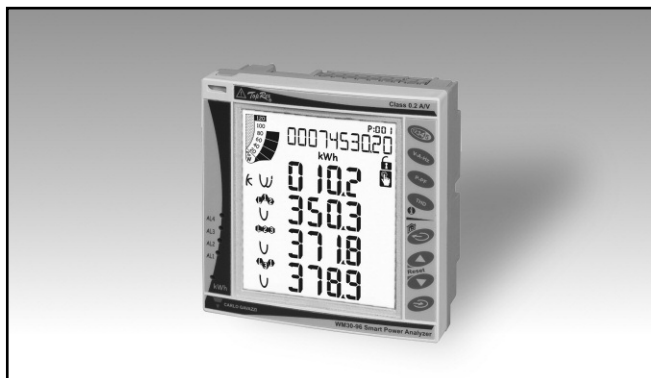

- Front protection degree: IP65, NEMA4X, NEMA12
- One RS232 or RS485 port (on request)
- Communication protocol: MODBUS-RTU, iFIX SCADA compatibility
- MODBUS TCP/IP Ethernet port (on request)
- BACNet-IP over Ethernet port (on request)
- Up to 2 digital outputs (pulse, alarm, remote control) (on request)
- Up to 4 freely configurable virtual alarms
- Up to 2 analogue outputs (+20mA, +10VDC) (on request)

- Class 0.5 (kWh) according to EN62053-22
- Class C (kWh) according to EN50470-3
- Class 2 (kvarh) according to EN62053-23
- Accuracy $\pm 0.2\%$ RDG (current/voltage)
- Instantaneous variables readout: 4x4 DGT
- Energies readout: 9+1 DGT
- System variables: VLL, VLN, A, VA, W, var, PF, Hz, Phase-sequence-asymmetry-loss.
- Single phase variables: VLL, VLN, AL, An (calculated), VA, W, var, PF
- Both system and single phase variables with average and max calculation
- Harmonic analysis (FFT) up to the 32nd harmonic (current and voltage)
- Energy measurements (imported/exported): total and partial kWh and kvarh
- Energy measurements according to ANSI C12.20 CA 0.5, ANSI C12.1 (revenue grade)
- Run hours counter (8+2 DGT)
- Real time clock function
- Application adaptable display and programming procedure (Easyprog function)
- Universal power supply: 18 to 60VAC/DC, 90 to 260AC/VDC
- Front dimensions: 96x96 mm

Product Description

Three-phase smart power analyzer with built-in advanced configuration system and LCD data displaying. Particularly recommended for the measurement of the main electrical variables. WM30 is based on a modular housing for panel mounting with IP65 (front) protection degree. Moreover, the analyzer can

be provided with digital outputs that can be either for pulse proportional to the active and reactive energy being measured or/and for alarm outputs. The instrument can be equipped with the following modules: RS485/RS232, Ethernet, BACNet-IP communication ports, pulse and alarm outputs.

How to order

WM30-96 AV5 3 H R2 A2 S1 XX

Model	
Range code	
System	
Power Supply	
A Outputs	
B Outputs	
Communication	
Option	

Type Selection

Range codes	System	Power supply	A Outputs
AV4: 400/690V _{LL} AC 1(2)A (**) V _{LN} : 160V to 480V _{LN} V _{LL} : 277V to 830V _{LL}	3: balanced and unbalanced load: 3-phase, 4-wire; 3-phase, 3-wire; 2-phase, 3-wire; 1-phase, 2-wire (*)	H: 90 to 260V AC/DC (48 to 62Hz) (*) L: 18 to 60VAC/DC (48 to 62Hz) (**)	XX: none (*) O2: Dual channel static output (*) R2: Dual channel relay output (*)
AV5: 400/690V _{LL} AC 5(6)A (*) V _{LN} : 160V to 480V _{LN} V _{LL} : 277V to 830V _{LL}			
AV6: 100/208V _{LL} AC 5(6)A (**) V _{LN} : 40V to 144V _{LN} V _{LL} : 70V to 250V _{LL}	Options	Communication	B Outputs
AV7: 100/208V _{LL} AC 1(2)A (**) V _{LN} : 40V to 144V _{LN} V _{LL} : 70V to 250V _{LL}	XX: none	XX: none (*) S1: RS485/RS232 port (*) E2: Ethernet / Internet port (**) BI: BACNet (IP) over Ethernet (**)	XX: none (*) A2: Dual channel 20mA DC output (*) V2: Dual channel 10V DC output (*)

(*) as standard.

(**) on request.

Position of modules and combination

Ref	Description	Main features	Part number	Pos. A	Pos. B	Pos. C
1	WM30 base provided with display, power supply, measuring inputs	- Inputs/system: AV5.3 - Power supply: H	WM30 AV5 3 H			
2		- Inputs/system: AV6.3 - Power supply: H	WM30 AV6 3 H			
3		- Inputs/system: AV5.3 - Power supply: L	WM30 AV5 3 L			
4		- Inputs/system: AV6.3 - Power supply: L	WM30 AV6 3 L			
5	Dual relay output (SPDT)	2-channel - Alarm or/and pulse output	M O R2 (1)	X		
6	Dual static output (AC/DC Opto-Mos)	2-channel - Alarm or/and pulse output	M O O2 (1)	X		
7	Dual analogue output (+20mADC)	2-channel	M O A2 (2)		X	
8	Dual analogue output (+10VDC)	2-channel	M O V2 (2)		X	
9	RS485 / RS232 port module	Max. 115.2 Kbps	M C 485 232 (3)			X
10	Ethernet port module	RJ45 10/100 BaseT	M C ETH (3)			X
11	BACNet-IP port module	Based on Ethernet bus	M C BACnet-IP (3)			X

NOTE:

(1) Only one A type module per meter in a maximum combination of 3 total mixed modules on the same meter.


(2) Only one B type module per meter in a maximum combination of 3 total mixed modules on the same meter.

(3) Only one C type module per meter in a maximum combination of 3 total mixed modules on the same meter.

The B-C position is not mandatory, if to fulfil the application, module "A" is not necessary, then maybe just "B" can be mounted.

Another example: if modules "A" and "B" (anyone) are not needed, then just module "C" maybe be mounted. If "A" module is needed, it is mandatory to put it in "A" position.

When no modules are mounted, then WM30-96 becomes a simple indicator.

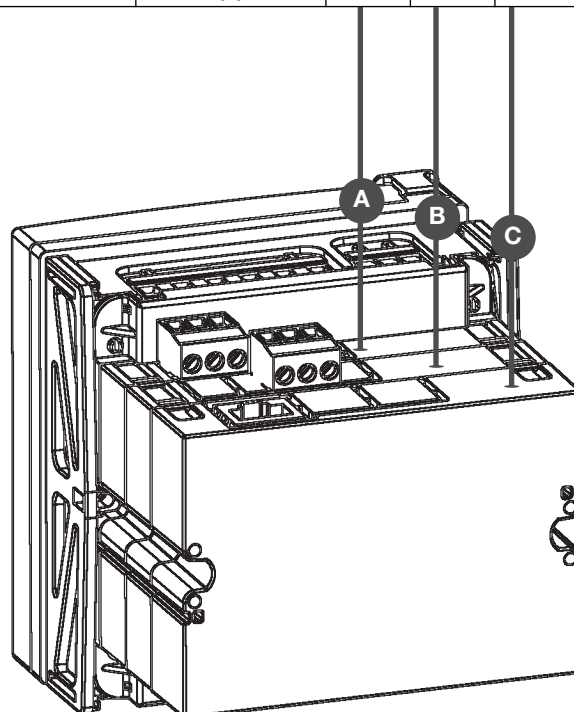

Input specifications

Rated inputs	System type: 1, 2 or 3-phase Galvanic insulation by means of built-in CT's AV5 and AV6: 5(6)A AV4 and AV7: 1(2)A	Energy additional errors	According to EN62053-22, ANSI C12.20, Class B or C according to EN50470-3, EN62053-23, ANSI C12.1
Current type		Influence quantities	
Current range (by CT)		Total Harmonic Distortion (THD)	±1% FS (FS: 100%) AV4: Imin: 5mARMS; Imax: 15Ap; Umin: 30VRMS; Umax: 585Vp AV5: Imin: 5mARMS; Imax: 15Ap; Umin: 30VRMS; Umax: 585Vp AV6: Imin: 5mARMS; Imax: 15Ap; Umin: 30VRMS; Umax: 585Vp AV7: Imin: 5mARMS; Imax: 15Ap; Umin: 30VRMS; Umax: 585Vp
Voltage (by direct connection or VT/PT)	AV4, AV5: 400/690VLL; AV6, AV7: 100/208VLL	Temperature drift	≤200ppm/°C
Accuracy (Display + RS485) (@25°C ±5°C, R.H. ≤60%, 48 to 62 Hz)	In: see below, Un: see below	Sampling rate	3200 samples/s @ 50Hz, 3840 samples/s @ 60Hz
AV4 model	In: 1A, Imax: 2A; Un: 160 to 480VLN (277 to 830VLL)	Measurements	See "List of the variables that can be connected to:"
AV5 model	In: 5A, Imax: 6A; Un: 160 to 480VLN (277 to 830VLL)	Method	TRMS measurements of distorted wave forms.
AV6 model	In: 5A, Imax: 6A; Un: 40 to 144VLN (70 to 250VLL)	Coupling type	By means of CT's
AV7 model	In: 1A, Imax: 2A; Un: 40 to 144VLN (70 to 250VLL)	Crest factor	AV5, AV6: ≤3 (15A max. peak) AV4, AV7: ≤3 (3A max. peak)
Current AV4, AV5, AV6, AV7 models	From 0.01In to 0.05In: ±(0.5% RDG +2DGT) From 0.05In to Imax: ±(0.2% RDG +2DGT) In the range Un: ±(0,2% RDG +1DGT) In the range Un: ±(0.5% RDG +1DGT)	Current Overloads	Continuous (AV5 and AV6) 6A, @ 50Hz Continuous (AV4 and AV7) 2A, @ 50Hz For 500ms (AV5 and AV6) 120A, @ 50Hz For 500ms (AV4 and AV7) 40A, @ 50Hz
Phase-neutral voltage	±0.1Hz (45 to 65Hz) 0.01In to 0.05In, PF 1: ±(1%RDG+1DGT) From 0.05In to Imax PF 0.5L, PF1, PF0.8C: ±(0.5%RDG+1DGT)	Voltage Overloads	Continuous 1.2 Un For 500ms 2 Un
Phase-phase voltage	±[0.001+0.5% (1.000 - "PF RDG")]	Input impedance	400VL-L (AV4 and AV5) > 1.6MΩ 208VL-L (AV6 and AV7) > 1.6MΩ 5(10)A (AV5 and AV6) < 0.2VA 1(2)A (AV4 and AV7) < 0.2VA
Frequency	0.1In to Imax, senφ 0.5L/C: ±(1%RDG+1DGT) 0.05In to 0.1In, senφ 0.5L/C: ±(1.5%RDG+1DGT) 0.05In to Imax, senφ 1: ±(1%RDG+1DGT) 0.02In to 0.05In, senφ 1: ±(1.5%RDG+1DGT)	Frequency	40 to 440 Hz
Active and Apparent power	Class 0.5 according to EN62053-22, ANSI C12.20 Class C according to EN50470-3.		
Power Factor	Class 1 according to EN62053-23, ANSI C12.1.		
Reactive power	5mA 1mA		
Active energy			
Reactive energy			
Start up current AV5, AV6			
Start up current AV4, AV7			

Output specifications

Relay outputs (M O R2)		Min. response time	≤200ms, filters excluded. Set-point on-time delay: “0 s”.
Physical outputs	2 (max. one module per instrument)	Pulse	Total: +kWh, -kWh, +kvarh, -kvarh. Partial: +kWh, -kWh, +kvarh, -kvarh. The above listed variables can be connected to any output. Programmable from 0.001 to 10.00 kWh/kvarh per pulse. ≥100ms < 120msec (ON), ≥120ms (OFF), according to EN62052-31 The activation of the outputs is managed through the serial communication port See “Insulation between inputs and outputs” table
Purpose	For either alarm output or pulse output	Signal retransmission	
Type	Relay, SPDT type AC 1-5A @ 250VAC; AC 15-1.5A @ 250VAC DC 12-5A @ 24VDC; DC 13-1.5A @ 24VDC	Pulse type	
Configuration	By means of the front key-pad	Pulse duration	
Function	The outputs can work as alarm outputs but also as pulse outputs, remote controlled outputs, or in any other combination.	Remote controlled outputs	
Alarms	Up alarm and down alarm linked to the virtual alarms, other details see Virtual alarms		
Min. response time	≤200ms, filters excluded. Set-point on-time delay: “0 s”.	Insulation	
20mA analogue outputs (M O A2)			
Pulse		Number of outputs	2 (max. one module per instrument)
Signal retransmission	Total: +kWh, -kWh, +kvarh, -kvarh. Partial: +kWh, -kWh, +kvarh, -kvarh. The above listed variables can be connected to any output.	Accuracy (@ 25°C ±5°C, R.H. ≤60%) Range Configuration	±0.2%FS 0 to 20mA By means of the front key-pad
Pulse type	Programmable from 0.001 to 10.00 kWh/kvarh per pulse. ≥100ms <120msec (ON), ≥120ms (OFF), according to EN62052-31	Signal retransmission	The signal output can be connected to any instantaneous variable available in the table “List of the variables that can be connected to”.
Pulse duration			Programmable within the whole range of retransmission; it allows the retransmission management of all values from 0 to 20 mADC.
Remote controlled outputs	The activation of the outputs is managed through the serial communication port See “Insulation between inputs and outputs” table	Scaling factor	≤400 ms typical (filter excluded) ≤1% (according to IEC 60688-1, EN 60688-1) ≤500 ppm/°C ≤600Ω See “Insulation between inputs and outputs” table
Insulation			
Static outputs (M O O2)		Response time	
Physical outputs	Opto-Mos type 2 (max. one module per instrument)	Ripple	
Purpose	For either pulse output or alarm output	Total temperature drift	
Signal	V _{ON} :2.5VAC/DC/max.100mA V _{OFF} : 260VAC/DC max.	Load	
Configuration	By means of the front key-pad	Insulation	
Function	The outputs can work as alarm outputs but also as pulse outputs, remote controlled outputs, or in any other combination.	10VDC analogue outputs (M O V2)	
Alarms	Up alarm and down alarm linked to the virtual alarms, other details see Virtual alarms	Number of outputs	2 (max. one module per instrument)
		Accuracy (@ 25°C ±5°C, R.H. ≤60%) Range Configuration	±0.2%FS 0 to 10 VDC By means of the front key-pad

Output specifications (cont.)

Signal retransmission	The signal output can be connected to any instantaneous variable available in the table "List of the variables that can be connected to".	Connections	3 wires. Max. distance 15m
Scaling factor	Programmable within the whole range of retransmission; it allows the retransmission management of all values from 0 to 10VDC.	Protocol	MODBUS RTU / JBUS
Response time	≤400 ms typical (filter excluded)	Data (bidirectional)	System and phase variables: see table "List of variables..."
Ripple	≤1% (according to IEC 60688-1, EN 60688-1)	Dynamic (reading only)	All the configuration parameters
Total temperature drift	≤500 ppm/°C	Static (reading and writing only)	1 start bit, 8 data bit, no/even/odd parity, 1 stop bit
Load	≥10kΩ	Data format	Selectable: 9.6k, 19.2k, 38.4k, 115.2k bit/s
Insulation	See "Insulation between inputs and outputs" table	Baud-rate	With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed.
RS485/RS422 port (on request)		Note	See "Insulation between inputs and outputs" table
Type	Multidrop, bidirectional (static and dynamic variables)		
Connections	2-wire Max. distance 1000m, termination directly on the module	Insulation	See "Insulation between inputs and outputs" table
Addresses	247, selectable by means of the front key-pad	Ethernet/Internet port (on request)	
Protocol	MODBUS/JBUS (RTU)	Protocols	Modbus TCP/IP
Data (bidirectional)		IP configuration	Static IP / Netmask / Default gateway
Dynamic (reading only)	System and phase variables: see table "List of variables..."	Port	Selectable (default 502)
Static (reading and writing only)	All the configuration parameters.	Client connections	Max 5 simultaneously
Data format	1 start bit, 8 data bit, no/even/odd parity, 1 stop bit	Connections	RJ45 10/100 BaseTX
Baud-rate	Selectable: 9.6k, 19.2k, 38.4k, 115.2k bit/s	Data (bidirectional)	Max. distance 100m
Driver input capability	1/5 unit load. Maximum 160 transceivers on the same bus.	Dynamic (reading only)	System and phase variables: see table "List of variables..."
Note	With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed.	Static (reading and writing only)	All the configuration parameters.
Insulation	See "Insulation between inputs and outputs" table	Note	With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed.
RS232 port (on request)		Insulation	See "Insulation between inputs and outputs" table
Type	Bidirectional (static and dynamic variables)	BACnet-IP (on request)	
		Protocols	BACnet-IP (for measurement reading purpose) and Modbus TCP/IP (for measurement

Output specifications (cont.)

	reading purpose and for programming parameter purpose)	Static (reading and writing only)	All the configuration parameters (Modbus only). With the rotary switch (on the back of the basic unit) in lock position the modification of the programming parameters and the reset command by means of the serial communication is not allowed anymore. In this case just the data reading is allowed. See “Insulation between inputs and outputs” table
IP configuration	Static IP / Netmask / Default gateway	Note	
BACnet-IP Port	Fixed: BAC0h		
Modbus Port	Selectable (default 502)		
Client connections	Modbus only: max 5 simultaneously		
Connections	RJ45 10/100 BaseTX Max. distance 100m		
Data			
Dynamic (reading only)	System and phase variables (BACnet-IP and Modbus): see table “List of variables...”	Insulation	

Energy meters

Meters		Energy Meters	
Total	4 (9+1 digit)	Total energy meters	+kWh, +kvarh, -kWh, -kvarh
Partial	4 (9+1 digit)	Partial energy meters	+kWh, +kvarh, -kWh, -kvarh
Pulse output	Connectable to total and/or partial meters		
Energy meter recording	Storage of total and partial energy meters. Energy meter storage format (EEPROM) Min. -9,999,999,999.9 kWh/kvarh Max. 9,999,999,999.9 kWh/kvarh.		

Harmonic distortion analysis

Analysis principle	FFT	System	The harmonic distortion can be measured in 3-wire or 4-wire systems. Tw: 0.02 sec@50Hz without filter
Harmonic measurement			
Current	Up to the 32nd harmonic		
Voltage	Up to the 32nd harmonic		
Type of harmonics	THD (VL1 and VL1-N) The same for the other phases: L2, L3. THD (AL1) The same for the other phases: L2, L3.		

Display, LED's and commands

Display refresh time	≤ 100 ms	Energy consumption kWh pulsating	Red LED (only kWh) 0.001 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≤7 0.01 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥7.1 ≤70.0 0.1 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥70.1 ≤700.0 1 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥700.1 ≤7000 10 kWh/kvarh by pulse if the Ct ratio by VT ratio is ≥7001 ≤70.00k 100 kWh/kvarh by pulse if the Ct ratio by VT ratio is >70.01k Max frequency: 16Hz, according to EN50470-1
Display	4 lines, 4-DGT, 1 lines, 10-DGT		
Type	LCD, single colour backlight	Back position LEDs On the base On the communication modules	Green as power-on Two LEDs: one for TX (green) and one for RX (amber).
Digit dimensions	4-DGT: h 9.5mm; 10-DGT: h 6.0mm		
Instantaneous variables read-out	4-DGT		
Energies variables read-out	Imported Total/Partial: 9+1DGT or 10DGT; Exported Total/Partial: 9+1DGT or 10DGT (with “-” sign).		
Run Hours counter	8+2 DGT (99.999.999 hours and 59 minutes max)	Key-pad	For variable selection, programming of the instrument working parameters, “dmd”, “max”, total energy and partial energy Reset
Overload status	EEEE indication when the value being measured is exceeding the “Continuous inputs overload” (maximum measurement capacity)		
Max. and Min. indication	Max. instantaneous variables: 9999; energies: 9 999 999 99.9 or 9 999 999 999. Min. instantaneous variables: 0.000; energies 0.0		
Front position LEDs Virtual alarms	4 red LED available in case of virtual alarm (AL1-AL2-AL3-AL4). Note: the real alarm is just the activation of the proper static or relay output if the proper module is available.		

Main functions

Password	Numeric code of max. 4 digits; 2 protection levels of the programming data:	System 3-Ph.2 balanced load	measurements 3-phase (4-wire), one current and 3-phase to neutral voltage measurements.
1st level	Password “0”, no protection;		
2nd level	Password from 1 to 9999, all data are protected		
System selection			
System 3-Ph.n unbalanced load	3-phase (4-wire)	System 2-Ph	3-phase (2-wire), one current and 1-phase (L1) to neutral voltage measurement.
System 3-Ph. unbalanced load	3-phase (3-wire), three currents and 3-phase to phase voltage measurements, or in case of Aaron connection two currents (with special wiring on screw terminals) and 3-phase to phase voltage measurements.		
		System 1-Ph	2-phase (3-wire) 1-phase (2-wire)
		Transformer ratio	
		VT (PT)	1.0 to 999.9 / 1000 to 9999.
		CT	1.0 to 999.9 / 1000 to 9999 (up to 10kA in case of CT with 1A secondary current and up to 50kA in case of CT with 5A secondary current).
System 3-Ph.1 balanced load	3-phase (3-wire), one current and 3-phase to phase voltage		

Main functions (cont.)

Filter Operating range Filtering coefficient Filter action	Selectable from 0 to 100% of the input display scale Selectable from 1 to 32 Measurements, analogue signal retransmission, serial communication (fundamental variables: V, A, W and their derived ones).	On-time delay Min. response time	0 to 9999s $\leq 200\text{ms}$, filters excluded. Set-point on-time delay: "0 s".
		Reset	By means of the front keypad. It is possible to reset the following data: - all the max and dmd values. - total energies: kWh, kvarh; - partial energies: kWh, kvarh
Displaying Number of variables	Up to 5 variables per page. See "Front view". 7 different set of variables available (see "Display pages") according to the application being selected. One page is freely programmable as combination of variables.	Harmonic analysis	Up to the 32 nd harmonics on current and voltage
Backlight	The backlight time is programmable from 0 (always on) to 255 minutes	Clock Functions Time format	Universal clock and calendar. Hour: minutes: seconds with selectable 24 hours or AM/PM format.
Virtual alarms Working condition	In case of basic unit or with the addition of M O R2 or M O O2 digital output modules.	Date format	Day-month-year with selectable DD-MM-YY or MM-DD-YY format.
No. of alarms Working mode Controlled variables	Up to 4 Up alarm and down alarm. The alarms can be connected to any instantaneous variable available in the table "List of the variables that can be connected to".	Battery life	10 years
Set-point adjustment	From 0 to 100% of the display scale	Easy connection function	For all the display selections, both energy and power measurements are independent from the current direction. The displayed energy is always "imported" with the only exception of "D", "F" and "G" types (see "display pages" table). For those latter selections the energies can be either "imported" or "exported" depending on the current direction.
Hysteresis	From 0 to full scale		

General specifications

Operating temperature	-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	Dielectric strength	4kVAC RMS for 1 minute
Storage temperature	-30°C to +70°C (-22°F to 158°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23	Noise rejection CMRR	100 dB, 48 to 62 Hz
Installation category	Cat. III (IEC60664, EN60664)	EMC Electrostatic discharges Immunity to irradiated	According to EN62052-11 15kV air discharge Test with current: 10V/m from 80 to 2000MHz
Insulation (for 1 minute)	See "Insulation between inputs and outputs" table	Electromagnetic fields Burst	Test without any current: 30V/m from 80 to 2000MHz On current and voltage measuring inputs circuit: 4kV
		Immunity to conducted disturbances	10V/m from 150KHz to 80MHz On current and voltage measuring inputs circuit: 4kV; on "L" auxiliary power
		Surge	

General specifications (cont.)

Radio frequency suppression	supply input: 1kV According to CISPR 22	Housing DIN Dimensions (WxHxD)	Module holder: 96x96x50mm. "A" and "B" type modules: 89.5x63x16mm. "C" type module: 89.5x63x20mm. With 3 modules (A+B+C): 81.7 mm ABS, self-extinguishing: UL 94 V-0 Panel mounting
Standard compliance			
Safety	IEC60664, IEC61010-1 EN60664, EN61010-1 EN62052-11. EN62053-21, EN62053-23, EN50470-3. MID "annex MI-003" DIN43864, IEC62053-31	Max. depth behind the panel	
Metrology		Material	
Pulse output		Mounting	
Approvals	CE, cULus "Listed"	Protection degree Front Screw terminals	IP65, NEMA4x, NEM12 IP20
Connections	Screw-type max. 2.5 mm ² . min./max. screws tightening torque: 0.4 Nm / 0.8 Nm. Suggested screws tightening torque: 0.5 Nm	Weight	Approx. 400 g (packing included)
Cable cross-section area			

Power supply specifications

Auxiliary power supply	H: 90 to 260VAC/DC; L: 18 to 60VAC/DC (48 to 62Hz)	Power consumption	AC: 6 VA; DC: 3.5 W
------------------------	--	-------------------	------------------------

Insulation between inputs and outputs

	Measuring Inputs	Relay outputs	Static Outputs	Communication port	Analogue Outputs	Auxiliary power supply
Measuring Inputs	-	4kV	4kV	4kV	4kV	4kV
Relay outputs	4kV	2kV	NA	4kV	4kV	4kV
Static Outputs	4kV	NA	2kV	4kV	4kV	4kV
Communication port	4kV	4kV	4kV	-	4kV	4kV
Analogue Outputs	4kV	4kV	4kV	4kV	0kV	4kV
Aux. power supply	4kV	4kV	4kV	4kV	4kV	-

NOTE: in the table "NA" means combination of modules not allowed.

NOTE: all the models have, mandatory, to be connected to external current transformers because the isolation among the current inputs is just functional (100VAC).

List of the variables that can be connected to:

- Communication port (all listed variables)
- Analogue outputs (all variables with the only exclusion of “energies” and “run hour counter”)
- Pulse outputs (only “energies”)
- Alarm outputs (“energies”, “hour counter” and “max” excluded)

No	Variable	1-ph. sys	2-ph. sys	3-ph. 3/4-wire balanced sys	3-ph. 2-wire balanced sys	3-ph. 3-wire unbal. sys	3-ph. 4-wire unbal. sys	Notes
1	VL-N sys	O	X	X	X	#	X	sys= system= Σ (1)
2	VL1	X	X	X	X	#	X	(1)
3	VL2	O	X	X	X	#	X	(1)
4	VL3	O	O	X	X	#	X	(1)
5	VL-L sys	O	X	X	X	X	X	sys= system= Σ (1)
6	VL1-2	#	X	X	X	X	X	(1)
7	VL2-3	#	O	X	X	X	X	(1)
8	VL3-1	#	O	X	X	X	X	(1)
9	AL1	X	X	X	X	X	X	(1)
10	AL2	O	X	X	X	X	X	(1)
11	AL3	O	O	X	X	X	X	(1)
12	VA sys	X	X	X	X	#	X	sys= system= Σ (1)
13	VA L1	X	X	X	X	#	X	(1)
14	VA L2	O	X	X	X	#	X	(1)
15	VA L3	O	O	X	X	#	X	(1)
16	var sys	X	X	X	X	#	X	sys= system= Σ (1)
17	var L1	X	X	X	X	#	X	(1)
18	var L2	O	X	X	X	#	X	(1)
19	var L3	O	O	X	X	#	X	(1)
20	W sys	X	X	X	X	X	X	sys= system= Σ (1)
21	WL1	X	X	X	X	#	X	(1)
22	WL2	O	X	X	X	#	X	(1)
23	WL3	O	O	X	X	#	X	(1)
24	PF sys	X	X	X	X	#	X	sys= system= Σ (1)
25	PF L1	X	X	X	X	#	X	(1)
26	PF L2	O	X	X	X	#	X	(1)
27	PF L3	O	O	X	X	#	X	(1)
28	Hz	X	X	X	X	X	X	(1)
29	Phase seq.	O	X	X	X	X	X	
30	Asy VLL	O	O	X	X	X	X	Asymmetry
31	Asy VLN	O	O	X	X	O	X	Asymmetry
32	Run Hours	X	X	X	X	X	X	
33	kWh (+)	X	X	X	X	X	X	Total
34	kvarh (+)	X	X	X	X	#	X	Total
35	kWh (+)	X	X	X	X	X	X	Partial
36	kvarh (+)	X	X	X	X	#	X	Partial
37	kWh (-)	X	X	X	X	X	X	Total
38	kvarh (-)	X	X	X	X	#	X	Total
39	kWh (-)	X	X	X	X	X	X	Partial
40	kvarh (-)	X	X	X	X	#	X	Partial
41	A L1 THD	X	X	X	X	X	X	(1)
42	A L2 THD	O	X	X	X	X	X	(1)
43	A L3 THD	O	O	X	X	X	X	(1)
44	V L1 THD	X	X	X	X	O	X	(1)
45	V L2 THD	O	X	X	X	O	X	(1)
46	V L3 THD	O	O	X	X	O	X	(1)
47	V L1-2 THD	X	X	X	X	X	X	(1)
48	V L2-3 THD	O	X	X	X	X	X	(1)
49	V L3-1 THD	O	O	X	X	X	X	(1)

(X) = available; (O) = not available (variable not available on the display); (#) Not available (the relevant page is not displayed) (1) Max. value with data storage

List of selectable applications

	Description	Notes
A	Cost allocation	Imported energy metering
B	Cost control	Imported and partial energy metering
C	Complex cost allocation	Imported/exported energy (total and partial)
D	Solar	Imported and exported energy metering with some basic power analyzer function
E	Complex cost and power analysis	Imported/exported energy (total and partial) and power analysis
F	Cost and power quality analysis	Imported energy and power quality analysis
G	Advanced energy and power analysis for power generation	Complete energy metering and power quality analysis

Display pages

Var Type	No	Line 1	Line 2	Line 3	Line 4	Line 5	Note	Applications						
		Variable Type	Variable Type	Variable Type	Variable Type	Variable Type		A	B	C	D	E	F	G
	0	Total kW (+)	Programmable					x	x	x	x	x	x	x
a	1	Total kW (+)	b, c, d	b, c, d	b, c, d	b, c, d		x	x	x	x	x	x	x
a	2	Total kvarh (+)	b, c, d	b, c, d	b, c, d	b, c, d		x	x	x	x	x	x	x
a	3	Total kWh (-)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x		x
a	4	Total kvarh (-)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x		x
a	5	kWh (+) partial	b, c, d	b, c, d	b, c, d	b, c, d			x	x		x	x	x
a	6	kvarh (+) part.	b, c, d	b, c, d	b, c, d	b, c, d			x	x		x	x	x
a	7	kWh (-) partial	b, c, d	b, c, d	b, c, d	b, c, d				x		x		x
a	8	kvarh (-) part.	b, c, d	b, c, d	b, c, d	b, c, d				x		x		x
a	9	Run Hours (99999999.99)	b, c, d	b, c, d	b, c, d	b, c, d				x	x	x	x	x
b	10	a/Phase seq.	VLN Σ	VL1	VL2	VL3	(1) (2)				x	x	x	x
b	11	a/Phase seq.	VLN Σ	VL1-2	VL2-3	VL3-1	(1) (2)				x	x	x	x
b	12	a/Phase seq.	An	AL1	AL2	AL3	(1) (2)				x	x	x	x
b	13	a/Phase seq.	Hz	"ASY"	VLL sys (% asy)	VLL sys (% asy)	(1) (2)				x	x	x	x
c	14	a/Phase seq.	W Σ	WL1	WL2	WL3	(1) (2)				x	x	x	x
c	15	a/Phase seq.	var Σ	var L1	var L2	var L3	(1) (2)					x	x	x
c	16	a/Phase seq.	PF Σ	PF L1	PF L2	PF L3	(1) (2)					x	x	x
c	17	a/Phase seq.	VA Σ	VA L1	VA L2	VA L3	(1) (2)					x	x	x
d	18	a/Phase seq.		THD V1	THD V2	THD V3	(1) (2)						x	x
d	19	a/Phase seq.		THD V12	THD V23	THD V31	(1) (2)						x	x
d	20	a/Phase seq.		THD A1	THD A2	THD A3	(1) (2)						x	x


(1) Also maximum value storage.

(2) Also average (dmd) value storage.

Additional available information on the display


No	Line 1	Line 2	Line 3	Line 4	Line 5	Note	Applications						
							A	B	C	D	E	F	G
1	Lot n. (text) xxxx	Yr. (text) xx	SYS (text)	x (1/2/3)	1...60 (min) "dmd"		x	x	x	x	x	x	x
2	Conn. xxx.x (3ph.n/3ph/3ph./ 3ph.2/1ph/2ph)	CT.rA (text)	1.0 ... 99.99k	PT.rA (text)	1.0...9999		x	x	x	x	x	x	x
3	LED PULSE (text) kWh	xxxx kWh per pulse					x	x	x	x	x	x	x
4	PULSE out1 (text) kWh/kvarh	xxxx kWh/kvarh per pulse	+/- tot/PAr				x	x	x	x	x	x	x
5	PULSE out2 (text) kWh/kvarh	xxxx kWh/kvarh per pulse	+/- tot/PAr				x	x	x	x	x	x	x
6	Remote out	out1 (text)	on/oFF	Out2 (text)	on/oFF		x	x	x	x	x	x	x
7	Alarm 1 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
8	Alarm 2 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
9	Alarm 3 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
10	Alarm 4 nE/nd	None / out 1 / out 2	Set 1	Set 2	(measurement)					x	x	x	x
11	Analogue 1	Hi:E	0.0 ... 9999	Hi.A	0.0 ... 100.0%					x	x	x	x
12	Analogue 2	Hi:E	0.0 ... 9999	Hi.A	0.0 ... 100.0%					x	x	x	x
13	COM port	None / out 1 / out 2	xxx (address)	bdr (text)	9.6/19.2/ 38.4/115.2		x	x	x	x	x	x	x
14	IP address	XXX	XXX	XXX	XXX		x	x	x	x	x	x	x

Back protection rotary switch


	Function	Rotary switch position	Description
	Unlok	1	All programming parameters are freely modifiable by means of the front key-pad and by means of the communication port.
	Lock	7	The key-pad, as far as programming is concerned and the data through the serial communication cannot be changed (no writing into meter allowed). Data reading is allowed.

Accuracy (According to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

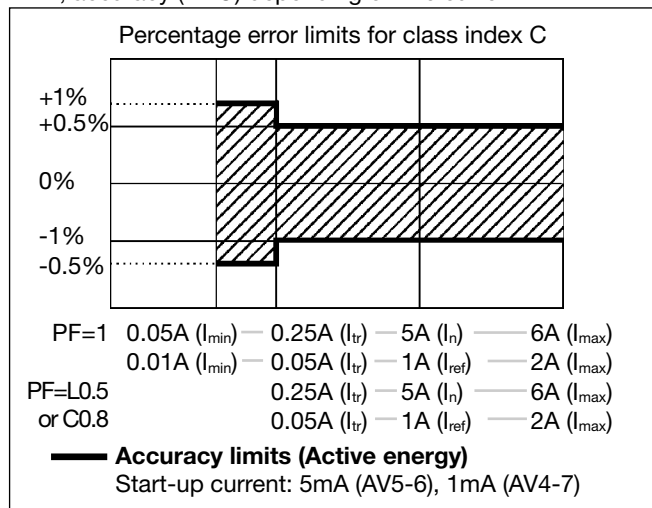

kvarh, accuracy (RDG) depending on the current

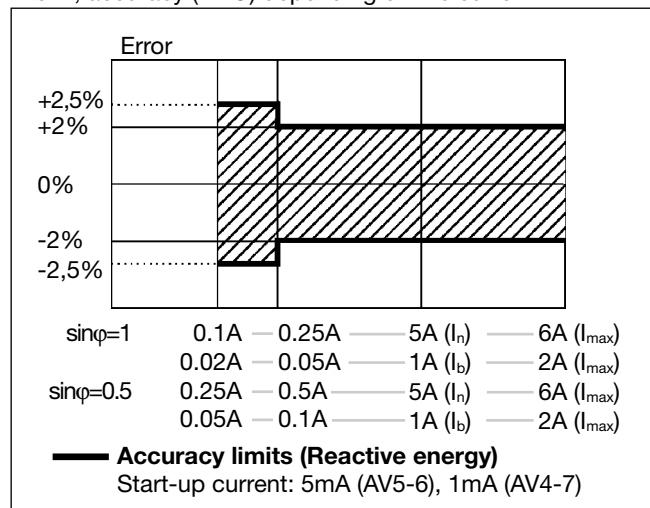

Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{1N} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos \varphi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$\text{var}_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

System variables

Equivalent three-phase voltage

$$V_{\Sigma} = \frac{V_1 + V_2 + V_3}{3} \cdot \sqrt{3}$$

Voltage asymmetry

$$ASY_{LL} = \frac{(V_{LL \max} - V_{LL \min})}{V_{LL \Sigma}}$$

$$ASY_{LN} = \frac{(V_{LN \max} - V_{LN \min})}{V_{LN \Sigma}}$$

Three-phase reactive power

$$\text{var}_{\Sigma} = (\text{var}_1 + \text{var}_2 + \text{var}_3)$$

Three-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + \text{var}_{\Sigma}^2}$$

Total harmonic distortion

$$THD_N = 100 \sqrt{\frac{\sum_{n=2}^N |X_n|^2}{|X_1|^2}}$$

Three-phase power factor

$$\cos \varphi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}} \quad (\text{TPF})$$

Energy metering

$$k \text{ var hi} = \int_{t_1}^{t_2} Q_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} Q_{nj}$$

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} P_{nj}$$




Where:

i= considered phase (L1, L2 or L3)
 P= active power; Q= reactive power;
 t_1, t_2 =starting and ending time points
 of consumption recording; n= time
 unit; Δt = time interval between two
 successive power consumptions;
 n_1, n_2 = starting and ending discrete
 time points of consumption recording





Wiring diagrams


System type selection: 3-Ph.2

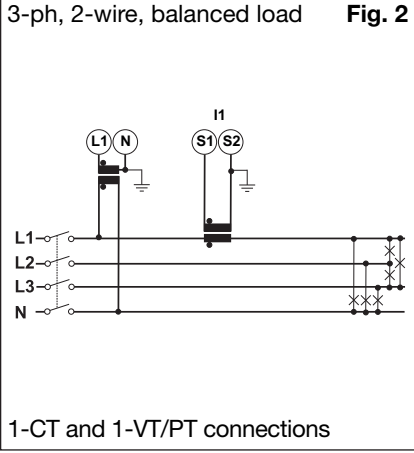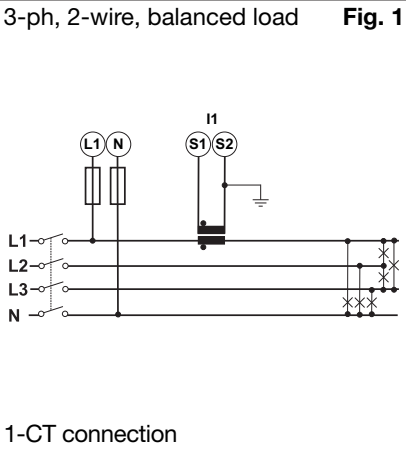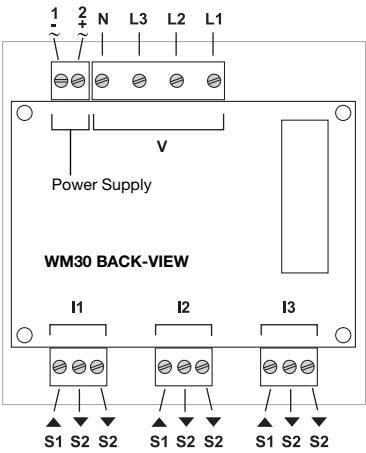




System type selection: 3-Ph.n

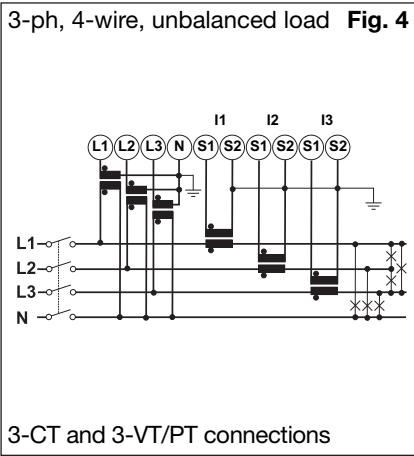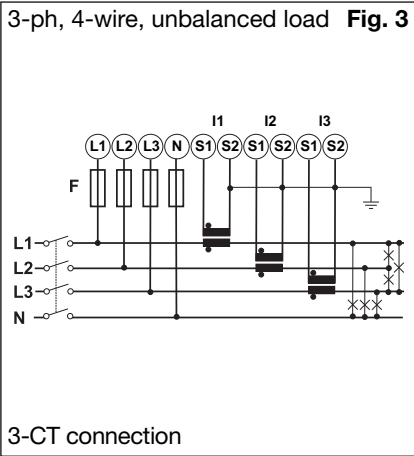

System type selection: 3-Ph

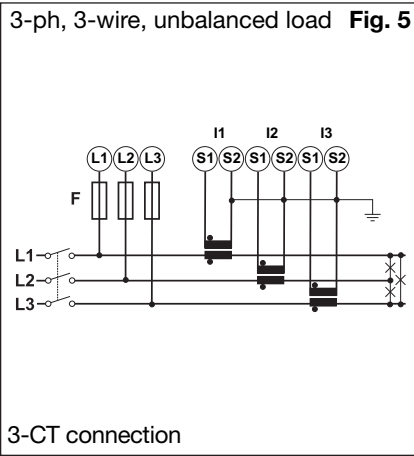


System type selection: 3-Ph (cont.)

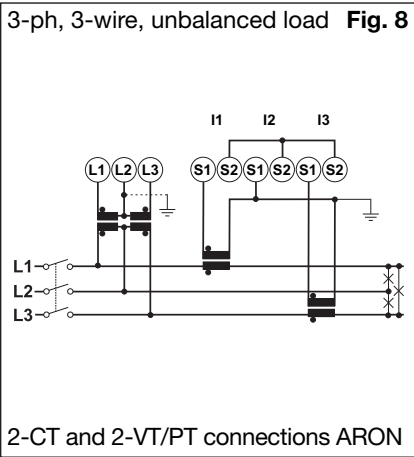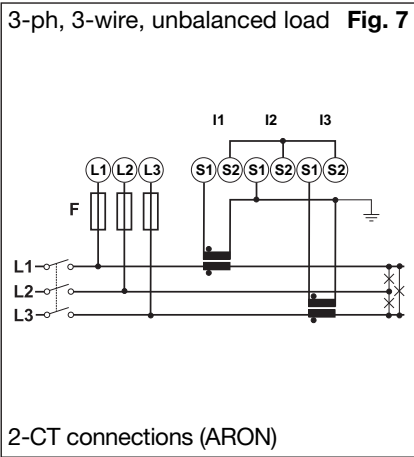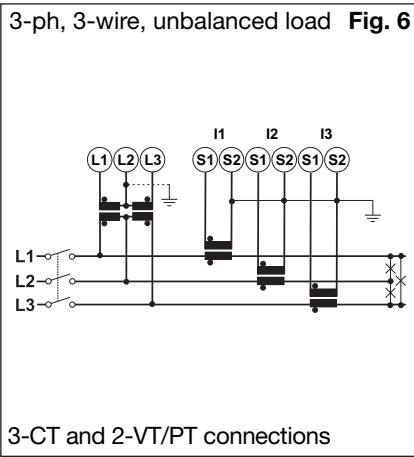


Wiring diagrams


System type selection: 3-Ph.1

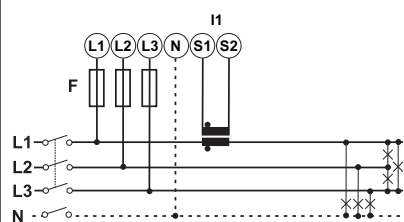3-ph, 3-wire, balanced load **Fig. 9**

1-CT connections

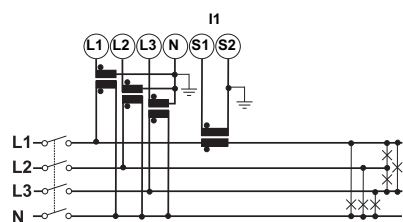
3-ph, 3-wire, balanced load **Fig. 10**

1-CT and 3-VT/PT connections

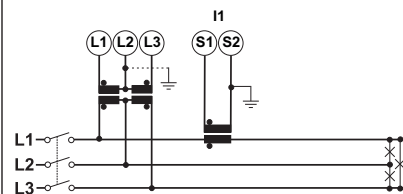
3-ph, 3-wire, balanced load **Fig. 11**

1-CT and 2-VT/PT connections

System type selection: 2-Ph

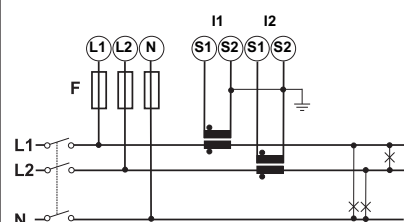
2-ph, 3-wire **Fig. 12**

2-CT connection

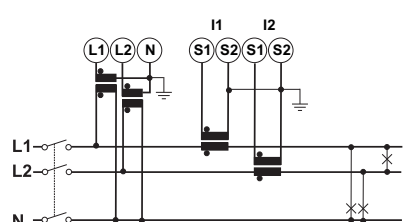2-ph, 3-wire **Fig. 13**


2-CT and 2-VT/PT connections

System type selection: 1-Ph

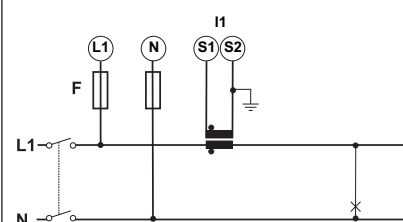1-ph, 2-wire **Fig. 14**


1-CT connection

System type selection: 1-Ph (cont.)

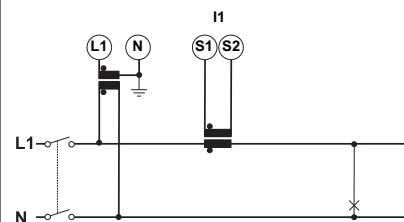
1-ph, 2-wire **Fig. 15**

1-CT and 1-VT/PT connections

Power Supply

90 to 260VAC/DC (H option) **Fig. 16**







F= 250V [T] 630mA

18 to 60VAC/DC (L option) **Fig. 17**




F= 250V [T] 3,15A



Static, relay and analogue outputs wiring diagrams

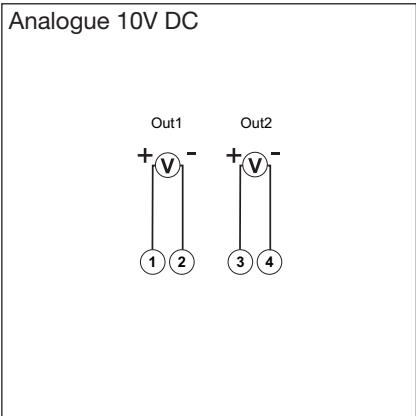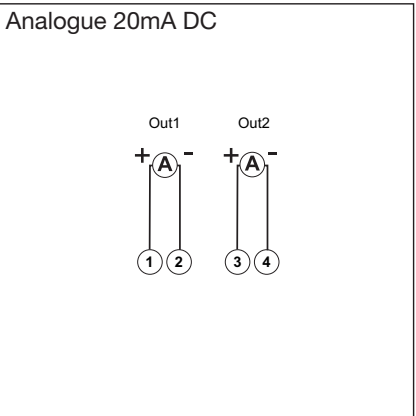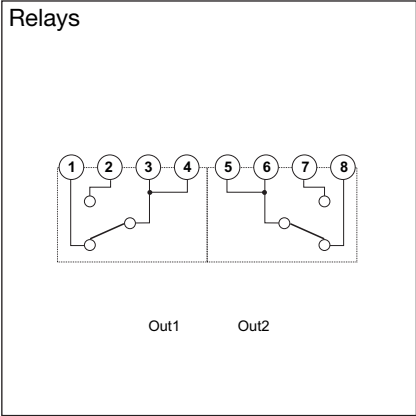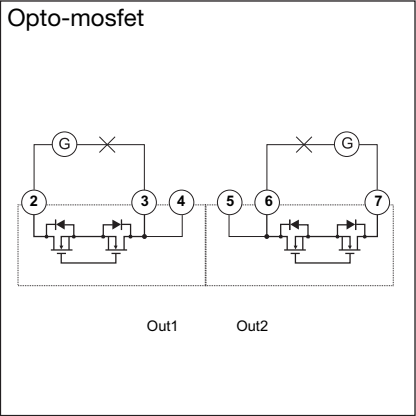


RS485 and RS232 wiring diagrams

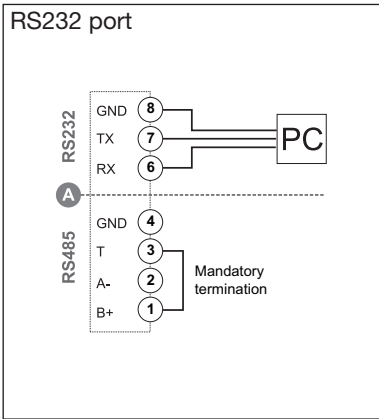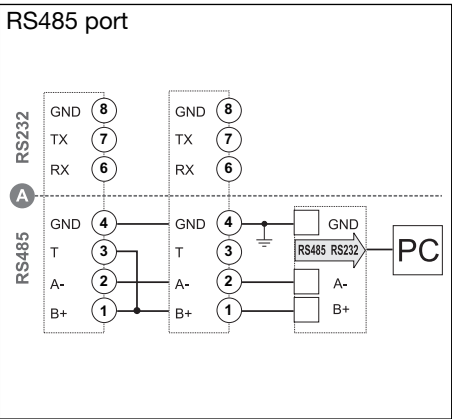

NOTE. RS485: additional devices provided with RS485 are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (B+) and (T). **A**: the communication RS232 and RS485 ports **can't be** connected and used simultaneously.

Front panel description

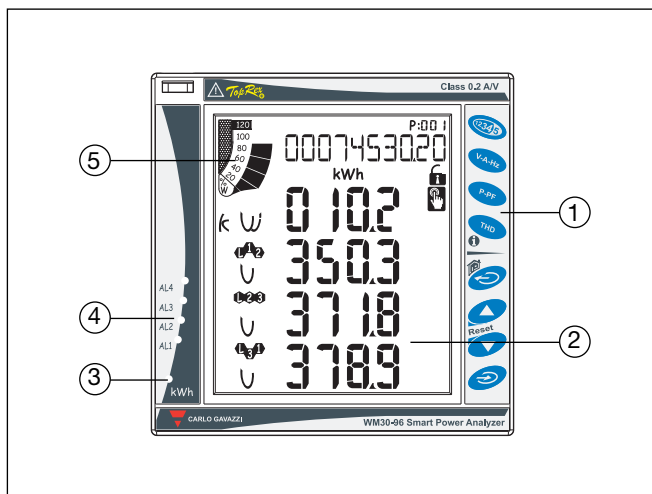

- 1. Key-pad**
To program the configuration parameters and scroll the variables on the display.
- 2. Display**
LCD-type with alphanumeric indications to:
 - display configuration parameters;
 - display all the measured variables.
- 3. kWh LED**
Red LED blinking proportional to the energy being measured
- 4. Alarm LED's**
Red LED's light-on when virtual alarms are activated.
- 5. Main bar-graph**
To display the power consumption versus the installed power.

Dimensions and Panel cut-out

