

G-Series

DIN-RAIL CIRCUIT BREAKER

The G-Series hydraulic-magnetic circuit breaker insures maximum protection by integrating wiping contacts for longevity; a common trip linkage between poles; a unique terminal bus connection system; and optional integrated auxiliary contacts. It is also suitable for reverse feed and provides finger safe terminals. This DIN rail mount circuit breaker accommodates either a 35mm x 7.5mm, or a 35mm x 15mm symmetrical din rails.

G-Series DIN Rail Circuit Breaker:

UL 489 Listed: 1 to 3 poles; 1-50 Amps; 125 VDC, 240 VAC;

UL Recognized: 1 to 4 poles; 0.1-63 Amps; 80 VDC, 240 VAC/480VAC; cUL, TUV & CCC.



Resources:

Download 3D CAD Files

[IGS >](#)

[STP >](#)

Product Highlights:

- ♦ DIN Rail Mounting
- ♦ UL 489 Listed
- ♦ UL Recognized, cUL, TUV & CCC
- ♦ Wiping Contacts
- ♦ Common Trip Linkage Between Poles

Typical Applications:

- ♦ Renewable Energy
- ♦ Telecom
- ♦ Control Panels
- ♦ Industrial Automation Controls



Carling Technologies™



Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 Fax: 860.793.9231

www.carlingtech.com

G-Series

DESIGN FEATURES

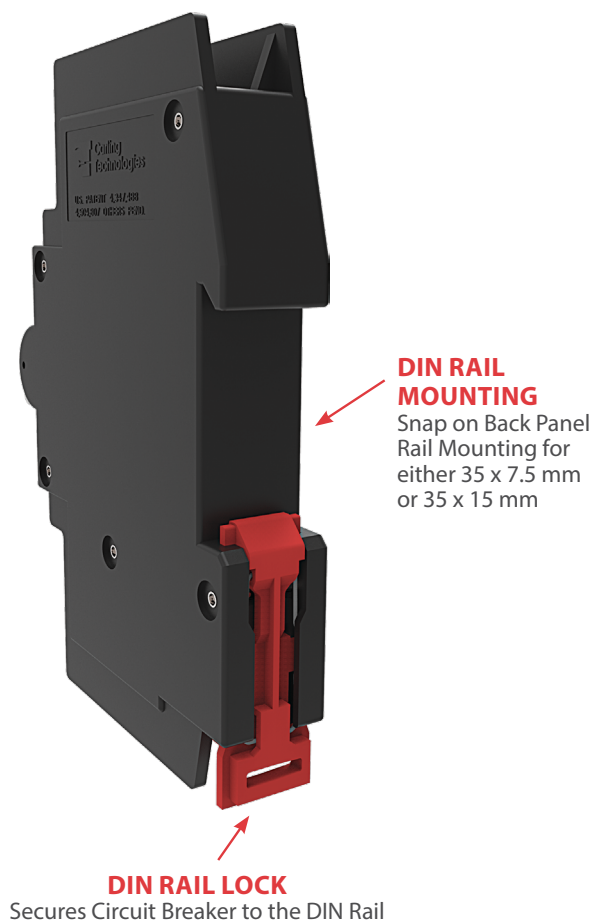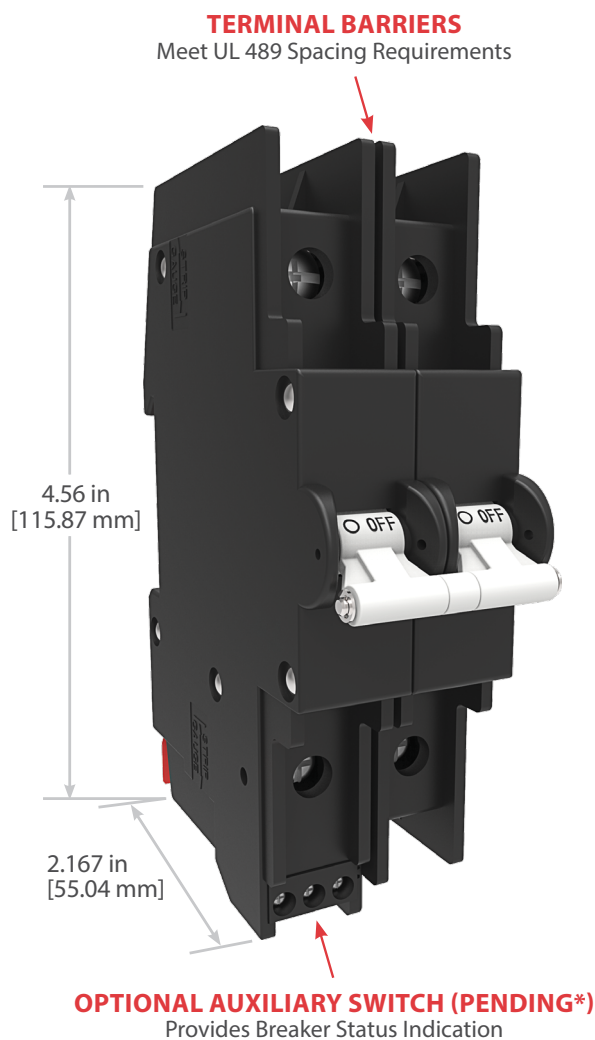

*Pending on UL489 version - available on UL1077 version

Electrical Tables

Table A: Lists UL Recognized, CSA Accepted and TUV Certified capabilities as a Component Supplementary Protector.

G-SERIES TABLE A: COMPONENT SUPPLEMENTARY PROTECTORS									
Circuit Configuration	Voltage				Current Rating	Short Circuit Capacity (Amps)			
	Max Rating	Frequency	Phase	Minimum Poles	Full Load Amps	Without Backup Fuse		Application Codes	
						UL/CSA	TUV	UL	CSA
Series	80	DC	---	1	.1 - 63	3000	1500	TC1, OL1, U1	TC1, OL1, U1
	240	50 / 60	1	1	.1 - 63	3000	1500	TC1, OL1, U1	TC1, OL1, U1
	240	50 / 60	1	2	.1 - 63	3000	1500	TC1, OL1, U1	TC1, OL1, U1
	480	50 / 60	3	3	.1 - 63	1500	415V, 1000	TC1, OL1, U1	TC1, OL1, U1


Table B: Lists UL Listed (489) configuration and performance capabilities.

G-SERIES TABLE B: UL 489 LISTED BRANCH CIRCUIT BREAKERS						
Circuit Configuration	Voltage				Current Rating Full Load Amps	Interrupting Capacity (Amps RMS)
	Max Rating	Frequency	Phase	Poles		
Series	80	DC	---	1	1 - 50	5000
	125	DC	---	2	1 - 50	5000
	120	50 / 60	1	1	1 - 50	5000
	120 / 240	50 / 60	1	1 - 3 ¹	1 - 50	5000
	240	50 / 60	1	1	1 - 25	5000

¹ One pole out of the three poles must be a neutral break.

Electrical

Maximum Voltage	AC: 240VAC (single pole), 480VAC (3 poles, additional pole shall be dedicated for neutral break) DC: 80VDC (single pole & multipole)
Current Rating	0.1 – 63A. Other ratings available, see Ordering Scheme.
Auxiliary Switch Rating	(optional) Integrated, load side. SPST, 3A – 125VAC, 2A – 30VDC.
position of circuit breaker	Auxiliary switch senses the on & off handle, as well as contact arm position. Switch connections are screw terminals.
Insulation Resistance	Minimum of 100 Megohms at 500 VDC
Dielectric Strength	UL, CSA: 1960 V 50/60 Hz for one minute between all electrically isolated terminals. G-Series circuit breakers comply with the 8mm spacing and 3750V 50/60 Hz dielectric requirements from hazardous voltage to operator accessible surfaces, between adjacent poles and from main circuits to auxiliary circuits per Publications EN 60950 and VDE 0805.
Resistance, Impedance	Values from Line to Load Terminal - based on series trip circuit breaker.

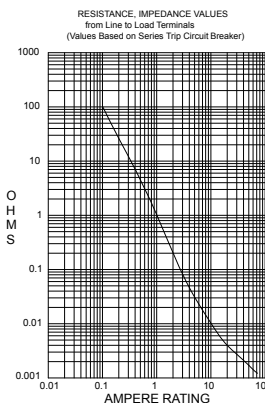

CURRENT (AMPS)	TOLERANCE (%)
0.1 - 5.0	15%
5.1 - 20.0	25%
20.1 - 63.0	35%

*Manufacturer reserves the right to change product specification without prior notice.

Mechanical

Endurance	10,000 ON-OFF operations @ 6 per minute; with rated current & voltage.
Trip Free	All G-Series circuit breakers will trip on overload, even when actuator is forcibly held in the ON position.
Trip Indication	The operating actuator moves positively to the OFF position when an overload causes the breaker to trip. With mid-trip, the handle moves to the mid position on electrical trip of the circuit breaker. With mid trip handle with alarm switch, handle moves to the mid position and the alarm switch actuates when the circuit breaker is electrically tripped.

Physical

Number of Poles	1 pole ≤ 63A, 2 poles ≤ 63A per pole
Weight	Approx. 172 grams/pole (4.13 oz).
Standard Colors	Housing: Black

Environmental

Designed in accordance with requirements of specification MIL-PRF-55629 & MIL-STD-202 as follows:	
Shock	Withstands 100 Gs, 6ms sawtooth while carrying rated current per Method 213, Test Condition "I". Instantaneous and ultrashort curves tested @ 90% of rated current.
Vibration	Withstands 0.060" excursion from 10-55 Hz & 10 Gs 55-500 Hz, @ rated current per Method 204C, Test Cond. A. Instantaneous & ultrashort curves tested @ 90% of rated current.
Moisture Resistance	Method 106D, i.e., ten 24-hour cycles @ +25°C to +65°C, 80-98% RH.
Salt Spray	Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).
Thermal Shock	Method 107D, Condition A (five cycles @ -55°C to +25°C to +85°C to +25°C).
Operating Temperature	-40°C to +85°C

G	A	1	-	B	0	-	24	-	620	-	1	1	-	D	C
1 Series	2 Actuator	3 Poles		4 Circuit	5 Aux/Alarm Switch		6 Frequency & Delay		7 Current Rating		8 Terminal	9 Actuator Color & Legend		10 Rating	11 Agency Approval

1 SERIES G

2 ACTUATOR

- A** Handle, one per pole
S Mid-Trip Handle, one per pole

3 POLES

- 1** One **3** Three
2 Two **4** Four

4 CIRCUIT

- A**¹ Switch Only (no coil)
B Series Trip (current)

5 AUXILIARY SWITCH³

- 0** without Aux Switch
1 S.P.D.T., Screw Terminal
3 S.P.D.T. Screw Terminal (Gold Contacts)
5 Plug-in Terminal
6 Plug-in Terminal (Gold Contacts)

6 FREQUENCY & DELAY

- | | |
|----------------------------------|---|
| 03 Switch Only | 26 50/60 Hz Long |
| 10 DC, Instantaneous | 42 50/60 Hz Hi-Inrush Short ² |
| 11 DC, Ultra Short | 44 50/60 Hz Hi-Inrush Medium |
| 12 DC, Short | 46 50/60 Hz Hi-Inrush Long |
| 14 DC, Medium | 52 DC Hi-Inrush Short |
| 16 DC, Long | 54 DC Hi-Inrush Medium |
| 20 50/60 Hz Instantaneous | 56 DC Hi-Inrush Long |
| 21 50/60 Ultra Short | |
| 22 50/60 Hz Short | |
| 24 50/60 Hz Medium | |

6 CURRENT RATING (AMPERES)

CODE	AMPERES			
210	0.100	410	1.000	450 5.000
220	0.200	512	1.250	455 5.500
225	0.250	415	1.500	460 6.000
230	0.300	517	1.750	465 6.500
235	0.350	410	1.000	470 7.000
240	0.400	512	1.250	475 7.500
245	0.450	415	1.500	480 8.000
250	0.500	517	1.750	485 8.500
255	0.550	420	2.000	490 9.000
260	0.600	522	2.250	495 9.500
265	0.650	425	2.500	610 10.000
270	0.700	527	2.750	710 10.500
275	0.750	430	3.000	611 11.000
280	0.800	435	3.500	711 11.500
285	0.850	440	4.000	612 12.000
290	0.900	445	4.500	712 12.500

8 TERMINAL

- 1** Screw Terminal

9 ACTUATOR COLOR & LEGEND

Actuator Color	I-O	ON-OFF	Dual	Legend Color
White	A	B	1	Black
Black	C	D	2	White
Red	F	G	3	White
Green	H	J	4	White
Blue	K	L	5	White
Yellow	M	N	6	Black
Gray	P	Q	7	Black
Orange	R	S	8	Black

10 APPLICATION RATING

- B** 125 VDC ⁵
D 240 VAC
H 480 VAC ⁴
M 80 VDC

11 AGENCY APPROVAL

- A** Without Approvals
C UL Recognized
E TUV Certified, UL Recognized

Notes:

- Switch only circuit only available when tied to a protected pole (Circuit code B)
 - for 2 to 30 amps select current code 630
 - for 31 to 50 amps select current code 650
 - for 51 to 63 amps select current code 663
 - Use delay 03 for all switch only poles
- Hi Inrush Delays limited to 50A max
- On multi-pole breakers one auxiliary switch is supplied, mounted in the extreme left pole when viewed from front of panel.
- 480 VAC rating requires 3 or 4 pole break 3Φ and 2 pole break 1Φ
- This construction is polarity sensitive when constructed as a single pole unit, 125 VDC is only available without agency approvals

G	A	1	-	B	0	-	24	-	620	-	1	1	-	D	G
1 Series	2 Actuator	3 Poles		4 Circuit	5 Aux/Alarm Switch		6 Frequency & Delay		7 Current Rating		8 Terminal	9 Actuator Color & Legend		10 Rating	11 Agency Approval

1 SERIES

G

2 ACTUATOR

- A** Handle, one per pole
S¹ Mid-Trip Handle, one per pole

3 POLES

- 1** One
2 Two
3 Three

4 CIRCUIT

- B** Series Trip (current)

5 AUXILIARY SWITCH³

- 0** without Aux Switch
1 S.P.D.T., Screw Terminal (*Pending*)
3 S.P.D.T. Screw Terminal (Gold Contacts) (*Pending*)
5 Plug-in Terminal (*Pending*)
6 Plug-in Terminal (Gold Contacts) (*Pending*)

6 FREQUENCY & DELAY

- | | |
|-----------------------------|--|
| 11 DC, Ultra Short | 42 50/60 Hz Hi-Inrush Short ⁴ |
| 12 DC, Short | 44 50/60 Hz Hi-Inrush Medium ⁴ |
| 14 DC, Medium | 46 50/60 Hz Hi-Inrush Long ⁴ |
| 16 DC, Long | 52 DC Hi-Inrush Short ⁴ |
| 21 50/60 Ultra Short | 54 DC Hi-Inrush Medium ⁴ |
| 22 50/60 Hz Short | 56 DC Hi-Inrush Long ⁴ |
| 24 50/60 Hz Medium | |
| 26 50/60 Hz Long | |

6 CURRENT RATING (AMPERES)

CODE	AMPERES			
410	1.000	450	5.000	611 11.000
512	1.250	455	5.500	611 11.500
415	1.500	460	6.000	612 12.000
517	1.750	465	6.500	612 12.500
420	2.000	470	7.000	613 13.000
522	2.250	475	7.500	614 14.000
425	2.500	480	8.000	615 15.000
527	2.750	485	8.500	616 16.000
430	3.000	490	9.000	617 17.000
435	3.500	495	9.500	618 18.000
440	4.000	610	10.000	620 20.000
445	4.500	710	10.500	622 22.000

8 TERMINAL

- 1** Screw Terminal

9 ACTUATOR COLOR & LEGEND

Actuator Color	ON-OFF	Dual	Legend Color
White	B	1	Black
Black	D	2	White
Red	G	3	White
Green	J	4	White
Blue	L	5	White
Yellow	N	6	Black
Gray	Q	7	Black
Orange	S	8	Black

10 APPLICATION RATING

- B** 125 VDC ⁵
C 120/240 VAC ⁶
D 240 VAC ⁷
K 120 VAC ⁸
M 80 VDC ⁹


11 AGENCY APPROVAL

- G** UL489 Listed


Notes:

- Mid-trip Handle(s) available at 1 pole unit and 2 pole unit only.
- Third pole of a 3 pole unit is switch only pole.
- On multi-pole breakers one auxiliary switch is supplied, mounted in the extreme left pole when viewed from front of panel. (*Pending*)
- Hi Inrush Delays limited to 50A maximum.
- 125VDC for 2 pole unit only.
- 120/240VAC for 2 pole and 3 pole unit only. Limited to 50A maximum, and third pole of a 3-pole unit is switch only pole.
- 240VAC for 1 pole unit only, limited to 25A maximum
- 120VAC for 1 pole unit only, limited to 50A maximum.
- 80VDC for 1 pole unit only


1 POLE WITHOUT AUXILIARY SWITCH

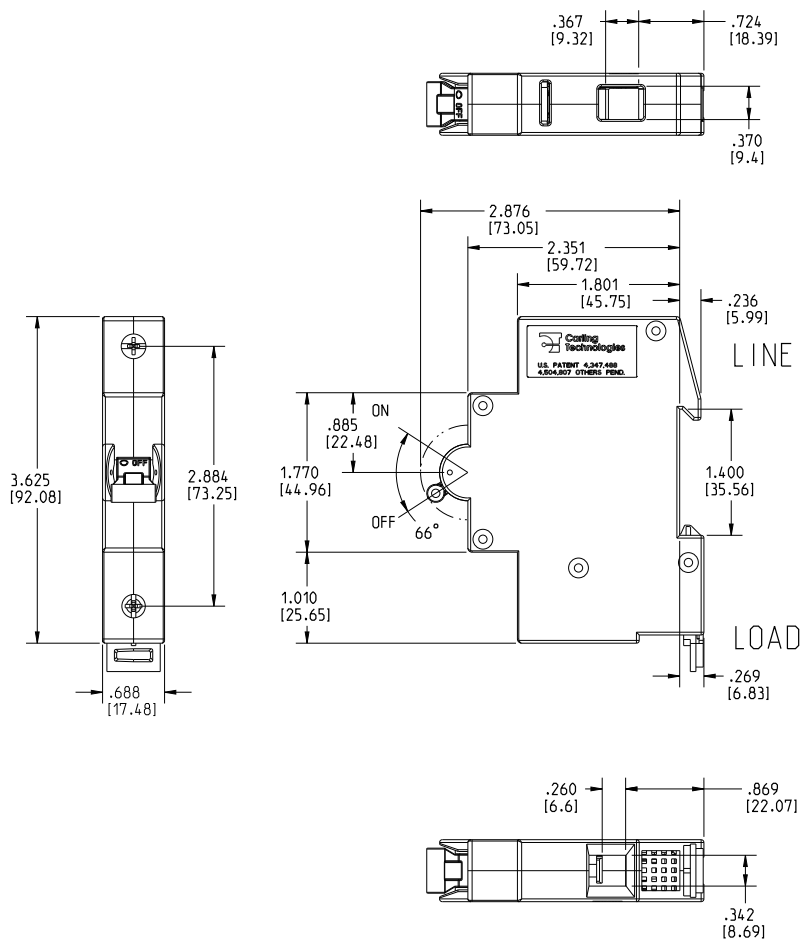


1 POLE WITH AUXILIARY SWITCH (PLUG-IN TERMINAL BLOCK)

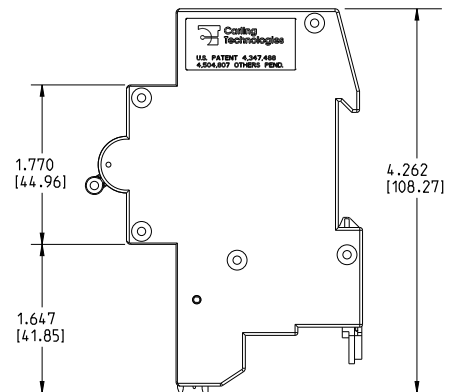

1 POLE WITH AUXILIARY SWITCH (SCREW TERMINAL BLOCK)

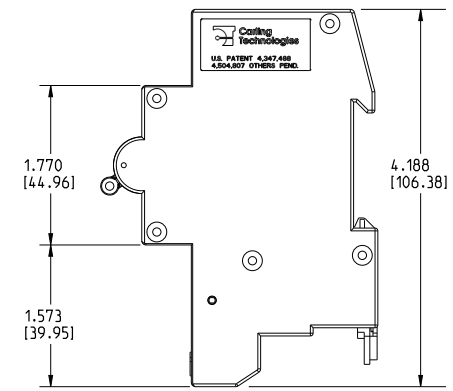


MULTIPLE POLES WITH AUXILIARY SWITCH (PLUG-IN TERMINAL BLOCK)

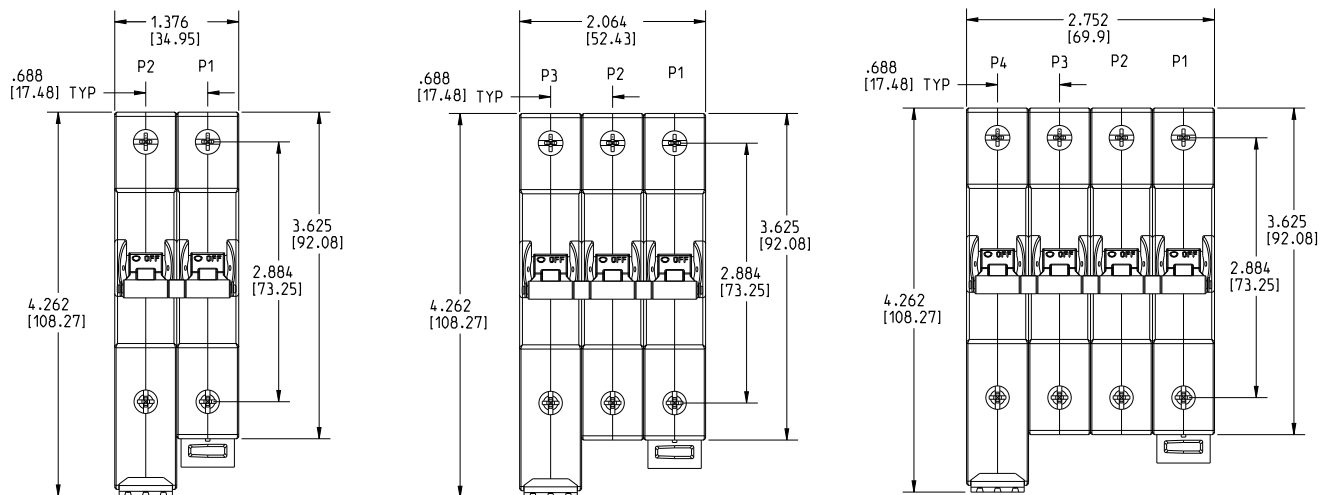


- Notes:
- 1 All dimensions are in inches [millimeters].
 - 2 Tolerance ± 0.020 [.51] unless otherwise specified.


1 POLE WITHOUT AUXILIARY SWITCH

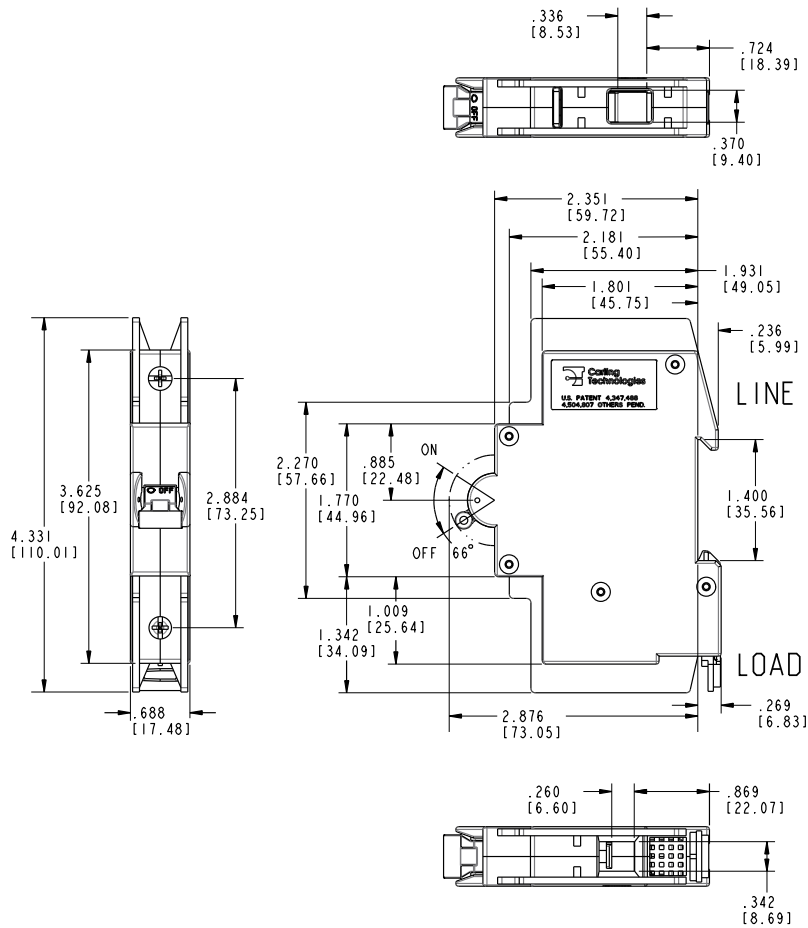



1 POLE WITH AUXILIARY SWITCH (*PENDING*)
(PLUG-IN TERMINAL BLOCK)

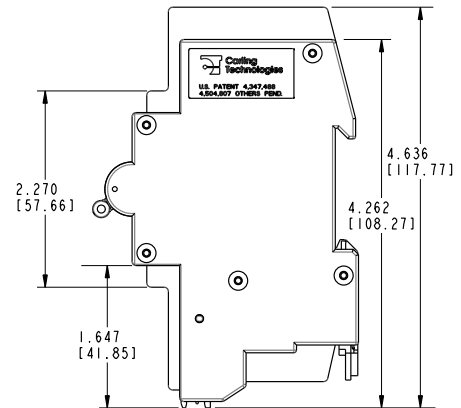

1 POLE WITH AUXILIARY SWITCH (PENDING)
(SCREW TERMINAL BLOCK)

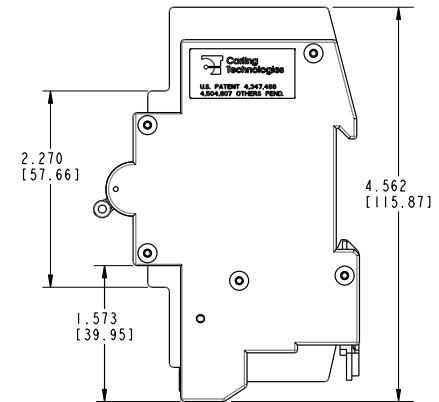


MULTIPLE POLES WITH AUXILIARY SWITCH (*PENDING*) (PLUG-IN TERMINAL BLOCK)

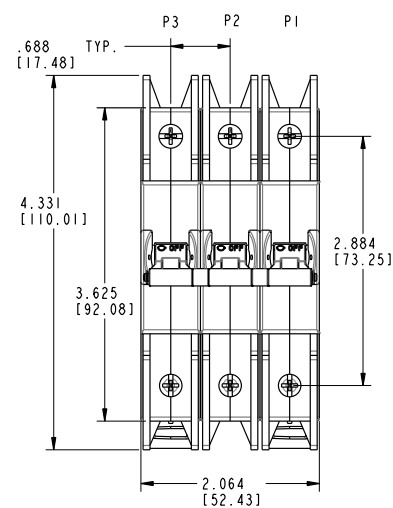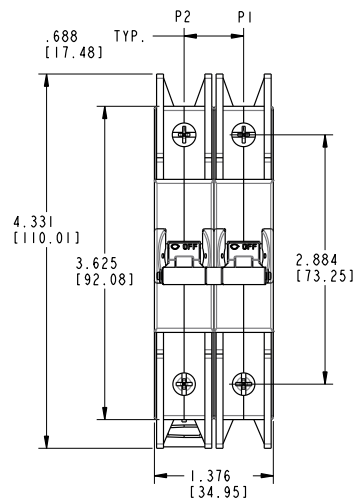


Notes:

- Notes:
1 All dimensions are in inches [millimeters].
2 Tolerance $\pm .020$ [.51] unless otherwise specified.

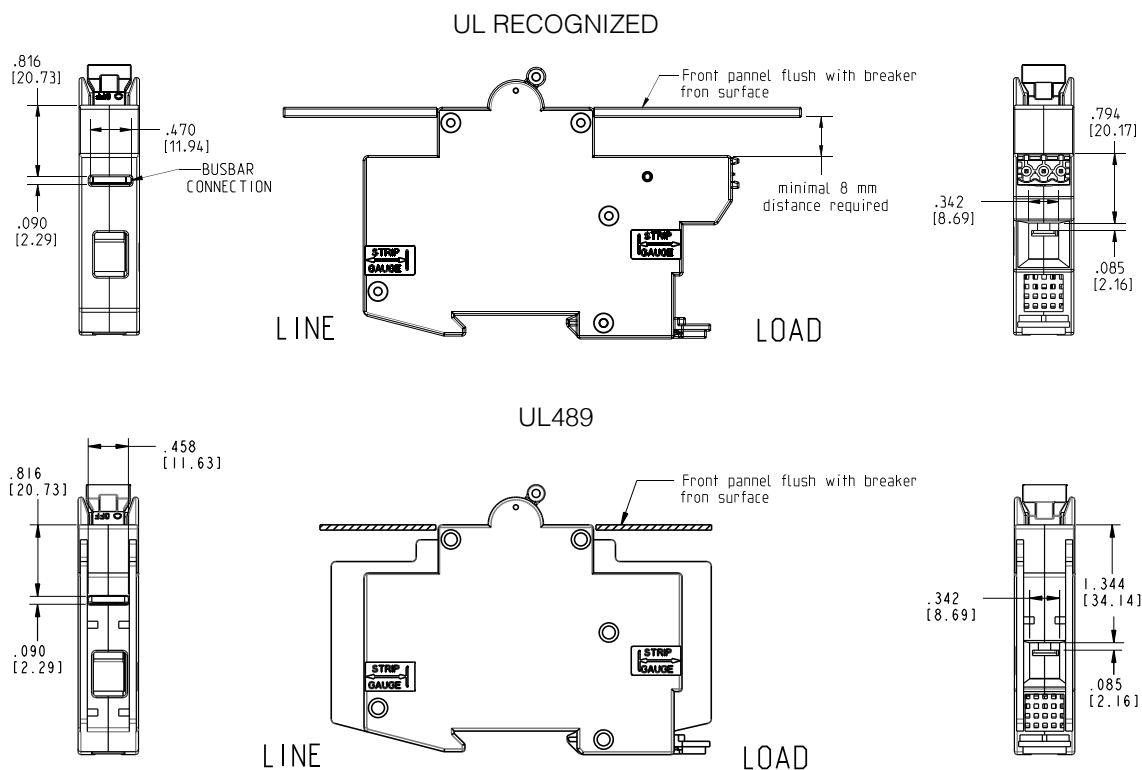

Notes:
 1 All dimensions are in inches [millimeters].
 2 Tolerance ± 0.020 [.51] unless otherwise specified.


Auxiliary contact with internal connector



- Advantages:
- Pre-wiring is possible
 - Easy interchangeable
 - Time saving solution
 - Various connection methods possible
 - Many different plugs available

Example plugs:

Spring clamp terminals

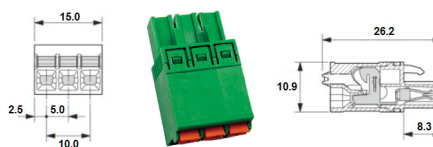

Dimensions in mm

Wire size solid wire	0.2 - 1.5 mm ²
Wire size stranded wire	0.2 - 2.5 mm ²
Wire size stranded wire with ferrule	0.25 - 1.5 mm ²
Wire stripping length	10 mm

Screw terminals



Screw terminals 45° angle



The auxiliary contact with internal connector can be used with Phoenix Combicon plugs.
 Phoenix item number internal connector: 1753453.
 The circuit breaker is standard delivered without plugs.

Time Delay Values

G-SERIES TIME DELAY VALUES											
Trip Time (Seconds)	PERCENT OF RATE CURRENT										
	Delay	100%	125%	135%	150%	200%	400%	600%	800%	1000%	1200%
	10	No Trip	May Trip	---	.032 MAX	.024 MAX	.020 MAX	.018 MAX	.016 MAX	.015 MAX	.013 MAX
	11	No Trip	.013 - .125	---	.010 - .070	.008 - .032	.006 - .020	.005 - .020	.004 - .020	.004 - .020	.004 - .020
	12	No Trip	.500 - 6.50	---	.300 - 3.00	.130 - 1.20	.031 - .220	.011 - .120	.004 - .090	.004 - .060	.004 - .040
	14	No Trip	2.00 - 60.0	---	1.20 - 40.0	.600 - 20.0	.150 - 3.00	.030 - 1.30	.004 - .600	.004 - .100	.004 - .100
	16	No Trip	45.0 - 345	---	20.0 - 150	9.00 - 60.0	1.40 - 11.4	.150 - 5.80	.009 - 3.70	.005 - 1.70	.005 - .500
	20	No Trip	May Trip	---	.040 MAX	.035 MAX	.030 MAX	.025 MAX	.020 MAX	.017 MAX	.015 MAX
	21	No Trip	.014 - .150	---	.011 - .095	.008 - .055	.006 - .035	.005 - .027	.005 - .021	.004 - .018	.004 - .017
	22	No Trip	.700 - 12.0	---	.350 - 4.00	.130 - 1.30	.027 - .220	.008 - .130	.004 - .090	.004 - .045	.004 - .040
	24	No Trip	10.0 - 160	---	6.00 - 60.0	2.20 - 20.0	.300 - 3.00	.050 - 1.30	.007 - .500	.005 - 0.60	.005 - .040
	26	No Trip	50.0 - 700	---	32.0 - 350	10.0 - 90.0	1.50 - 15.0	.550 - 7.00	.020 - 3.00	.006 - 2.00	.005 - 1.00
	42	No Trip	.700 - 12.0	---	.400 - 6.00	.180 - 2.30	.050 - .600	.26 - .300	.018 - .200	.014 - .150	.012 - .130
	44	No Trip	7.00 - 100	---	3.00 - 50.0	1.10 - 18.0	.220 - 3.00	.120 - 1.70	.075 - 1.20	.050 - .850	.042 - .720
	46	No Trip	50.0 - 700	---	31.0 - 350	12.0 - 150	1.50 - 20.0	.700 - 10.0	.404 - 7.90	.260 - 6.50	.198 - 5.80
	52	No Trip	.500 - 6.50	---	.340 - 4.50	.180 - 2.30	.051 - .600	.030 - .320	.018 - .220	.014 - .200	.012 - .130
	54	No Trip	1.50 - 50.0	---	.750 - 35.0	.350 - 18.0	.110 - 3.00	.070 - 1.70	.045 - 1.40	.039 - 1.30	.035 - 1.30
	56	No Trip	45.0 - 345	---	19.0 - 170	8.50 - 100	1.24 - 15.0	.410 - 9.00	.256 - 8.00	.210 - 5.50	.198 - 2.90

Notes:


Delay Curves 11,12,14,16,21,22,24,26,42,44,46,52,54,56: Breakers to hold 100% and must trip at 125% of rated current and greater within the time limit shown in this curve.

Delay Curves 10,20: Breakers to hold 100% and must trip at 150% of rated current and greater within the time limit shown in this curve.


All Curves: Curve data shown represents breaker response at ambient temperature of 77°F (25°C) with no preloading. Breakers are mounted in standard wall-mount position.

On 50 amp and less current ratings, the minimum inrush pulse tolerance handling capability is 12 times the rated current on standard delays and 25 times the rated current on high inrush delays. These values are based on a 60 Hz 1/2 cycle, 8.33 ms pulse. High inrush delays should be specified for applications with high initial surge currents of short duration such as switching power supplies, highly capacitive loads and transformer loads.


Instantaneous - DC 10

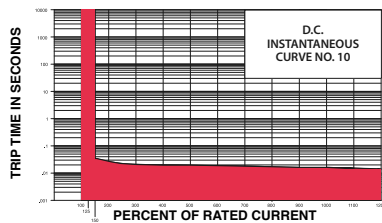


Ultrasort - DC 11

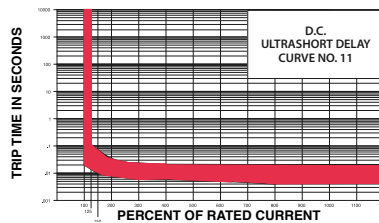


Short - DC 12

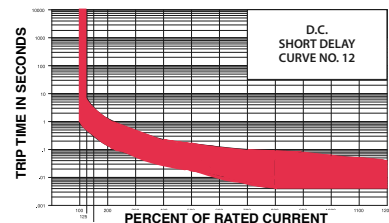


Medium - DC 14

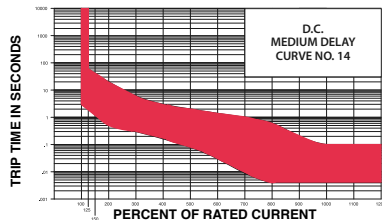


Long - DC 16

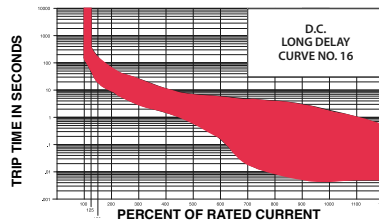


Instantaneous - AC 20

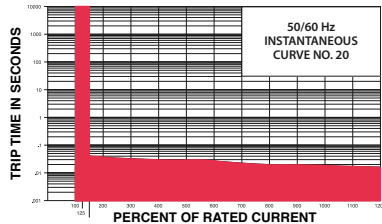


Ultrasort - AC 21

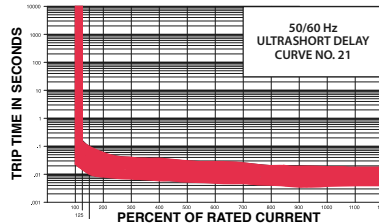


Short - AC 22

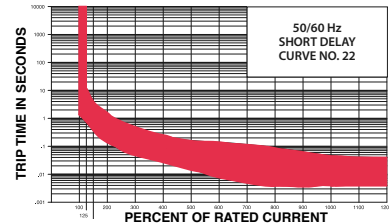


Medium - AC 24

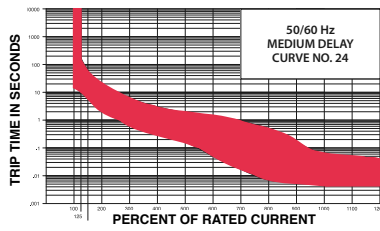


Long - AC 26

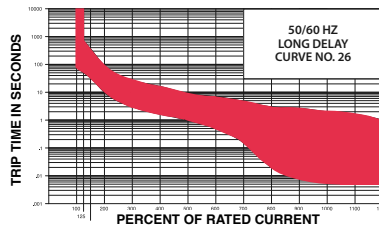


Short - High Inrush AC 42

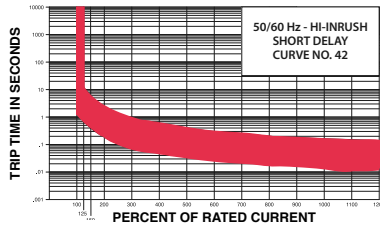


Medium - High Inrush AC 44

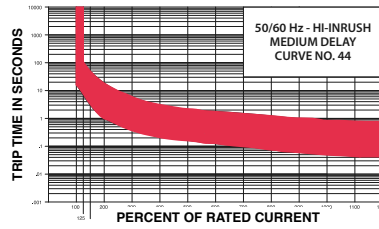


Long - High Inrush AC 46

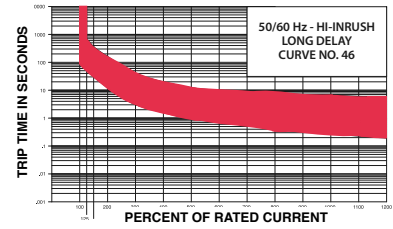


Short - High Inrush DC 52

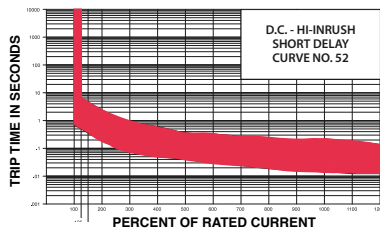

Medium - High Inrush DC 54

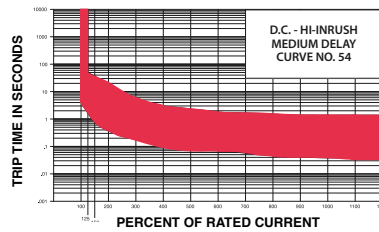

Long - High Inrush DC 56

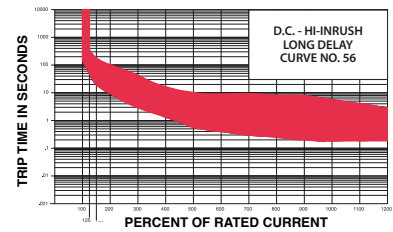

Authorized Sales Representatives

Click on the group name on the map below to find your local representative or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

Worldwide Headquarters

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific Ltd.,
Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters

Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com



Carling Technologies™
Innovative Designs. Powerful Solutions.