




Technical drawing of a 12-pin connector. The drawing shows a side view of the connector with 12 pins. The overall height is dimensioned as 14.28 ± 0.13 . The width of the connector is dimensioned as W . The drawing includes a detail view of the pin tip, showing a 0.1mm diameter and a 0.25mm width.

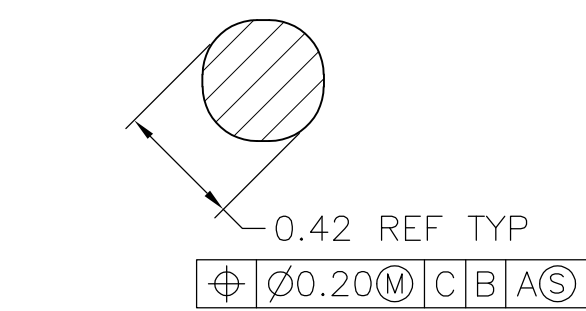

6. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.

$\begin{smallmatrix} 2 & 3 \\ 2 & 3 \\ 2 & 3 \\ 2 & 3 \\ 2 & 3 \\ 2 & 3 \\ 2 & 3 \end{smallmatrix}$	D,E,F	—	A,B,C	6	5646956-7
	—	A,B,C,D	E,F	6	5646956-6
	A,B	D,E,F	C	6	5646956-5
	A,D,E,F	B	C	6	5646956-4
	A,B	C,D	E,F	6	5646956-3
	A,F	B,C,D,E	—	6	5646956-2
	A,B,C,D,E,F	—	—	6	5646956-1
FINISH	POSITIONS LOADED WITH 10.90 CONTACTS (2)	POSITIONS LOADED WITH 9.30 CONTACTS (3)	POSITIONS LOADED WITH 7.68 CONTACTS (4)	NO OF LOADED POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROL DOCUMENT.		DWN B CARBO	04JAN05	 TE Connectivity	
		CHK R PATTERSON	04JAN05		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: R PATTERSON PRODUCT SPEC		NAME	ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE
		APPLICATION SPEC		SIZE	
MATERIAL		WEIGHT		CAGE CODE	
				DRAWING NO A1 00779 C 5646956	RESTRICTED TO
		CUSTOMER DRAWING		SCALE	6:1
				SHEET	1 of 1
				REV	E