

■ Description

The FA7615CP(E) is a bipolar IC containing basic circuit necessary for PWM-type switching power supply control. This IC can be operated by external synchronizing pulses.

■ Features


- External synchronization input terminal
- Low-voltage operation ($V_{CC} = 3.6$ to $22V$)
- Totem-pole predriver
- Latch-mode short-circuit protection function (no malfunction due to electrical noise)
- One capacitor shared for short-circuit protection and for soft-start to minimize the number of external discrete components

■ Applications


- Battery power supply for portable equipment

■ Dimensions, mm


● SSOP-16

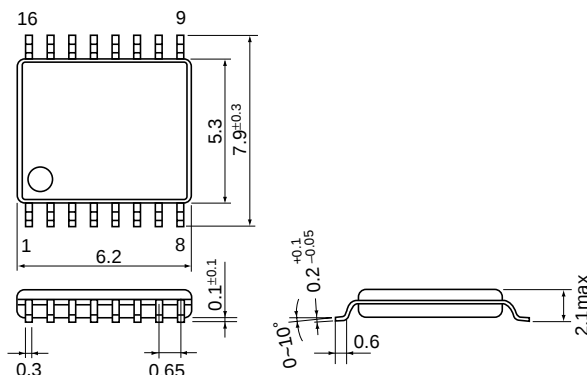

● DIP-16

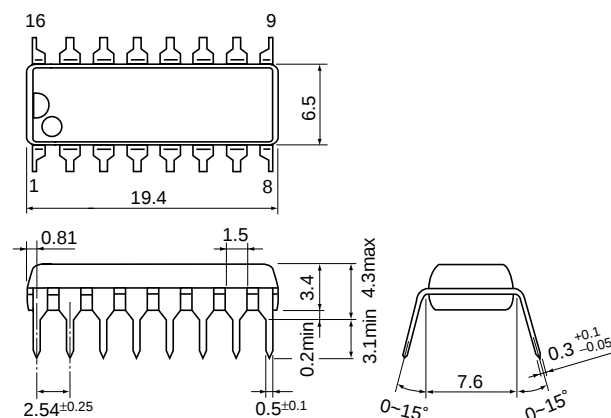

■ Block diagram

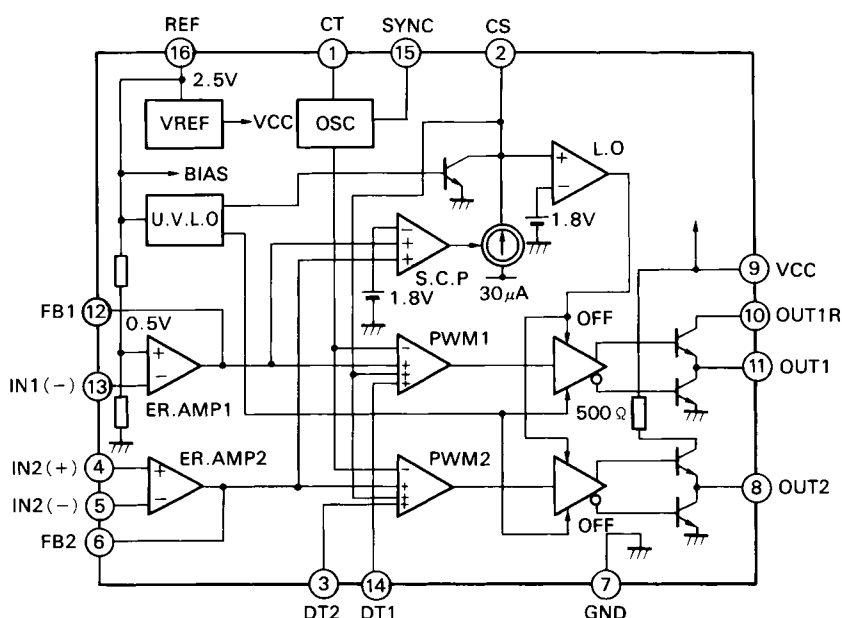

Pin No.	Pin symbol	Description
1	CT	Oscillator timing capacitor
2	CS	Capacitor for soft-start, short-circuit protection and delay
3	DT2	Dead time adjustment
4	IN2 (+)	Non-inverting input to error amplifier
5	IN2 (-)	Inverting input to error amplifier
6	FB2	Error amplifier output
7	GND	Ground
8	OUT2	CH. 2 Output
9	VCC	Power supply
10	OUT1R	CH. 1 Current limiting resistor
11	OUT1	CH. 1 Output
12	FB1	Error amplifier output
13	IN1 (-)	Inverting input to error amplifier
14	DT1	Dead time adjustment
15	SYNC	External synchronization input
16	REF	Reference voltage output (2.5V)

■ Absolute maximum ratings

Item	Symbol	Rating	Unit
Supply voltage	V _{CC}	22	V
Reference voltage output current	I _{OR}	5	mA
Output current	I _O	±50	mA
Total power dissipation	P _d	400	mW
Operating temperature	T _{opr}	−20 to +85	°C
Storage temperature	T _{stg}	−40 to +150	°C

■ Recommended operating conditions

Item	Symbol	Min.	Max.	Unit
Supply voltage	V _{CC}	3.6	20	V
Feedback resistance	R _{NF}	100		kΩ
Oscillator timing capacitor	C _T	220	22,000	pF
Oscillator timing resistance	R _T	10	100	kΩ
Oscillation frequency	f _{osc}	5	200	kHz

■ Electrical characteristics (T_a = 25°C, V_{CC} = 6V, R_T = 47kΩ, C_T = 1000pF)

Reference voltage section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output voltage	V _{REF}	I _{OR} = 1mA	2.383	2.432	2.481	V
Line regulation	LINE	V _{CC} = 3.6 to 20V, I _{OR} = 1mA		4	12	mV
Load regulation	LOAD	I _{OR} = 0.1 to 1mA		1	6	mV
Output voltage variation due to temperature change	V _{TC1}	T _a = −20 to +25°C	−1		1	%
	V _{TC2}	T _a = +25 to +85°C	−1		1	%

Oscillator section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Oscillation frequency	f _{OSC}	C _T = 1000pF, R _T = 47kΩ	17	20	23	kHz
Frequency variation 1 (due to supply voltage change)	f _{dV}	V _{CC} = 3.6 to 20V		1		%
Frequency variation 2 (due to temperature change)	f _{dT}	T _a = −20 to +85°C		5		%
Synchronizing terminal input current	I _{SYNC}	V _{SYNC} = 2V		0.4	1.0	mA
Synchronizing terminal input voltage	V _{SYNC}		1		2.5	V

Error amplifier section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Reference voltage	V _B		0.484	0.494	0.504	V
Input bias current	I _B			5	100	nA
Open-loop voltage gain	A _v		70			dB
Unity-gain bandwidth	G _B			1.0		MHz
Maximum output voltage (Pin 6 and Pin 12)	V _{OM+}	R _{NF} = 100kΩ	V _{REF} −0.2			V
	V _{OM−}	R _{NF} = 100kΩ			200	mV
Output source current (Pin 6 and Pin 12)	I _{OM+}	V _{OM} = 1V	40	85	200	μA

PWM comparator section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input threshold voltage (Pin 6 and Pin 12)	V _{TH0}	Duty cycle = 0%		0.38	0.48	V
Input threshold voltage (Pin 6 and Pin 12)	V _{TH50}	Duty cycle = 50%		0.6		V

Dead time adjustment circuit section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input bias current (Pin 3 and Pin 14)	I _{BDT}			80	300	nA
Input threshold voltage (Pin 3 and Pin 14)	V _{TH DT0}	Duty cycle = 0%		0.38	0.48	V
Input threshold voltage (Pin 3 and Pin 14)	V _{TH DT50}	Duty cycle = 50%		0.60		V

Short-circuit protection circuit section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input threshold voltage (Pin 6 and Pin 12)	V _{TH PC}		1.60	1.80	2.00	V
Charge current (Pin 2)	I _{CHG}	Pin 2 = 0V, Pin 6, Pin 12 = 2V	18	30	42	μA
Latch-mode threshold voltage (Pin 2)	V _{TH LA}		1.60	1.80	2.00	V

Undervoltage lockout section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
OFF-to-ON threshold voltage	V _{TH ON}			2.65		V
ON-to-OFF threshold voltage	V _{TH OFF}			2.60		V
Voltage hysteresis	V _{HYS}			50		mV

Output section


Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output saturation voltage	H-level (CH.1)	Output source current = 20mA		0.3	0.8	V
	L-level (Common to CH.1 and CH.2)	Output sink current = 20mA		0.3	0.8	V
CH. 1 Output source current (Pin 11)	I _{SOURCE1}	Pin 11 = 0V	6	11	15	mA
CH. 2 Output source current (Pin 8)	I _{SOURCE2}	V _{CC} = 16V, Pin 8 = 0V	19	27	36	mA

Overall device


Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Supply current	I _{CC LA}	Latch mode		2.0	3.0	mA
Operating-state supply current	I _{CC AV}	R _L = ∞ Duty cycle = 50%		3.5	6.0	mA

■ Characteristic curves (Ta = 25°C)


Oscillation frequency (f_{osc}) vs.
timing resistor resistance (R_T)

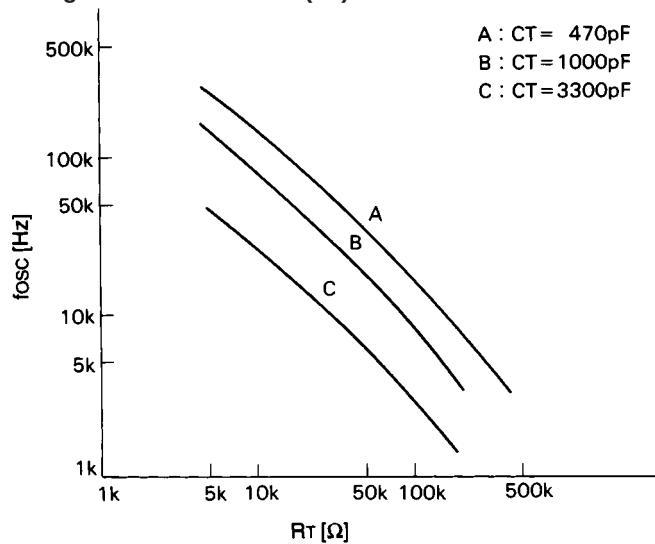


Output duty cycle vs. CS terminal voltage (V_{cs})

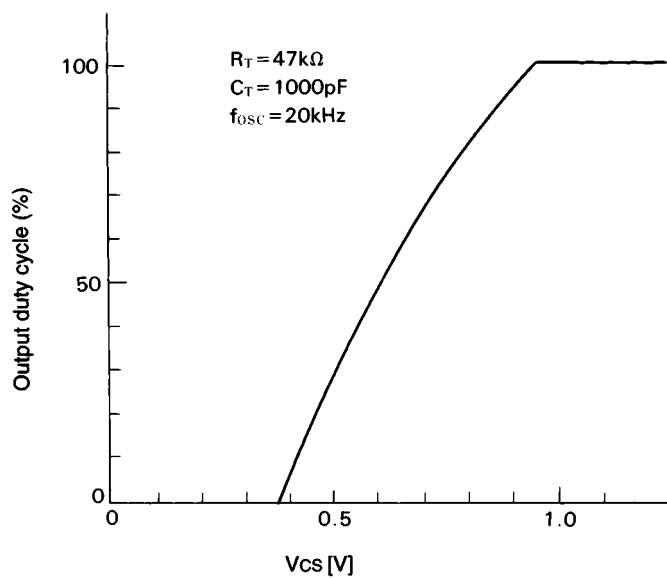


Output duty cycle vs. DT terminal voltage (V_{DT})

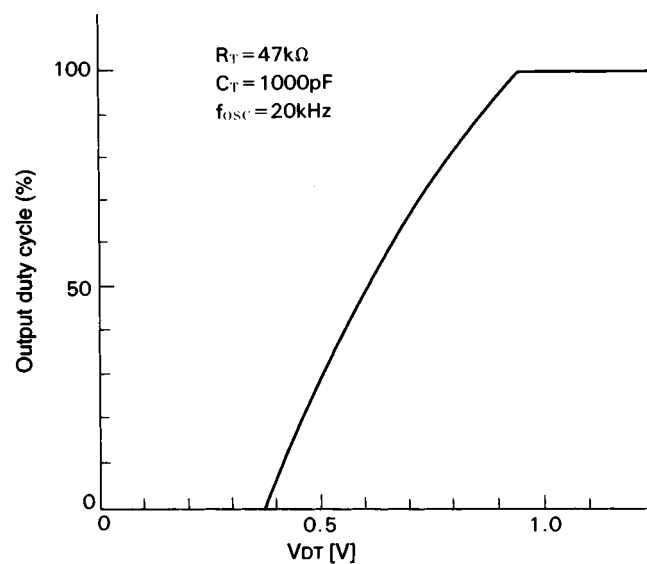


Output duty cycle vs. FB terminal voltage (V_{FB})

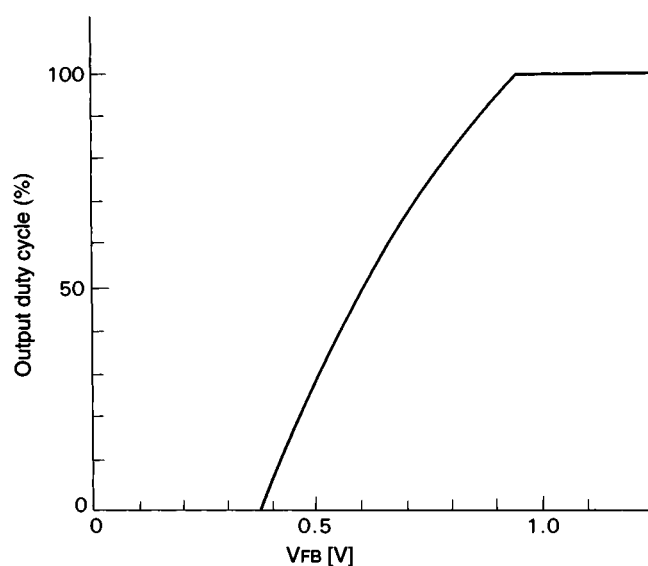


H-level output saturation voltage (V_{O1H})
vs. CH. 1 output source current ($I_{SOURCE1}$)

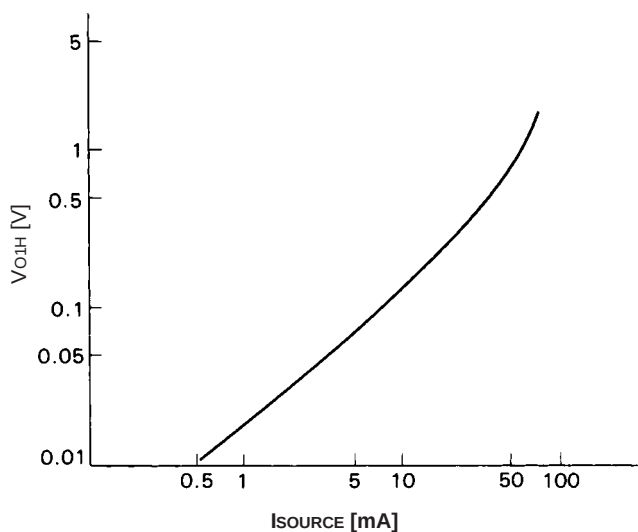


CH-2 output source current ($I_{SOURCE2}$)
vs. supply voltage (V_{CC})

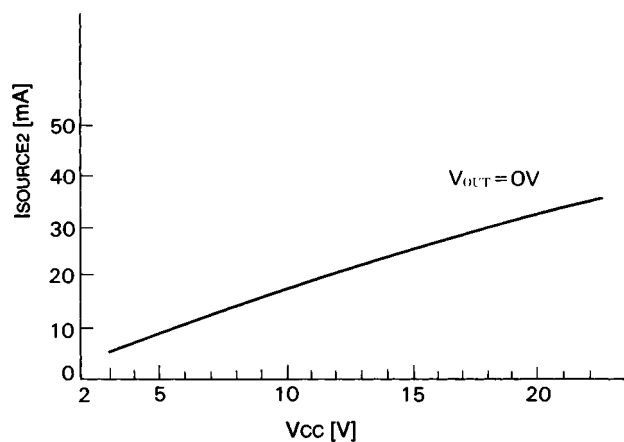


L-level output voltage (VoL) vs. output sink current (ISINK)

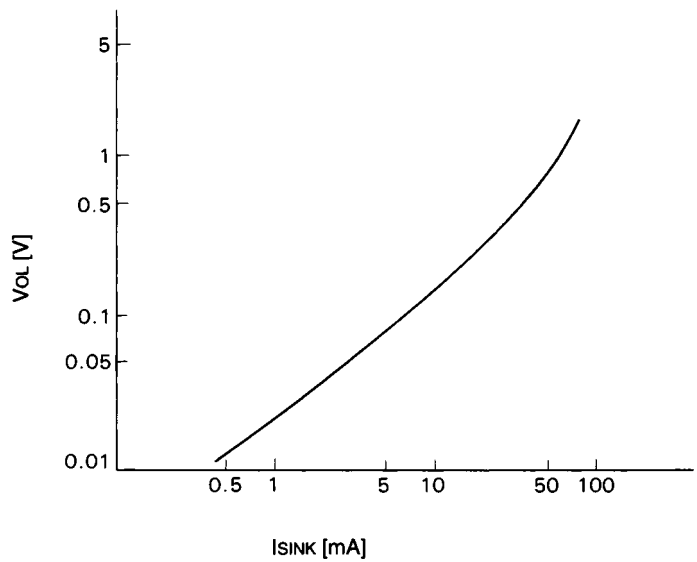

Supply current (Icc) vs. supply voltage (Vcc)

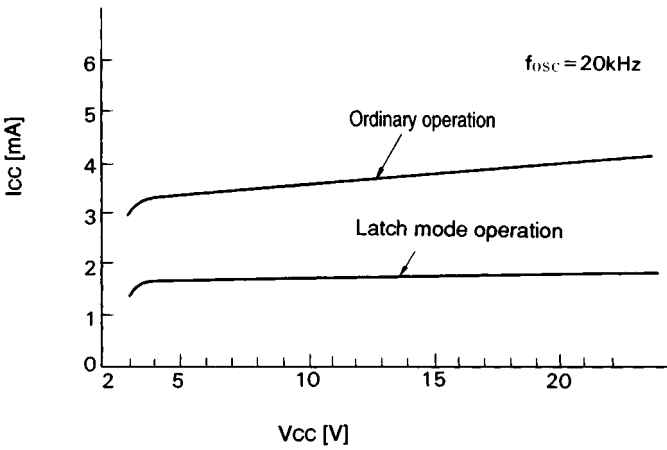


Error amplifier frequency (f) vs. voltage gain (AV)/phase (θ)

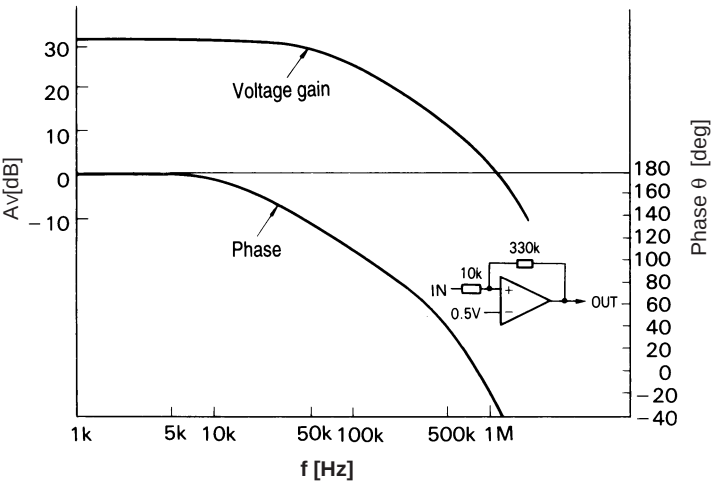

■ Application circuit

● Flyback-transformer type and chopper type boost converter circuit

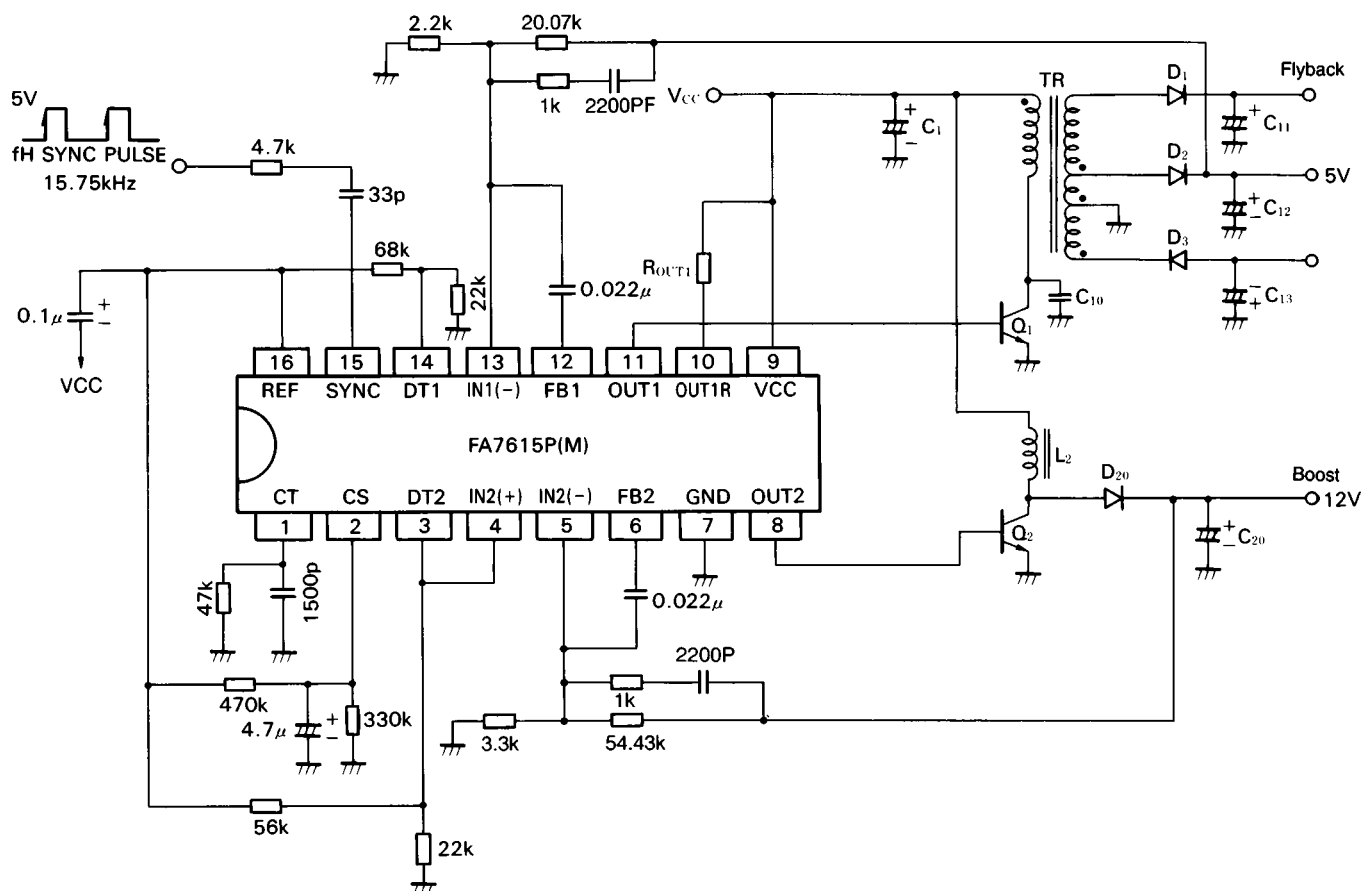

Parts tolerances characteristics are not defined in the circuit design sample shown above. When designing an actual circuit for a product, you must determine parts tolerances and characteristics for safe and economical operation.

Please connect a capacitor, which the value is about 0.01μF to 0.1μF, between VCC and REF terminals in order to prevent from irregular output pulse at start-up.