


3 Watt SMT Dual Series DC/DC Converters



Features

- SMT Technology
- 2:1 Input Range
- High Efficiency up to 83%
- I/O Isolation 1500VDC
- Short Circuit Protected
- MTBF > 1,000,000 Hours

Selection Chart					
Model	Input Range VDC		Output		
	Min	Max	VDC	mA	Power W
12D5.300SMT	9	18	±5	±300	3
12D12.125SMT	9	18	±12	±125	3
12D15.100SMT	9	18	±15	±100	3
24D5.300SMT	18	36	±5	±300	3
24D12.125SMT	18	36	±12	±125	3
24D15.100SMT	18	36	±15	±100	3
48D5.300SMT	36	75	±5	±300	3
48D12.125SMT	36	75	±12	±125	3
48D15.100SMT	36	75	±15	±100	3

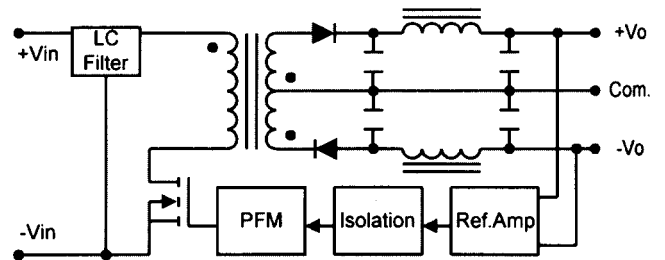

3 Watt SMT Dual Series DC/DC Converters

Input Parameters									
Model		12D5.300SMT	12D12.125SMT	12D15.100SMT	24D5.300SMT	24D12.125SMT	24D15.100SMT	Units	
Voltage Range	MIN	9.0			18.0			VDC	
	TYP	12.0			24.0				
	MAX	18.0			36.0				
Input Current	No Load	TYP	20	20	20	5	5	5	mA
	Full Load	TYP	321	309	309	158	152	152	
Reflected Ripple	TYP	25			15			mA	
Under Voltage Shutdown	MAX	8			16			VDC	
Reverse Polarity	MAX	0.5						A	
Input Current									
Short Circuit Input Power	MAX	1500						mW	
Input Filter		Pi Filter							
Efficiency	TYP	78	81	81	79	82	82	%	
Switching Frequency	TYP	300						kHz	
Input Surge Voltage	MIN	-0.7			-0.7			VDC	
(1000 ms)	MAX	25			50				
Internal Power Dissipation	MAX	2500						mW	
Recommended Fuse		750 mA Slow Blow Type			350 mA Slow Blow Type			mA	
Input Parameters									
Model		48D5.300SMT		48D12.125SMT		48D15.100SMT		Units	
Voltage Range	MIN	36.0						VDC	
	TYP	48.0							
	MAX	75.0							
Input Current	No Load	TYP	3	3		3		mA	
	Full Load	TYP	79	76		76			
Reflected Ripple	TYP	10						mA	
Under Voltage Shutdown	MAX	32						VDC	
Reverse Polarity	MAX	0.5						A	
Input Current									
Short Circuit Input Power	MAX	1500						mW	
Input Filter		Pi Filter							
Efficiency	TYP	79		82		82		%	
Switching Frequency	TYP	300						kHz	
Input Surge Voltage	MIN	-0.7						VDC	
(1000 ms)	MAX	100							
Internal Power Dissipation	MAX	2500						mW	
Recommended Fuse		200 mA Slow Blow Type						mA	

3 Watt SMT Dual Series DC/DC Converters

Output Parameters					
Model		12D5.300SMT 24D5.300SMT 48D5.300SMT	12D12.125SMT 24D12.125SMT 48D12.125SMT	12D15.100SMT 24D15.100SMT 48D15.100SMT	Units
Output Voltage		±5	±12	±15	VDC
Output Current	MIN MAX	±30 ±300	±12.5 ±125	±10 ±100	mA
Output Voltage Accuracy	TYP MAX	±0.5 ±1.0			%
Output Voltage Balance, Dual Output Balance Load	TYP MAX	±0.5 ±1.0			%
Load Regulation, Io=10% to 100%	TYP MAX	±0.3 ±1.0			%
Line Regulation, Vin=Min. to Max.	TYP MAX	±0.1 ±0.3			%
Ripple & Noise (20MHz)	TYP MAX	50 75			mV P-P
Ripple & Noise (20MHZ), Over Line, Load & Temp	MAX	100			mV P-P
Ripple & Noise (20MHZ)	MAX	10			mV RMS
Over Load	MIN	120			%
Transient Recovery Time, 25% Load Step Change	TYP MAX	200 500			µs
Transient Response Deviation, 25 % Load Step Change	TYP MAX	±2 ±6			%
Temperature Coefficient	TYP MAX	±0.01 ±0.02			%/°C
Short Circuit		Continuous			


NOTES

- (1) Specifications typical at T_a=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- (2) Transient recovery time is measured to within 1% error band for a step change in output load 75% to 100%
- (3) When measuring output ripple & noise, an external 0.1µF ceramic capacitor is recommended to be placed from each output to common.
- (4) Specifications subject to change without notice.
- (5) Water Washability - Calex DC/DC converters are designed to withstand most solder/wash processes. Careful attention should be used when assessing the applicability in your specific manufacturing process. Converters are not hermetically sealed.

General Specifications			
All Models			Units
Isolation			
Isolation Voltage, 60 Seconds	MIN	1500	VDC
Isolation Resistance, 500 VDC	TYP	1000	Mohms
Isolation Capacitance, 100kHz, 1V	TYP MAX	65 100	pF
Environmental			
Operating Temperature	MIN MAX	-40 +71	°C
Storage Temperature	MIN MAX	-40 +125	°C
Humidity	MAX	95	%
Cooling		Free-Air Convection	
General			
Case Size		1.27 x 0.74 x 0.4 inches 32.3 x 18.8 x 10.2mm	
Case Material		Non-Conductive Black Plastic	
Weight		10g	

3 Watt SMT Dual Series DC/DC Converters


Mechanical Configuration

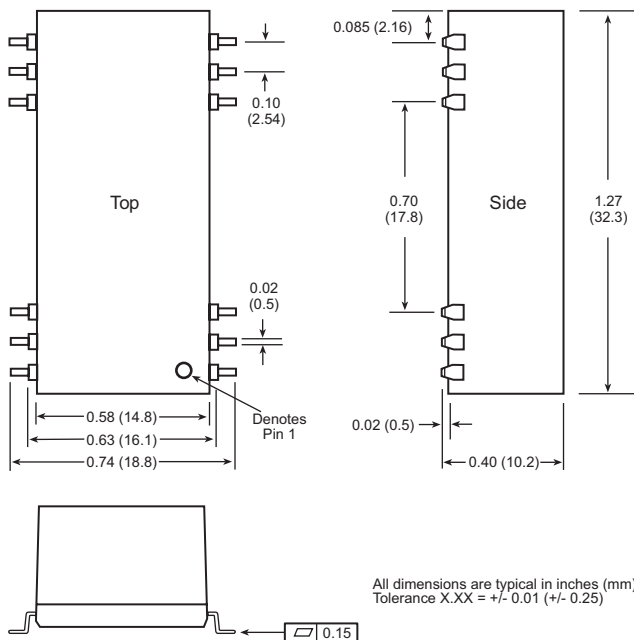


Pin	Function
1, 2	-INPUT
10	CMN
3, 11, 14, 22	NC
12	-OUTPUT
13	+OUTPUT
15	CMN
23, 24	+INPUT

NC: No Connection

Typical Application

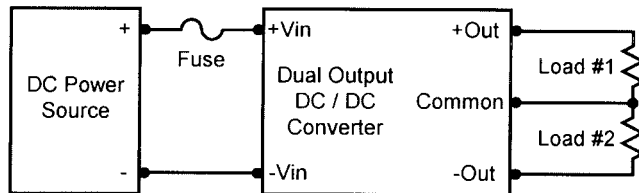

Derating Curve

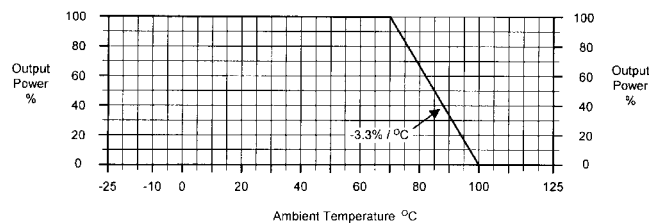

Connecting Pin Patterns

