


- **Output Swing Includes Both Supply Rails**
- **Low Noise . . . 15 nV/√Hz Typ at f = 1 kHz**
- **Low Input Bias Current . . . 1 pA Typ**
- **Fully Specified for Single-Supply 3-V and 5-V Operation**
- **Common-Mode Input Voltage Range Includes Negative Rail**
- **High Gain Bandwidth . . . 2 MHz at V<sub>DD</sub> = 5 V with 600 Ω Load**
- **High Slew Rate . . . 1.6 V/μs at V<sub>DD</sub> = 5 V**
- **Wide Supply Voltage Range 2.7 V to 10 V**
- **Macromodel Included**

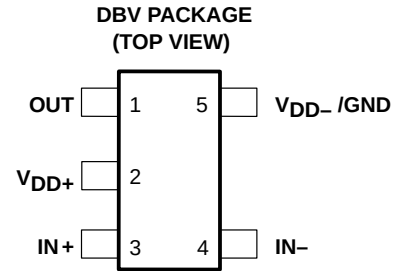

## description

The TLV2731 is a single low-voltage operational amplifier available in the SOT-23 package. It offers 2 MHz of bandwidth and 1.6 V/μs of slew rate for applications requiring good ac performance. The device exhibits rail-to-rail output performance for increased dynamic range in single or split supply applications. The TLV2731 is fully characterized at 3 V and 5 V and is optimized for low-voltage applications.

The TLV2731, exhibiting high input impedance and low noise, is excellent for small-signal conditioning of high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels combined with 3-V operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). The device can also drive 600-Ω loads for telecom applications.

With a total area of 5.6mm<sup>2</sup>, the SOT-23 package only requires one-third the board space of the standard 8-pin SOIC package. This ultra-small package allows designers to place single amplifiers very close to the signal source, minimizing noise pick-up from long PCB traces.

## AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max AT 25°C | PACKAGED DEVICES | SYMBOL | CHIP FORM‡<br>(Y) |
|----------------|-----------------------------|------------------|--------|-------------------|
|                |                             | SOT-23 (DBV)†    |        |                   |
| 0°C to 70°C    | 3 mV                        | TLV2731CDBV      | VALC   | TLV2731Y          |
| –40°C to 85°C  | 3 mV                        | TLV2731IDBV      | VALI   |                   |

† The DBV package available in tape and reel only.

‡ Chip forms are tested at T<sub>A</sub> = 25°C only.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated

# TLV2731, TLV2731Y

## Advanced LinCMOS™ RAIL-TO-RAIL



### LOW-POWER SINGLE OPERATIONAL AMPLIFIERS

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

#### TLV2731Y chip information

This chip, when properly assembled, displays characteristics similar to the TLV2731C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. This chip may be mounted with conductive epoxy or a gold-silicon preform.

#### BONDING PAD ASSIGNMENTS

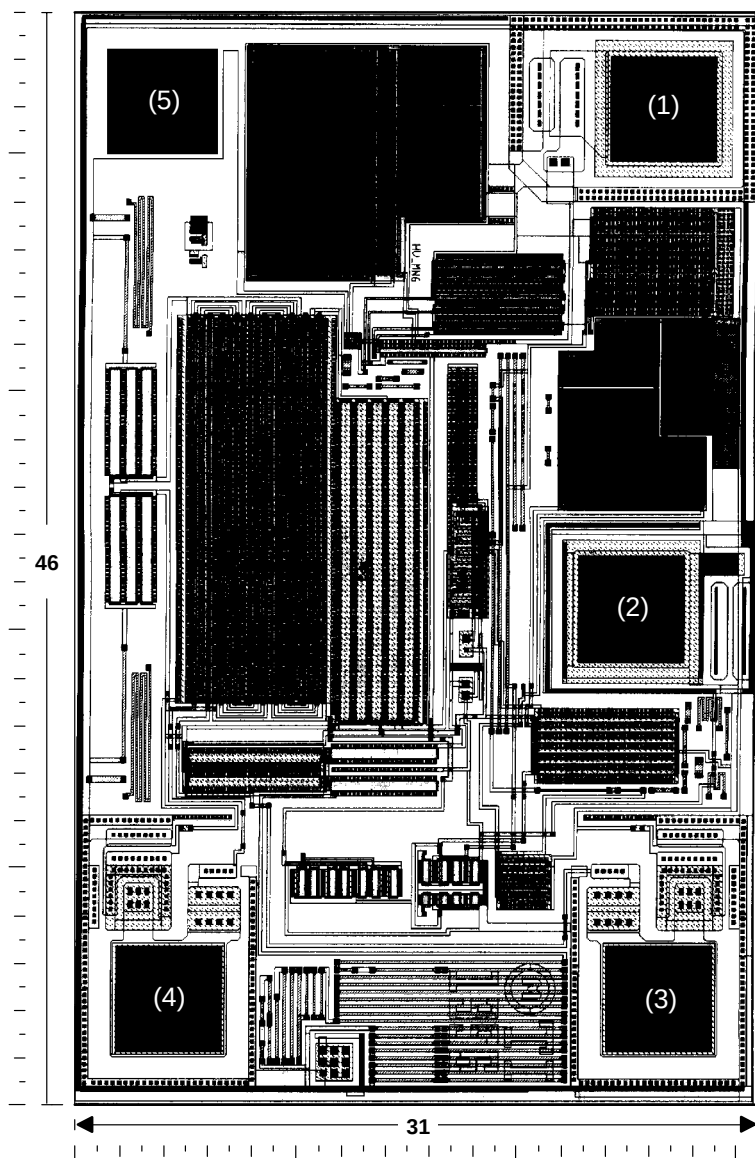

CHIP THICKNESS: 10 MILS TYPICAL

BONDING PADS:  $4 \times 4$  MILS MINIMUM


$T_{jmax} = 150^{\circ}\text{C}$

TOLERANCES ARE  $\pm 10\%$ .

ALL DIMENSIONS ARE IN MILS.

PIN (2) IS INTERNALLY CONNECTED TO BACKSIDE OF CHIP.

equivalent schematic

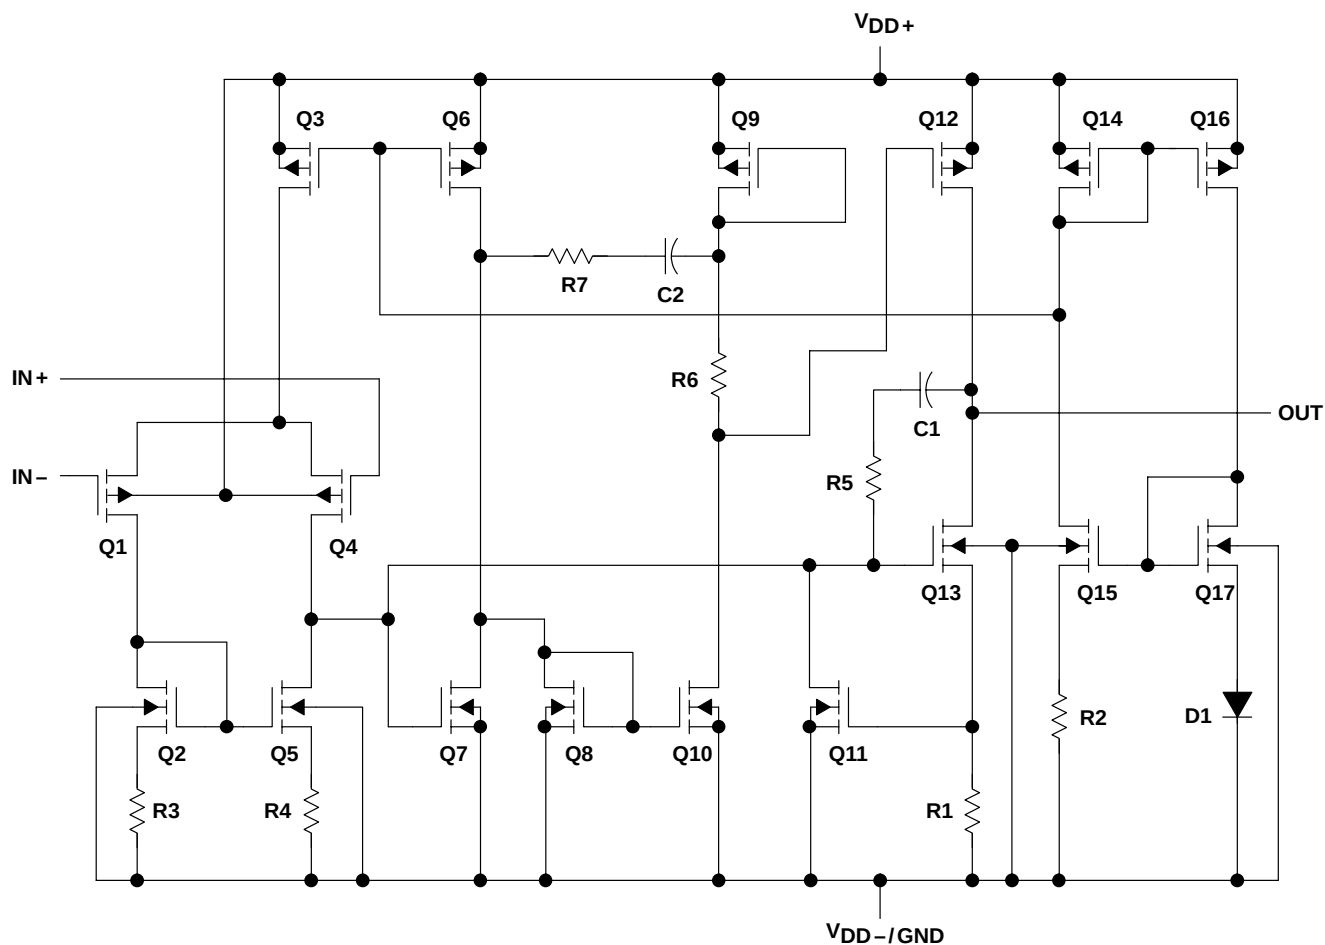

| COMPONENT COUNT† |    |
|------------------|----|
| Transistors      | 23 |
| Diodes           | 5  |
| Resistors        | 11 |
| Capacitors       | 2  |

† Includes both amplifiers and all ESD, bias, and trim circuitry

# TLV2731, TLV2731Y

## Advanced LinCMOS™ RAIL-TO-RAIL

### LOW-POWER SINGLE OPERATIONAL AMPLIFIERS

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                           |                              |
|---------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                                     | 12 V                         |
| Differential input voltage, $V_{ID}$ (see Note 2)                         | $\pm V_{DD}$                 |
| Input voltage range, $V_I$ (any input, see Note 1)                        | $-0.3\text{ V to }V_{DD}$    |
| Input current, $I_I$ (each input)                                         | $\pm 5\text{ mA}$            |
| Output current, $I_O$                                                     | $\pm 50\text{ mA}$           |
| Total current into $V_{DD+}$                                              | $\pm 50\text{ mA}$           |
| Total current out of $V_{DD-}$                                            | $\pm 50\text{ mA}$           |
| Duration of short-circuit current (at or below) 25°C (see Note 3)         | unlimited                    |
| Continuous total power dissipation                                        | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : TLV2731C                    | 0°C to 70°C                  |
| TLV2731I                                                                  | -40°C to 85°C                |
| Storage temperature range, $T_{stg}$                                      | -65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: DBV package | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to  $V_{DD-}$ .
2. Differential voltages are at the noninverting input with respect to the inverting input. Excessive current flows when input is brought below  $V_{DD-} - 0.3\text{ V}$ .
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|
| DBV     | 150 mW                                      | 1.2 mW/°C                                         | 96 mW                                    | 78 mW                                    |

#### recommended operating conditions

|                                       | TLV2731C  |                 | TLV2731I  |                 | UNIT |
|---------------------------------------|-----------|-----------------|-----------|-----------------|------|
|                                       | MIN       | MAX             | MIN       | MAX             |      |
| Supply voltage, $V_{DD}$ (see Note 1) | 2.7       | 10              | 2.7       | 10              | V    |
| Input voltage range, $V_I$            | $V_{DD-}$ | $V_{DD+} - 1.3$ | $V_{DD-}$ | $V_{DD+} - 1.3$ | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD-}$ | $V_{DD+} - 1.3$ | $V_{DD-}$ | $V_{DD+} - 1.3$ | V    |
| Operating free-air temperature, $T_A$ | 0         | 70              | -40       | 85              | °C   |

NOTE 1: All voltage values, except differential voltages, are with respect to  $V_{DD-}$ .



**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                                      | TEST CONDITIONS                                                                            |                                     | T <sub>A</sub> <sup>†</sup> | TLV2731C         |             |                  | TLV2731I    |       |     | UNIT |
|------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|------------------|-------------|------------------|-------------|-------|-----|------|
|                  |                                                                      |                                                                                            |                                     |                             | MIN              | TYP         | MAX              | MIN         | TYP   | MAX |      |
| V <sub>IO</sub>  | Input offset voltage                                                 | V <sub>DD</sub> ± = ±1.5 V, V <sub>IC</sub> = 0, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω |                                     | Full range                  | 0.7              |             | 3                | 0.7         |       | 3   | mV   |
| α <sub>VIO</sub> | Temperature coefficient of input offset voltage                      |                                                                                            |                                     |                             | 0.5              |             | 0.5              |             | μV/°C |     |      |
|                  | Input offset voltage long-term drift (see Note 4)                    |                                                                                            |                                     | 25°C                        | 0.003            |             | 0.003            |             | μV/mo |     |      |
| I <sub>IO</sub>  | Input offset current                                                 |                                                                                            |                                     | 25°C                        | 0.5              | 60          | 0.5              | 60          | pA    |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 150              |             | 150              |             |       |     |      |
| I <sub>IB</sub>  | Input bias current                                                   |                                                                                            |                                     | 25°C                        | 1                | 60          | 1                | 60          | pA    |     |      |
|                  |                                                                      | Full range                                                                                 | 150                                 |                             | 150              |             |                  |             |       |     |      |
| V <sub>ICR</sub> | Common-mode input voltage range                                      | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                                           |                                     | 25°C                        | 0 to 2           | −0.3 to 2.2 | 0 to 2           | −0.3 to 2.2 | V     |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 0 to 1.7         | 0 to 1.7    |                  |             |       |     |      |
| V <sub>OH</sub>  | High-level output voltage                                            | I <sub>OH</sub> = −1 mA                                                                    |                                     | 25°C                        | 2.87             |             | 2.87             |             | V     |     |      |
|                  |                                                                      | I <sub>OH</sub> = −2 mA                                                                    |                                     | 25°C                        | 2.74             |             | 2.74             |             |       |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 2.3              |             | 2.3              |             |       |     |      |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>IC</sub> = 1.5 V, I <sub>OL</sub> = 50 μA                                           |                                     | 25°C                        | 10               |             | 10               |             | mV    |     |      |
|                  |                                                                      | V <sub>IC</sub> = 1.5 V, I <sub>OL</sub> = 500 μA                                          |                                     | 25°C                        | 100              |             | 100              |             |       |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 300              |             | 300              |             |       |     |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 1.5 V, V <sub>O</sub> = 1 V to 2 V                                       | R <sub>L</sub> = 600 Ω <sup>‡</sup> | 25°C                        | 1                | 1.6         | 1                | 1.6         | V/mV  |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 0.3              |             | 0.3              |             |       |     |      |
|                  |                                                                      |                                                                                            | R <sub>L</sub> = 1 MΩ <sup>‡</sup>  | 25°C                        | 250              |             | 250              |             |       |     |      |
| r <sub>id</sub>  | Differential input resistance                                        |                                                                                            |                                     | 25°C                        | 10 <sup>12</sup> |             | 10 <sup>12</sup> |             | Ω     |     |      |
| r <sub>ic</sub>  | Common-mode input resistance                                         |                                                                                            |                                     | 25°C                        | 10 <sup>12</sup> |             | 10 <sup>12</sup> |             | Ω     |     |      |
| c <sub>ic</sub>  | Common-mode input capacitance                                        | f = 10 kHz                                                                                 |                                     | 25°C                        | 6                |             | 6                |             | pF    |     |      |
| z <sub>o</sub>   | Closed-loop output impedance                                         | f = 1 MHz, A <sub>V</sub> = 1                                                              |                                     | 25°C                        | 156              |             | 156              |             | Ω     |     |      |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = 0 to 1.7 V, V <sub>O</sub> = 1.5 V, R <sub>S</sub> = 50 Ω                |                                     | 25°C                        | 60               | 70          | 60               | 70          | dB    |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 55               |             | 55               |             |       |     |      |
| k <sub>SVR</sub> | Supply voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 8 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load              |                                     | 25°C                        | 70               | 96          | 70               | 96          | dB    |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 70               |             | 70               |             |       |     |      |
| I <sub>DD</sub>  | Supply current                                                       | V <sub>O</sub> = 1.5 V, No load                                                            |                                     | 25°C                        | 750              | 1200        | 750              | 1200        | μA    |     |      |
|                  |                                                                      |                                                                                            |                                     | Full range                  | 1500             |             | 1500             |             |       |     |      |

$^\dagger$  Full range for the TLV2731C is 0°C to 70°C. Full range for the TLV2731I is – 40°C to 85°C.

$^\ddagger$  Referenced to 1.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLV2731, TLV2731Y**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**LOW-POWER SINGLE OPERATIONAL AMPLIFIERS**

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

**operating characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                                 | $T_A$ †    | TLV2731C |        |     | TLV2731I |        |     | UNIT                   |
|-------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------|----------|--------|-----|----------|--------|-----|------------------------|
|             |                                             |                                                                                                                 |            | MIN      | TYP    | MAX | MIN      | TYP    | MAX |                        |
| SR          | Slew rate at unity gain                     | $V_O = 1.1\text{ V to }1.9\text{ V},$<br>$C_L = 100\text{ pF}^\ddagger$<br>$R_L = 600\text{ }\Omega^\ddagger$   | 25°C       | 0.75     | 1.25   |     | 0.75     | 1.25   |     | V/ $\mu\text{s}$       |
|             |                                             |                                                                                                                 | Full range | 0.5      |        |     | 0.5      |        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$                                                                                              | 25°C       |          | 105    |     |          | 105    |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                              | 25°C       |          | 16     |     |          | 16     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                              | 25°C       |          | 1.4    |     |          | 1.4    |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                             | 25°C       |          | 1.5    |     |          | 1.5    |     |                        |
| $I_n$       | Equivalent input noise current              |                                                                                                                 | 25°C       |          | 0.6    |     |          | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD+N       | Total harmonic distortion plus noise        | $V_O = 1\text{ V to }2\text{ V},$<br>$f = 20\text{ kHz},$<br>$R_L = 600\text{ }\Omega^\ddagger$                 | 25°C       |          | 0.285% |     |          | 0.285% |     |                        |
|             |                                             |                                                                                                                 |            |          | 7.2%   |     |          | 7.2%   |     |                        |
|             |                                             | $V_O = 1\text{ V to }2\text{ V},$<br>$f = 20\text{ kHz},$<br>$R_L = 600\text{ }\Omega^\S$                       | 25°C       |          | 0.014% |     |          | 0.014% |     |                        |
|             |                                             |                                                                                                                 |            |          | 0.098% |     |          | 0.098% |     |                        |
|             |                                             |                                                                                                                 |            |          | 0.13%  |     |          | 0.13%  |     |                        |
|             |                                             |                                                                                                                 |            |          |        |     |          |        |     |                        |
|             | Gain-bandwidth product                      | $f = 10\text{ kHz},$<br>$C_L = 100\text{ pF}^\ddagger$<br>$R_L = 600\text{ }\Omega^\ddagger$                    | 25°C       |          | 1.9    |     |          | 1.9    |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 1\text{ V},$<br>$R_L = 600\text{ }\Omega^\ddagger$<br>$A_V = 1,$<br>$C_L = 100\text{ pF}^\ddagger$ | 25°C       |          | 60     |     |          | 60     |     | kHz                    |
| $t_s$       | Settling time                               | $A_V = -1,$<br>Step = 1 V to 2 V,<br>$R_L = 600\text{ }\Omega^\ddagger$<br>$C_L = 100\text{ pF}^\ddagger$       | 25°C       |          | 0.9    |     |          | 0.9    |     | $\mu\text{s}$          |
|             |                                             |                                                                                                                 |            |          | 1.5    |     |          | 1.5    |     |                        |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 600\text{ }\Omega^\ddagger$<br>$C_L = 100\text{ pF}^\ddagger$                                            | 25°C       |          | 50°    |     |          | 50°    |     |                        |
|             | Gain margin                                 |                                                                                                                 | 25°C       |          | 8      |     |          | 8      |     | dB                     |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

‡ Referenced to 1.5 V

§ Referenced to 0 V

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                         |                                                                      | TEST CONDITIONS                                                                           |                                     | T <sub>A</sub> <sup>†</sup> | TLV2731C           |     |     | TLV2731I           |     |     | UNIT  |
|---------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|--------------------|-----|-----|--------------------|-----|-----|-------|
|                                                   |                                                                      |                                                                                           |                                     |                             | MIN                | TYP | MAX | MIN                | TYP | MAX |       |
| V <sub>IO</sub>                                   | Input offset voltage                                                 | V <sub>DD±</sub> = ±2.5 V, V <sub>IC</sub> = 0, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω |                                     | Full range                  | 0.7 3              |     |     | 0.7 3              |     |     | mV    |
| α <sub>VIO</sub>                                  | Temperature coefficient of input offset voltage                      |                                                                                           |                                     |                             | 0.5                |     |     | 0.5                |     |     | μV/°C |
| Input offset voltage long-term drift (see Note 4) |                                                                      |                                                                                           |                                     | 25°C                        | 0.003              |     |     | 0.003              |     |     | μV/mo |
| I <sub>IO</sub>                                   | Input offset current                                                 |                                                                                           |                                     | 25°C                        | 0.5 60             |     |     | 0.5 60             |     |     | pA    |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 150                |     |     | 150                |     |     |       |
| I <sub>IB</sub>                                   | Input bias current                                                   |                                                                                           |                                     | 25°C                        | 1 60               |     |     | 1 60               |     |     | pA    |
|                                                   |                                                                      | Full range                                                                                | 150                                 |                             |                    | 150 |     |                    |     |     |       |
| V <sub>ICR</sub>                                  | Common-mode input voltage range                                      | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                                          |                                     | 25°C                        | 0 to 4 −0.3 to 4.2 |     |     | 0 to 4 −0.3 to 4.2 |     |     | V     |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 0 to 3.7           |     |     | 0 to 3.7           |     |     |       |
| V <sub>OH</sub>                                   | High-level output voltage                                            | I <sub>OH</sub> = −1 mA                                                                   |                                     | 25°C                        | 4.9                |     |     | 4.9                |     |     | V     |
|                                                   |                                                                      | I <sub>OH</sub> = −4 mA                                                                   |                                     | 25°C                        | 4.6                |     |     | 4.6                |     |     |       |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 4.3                |     |     | 4.3                |     |     |       |
| V <sub>OL</sub>                                   | Low-level output voltage                                             | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 500 μA                                         |                                     | 25°C                        | 80                 |     |     | 80                 |     |     | mV    |
|                                                   |                                                                      | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 1 mA                                           |                                     | 25°C                        | 160                |     |     | 160                |     |     |       |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 500                |     |     | 500                |     |     |       |
| A <sub>VD</sub>                                   | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V, V <sub>O</sub> = 1 V to 4 V                                      | R <sub>L</sub> = 600 Ω <sup>‡</sup> | 25°C                        | 1 1.5              |     |     | 1 1.5              |     |     | V/mV  |
|                                                   |                                                                      |                                                                                           | R <sub>L</sub> = 1 MΩ <sup>‡</sup>  | Full range                  | 0.3                |     |     | 0.3                |     |     |       |
|                                                   |                                                                      |                                                                                           |                                     | 25°C                        | 400                |     |     | 400                |     |     |       |
| r <sub>id</sub>                                   | Differential input resistance                                        |                                                                                           |                                     | 25°C                        | 10 <sup>12</sup>   |     |     | 10 <sup>12</sup>   |     |     | Ω     |
| r <sub>ic</sub>                                   | Common-mode input resistance                                         |                                                                                           |                                     | 25°C                        | 10 <sup>12</sup>   |     |     | 10 <sup>12</sup>   |     |     | Ω     |
| c <sub>ic</sub>                                   | Common-mode input capacitance                                        | f = 10 kHz                                                                                |                                     | 25°C                        | 6                  |     |     | 6                  |     |     | pF    |
| z <sub>o</sub>                                    | Closed-loop output impedance                                         | f = 1 MHz, A <sub>V</sub> = 1                                                             |                                     | 25°C                        | 138                |     |     | 138                |     |     | Ω     |
| CMRR                                              | Common-mode rejection ratio                                          | V <sub>IC</sub> = 0 to 2.7 V, V <sub>O</sub> = 2.5 V, R <sub>S</sub> = 50 Ω               |                                     | 25°C                        | 60 70              |     |     | 60 70              |     |     | dB    |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 55                 |     |     | 55                 |     |     |       |
| k <sub>SVR</sub>                                  | Supply voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 8 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load             |                                     | 25°C                        | 70 96              |     |     | 70 96              |     |     | dB    |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 70                 |     |     | 70                 |     |     |       |
| I <sub>DD</sub>                                   | Supply current                                                       | V <sub>O</sub> = 2.5 V, No load                                                           |                                     | 25°C                        | 850 1300           |     |     | 850 1300           |     |     | μA    |
|                                                   |                                                                      |                                                                                           |                                     | Full range                  | 1600               |     |     | 1600               |     |     |       |

$^\dagger$  Full range for the TLV2731C is 0°C to 70°C. Full range for the TLV2731I is – 40°C to 85°C.

$^\ddagger$  Referenced to 2.5 V

NOTE 5: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLV2731, TLV2731Y**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**LOW-POWER SINGLE OPERATIONAL AMPLIFIERS**

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS                             |                                                                                                          | $T_A$ †                                              | TLV2731C |       |        | TLV2731I |        |     | UNIT                   |
|-------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------|-------|--------|----------|--------|-----|------------------------|
|             |                                             |                                                                                                          |                                                      | MIN      | TYP   | MAX    | MIN      | TYP    | MAX |                        |
| SR          | Slew rate at unity gain                     | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$C_L = 100\text{ pF}^\ddagger$                                  | $R_L = 600\ \Omega^\ddagger,$<br>25°C                | 1        | 1.6   |        | 1        | 1.6    |     | V/ $\mu\text{s}$       |
|             |                                             |                                                                                                          | Full range                                           | 0.7      |       |        | 0.7      |        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$                                                                                       | 25°C                                                 |          | 100   |        |          | 100    |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                       | 25°C                                                 |          | 15    |        |          | 15     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                       | 25°C                                                 |          | 1.4   |        |          | 1.4    |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                      | 25°C                                                 |          | 1.5   |        |          | 1.5    |     |                        |
| $I_n$       | Equivalent input noise current              |                                                                                                          | 25°C                                                 |          | 0.6   |        |          | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD+N       | Total harmonic distortion plus noise        | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$f = 20\text{ kHz},$<br>$R_L = 600\ \Omega^\ddagger$            | $A_V = 1$                                            | 25°C     |       | 0.409% |          | 0.409% |     |                        |
|             |                                             |                                                                                                          | $A_V = 10$                                           |          | 3.68% |        |          | 3.68%  |     |                        |
|             |                                             | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$f = 20\text{ kHz},$<br>$R_L = 600\ \Omega^\S$                  | $A_V = 1$                                            | 25°C     |       | 0.018% |          | 0.018% |     |                        |
|             |                                             |                                                                                                          | $A_V = 10$                                           |          |       | 0.045% |          | 0.045% |     |                        |
|             |                                             |                                                                                                          | $A_V = 100$                                          |          |       | 0.116% |          | 0.116% |     |                        |
|             |                                             |                                                                                                          |                                                      |          |       |        |          |        |     |                        |
|             | Gain-bandwidth product                      | $f = 10\text{ kHz},$<br>$C_L = 100\text{ pF}^\ddagger$                                                   | $R_L = 600\ \Omega^\ddagger,$<br>25°C                |          | 2     |        |          | 2      |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 1\text{ V},$<br>$R_L = 600\ \Omega^\ddagger,$                                               | $A_V = 1,$<br>$C_L = 100\text{ pF}^\ddagger$<br>25°C |          | 300   |        |          | 300    |     | kHz                    |
| $t_s$       | Settling time                               | $A_V = -1,$<br>Step = 1.5 V to 3.5 V,<br>$R_L = 600\ \Omega^\ddagger,$<br>$C_L = 100\text{ pF}^\ddagger$ | To 0.1%                                              | 25°C     | 0.95  |        |          | 0.95   |     | $\mu\text{s}$          |
|             |                                             |                                                                                                          | To 0.01%                                             |          | 2.4   |        |          | 2.4    |     |                        |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 600\ \Omega^\ddagger,$                                                                            | $C_L = 100\text{ pF}^\ddagger$<br>25°C               |          | 48°   |        |          | 48°    |     |                        |
|             | Gain margin                                 |                                                                                                          | 25°C                                                 |          | 8     |        |          | 8      |     | dB                     |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

‡ Referenced to 2.5 V

§ Referenced to 0 V



**electrical characteristics at  $V_{DD} = 3\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                  | TLV2731Y |                                  |     | UNIT          |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------|----------------------------------|-----|---------------|
|                                                                            |                                                                                  | MIN      | TYP                              | MAX |               |
| $V_{IO}$ Input offset voltage                                              | $V_{DD} \pm \pm 1.5\text{ V}$ , $V_{IC} = 0$ , $V_O = 0$ ,<br>$R_S = 50\ \Omega$ |          | 750                              |     | $\mu\text{V}$ |
| $I_{IO}$ Input offset current                                              |                                                                                  |          | 0.5                              | 60  | $\text{pA}$   |
| $I_{IB}$ Input bias current                                                |                                                                                  |          | 1                                | 60  | $\text{pA}$   |
| $V_{ICR}$ Common-mode input voltage range                                  | $ V_{IO}  \leq 5\text{ mV}$ , $R_S = 50\ \Omega$                                 |          | –0.3<br>to<br>2.2                |     | $\text{V}$    |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -1\text{ mA}$                                                          |          | 2.87                             |     | $\text{V}$    |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 1.5\text{ V}$ , $I_{OL} = 50\ \mu\text{A}$                             |          | 10                               |     | $\text{mV}$   |
|                                                                            | $V_{IC} = 1.5\text{ V}$ , $I_{OL} = 500\ \mu\text{A}$                            |          | 100                              |     |               |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_O = 1\text{ V to }2\text{ V}$                                                 |          | $R_L = 600\ \Omega^\dagger$      | 1.6 | $\text{V/mV}$ |
|                                                                            |                                                                                  |          | $R_L = 1\text{ M}\Omega^\dagger$ | 250 |               |
| $r_{id}$ Differential input resistance                                     |                                                                                  |          | $10^{12}$                        |     | $\Omega$      |
| $r_{ic}$ Common-mode input resistance                                      |                                                                                  |          | $10^{12}$                        |     | $\Omega$      |
| $c_{ic}$ Common-mode input capacitance                                     | $f = 10\text{ kHz}$                                                              |          | 6                                |     | $\text{pF}$   |
| $z_o$ Closed-loop output impedance                                         | $f = 1\text{ MHz}$ , $A_V = 1$                                                   |          | 156                              |     | $\Omega$      |
| CMRR Common-mode rejection ratio                                           | $V_{IC} = 0\text{ to }1.7\text{ V}$ , $V_O = 0$ , $R_S = 50\ \Omega$             |          | 70                               |     | $\text{dB}$   |
| $k_{SVR}$ Supply voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 2.7\text{ V to }8\text{ V}$ , $V_{IC} = 0$ , No load                   |          | 96                               |     | $\text{dB}$   |
| $I_{DD}$ Supply current                                                    | $V_O = 0$ , No load                                                              |          | 750                              |     | $\mu\text{A}$ |

$^\dagger$  Referenced to 1.5 V

**electrical characteristics at  $V_{DD} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                  | TLV2731Y |                                  |     | UNIT          |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------|----------------------------------|-----|---------------|
|                                                                            |                                                                                  | MIN      | TYP                              | MAX |               |
| $V_{IO}$ Input offset voltage                                              | $V_{DD} \pm \pm 1.5\text{ V}$ , $V_{IC} = 0$ , $V_O = 0$ ,<br>$R_S = 50\ \Omega$ |          | 710                              |     | $\mu\text{V}$ |
| $I_{IO}$ Input offset current                                              |                                                                                  |          | 0.5                              | 60  | $\text{pA}$   |
| $I_{IB}$ Input bias current                                                |                                                                                  |          | 1                                | 60  | $\text{pA}$   |
| $V_{ICR}$ Common-mode input voltage range                                  | $ V_{IO}  \leq 5\text{ mV}$ , $R_S = 50\ \Omega$                                 |          | –0.3<br>to<br>4.2                |     | $\text{V}$    |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -1\text{ mA}$                                                          |          | 4.9                              |     | $\text{V}$    |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 500\ \mu\text{A}$                            |          | 80                               |     | $\text{mV}$   |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 1\text{ mA}$                                 |          | 160                              |     |               |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_O = 1\text{ V to }2\text{ V}$                                                 |          | $R_L = 600\ \Omega^\dagger$      | 15  | $\text{V/mV}$ |
|                                                                            |                                                                                  |          | $R_L = 1\text{ M}\Omega^\dagger$ | 400 |               |
| $r_{id}$ Differential input resistance                                     |                                                                                  |          | $10^{12}$                        |     | $\Omega$      |
| $r_{ic}$ Common-mode input resistance                                      |                                                                                  |          | $10^{12}$                        |     | $\Omega$      |
| $c_{ic}$ Common-mode input capacitance                                     | $f = 10\text{ kHz}$                                                              |          | 6                                |     | $\text{pF}$   |
| $z_o$ Closed-loop output impedance                                         | $f = 1\text{ MHz}$ , $A_V = 1$                                                   |          | 138                              |     | $\Omega$      |
| CMRR Common-mode rejection ratio                                           | $V_{IC} = 0\text{ to }1.7\text{ V}$ , $V_O = 0$ , $R_S = 50\ \Omega$             |          | 70                               |     | $\text{dB}$   |
| $k_{SVR}$ Supply voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 2.7\text{ V to }8\text{ V}$ , $V_{IC} = 0$ , No load                   |          | 96                               |     | $\text{dB}$   |
| $I_{DD}$ Supply current                                                    | $V_O = 0$ , No load                                                              |          | 850                              |     | $\mu\text{A}$ |

$^\dagger$  Referenced to 2.5 V

**TLV2731, TLV2731Y**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**LOW-POWER SINGLE OPERATIONAL AMPLIFIERS**

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS**

**Table of Graphs**

|                 |                                                 |                                                | <b>FIGURE</b>    |
|-----------------|-------------------------------------------------|------------------------------------------------|------------------|
| $V_{IO}$        | Input offset voltage                            | Distribution<br>vs Common-mode input voltage   | 1, 2<br>3, 4     |
| $\alpha_{VIO}$  | Input offset voltage temperature coefficient    | Distribution                                   | 5, 6             |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents            | vs Free-air temperature                        | 7                |
| $V_I$           | Input voltage                                   | vs Supply voltage<br>vs Free-air temperature   | 8<br>9           |
| $V_{OH}$        | High-level output voltage                       | vs High-level output current                   | 10, 13           |
| $V_{OL}$        | Low-level output voltage                        | vs Low-level output current                    | 11, 12, 14       |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage             | vs Frequency                                   | 15               |
| $I_{OS}$        | Short-circuit output current                    | vs Supply voltage<br>vs Free-air temperature   | 16<br>17         |
| $V_O$           | Output voltage                                  | vs Differential input voltage                  | 18, 19           |
| $A_{VD}$        | Differential voltage amplification              | vs Load resistance                             | 20               |
| $A_{VD}$        | Large-signal differential voltage amplification | vs Frequency<br>vs Free-air temperature        | 21, 22<br>23, 24 |
| $z_o$           | Output impedance                                | vs Frequency                                   | 25, 26           |
| $CMRR$          | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature        | 27<br>28         |
| $k_{SVR}$       | Supply-voltage rejection ratio                  | vs Frequency<br>vs Free-air temperature        | 29, 30<br>31     |
| $I_{DD}$        | Supply current                                  | vs Supply voltage                              | 32               |
| $SR$            | Slew rate                                       | vs Load capacitance<br>vs Free-air temperature | 33<br>34         |
| $V_O$           | Inverting large-signal pulse response           |                                                | 35, 36           |
| $V_O$           | Voltage-follower large-signal pulse response    |                                                | 37, 38           |
| $V_O$           | Inverting small-signal pulse response           |                                                | 39, 40           |
| $V_O$           | Voltage-follower small-signal pulse response    |                                                | 41, 42           |
| $V_n$           | Equivalent input noise voltage                  | vs Frequency                                   | 43, 44           |
|                 | Noise voltage (referred to input)               | Over a 10-second period                        | 45               |
| $THD + N$       | Total harmonic distortion plus noise            | vs Frequency                                   | 46               |
|                 | Gain-bandwidth product                          | vs Free-air temperature<br>vs Supply voltage   | 47<br>48         |
|                 | Gain margin                                     | vs Load capacitance                            | 49, 50           |
| $\phi_m$        | Phase margin                                    | vs Frequency<br>vs Load capacitance            | 21, 22<br>51, 52 |
| $B_1$           | Unity-gain bandwidth                            | vs Load capacitance                            | 53, 54           |

## TYPICAL CHARACTERISTICS

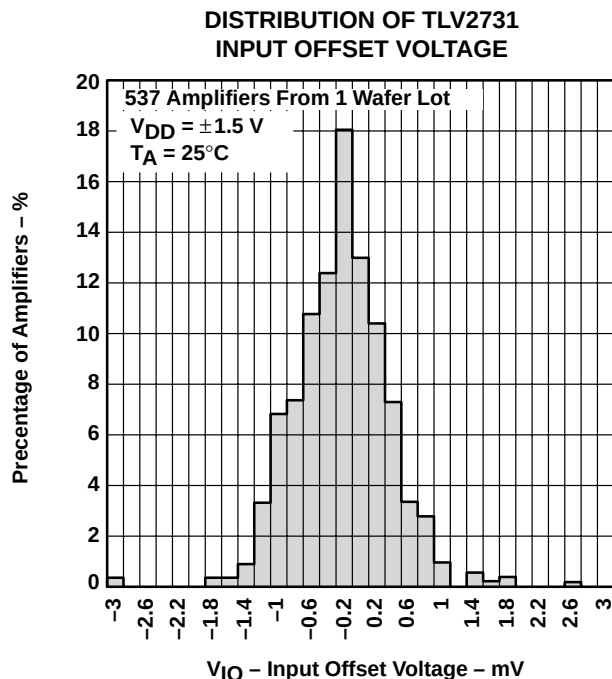


Figure 1

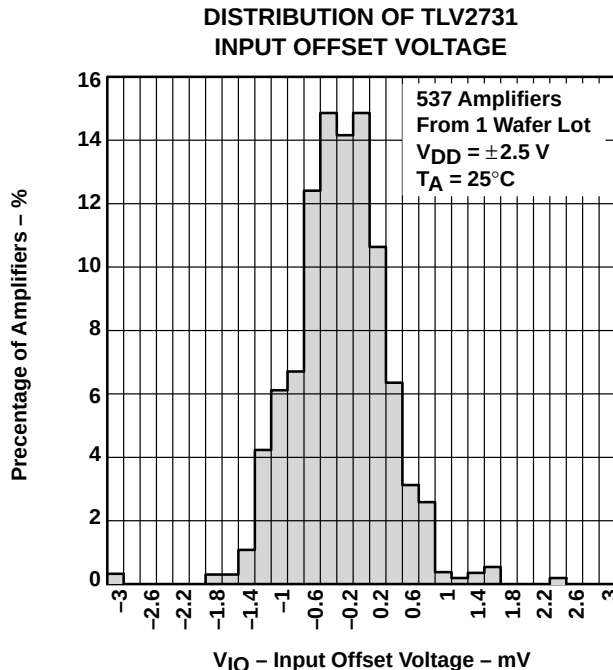


Figure 2

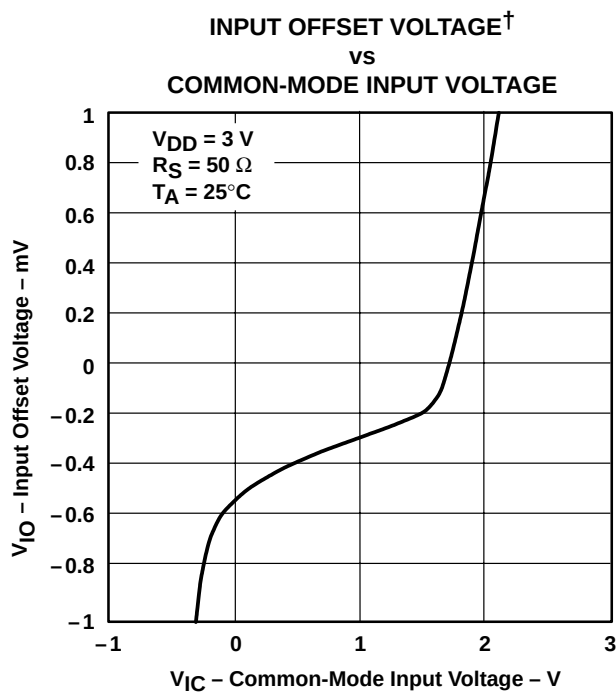


Figure 3

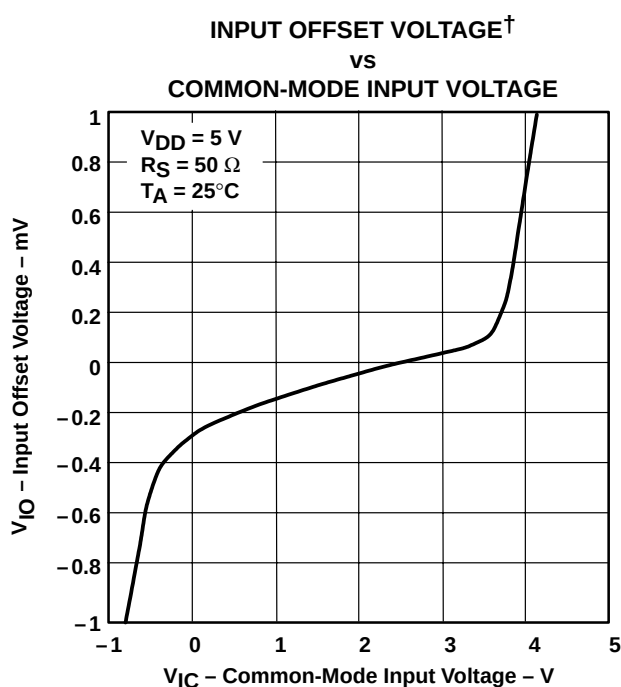


Figure 4

† For all curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3 \text{ V}$ , all loads are referenced to 1.5 V.

# TLV2731, TLV2731Y

## Advanced LinCMOS™ RAIL-TO-RAIL

### LOW-POWER SINGLE OPERATIONAL AMPLIFIERS

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

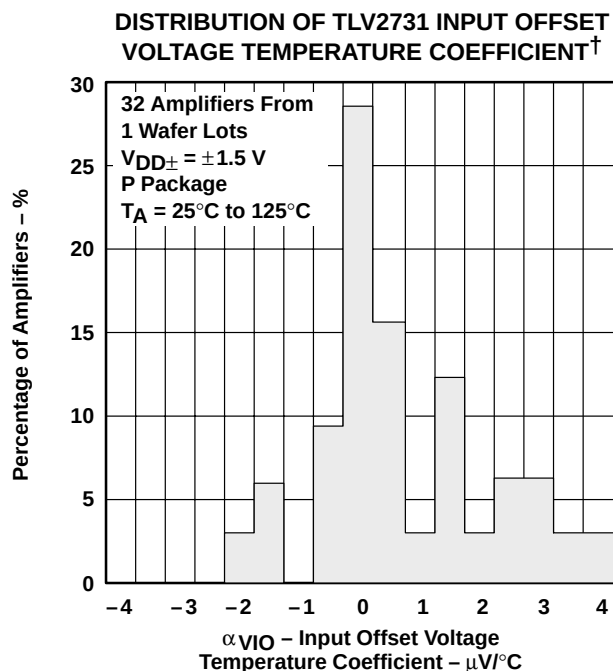


Figure 5

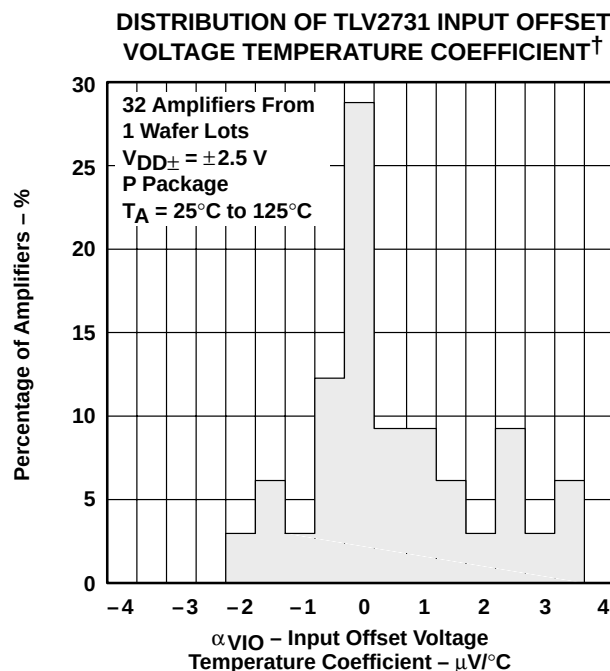


Figure 6

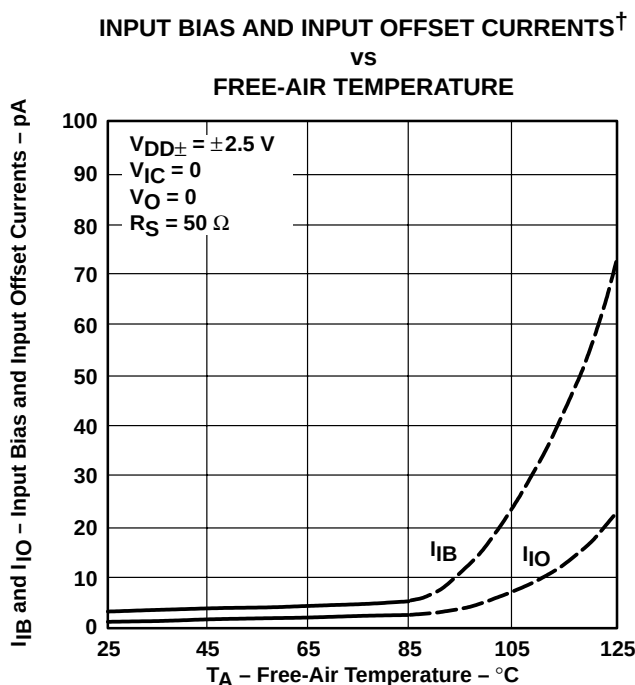


Figure 7





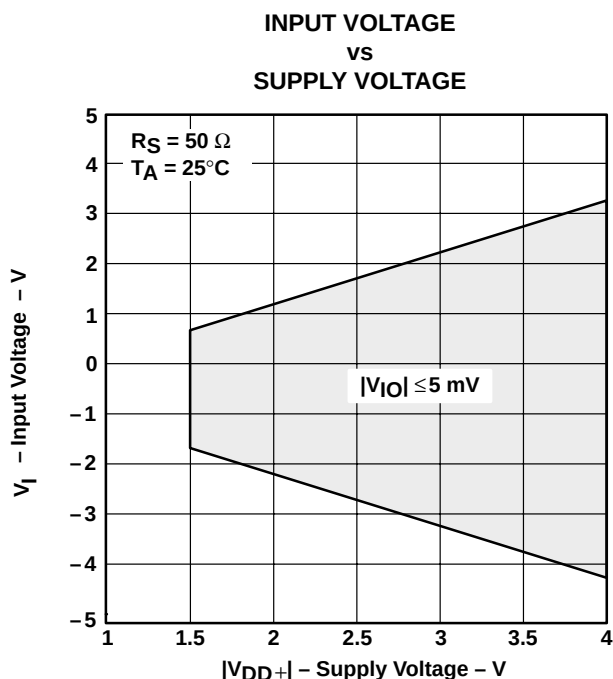


Figure 8

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

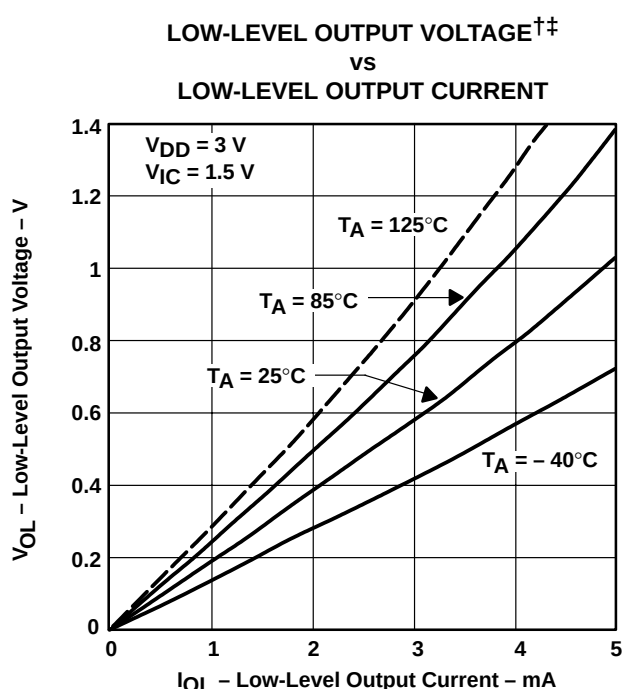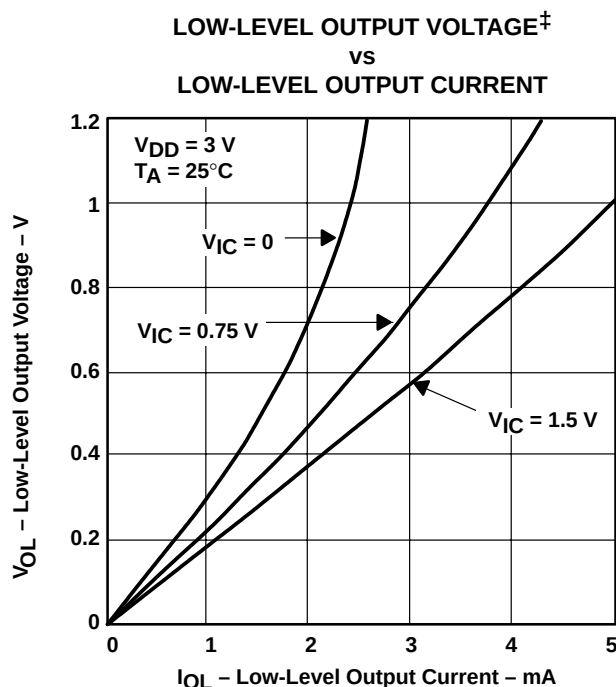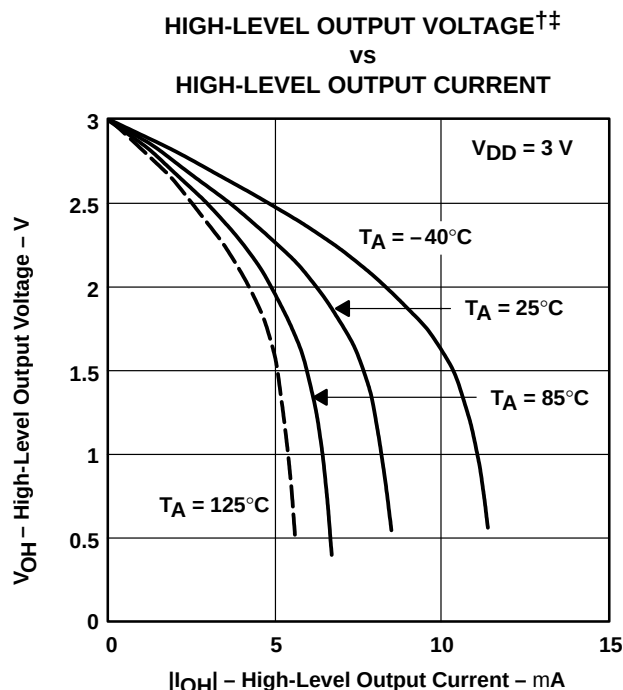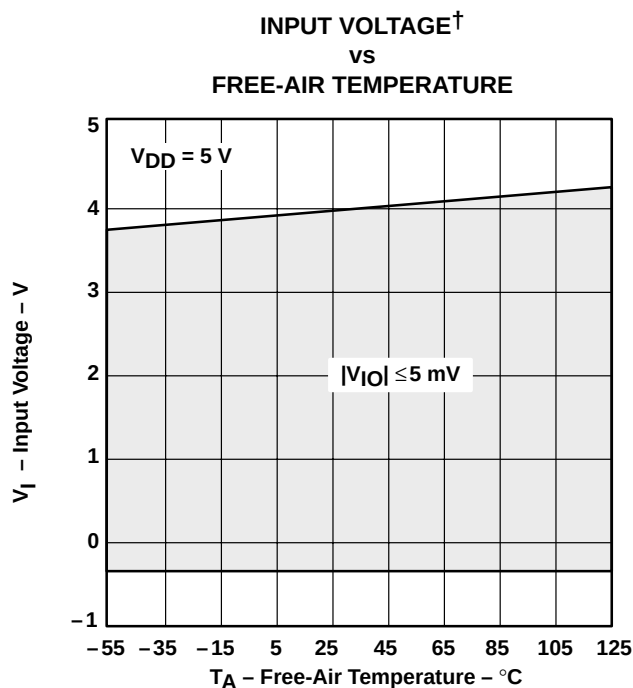

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

<sup>‡</sup> For all curves where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3$  V, all loads are referenced to 1.5 V.

## TYPICAL CHARACTERISTICS

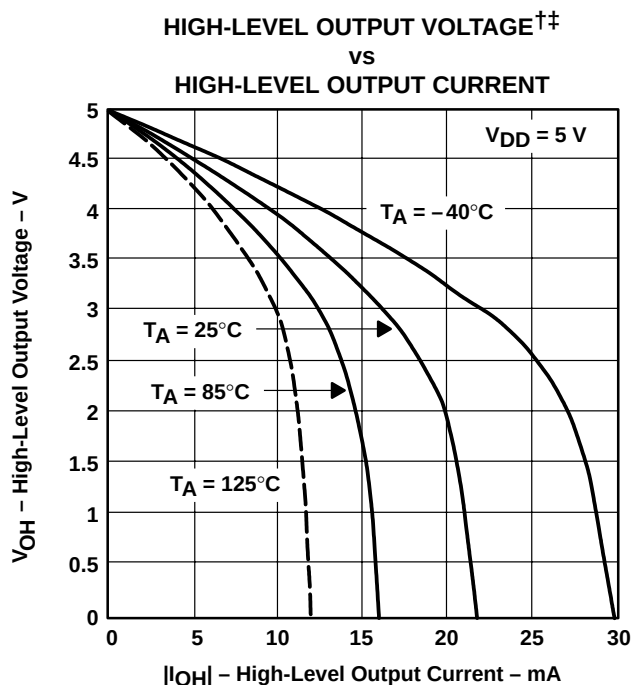


Figure 13

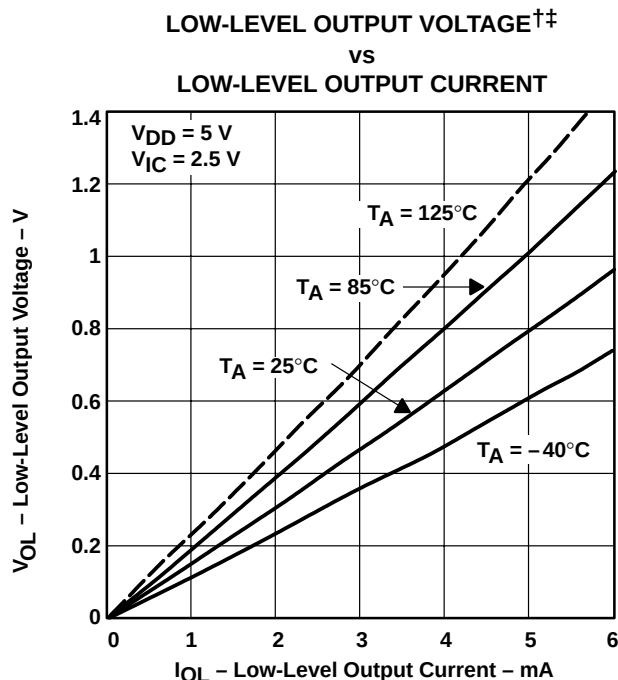


Figure 14

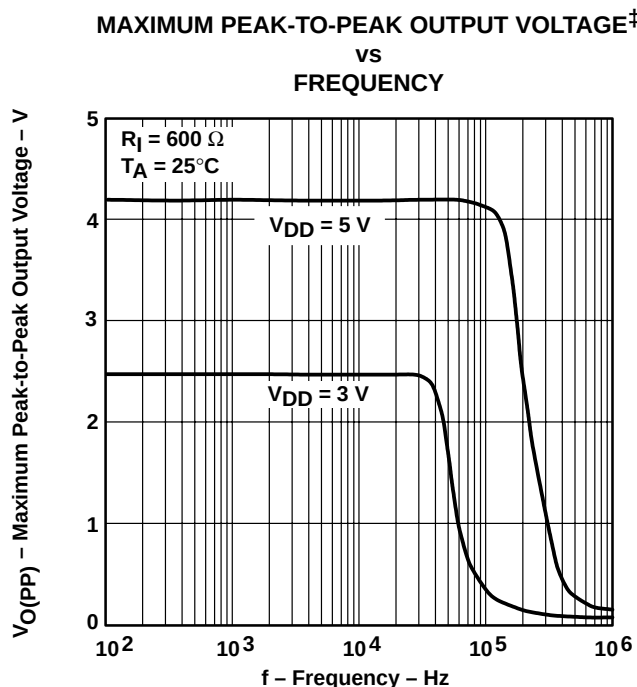


Figure 15





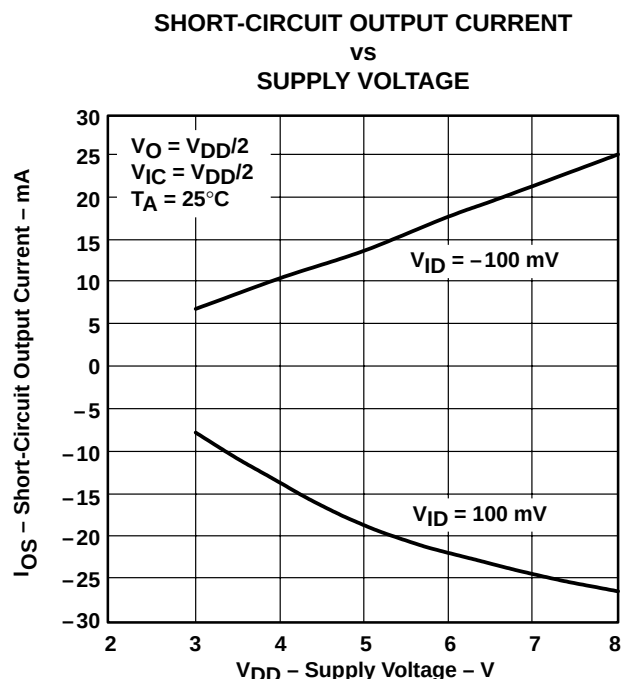


Figure 16

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

<sup>‡</sup> For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.

## TYPICAL CHARACTERISTICS

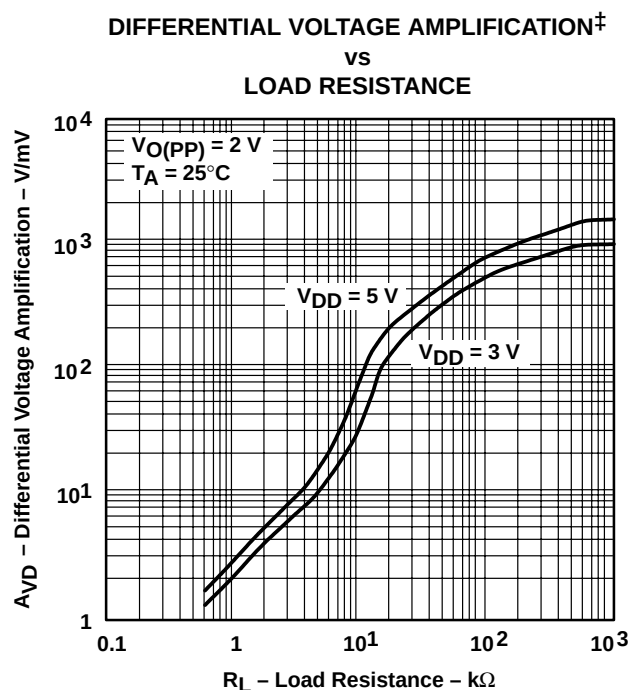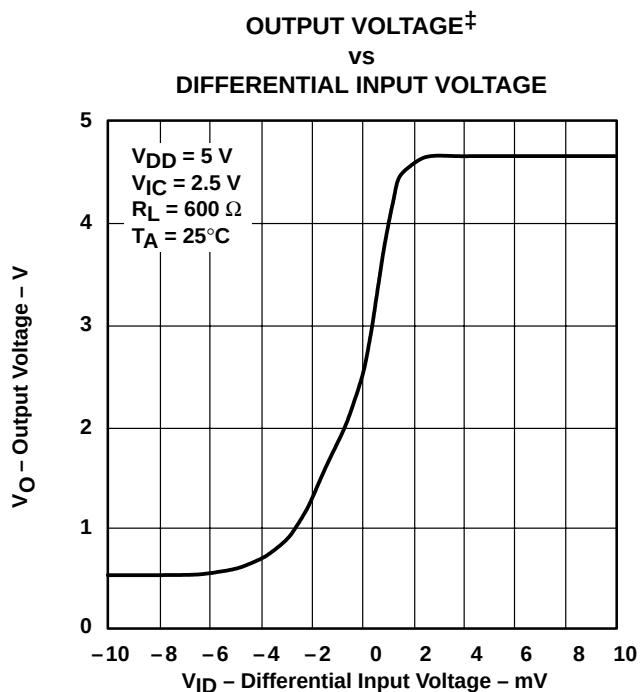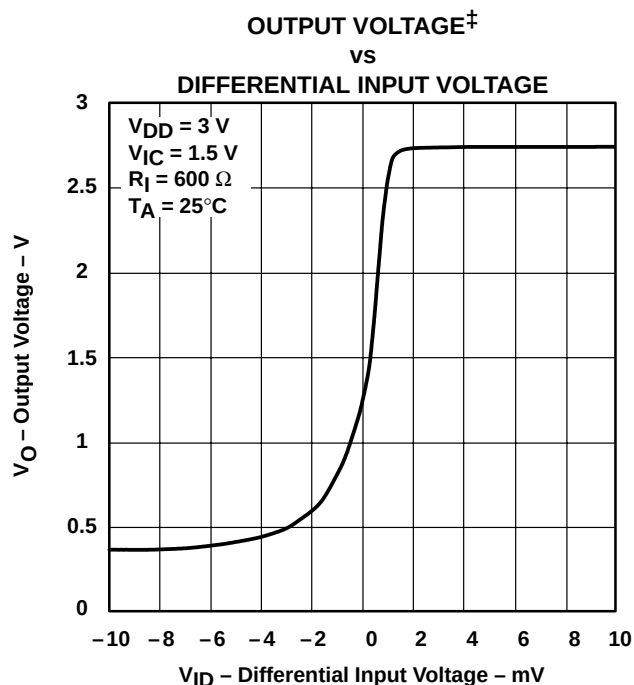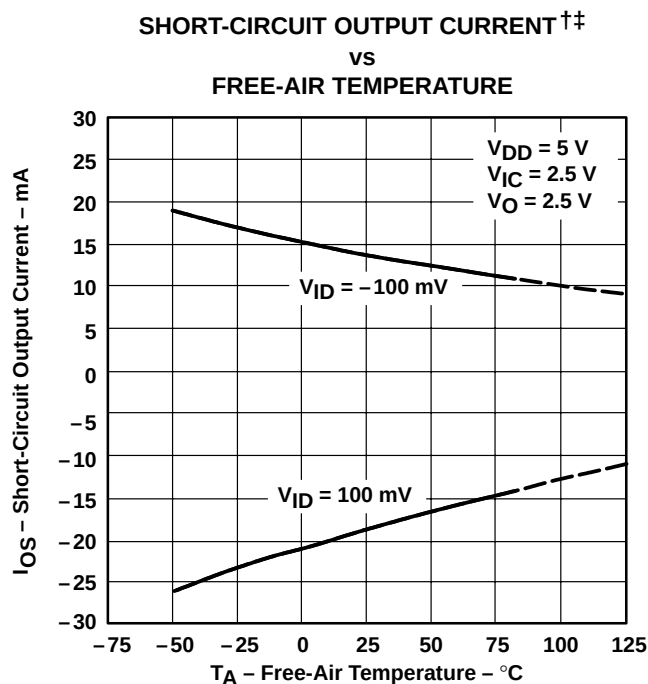

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.


<sup>‡</sup> For all curves where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3$  V, all loads are referenced to 1.5 V.

**TLV2731, TLV2731Y**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**LOW-POWER SINGLE OPERATIONAL AMPLIFIERS**

SLOS198A – AUGUST 1997 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
AMPLIFICATION AND PHASE MARGIN†**

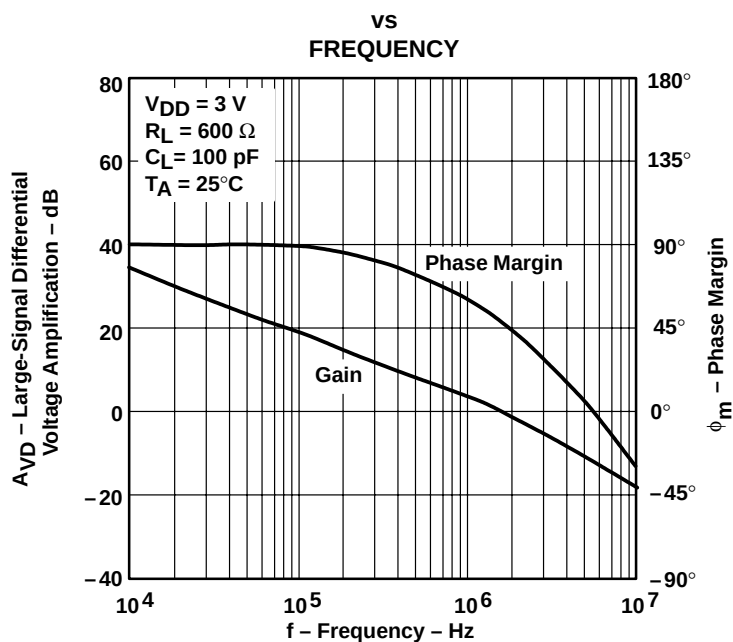

**Figure 21**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
AMPLIFICATION AND PHASE MARGIN†**

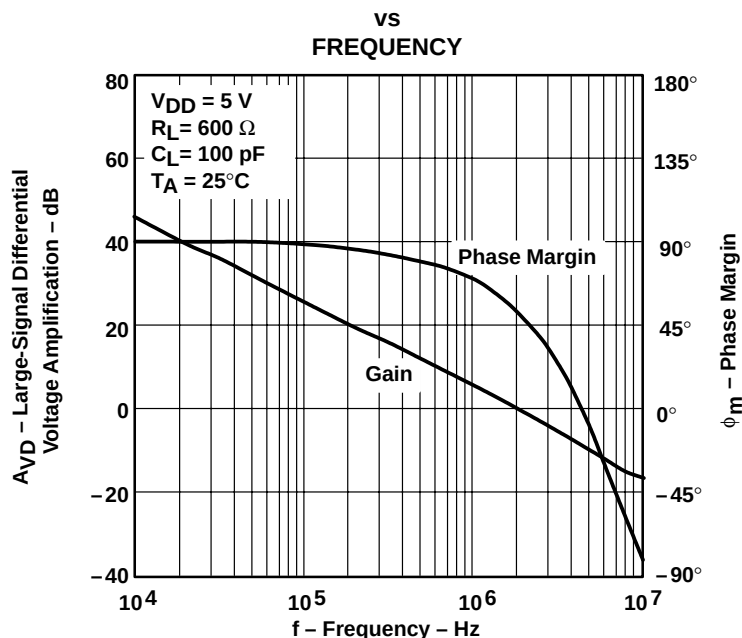

**Figure 22**

† For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.



## TYPICAL CHARACTERISTICS

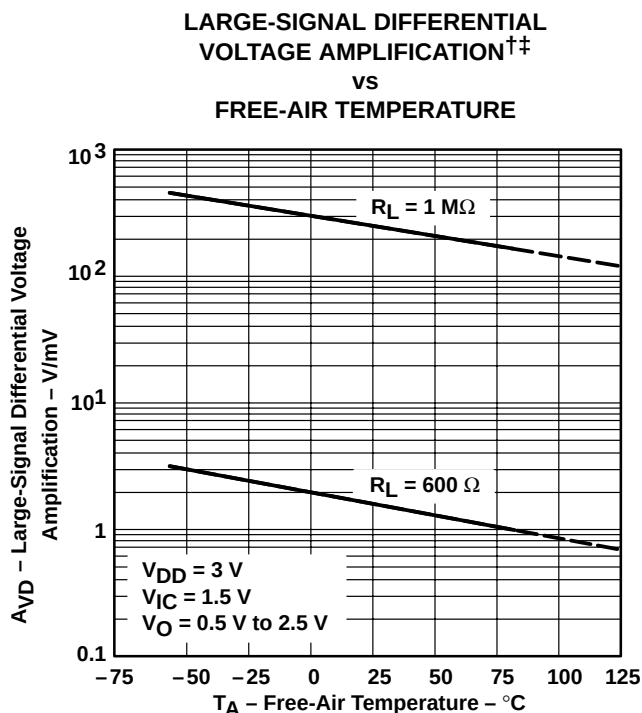


Figure 23

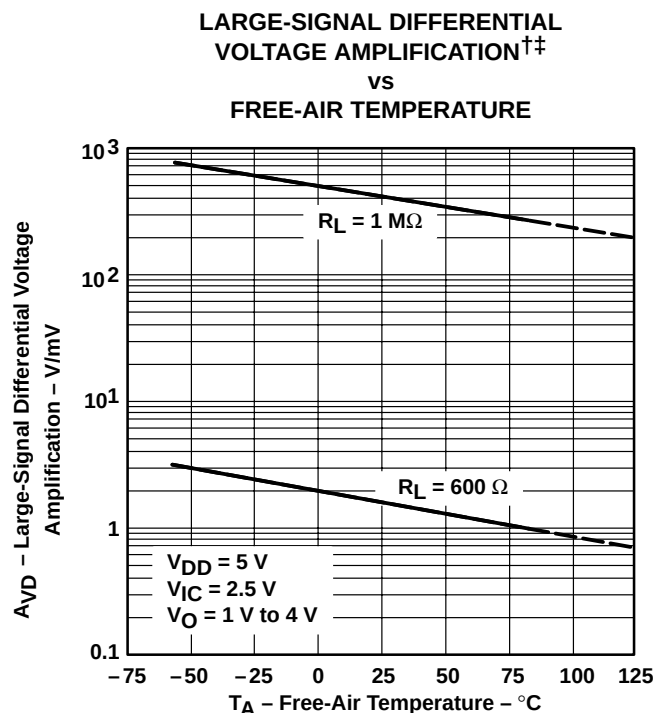


Figure 24

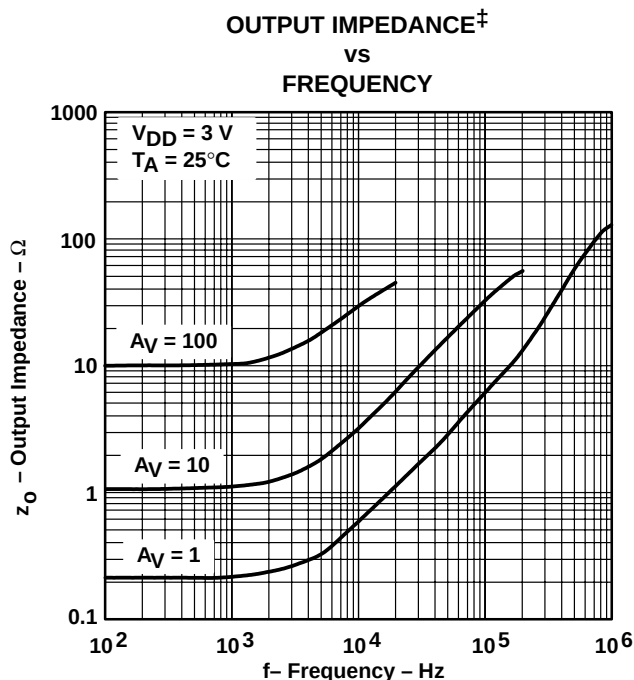


Figure 25

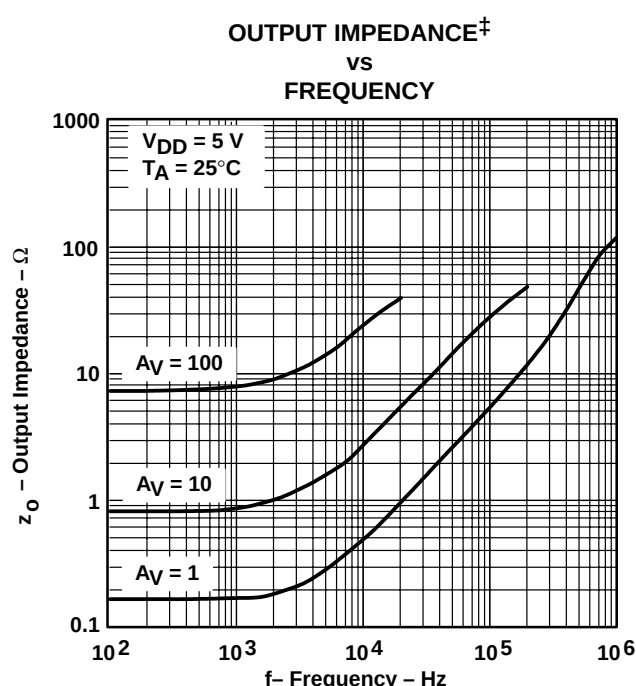


Figure 26

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

‡ For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.

## TYPICAL CHARACTERISTICS

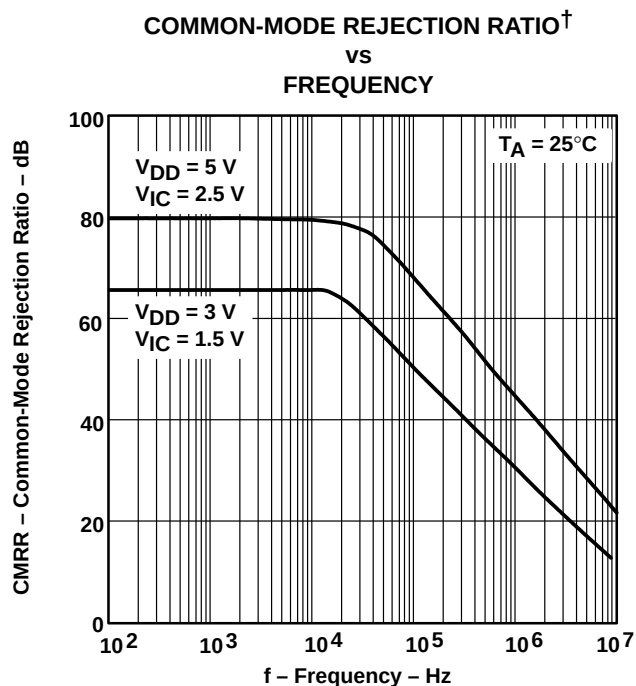


Figure 27

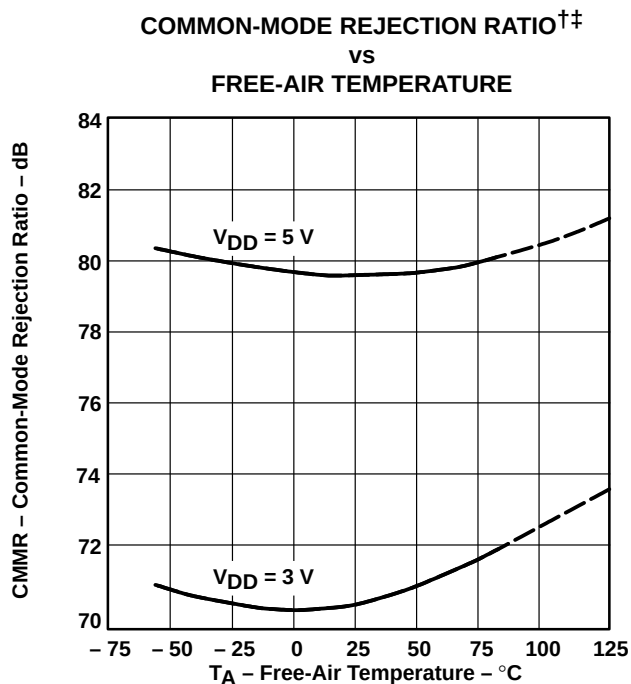


Figure 28

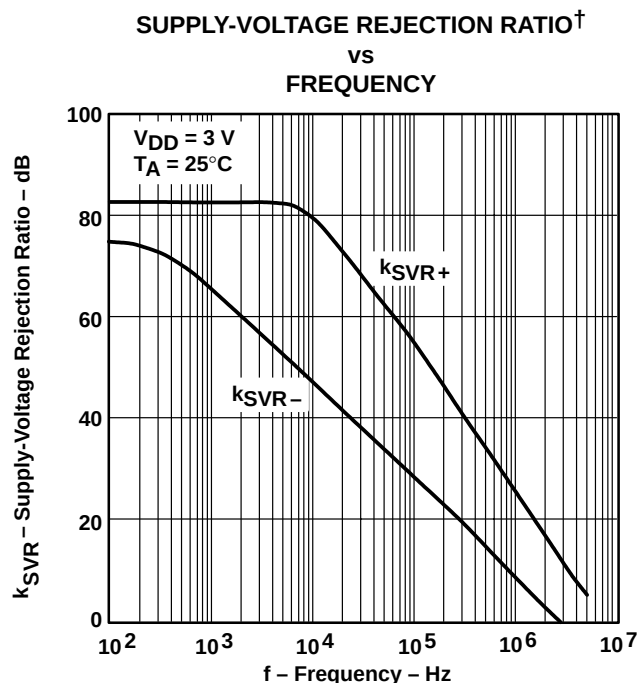


Figure 29

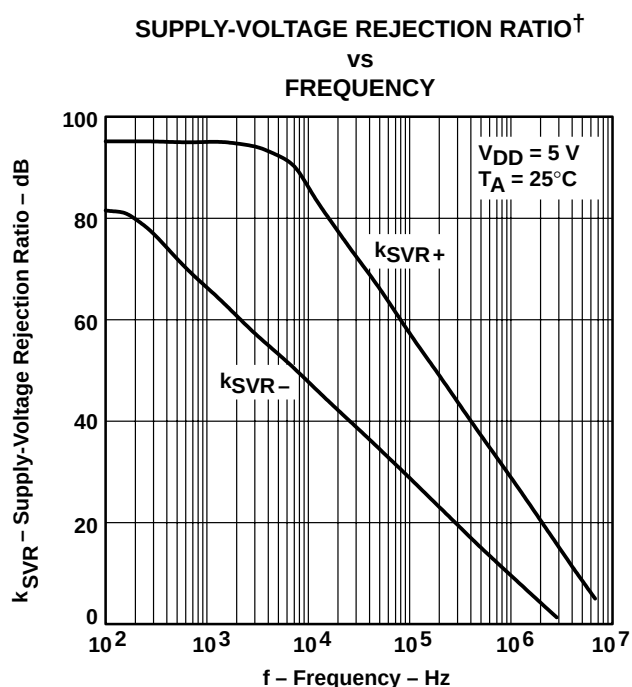


Figure 30

<sup>†</sup> For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.

<sup>‡</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

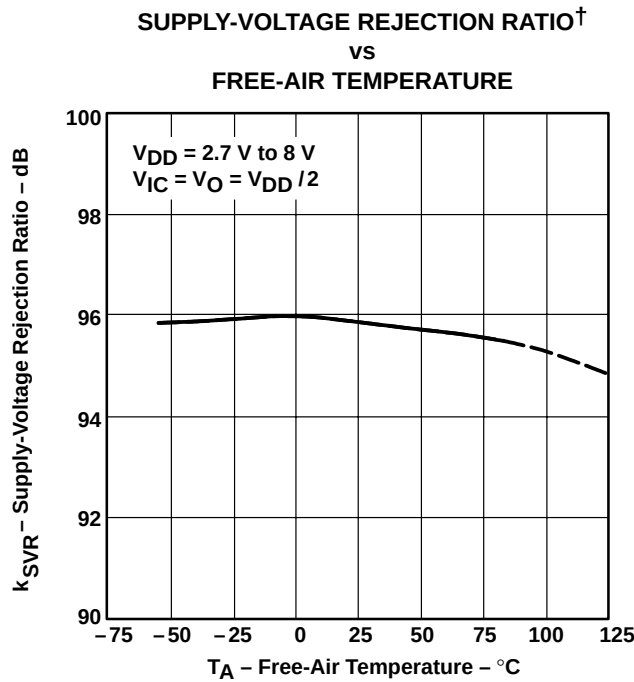


Figure 31

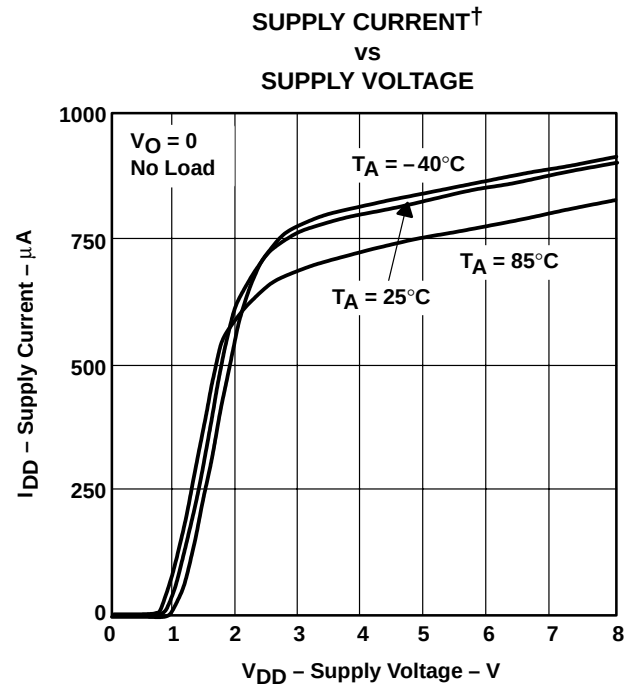


Figure 32

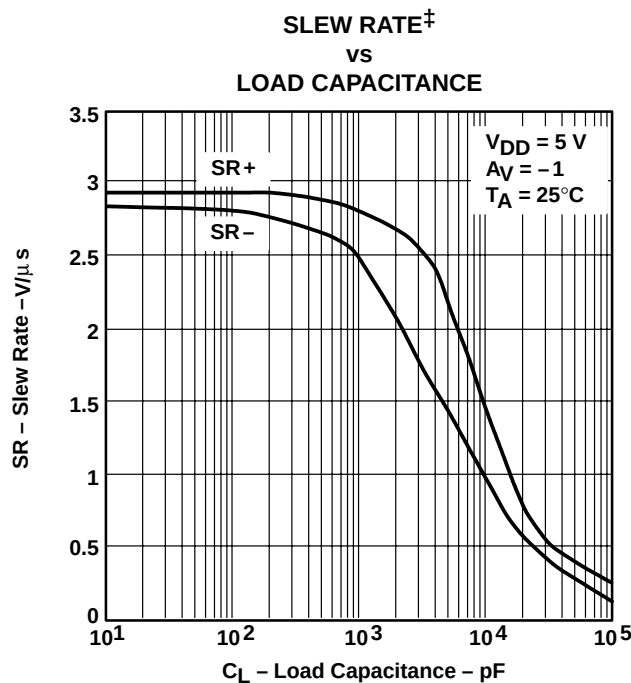


Figure 33

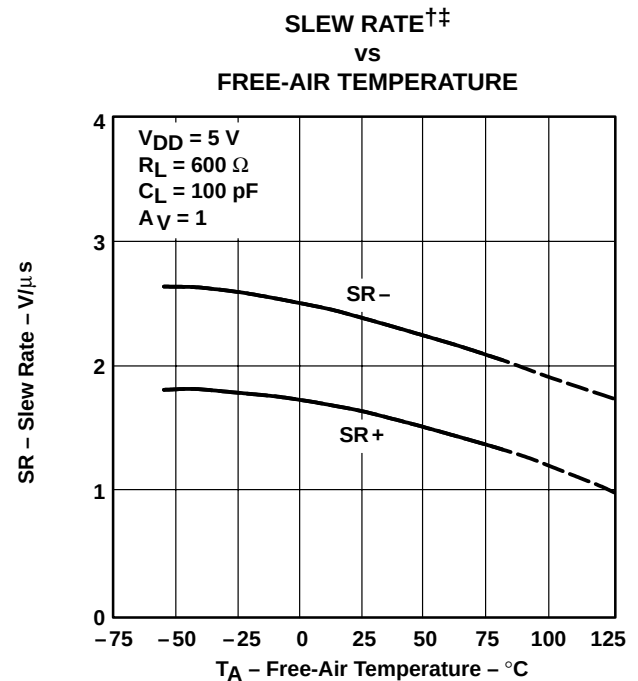


Figure 34

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.


‡ For all curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3 \text{ V}$ , all loads are referenced to 1.5 V.

**TLV2731, TLV2731Y**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**LOW-POWER SINGLE OPERATIONAL AMPLIFIERS**

SLOS198A – AUGUST 1997 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

**INVERTING LARGE-SIGNAL PULSE RESPONSE†**

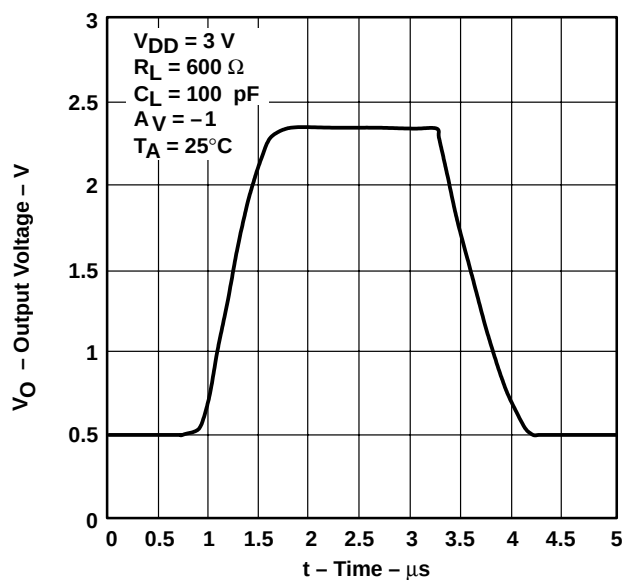


**Figure 35**

**INVERTING LARGE-SIGNAL PULSE RESPONSE†**

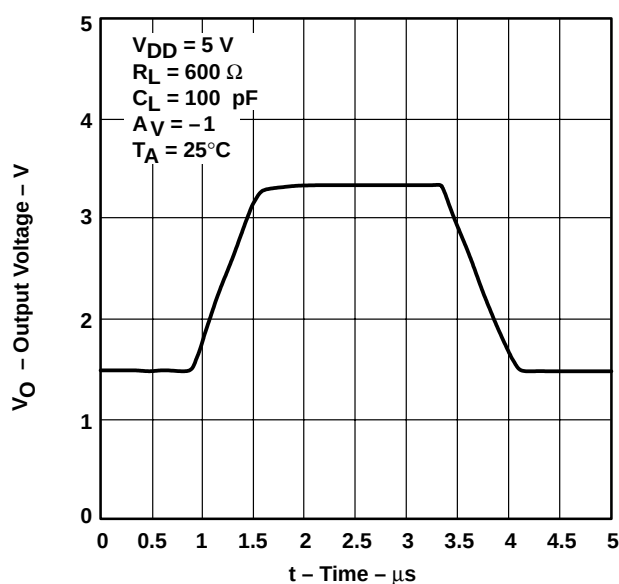


**Figure 36**

**VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE†**

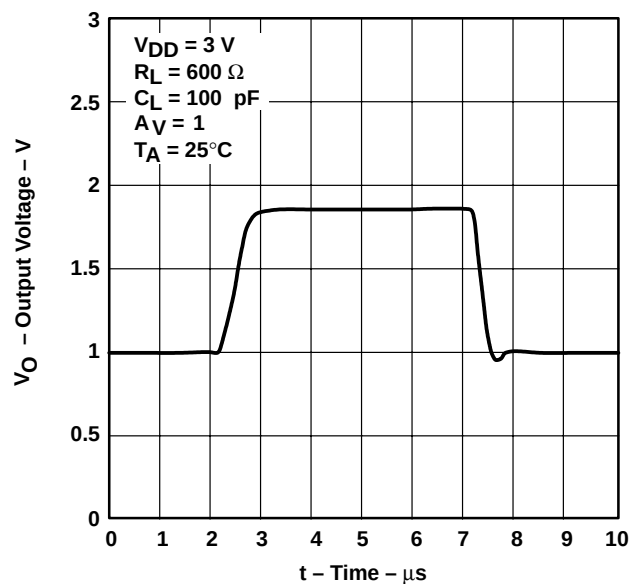

**Figure 37**

**VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE†**

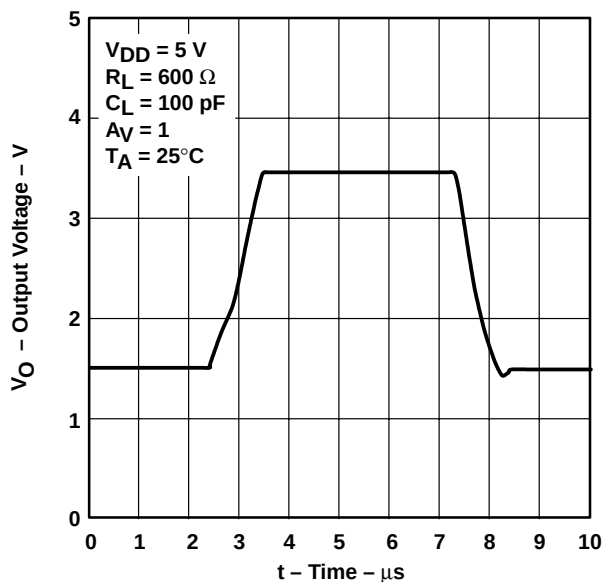

**Figure 38**

† For all curves where  $V_{DD} = 5V$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3V$ , all loads are referenced to 1.5 V.

## TYPICAL CHARACTERISTICS

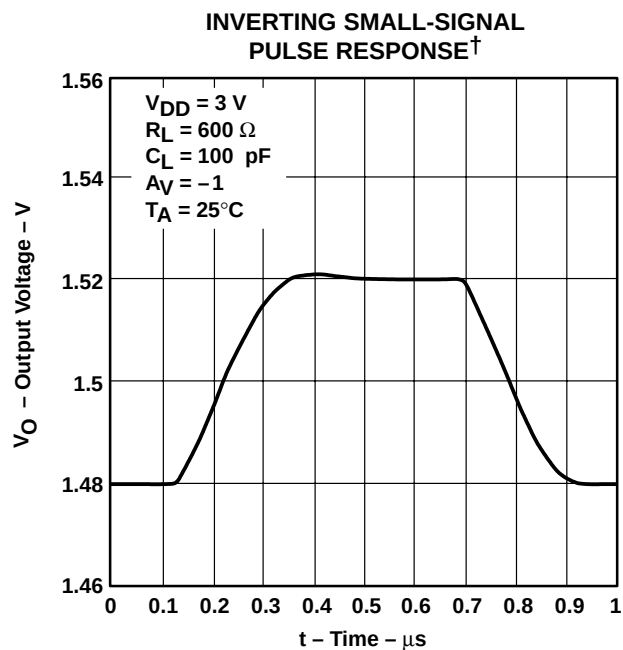


Figure 39

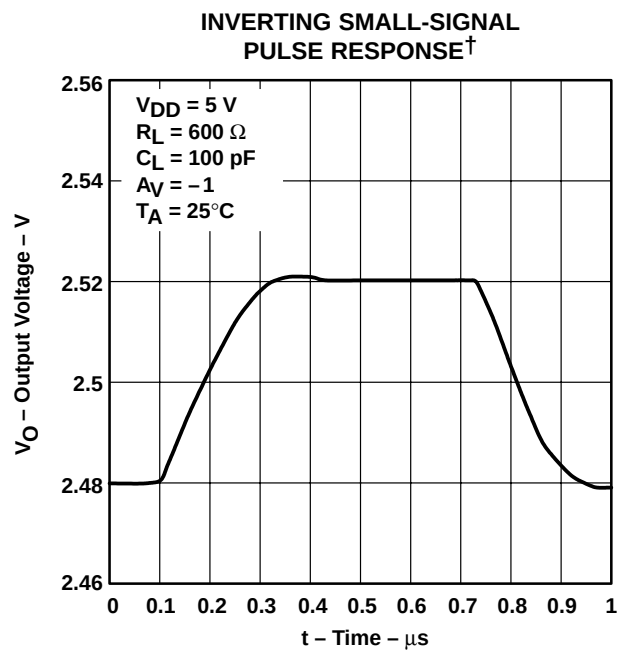


Figure 40

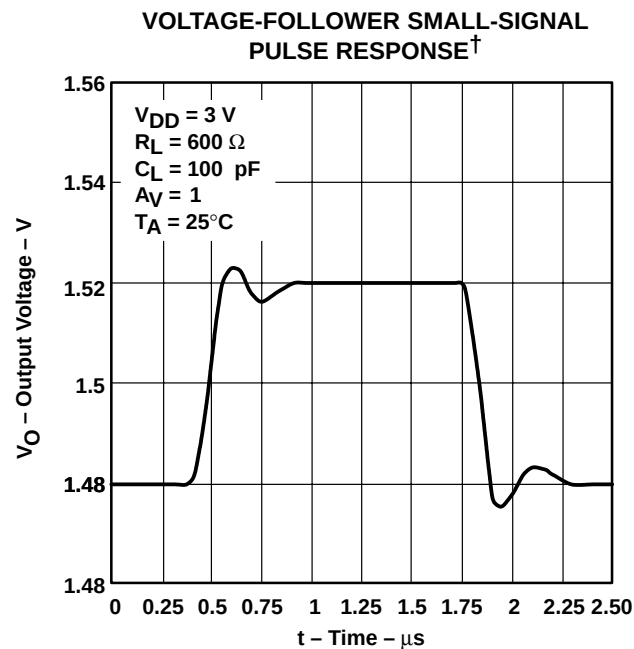


Figure 41

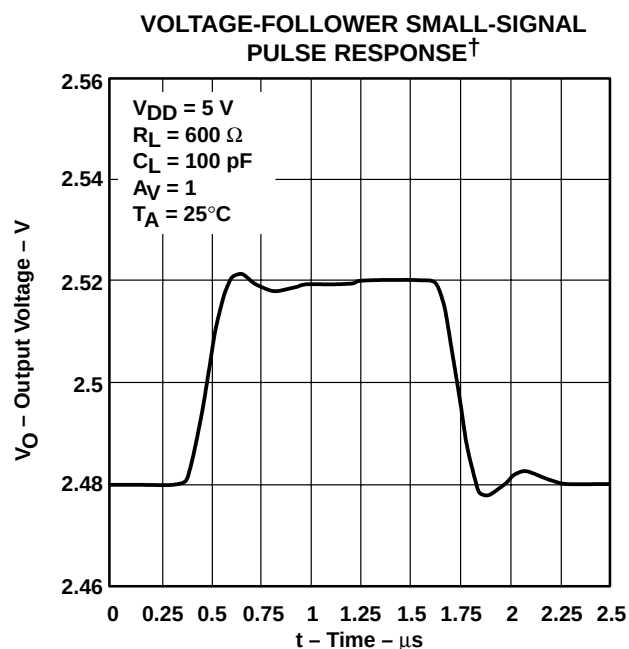


Figure 42

† For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.

# TLV2731, TLV2731Y

## Advanced LinCMOS™ RAIL-TO-RAIL

### LOW-POWER SINGLE OPERATIONAL AMPLIFIERS

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

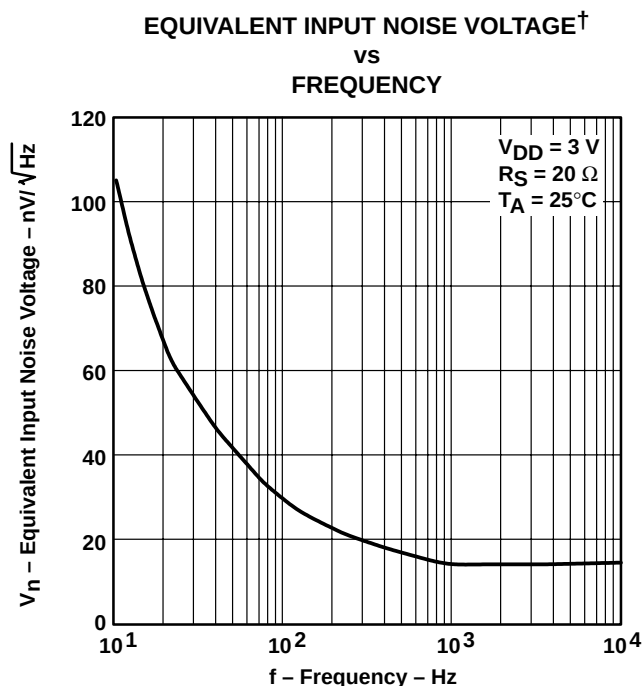


Figure 43

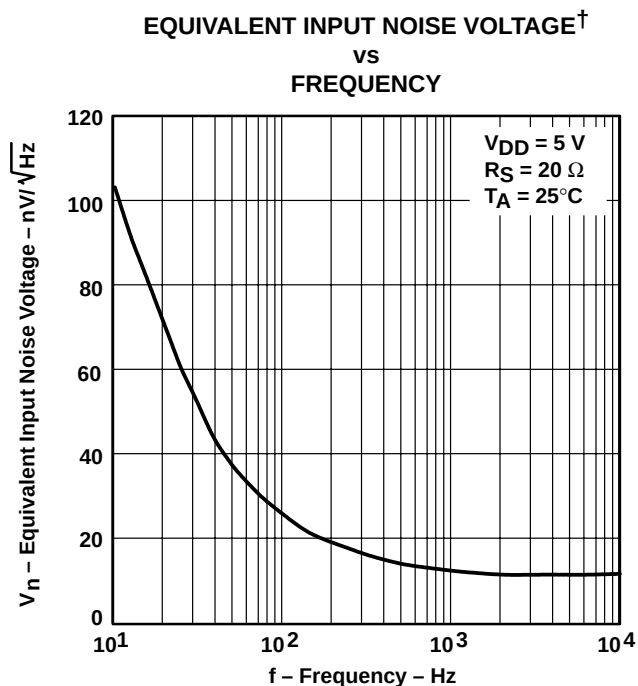


Figure 44

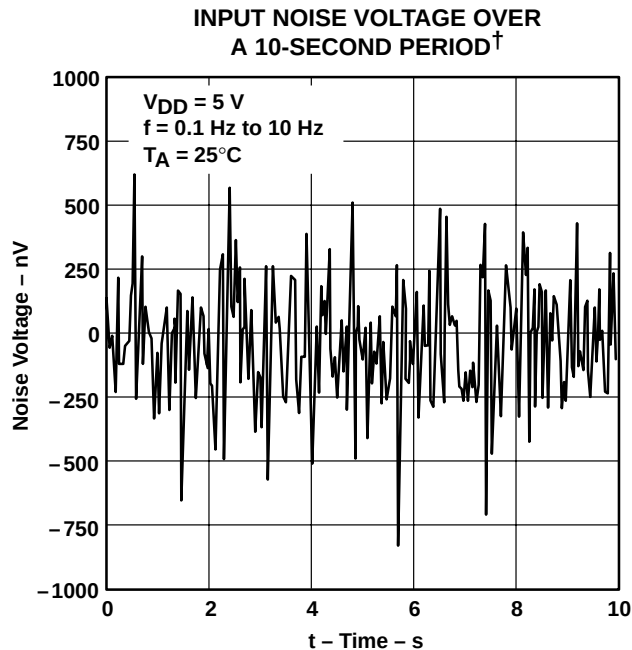


Figure 45

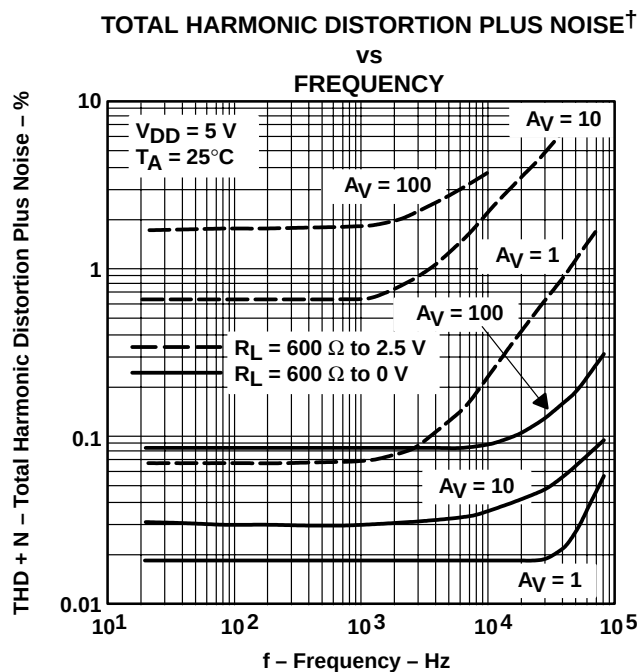


Figure 46

<sup>†</sup> For all curves where  $V_{DD} = 5V$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3V$ , all loads are referenced to 1.5 V.

## TYPICAL CHARACTERISTICS

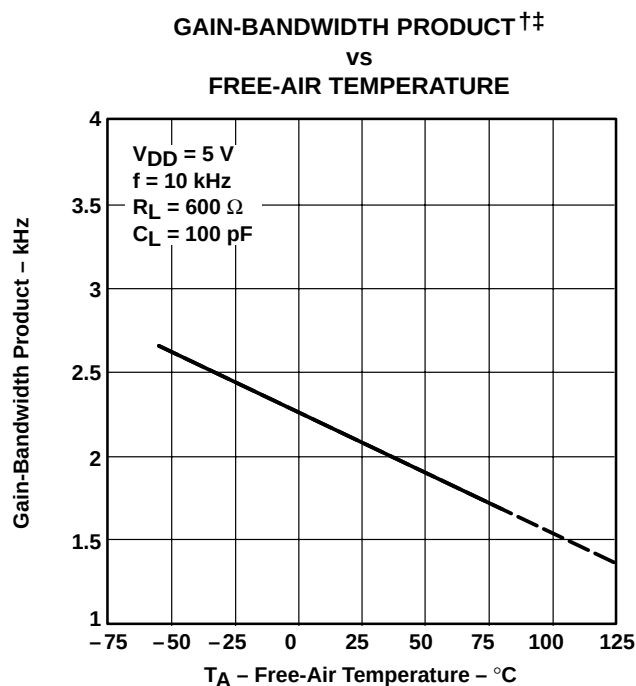


Figure 47

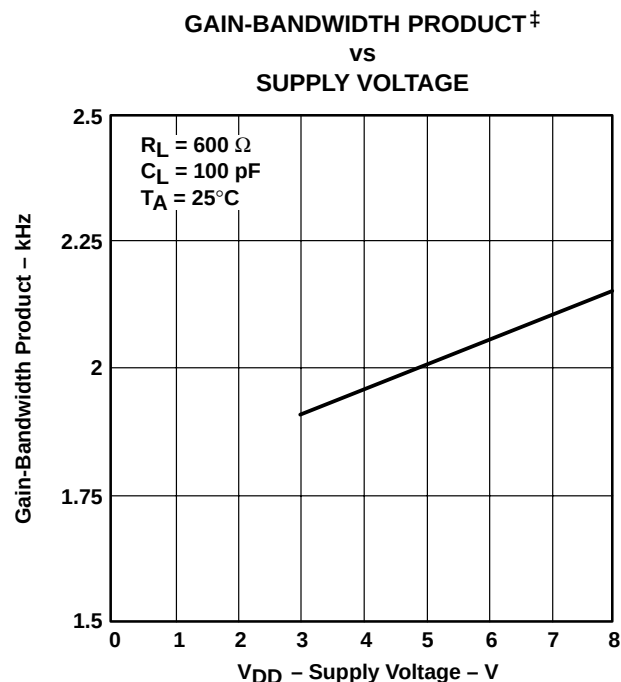


Figure 48

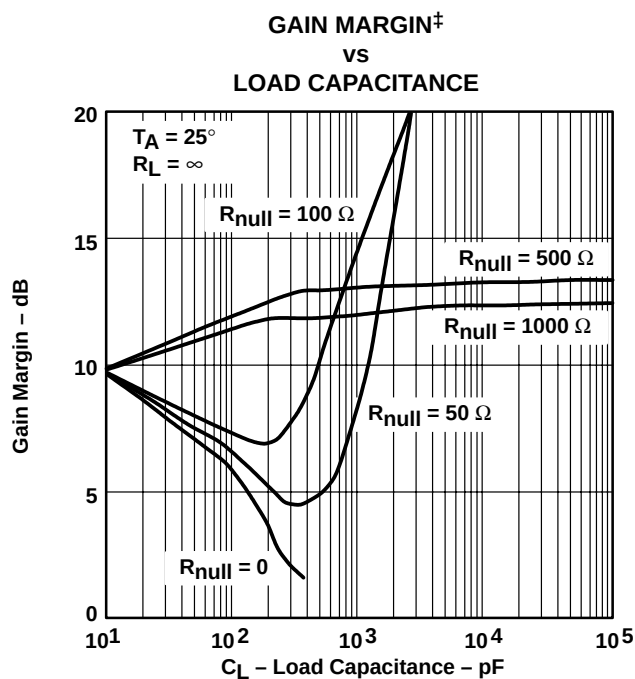


Figure 49


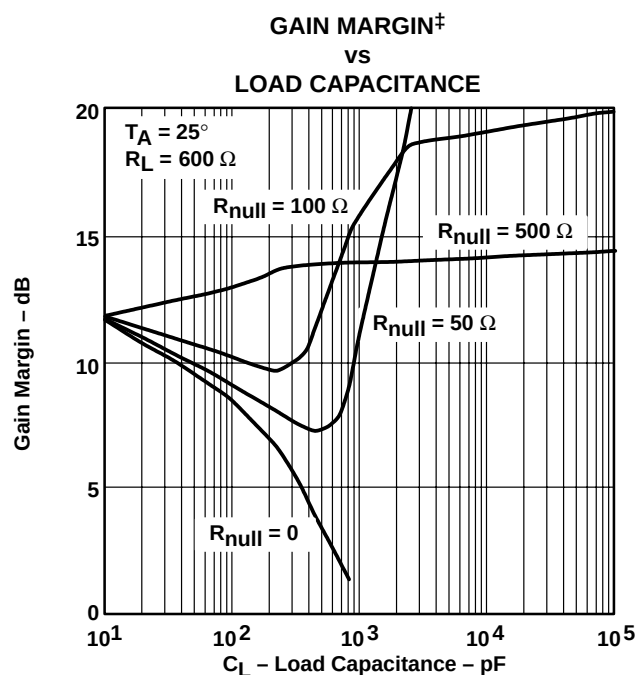


Figure 50


<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

<sup>‡</sup> For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.


**TYPICAL CHARACTERISTICS**

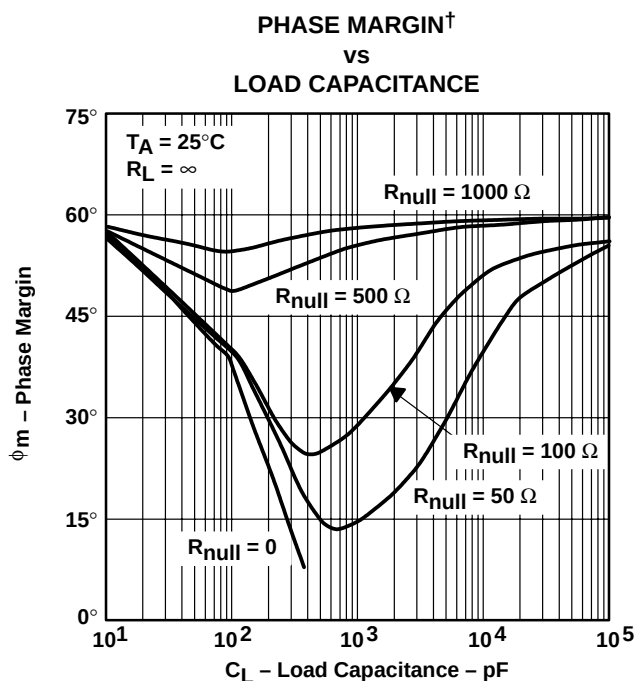


**Figure 51**

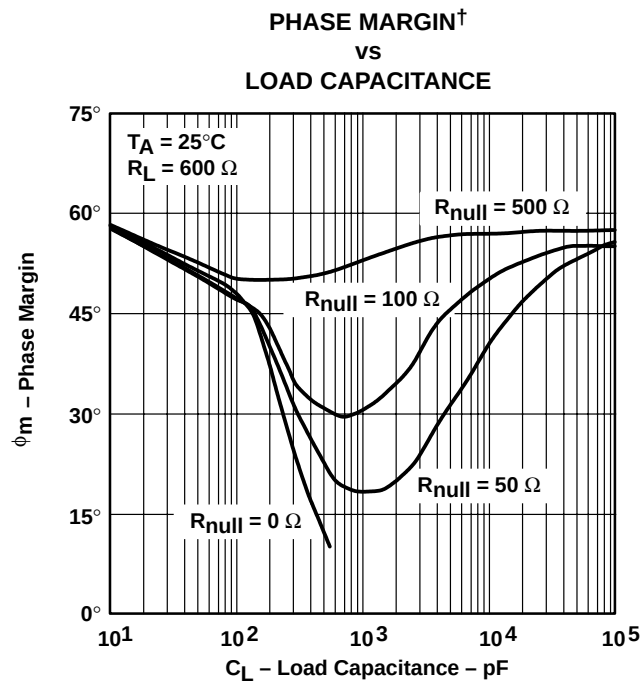

**Figure 52**

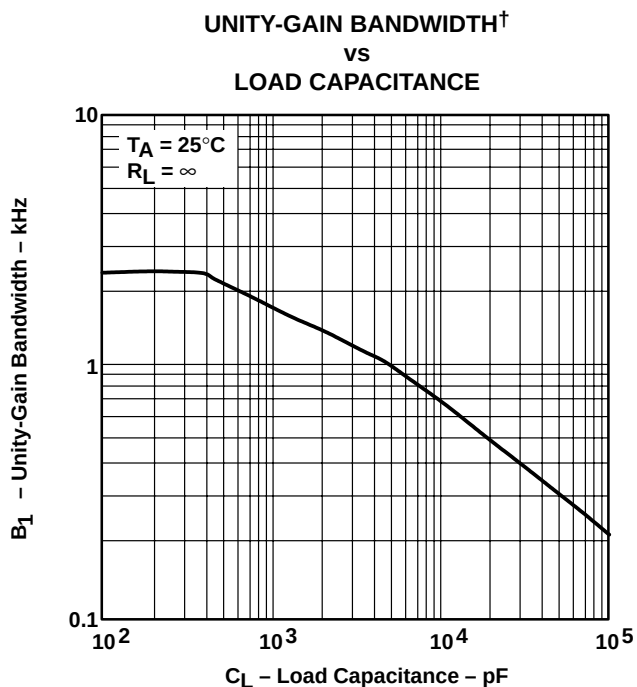

**Figure 53**

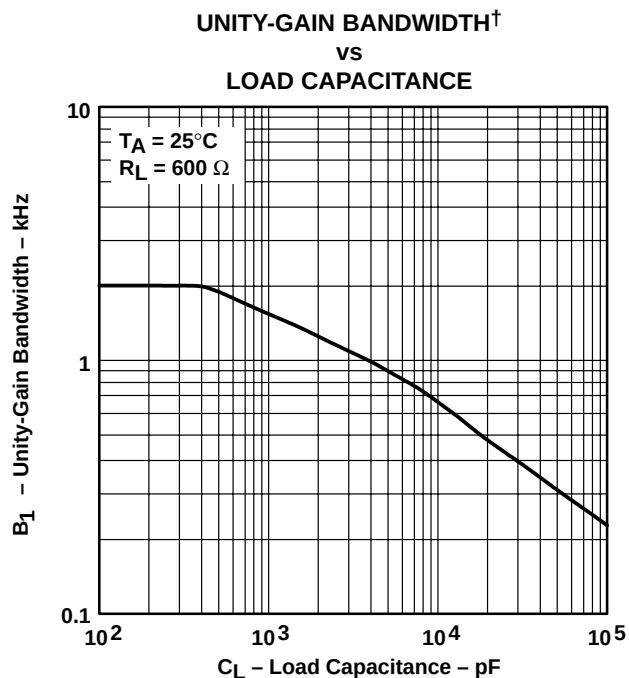

**Figure 54**

† For all curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V. For all curves where  $V_{DD} = 3\text{ V}$ , all loads are referenced to 1.5 V.



## APPLICATION INFORMATION

### driving large capacitive loads

The TLV2731 is designed to drive larger capacitive loads than most CMOS operational amplifiers. Figure 49 through Figure 54 illustrate its ability to drive loads greater than 100 pF while maintaining good gain and phase margins ( $R_{null} = 0$ ).

A small series resistor ( $R_{null}$ ) at the output of the device (see Figure 55) improves the gain and phase margins when driving large capacitive loads. Figure 49 through Figure 52 show the effects of adding series resistances of 50  $\Omega$ , 100  $\Omega$ , 500  $\Omega$ , and 1000  $\Omega$ . The addition of this series resistor has two effects: the first effect is that it adds a zero to the transfer function and the second effect is that it reduces the frequency of the pole associated with the output load in the transfer function.

The zero introduced to the transfer function is equal to the series resistance times the load capacitance. To calculate the approximate improvement in phase margin, equation 1 can be used.

$$\Delta\phi_{m1} = \tan^{-1} (2 \times \pi \times \text{UGBW} \times R_{null} \times C_L) \quad (1)$$

Where :


$\Delta\phi_{m1}$  = Improvement in phase margin

UGBW = Unity-gain bandwidth frequency

$R_{null}$  = Output series resistance

$C_L$  = Load capacitance

The unity-gain bandwidth (UGBW) frequency decreases as the capacitive load increases (see Figure 53 and Figure 54). To use equation 1, UGBW must be approximated from Figure 53 and Figure 54.

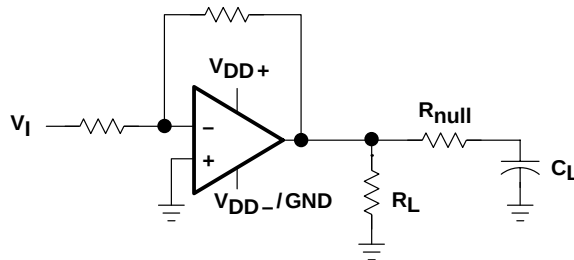

**Figure 55. Series-Resistance Circuit**

# TLV2731, TLV2731Y

## Advanced LinCMOS™ RAIL-TO-RAIL

### LOW-POWER SINGLE OPERATIONAL AMPLIFIERS

SLOS198A – AUGUST 1997 – REVISED MARCH 2001

## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 6) and subcircuit in Figure 56 are generated using the TLV2731 typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 6: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers," *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

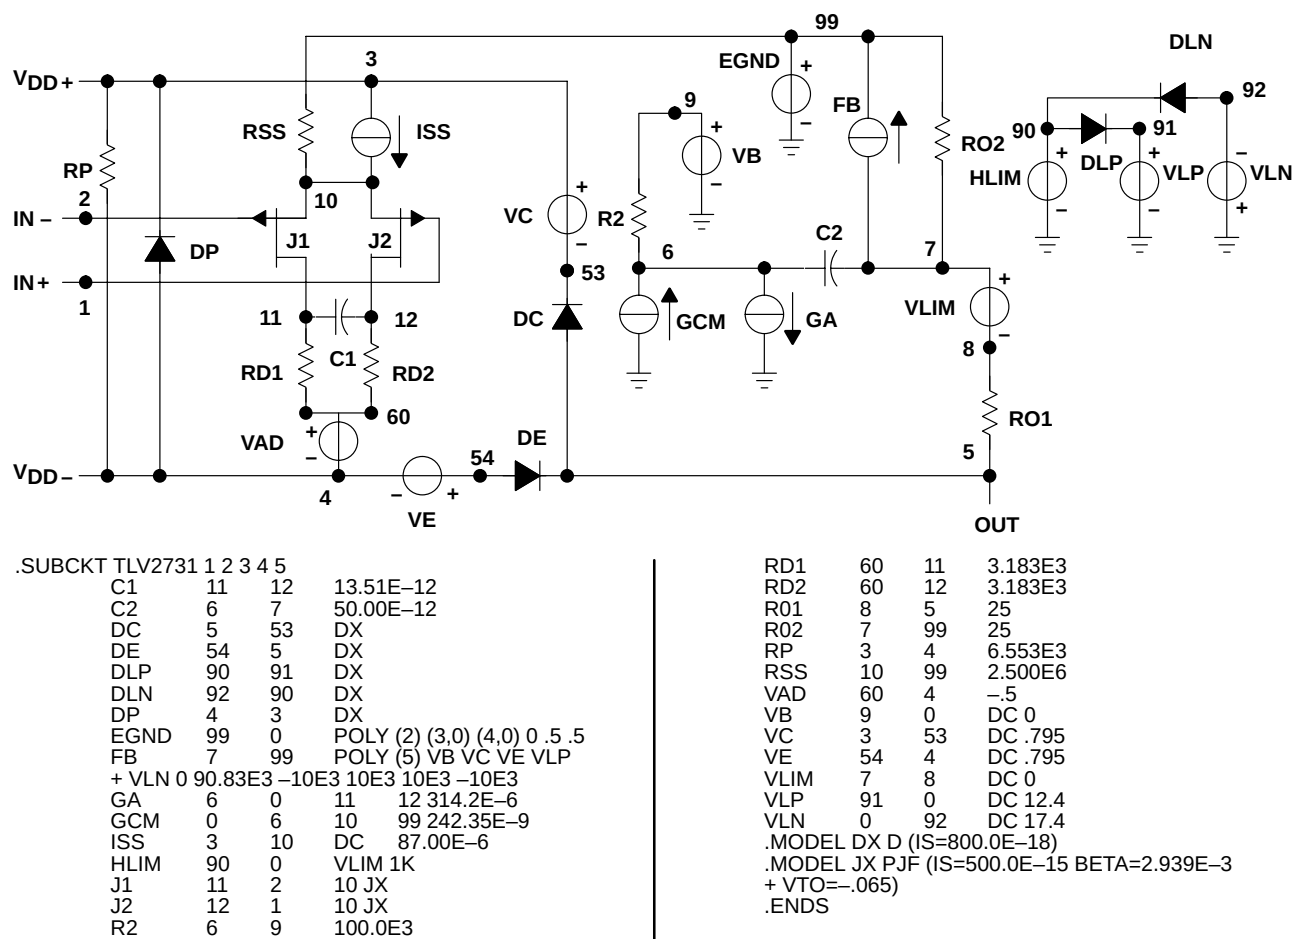


Figure 56. Boyle Macromodel and Subcircuit

*PSpice* and *Parts* are trademark of MicroSim Corporation.

Macromodels, simulation models, or other models provided by TI, directly or indirectly, are not warranted by TI as fully representing all of the specification and operating characteristics of the semiconductor product to which the model relates.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## MECHANICAL INFORMATION

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE PACKAGE

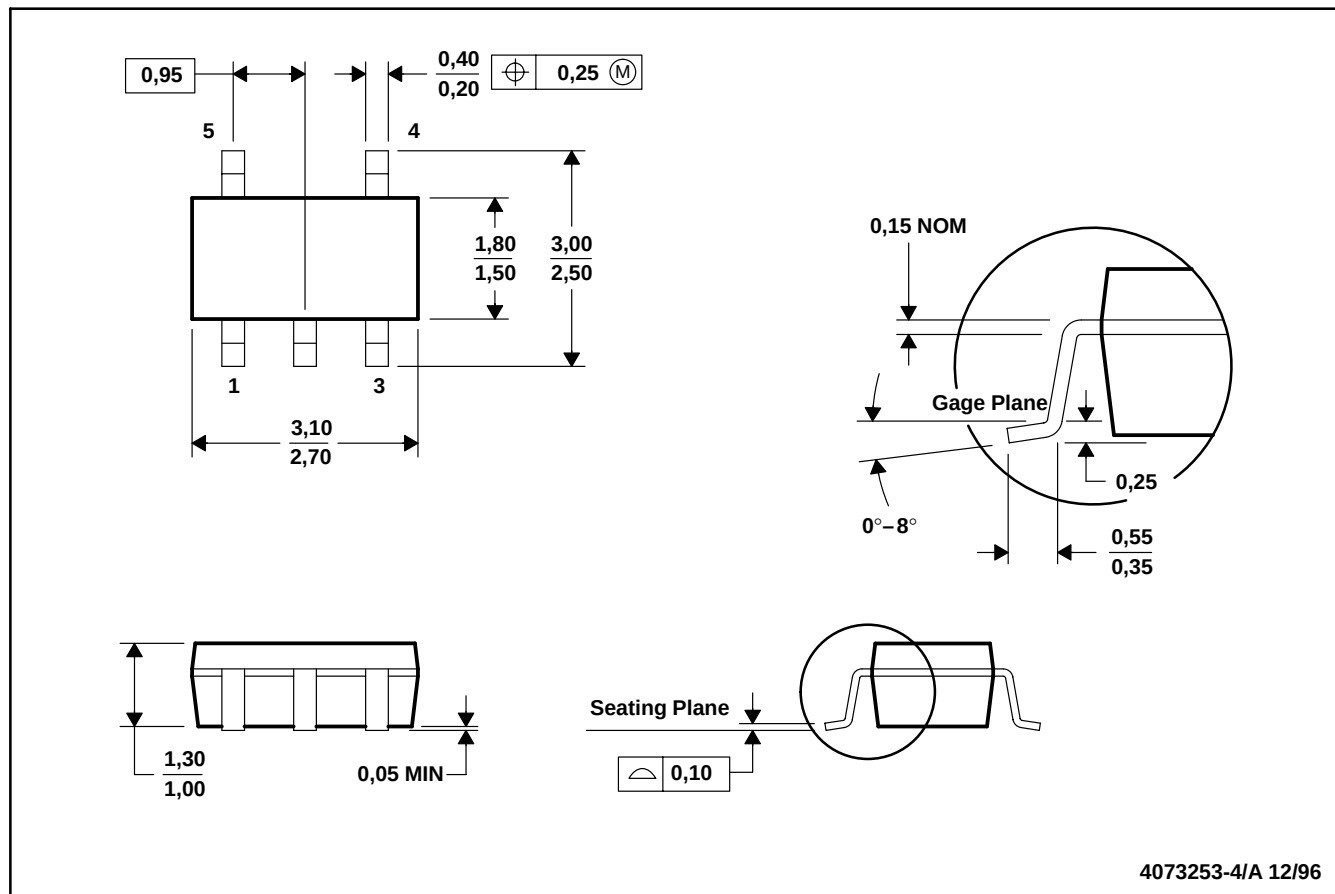

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions include mold flash or protrusion.

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLV2731CDBV      | OBSOLETE              | SOT-23       | DBV             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TLV2731CDBVR     | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731CDBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731CDBVT     | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731CDBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731IDBVR     | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731IDBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731IDBVT     | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2731IDBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    |             | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated