

## HIGH EFFICIENCY SWITCHED MODE RECTIFIER

### MAIN PRODUCT CHARACTERISTICS


$I_{F(AV)}$	<b>2A</b>
$V_{RRM}$	<b>200V</b>
$V_F(max)$	<b>0.8V</b>

### FEATURES AND BENEFITS

- VERY LOW CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD AND REVERSE RECOVERY TIMES
- HIGH SURGE CURRENT

### DESCRIPTION

Low voltage drop rectifiers suited for Switched Mode Power Supplies and for switching mode base drive and transistor circuit.

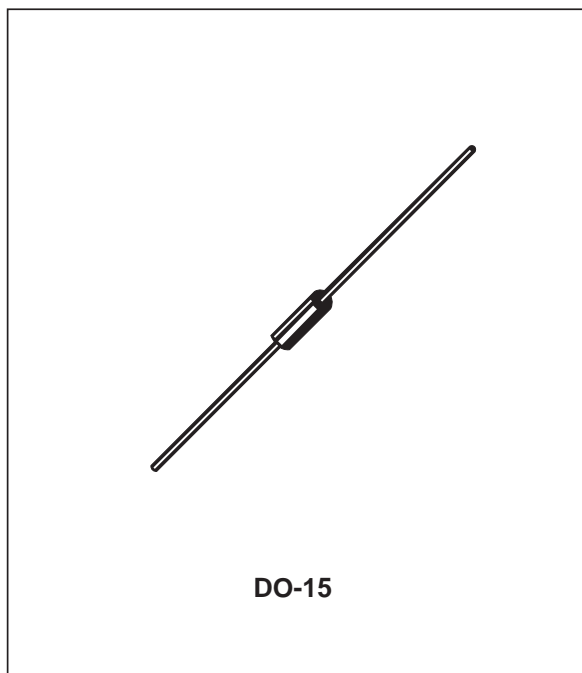

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		200	V
$V_{RSM}$	Non repetitive peak reverse voltage		220	V
$I_{FRM}$	Repetive peak forward current	$t_p < 20\mu s$	70	A
$I_{F(AV)}$	Average forward current *	$T_a = 75^\circ C$ $\delta = 0.5$	2	A
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10ms$ Sinusoidal	70	A
$P_{tot}$	Power dissipation *	$T_a = 75^\circ C$	1.85	W
$T_{stg}$ $T_j$	Storage temperature range Maximum junction temperature		- 40 to + 150 150	$^\circ C$
$T_L$	Maximum lead temperature for soldering during 10s at 4mm from case		230	$^\circ C$

\* On infinite heatsink with 10mm lead length

## STSR220

### THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to ambient thermal resistance *	40	°C/W

\* On infinite heatsink with 10mm lead length.

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
$I_R$	Reverse leakage current	$V_R = V_{RRM}$	$T_j = 25^\circ\text{C}$			10	$\mu\text{A}$
			$T_j = 100^\circ\text{C}$			0.5	mA
$V_F$	Forward voltage drop	$I_F = 2\text{A}$	$T_j = 25^\circ\text{C}$			1	V
		$I_F = 2\text{A}$	$T_j = 100^\circ\text{C}$			0.8	

### RECOVERY CHARACTERISTICS


Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ\text{C}$ $V_R = 30\text{V}$	$I_F = 1\text{A}$	$di_F/dt = -50\text{A}/\mu\text{s}$			35	ns
$Q_{rr}$	$T_j = 25^\circ\text{C}$ $V_R < 30\text{V}$	$I_F = 2\text{A}$	$di_F/dt = -20\text{A}/\mu\text{s}$		12		nC
$t_{fr}$	$T_j = 25^\circ\text{C}$ Measured at $1.1 \times V_F$	$I_F = 1\text{A}$	$t_r = 10\text{ns}$		20		ns
$V_{FP}$	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$	$t_r = 10\text{ns}$		5		V

To evaluate the conduction losses use the following equation:

$$P = 0.68 \times I_{F(AV)} + 0.06 I_{F(RMS)}^2$$

## PACKAGE MECHANICAL DATA

DO-15

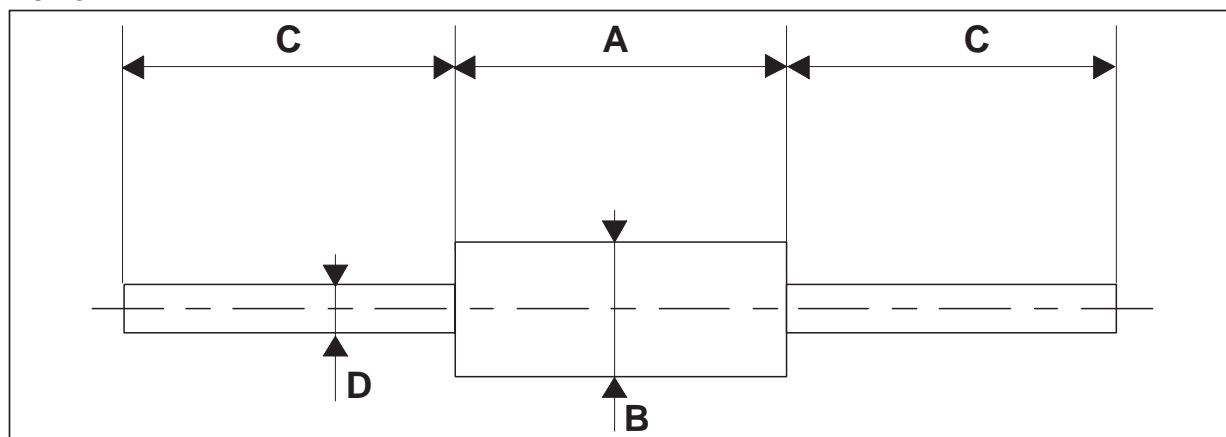

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.05	6.75	0.238	0.266
B	2.95	3.53	0.116	0.139
C	26	31	1.024	1.220
D	0.71	0.88	0.028	0.035

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STSR220	STSR220	DO-15	0.4 g	1000	Ammopack

- Cooling method : by convection (method A)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>