

APPLICATION SPECIFICATION

1. SCOPE

This specification covers the requirements for application of .140 diameter MATE-N-LOK* pin and socket contacts. These requirements are applicable to hand or automatic machine crimping tools. For specific wire and insulation ranges relative to the products covered in this specification see Figure 2 and 3.

2. NOMENCLATURE

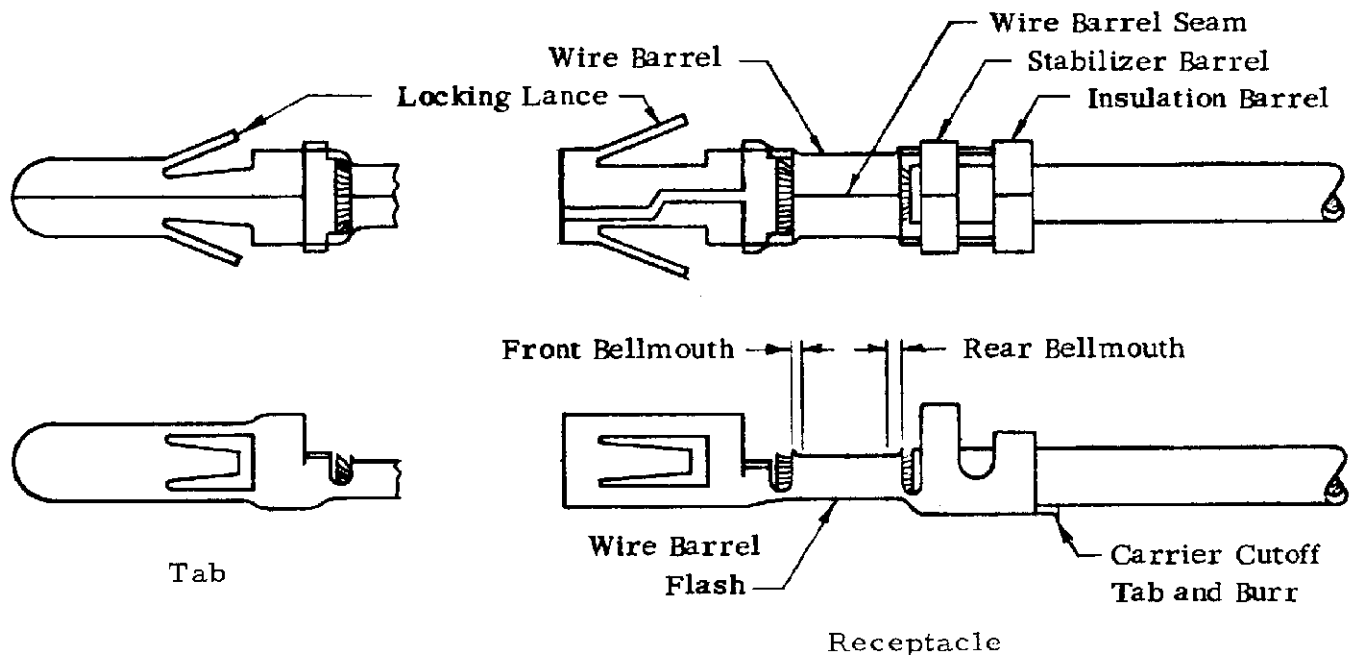


Figure 1

3. CRIMP AND DIMENSIONAL REQUIREMENTS

3.1. Wire Preparation

A. Strip Length

Insulation shall be stripped as indicated in Figure 2 and 3.

B. Workmanship

Reasonable care shall be taken not to nick, scrape or cut any strands or the solid wire during the stripping operation.

*Trademark of AMP Incorporated.

© COPYRIGHT 1976 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

				DR <i>C. E. Fatz</i> 10/27/76	 AMP INCORPORATED Harrisburg, Pa.			
				CHK <i>A. Brinell</i> 10/27/76				
				APP <i>H. Menay</i> 10/29/76	LOC B	NO A	114-1007	
				REV 0				
SHEET 1 OF 4				NAME CONTACT, PIN AND SOCKET, MATE-N-LOK, .140 DIAMETER, APPLICATION OF				
DIST 1	0	Was 108-1008						
LTR	REVISION RECORD		APP	DATE				

3.2. Carrier Cutoff Tab and Burr

A. Cutoff Tab

Cutoff tab shall not exceed .015.

B. Burr

Burr on cutoff shall not exceed .005.

3.3. Wire Barrel Crimp

A. Crimp Dimensions and Type

Crimp height, width and type shall be as shown in Figure 2 and 3.

B. Wire Barrel Flash

Wire barrel flash shall not exceed .007.

C. Wire Barrel Seam

The wire barrel seam shall be closed adequately to confine all strands of the wire. There shall be no loose wire strands or wire strands embedded in the outside of the wire barrel.

D. Bellmouth

(1) Rear bellmouth length shall be .010-.030.

(2) Front bellmouth length shall be .015 maximum.

E. Conductor Location

(1) End of the wire shall be flush with the front end of the wire barrel or extend .094 maximum after crimping.

(2) Both insulation and conductor shall be visible between the stabilizer barrel and wire barrel when the insulation diameter is less than .150. Care shall be taken not to allow insulation to be crimped in the wire barrel. Both conductor and insulation shall be visible between the stabilizer barrel and insulation barrel when the insulation diameter is .150 or greater.

3.4. Insulation Barrel Crimp

A. Crimp Dimensions and Type

(1) Crimp width and type shall be as shown in Figure 2 and 3.

(2) Crimped insulation barrel shall not extend at any point more than .005 outside the .190 diameter of the stabilizer. Check using AMP Gage 578957 and 679648.

		AMP INCORPORATED Harrisburg, Pa.		SHEET 2 OF 4	
LOC B	A	NO 114-1007	REV 0		
NAME CONTACT, PIN AND SOCKET, MATE-N-LOK, .140 DIAMETER, APPLICATION OF					

B. Workmanship

Reasonable care shall be taken not to cut or break the insulation during the crimping operation.

3.5. Locking Lance

Locking lance shall not be deformed.

3.6. Stabilizer Barrel Crimp

A. Crimp Dimensions and Type

- (1) Crimp diameter and type shall be as shown in Figure 2 and 3.
- (2) Crimped stabilizer barrel shall be concentric with the .162-.166 outside diameter dimension on socket within .015 diameter.
Check using AMP Gage 578957 and 679648.
- (3) Crimped stabilizer barrel shall be concentric with the .138-.142 outside front diameter dimension on pin within .015 diameter.
Check using AMP Gage 578957 and 679648.

B. Twist or Roll

There shall be no twist or roll in crimped portion that will impair usage of the contact.

SHEET
3 OF 4



AMP INCORPORATED
Harrisburg, Pa.

LOC
B

A

NO
114-1007

REV
0

NAME

CONTACT, PIN AND SOCKET,
MATE-N-LOK, .140 DIAMETER,
APPLICATION OF

Part Numbers		Wires		Insulation Diameter	Strip Length	Wire Barrel Crimp			Insulation Barrel Crimp			Stabilizer Barrel Crimp	
						Width	Height	Type	Width	Height	Type	Diameter, ±.005	Type
Ptn	Socket	No	Size				±.002	Crimper/Anvil			Crimper/Anvil		
61627	61626	1	14	.149 or less	.250 ±.062	.100	.071	F	.180	F	O	.190	O
			16				.061						
			18				.055						
			20				.051						
350201	350200	1	14	.150-.180	.312 ±.031	.100	.071	F	.180	F	O	.190	O
			16				.061						
			18				.055						
			20				.051						
350201	350200	1	10	.149 or less	.250 ±.062	.140	.100	F	.180	F	O	.190	O
			12				.082						
			14				.070						
			14				.100						
350201	350200	1	12	.150-.180	.312 ±.031	.140	.082	F	.180	F	O	.190	O
			14				.070						

Figure 2

Automatic Machine Wire Crimp Dimensions

Part Numbers		Wires		Insulation Diameter	Strip Length	Wire Barrel Crimp			Insulation Barrel Crimp			Stabilizer Barrel Crimp		Hand Tool Part No
						Width	Height	Type	Width	Height	Type	Diameter, ±.005	Type	
Ptn	Socket	No	Size					Crimper/Anvil			Crimper/Anvil			
350389	350388	1	14	.149 or less	.250 ±.062	.090	.066	F	.160	.195	F	O	O	90247-1
			16				±.003							
			18				.055							
			20				±.003							
350391	350390	1	14	.150-.180	.312 ±.031	.090	.066	F	.160	.195	F	O	O	69710 with die insert 90306-1
			16				±.003							
			18				.055							
			20				±.003							
350391	350390	1	10	.149 or less	.250 ±.062	.140	.095	F	.160	.195	F	O	O	69710 with die insert 90306-1
			12				±.002							
			14				.075							
			14				±.002							
350391	350390	1	10	.150-.180	.312 ±.031	.140	.095	F	.160	.195	F	O	O	69710 with die insert 90306-1
			12				±.002							
			14				.075							
			14				±.002							

Figure 3

Hand Tool Wire Crimp Dimensions

AMP INCORPORATED
Harrisburg, Pa.SHEET
4 OF 4

LOC B A NO 114-1007 REV 0

NAME CONTACT, PIN AND SOCKET,
MATE-N-LOK, .140 DIAMETER,
APPLICATION OF