

## Regulating Pulse Width Modulator


### FEATURES

- 8 To 35V Operation
- 5V Reference Trimmed To  $\pm 1\%$
- 1Hz To 400kHz Oscillator Range
- Dual 100mA Source/Sink Outputs
- Digital Current Limiting
- Double Pulse Suppression
- Programmable Deadtime
- Under-Voltage Lockout
- Single Pulse Metering
- Programmable Soft-Start
- Wide Current Limit Common Mode Range
- TTL/CMOS Compatible Logic Ports
- Symmetry Correction Capability
- Guaranteed 6 Unit Synchronization

### DESCRIPTION

The UC1526 is a high performance monolithic pulse width modulator circuit designed for fixed-frequency switching regulators and other power control applications. Included in an 18-pin dual-in-line package are a temperature compensated voltage reference, sawtooth oscillator, error amplifier, pulse width modulator, pulse metering and setting logic, and two low impedance power drivers. Also included are protective features such as soft-start and under-voltage lockout, digital current limiting, double pulse inhibit, a data latch for single pulse metering, adjustable deadtime, and provision for symmetry correction inputs. For ease of interface, all digital control ports are TTL and B-series CMOS compatible. Active LOW logic design allows wired-OR connections for maximum flexibility. This versatile device can be used to implement single-ended or push-pull switching regulators of either polarity, both transformerless and transformer coupled. The UC1526 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . The UC2526 is characterized for operation from  $-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , and the UC3526 is characterized for operation from  $0^{\circ}$  to  $+70^{\circ}\text{C}$ .

### BLOCK DIAGRAM

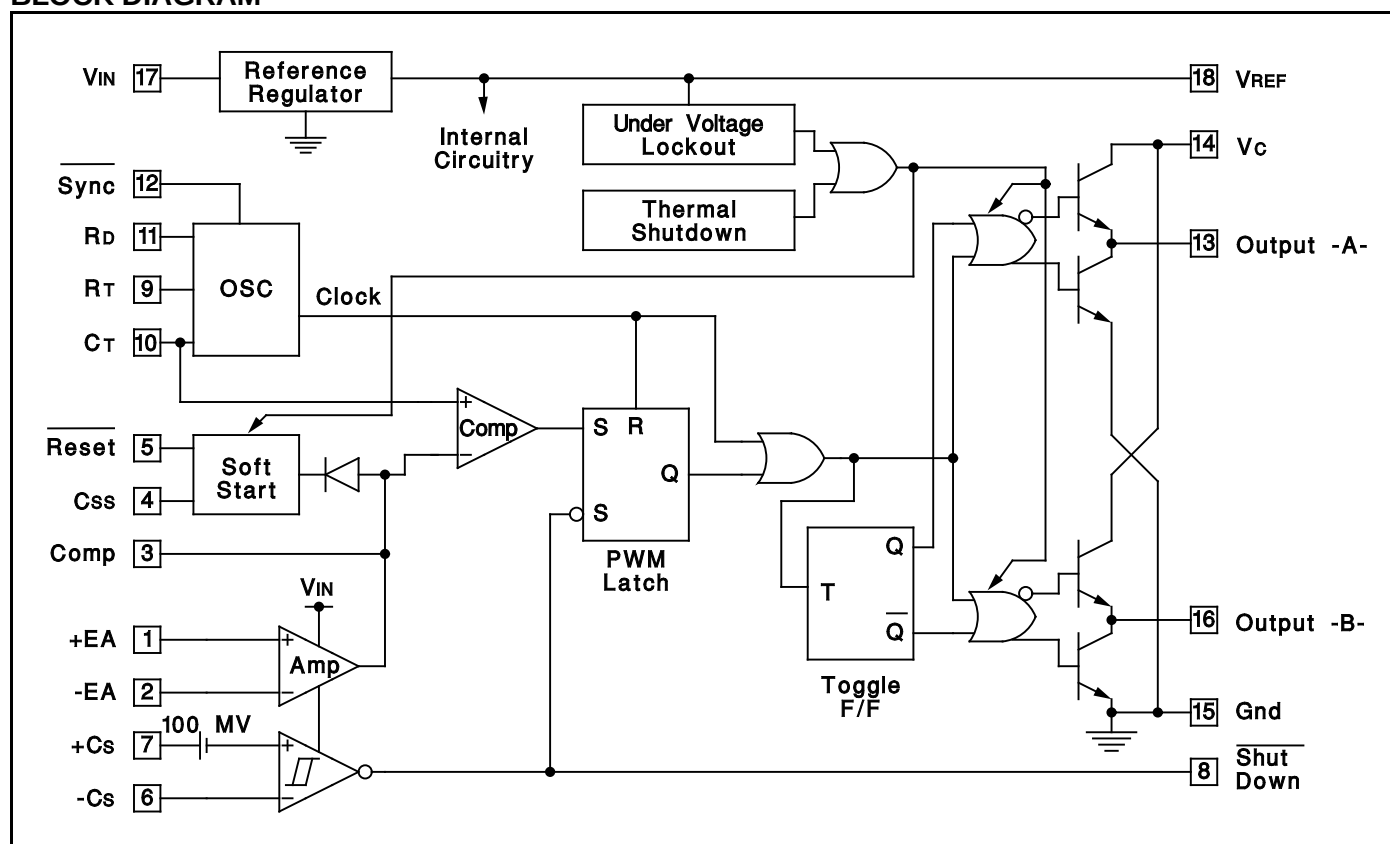

**ABSOLUTE MAXIMUM RATINGS** (Note 1, 2)

|                                          |                 |
|------------------------------------------|-----------------|
| Input Voltage (+VIN)                     | +40V            |
| Collector Supply Voltage (+Vc)           | +40V            |
| Logic Inputs                             | -0.3V to +5.5V  |
| Analog Inputs                            | -0.3V to +VIN   |
| Source/Sink Load Current (each output)   | 200mA           |
| Reference Load Current                   | 50mA            |
| Logic Sink Current                       | 15mA            |
| Power Dissipation at TA = +25°C (Note 2) | 1000mW          |
| Power Dissipation at Tc = +25°C (Note 2) | 3000mW          |
| Operating Junction Temperature           | +150°C          |
| Storage Temperature Range                | -65°C to +150°C |
| Lead Temperature (soldering, 10 seconds) | +300°C          |



Note 1: Values beyond which damage may occur.

Note 2: Consult packaging section of databook for thermal limitations and considerations of package.

**RECOMMENDED OPERATING CONDITIONS** (Note 3)

|                                        |                 |
|----------------------------------------|-----------------|
| Input Voltage                          | +8V to +35V     |
| Collector Supply Voltage               | +4.5V to +35V   |
| Sink/Source Load Current (each output) | 0 to 100mA      |
| Reference Load Current                 | 0 to 20mA       |
| Oscillator Frequency Range             | 1Hz to 400kHz   |
| Oscillator Timing Resistor             | 2kΩ to 150kΩ    |
| Oscillator Timing Capacitor            | 1nF to 20μF     |
| Available Deadtime Range at 40kHz      | 3% to 50%       |
| Operating Ambient Temperature Range    |                 |
| UC1526                                 | -55°C to +125°C |
| UC2526                                 | -25°C to +85°C  |
| UC3526                                 | -0°C to +70°C   |

Note 3: Range over which the device is functional and parameter limits are guaranteed.

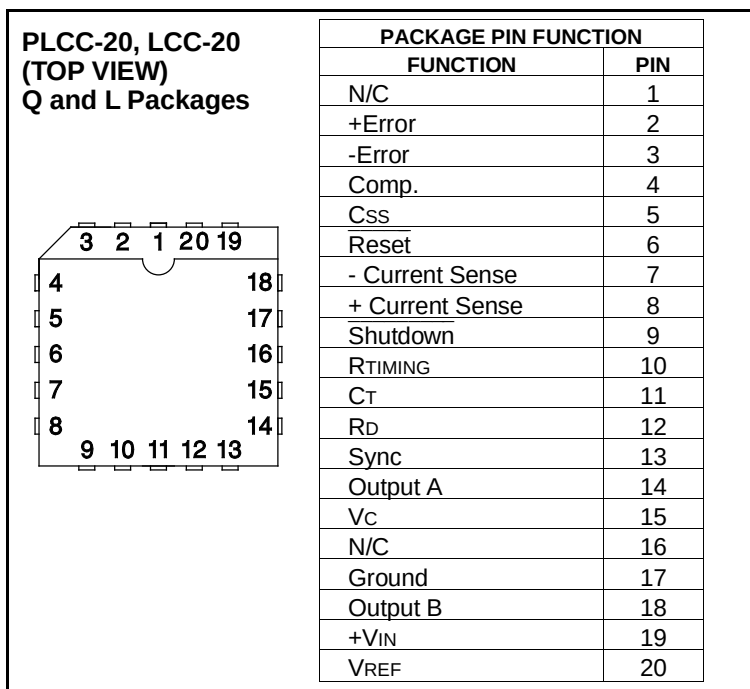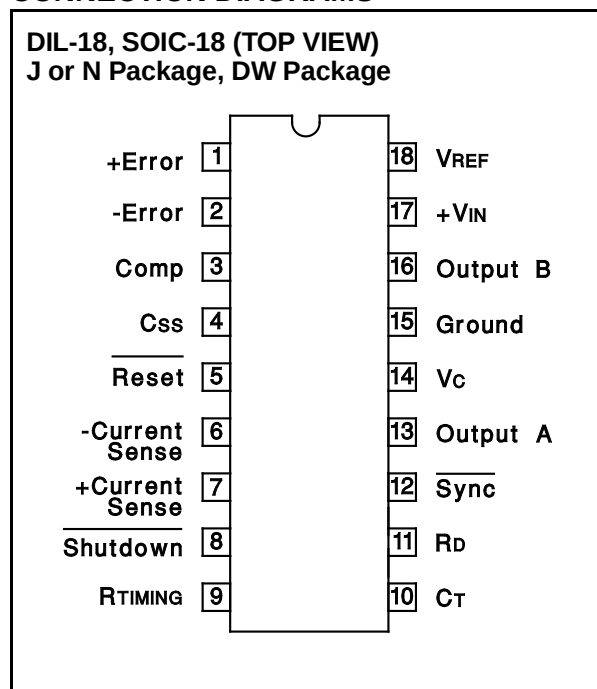**CONNECTION DIAGRAMS**

**ELECTRICAL CHARACTERISTICS:** +VIN = 15V, and over operating ambient temperature, unless otherwise specified, TA = TJ.

| PARAMETER                  | TEST CONDITIONS                       | UC1526 / UC2526 |      |      | UC3526 |      |      | UNITS |
|----------------------------|---------------------------------------|-----------------|------|------|--------|------|------|-------|
|                            |                                       | MIN             | TYP  | MAX  | MIN    | TYP  | MAX  |       |
| Reference Section (Note 4) |                                       |                 |      |      |        |      |      |       |
| Output Voltage             | T <sub>J</sub> = + 25°C               | 4.95            | 5.00 | 5.05 | 4.90   | 5.00 | 5.10 | V     |
| Line Regulation            | +V <sub>IN</sub> = 8 to 35V           |                 | 10   | 20   |        | 10   | 30   | mV    |
| Load Regulation            | I <sub>L</sub> = 0 to 20mA            |                 | 10   | 30   |        | 10   | 50   | mV    |
| Temperature Stability      | Over Operating T <sub>J</sub>         |                 | 15   | 50   |        | 15   | 50   | mV    |
| Total Output Voltage Range | Over Recommended Operating Conditions | 4.90            | 5.00 | 5.10 | 4.85   | 5.00 | 5.15 | V     |
| Short Circuit Current      | V <sub>REF</sub> = 0V                 | 25              | 50   | 100  | 25     | 50   | 100  | mA    |
| Under -Voltage Lockout     |                                       |                 |      |      |        |      |      |       |
| RESET Output Voltage       | V <sub>REF</sub> = 3.8V               |                 | 0.2  | 0.4  |        | 0.2  | 0.4  | V     |
|                            | V <sub>REF</sub> = 4.8V               | 2.4             | 4.8  |      | 2.4    | 4.8  |      | V     |

Note 4: IL = 0mA.

**ELECTRICAL CHARACTERISTICS:** +V<sub>IN</sub> = 15V, and over operating ambient temperature, unless otherwise specified, T<sub>A</sub> = T<sub>J</sub>.

| PARAMETER                                 | TEST CONDITIONS                                                           | UC1526 / UC2526 |      |       | UC3526 |      |       | UNITS |
|-------------------------------------------|---------------------------------------------------------------------------|-----------------|------|-------|--------|------|-------|-------|
|                                           |                                                                           | MIN             | TYP  | MAX   | MIN    | TYP  | MAX   |       |
| Oscillator Section (Note 5)               |                                                                           |                 |      |       |        |      |       |       |
| Initial Accuracy                          | T <sub>J</sub> = + 25°C                                                   |                 | ±3   | ±8    |        | ±3   | ±8    | %     |
| Voltage Stability                         | +V <sub>IN</sub> = 8 to 35V                                               |                 | 0.5  | 1     |        | 0.5  | 1     | %     |
| Temperature Stability                     | Over Operating T <sub>J</sub>                                             |                 | 7    | 10    |        | 3    | 5     | %     |
| Minimum Frequency                         | R <sub>T</sub> = 150kΩ, C <sub>T</sub> = 20μF                             |                 |      | 1     |        |      | 1     | Hz    |
| Maximum Frequency                         | R <sub>T</sub> = 2kΩ, C <sub>T</sub> = 1.0nF                              | 400             |      |       | 400    |      |       | kHz   |
| Sawtooth Peak Voltage                     | +V <sub>IN</sub> = 35V                                                    |                 | 3.0  | 3.5   |        | 3.0  | 3.5   | V     |
| Sawtooth Valley Voltage                   | +V <sub>IN</sub> = 8V                                                     | 0.5             | 1.0  |       | 0.5    | 1.0  |       | V     |
| Error Amplifier Section (Note 6)          |                                                                           |                 |      |       |        |      |       |       |
| Input Offset Voltage                      | R <sub>S</sub> ≤ 2kΩ                                                      |                 | 2    | 5     |        | 2    | 10    | mV    |
| Input Bias Current                        |                                                                           |                 | -350 | -1000 |        | -350 | -2000 | nA    |
| Input Offset Current                      |                                                                           |                 | 35   | 100   |        | 35   | 200   | nA    |
| DC Open Loop Gain                         | R <sub>L</sub> ≥ 10MΩ                                                     | 64              | 72   |       | 60     | 72   |       | dB    |
| HIGH Output Voltage                       | V <sub>PIN1</sub> -V <sub>PIN2</sub> ≥ 150mV, I <sub>SOURCE</sub> = 100μA | 3.6             | 4.2  |       | 3.6    | 4.2  |       | V     |
| LOW Output Voltage                        | V <sub>PIN2</sub> -V <sub>PIN1</sub> ≥ 150mV, I <sub>SINK</sub> = 100μA   |                 | 0.2  | 0.4   |        | 0.2  | 0.4   | V     |
| Common Mode Rejection                     | R <sub>S</sub> ≤ 12kΩ                                                     | 70              | 94   |       | 70     | 94   |       | dB    |
| Supply Voltage Rejection                  | +V <sub>IN</sub> = 12 to 18V                                              | 66              | 80   |       | 66     | 80   |       | dB    |
| PWM Comparator (Note 5)                   |                                                                           |                 |      |       |        |      |       |       |
| Minimum Duty Cycle                        | V <sub>COMPENSATION</sub> = +0.4V                                         |                 |      | 0     |        |      | 0     | %     |
| Maximum Duty Cycle                        | V <sub>COMPENSATION</sub> = +3.6V                                         | 45              | 49   |       | 45     | 49   |       | %     |
| Digital Ports (SYNC, SHUTDOWN, and RESET) |                                                                           |                 |      |       |        |      |       |       |
| HIGH Output Voltage                       | I <sub>SOURCE</sub> =40μA                                                 | 2.4             | 4.0  |       | 2.4    | 4.0  |       | V     |
| LOW Output Voltage                        | I <sub>SINK</sub> = 3.6mA                                                 |                 | 0.2  | 0.4   |        | 0.2  | 0.4   | V     |
| HIGH Input Current                        | V <sub>IH</sub> = +2.4V                                                   |                 | -125 | -200  |        | -125 | -200  | μA    |
| LOW Input Current                         | V <sub>IL</sub> = +0.4V                                                   |                 | -225 | -360  |        | -225 | -360  | μA    |
| Current Limit Comparator (Note 7)         |                                                                           |                 |      |       |        |      |       |       |
| Sense Voltage                             | R <sub>S</sub> ≤ 50Ω                                                      | 90              | 100  | 110   | 80     | 100  | 120   | mV    |
| Input Bias Current                        |                                                                           |                 | -3   | -10   |        | -3   | -10   | μA    |
| Soft-Start Section                        |                                                                           |                 |      |       |        |      |       |       |
| Error Clamp Voltage                       | $\overline{\text{RESET}}$ = +0.4V                                         |                 | 0.1  | 0.4   |        | 0.1  | 0.4   | V     |
| C <sub>s</sub> Charging Current           | $\overline{\text{RESET}}$ =+2.4V                                          | 50              | 100  | 150   | 50     | 100  | 150   | μA    |
| Output Drivers (Each Output) (Note 8)     |                                                                           |                 |      |       |        |      |       |       |
| HIGH Output Voltage                       | I <sub>SOURCE</sub> = 20mA                                                | 12.5            | 13.5 |       | 12.5   | 13.5 |       | V     |
|                                           | I <sub>SOURCE</sub> = 100mA                                               | 12              | 13   |       | 12     | 13   |       | V     |
| LOW Output Voltage                        | I <sub>SINK</sub> = 20mA                                                  |                 | 0.2  | 0.3   |        | 0.2  | 0.3   | V     |
|                                           | I <sub>SINK</sub> = 100mA                                                 |                 | 1.2  | 2.0   |        | 1.2  | 2.0   | V     |
| Collector Leakage                         | V <sub>C</sub> = 40V                                                      |                 | 50   | 150   |        | 50   | 150   | μA    |
| Rise Time                                 | C <sub>L</sub> = 1000pF                                                   |                 | 0.3  | 0.6   |        | 0.3  | 0.6   | μS    |
| Fall Time                                 | C <sub>L</sub> = 1000pF                                                   |                 | 0.1  | 0.2   |        | 0.1  | 0.2   | μS    |
| Power Consumption (Note 9)                |                                                                           |                 |      |       |        |      |       |       |
| Standby Current                           | $\overline{\text{SHUTDOWN}}$ = +0.4V                                      |                 | 18   | 30    |        | 18   | 30    | mA    |

Note 4: I<sub>L</sub> = 0mA.

Note 5: F<sub>OSC</sub> = 40kHz (R<sub>T</sub> = 4.12kΩ ± 1%, C<sub>T</sub> = 0.1μF ± 1%, R<sub>D</sub> = 0Ω)

Note 6: V<sub>CM</sub> = 0 to +5.2V

Note 8: V<sub>C</sub> = +15V

Note 9: +V<sub>IN</sub> = +35V, R<sub>T</sub> = 4.12kΩ

## APPLICATIONS INFORMATION

### Voltage Reference

The reference regulator of the UC1526 is based on a temperature compensated zener diode. The circuitry is fully active at supply voltages above +8V, and provides up to 20mA of load current to external circuitry at +5.0V. In systems where additional current is required, an external PNP transistor can be used to boost the available current. A rugged low frequency audio-type transistor should be used, and lead lengths between the PWM and transistor should be as short as possible to minimize the risk of oscillations. Even so, some types of transistors may require collector-base capacitance for stability. Up to 1 amp of load current can be obtained with excellent regulation if the device selected maintains high current gain.

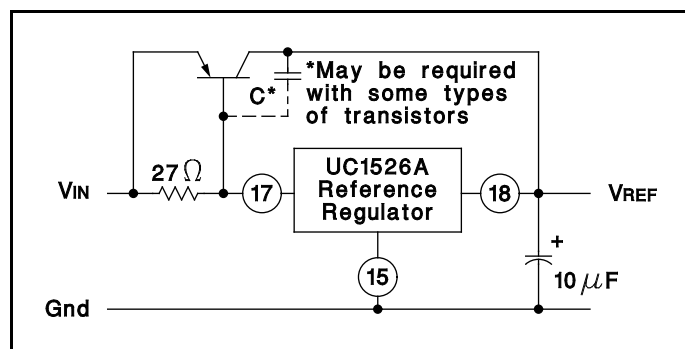


Figure 1. Extending Reference Output Current

### Under-Voltage Lockout

The under-voltage lockout circuit protects the UC1526 and the power devices it controls from inadequate supply voltage. If +VIN is too low, the circuit disables the output drivers and holds the  $\overline{\text{RESET}}$  pin LOW. This prevents spurious output pulses while the control circuitry is stabilizing, and holds the soft-start timing capacitor in a discharged state.

The circuit consists of a +1.2V bandgap reference and comparator circuit which is active when the reference voltage has risen to  $3V_{BE}$  or +1.8V at 25°C. When the reference voltage rises to approximately +4.4V, the circuit enables the output drivers and releases the  $\overline{\text{RESET}}$  pin, allowing a normal soft-start. The comparator has 200mV of hysteresis to minimize oscillation at the trip point. When +VIN to the PWM is removed and the reference drops to +4.2V, the under-voltage circuit pulls  $\overline{\text{RESET}}$  LOW again. The soft-start capacitor is immediately discharged, and the PWM is ready for another soft-start cycle.

The UC1526 can operate from a +5V supply by connecting the VREF pin to the +VIN pin and maintaining the supply between +4.8 and +5.2V.

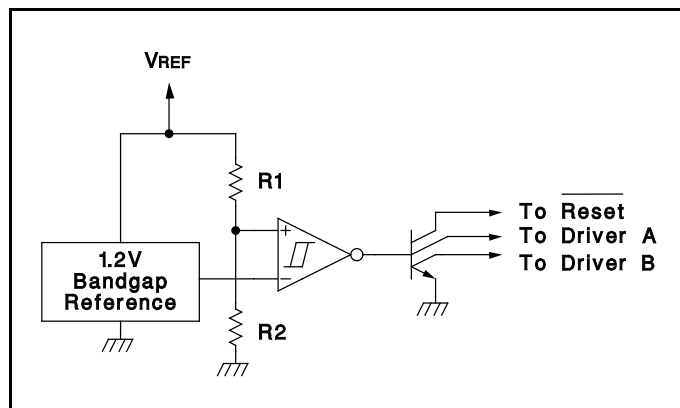


Figure 2. Under-Voltage Lockout Schematic

### Soft-Start Circuit

The soft-start circuit protects the power transistors and rectifier diodes from high current surges during power supply turn-on. When supply voltage is first applied to the UC1526, the under-voltage lockout circuit holds  $\overline{\text{RESET}}$  LOW with Q3. Q1 is turned on, which holds the soft-start capacitor voltage at zero. The second collector of Q1 clamps the output of the error amplifier to ground, guaranteeing zero duty cycle at the driver outputs. When the supply voltage reaches normal operating range,  $\overline{\text{RESET}}$  will go HIGH. Q1 turns off, allowing the internal 100mA current source to charge Cs. Q2 clamps the error amplifier output to  $1V_{BE}$  above the voltage on Cs. As the soft-start voltage ramps up to +5V, the duty cycle of the PWM linearly increases to whatever value the voltage regulation loop requires for an error null.

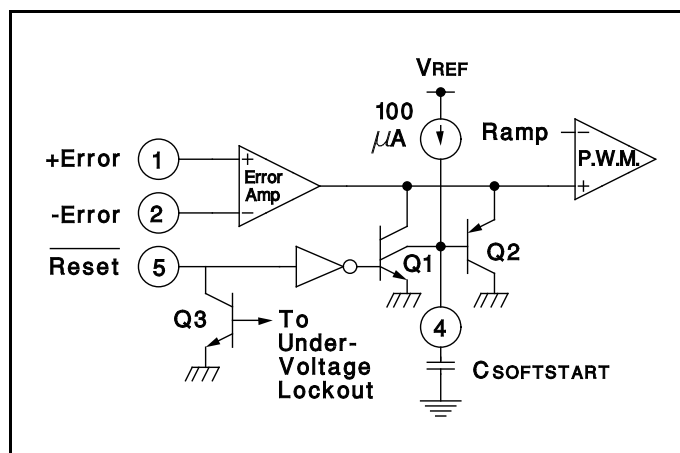


Figure 3. Soft-Start Circuit Schematic

### Digital Control Ports

The three digital control ports of the UC1526 are bi-directional. Each pin can drive TTL and 5V CMOS logic directly, up to a fan-out of 10 low-power Schottky gates. Each pin can also be directly driven by open-collector

## APPLICATIONS INFORMATION (cont.)

TTL, open-drain CMOS, and open-collector voltage comparators; fan-in is equivalent to 1 low-power Schottky gate. Each port is normally HIGH; the pin is pulled LOW to activate the particular function. Driving  $\overline{\text{SYNC}}$  LOW initiates a discharge cycle in the oscillator. Pulling  $\overline{\text{SHUTDOWN}}$  LOW immediately inhibits all PWM output pulses. Holding  $\overline{\text{RESET}}$  LOW discharges the soft-start capacitor. The logic threshold is +1.1V at +25°C. Noise immunity can be gained at the expense of fan-out with an external 2k pull-up resistor to +5V.

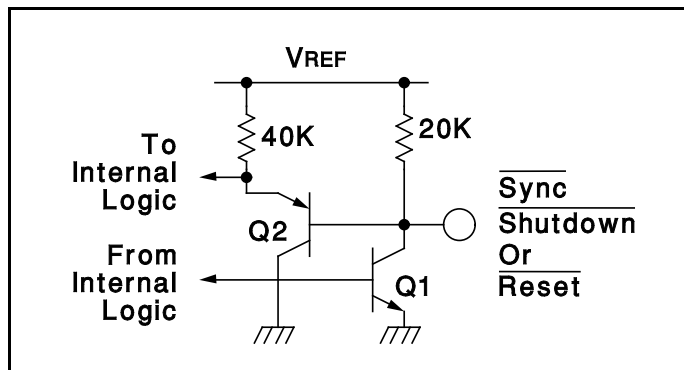


Figure 4. Digital Control Port Schematic

### Oscillator

The oscillator is programmed for frequency and dead time with three components:  $R_T$ ,  $C_T$  and  $R_D$ . Two waveforms are generated: a sawtooth waveform at pin 10 for pulse width modulation, and a logic clock at pin 12. The following procedure is recommended for choosing timing values:

1. With  $R_D = 0$  (pin 11 shorted to ground) select values for  $R_T$  and  $C_T$  from Figure 7 to give the desired oscillator period. Remember that the frequency at each driver output is half the oscillator frequency, and the frequency at the +Vc terminal is the same as the oscillator frequency.
2. If more dead time is required, select a large value of  $R_D$ . At 40kHz dead time increases by 400ns/ $\Omega$ .
3. Increasing the dead time will cause the oscillator frequency to decrease slightly. Go back and decrease the value of  $R_T$  slightly to bring the frequency back to the nominal design value.

The UC1526 can be synchronized to an external logic clock by programming the oscillator to free-run at a frequency 10% slower than the sync frequency. A periodic LOW logic pulse approximately 0.5 $\mu$ s wide at the  $\overline{\text{SYNC}}$  pin will then lock the oscillator to the external frequency.

Multiple devices can be synchronized together by programming one master unit for the desired frequency and then sharing its sawtooth and clock waveforms with the slave units. All  $C_T$  terminals are connected to the  $C_T$  pin of the master, and all  $\overline{\text{SYNC}}$  terminals are likewise connected to the  $\overline{\text{SYNC}}$  pin of the master. Slave  $R_T$  terminals are left open or connected to  $V_{REF}$ . Slave  $R_D$  terminals may be either left open or grounded.

### Error Amplifier

The error amplifier is a transconductance design, with an output impedance of 2M $\Omega$ . Since all voltage gain takes place at the output pin, the open-loop gain/frequency characteristics can be controlled with shunt reactance to ground. When compensated for unity-gain stability with 100pF, the amplifier has an open-loop pole at 800Hz.

The input connections to the error amplifier are determined by the polarity of the switching supply output voltage. For positive supplies, the common-mode voltage is +5.0V and the feedback connections in Figure 6A are used. With negative supplies, the common-mode voltage is ground and the feedback divider is connected between the negative output and the +5.0V reference voltage, as shown in Figure 6B.

### Output Drivers

The totem-pole output drivers of the UC1526 are designed to source and sink 100mA continuously and 200mA peak. Loads can be driven either from the output pins 13 and 16, or from the +Vc, as required.

Since the bottom transistor of the totem-pole is allowed to saturate, there is a momentary conduction path from the +Vc terminal to ground during switching. To limit the resulting current spikes a small resistor in series with pin 14 is always recommended. The resistor value is determined by the driver supply voltage, and should be chosen for 200mA peak currents.

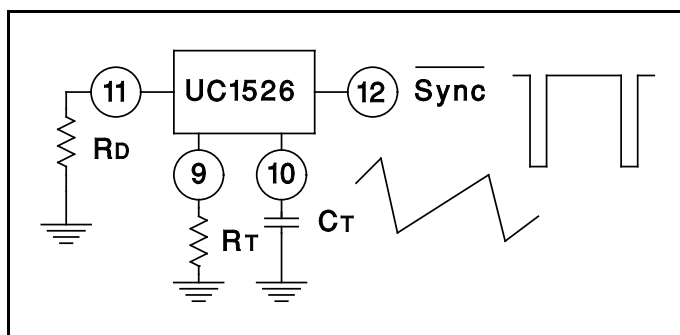


Figure 5. Oscillator Connections and Waveforms

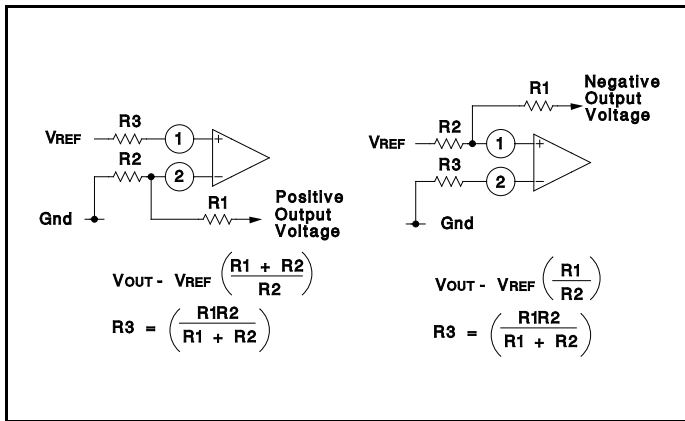


Figure 6. Error Amplifier Connections

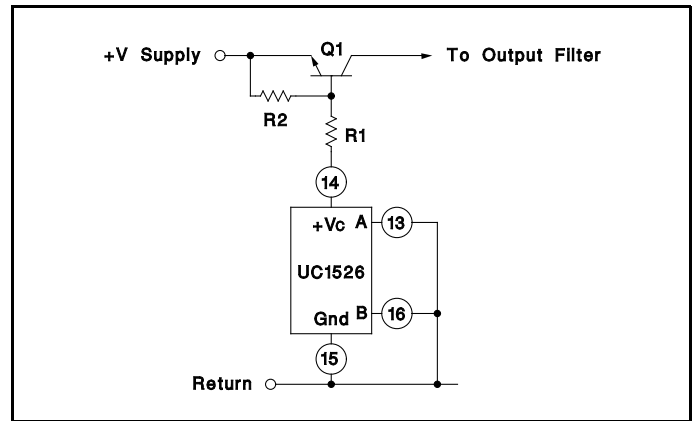


Figure 8. Single-Ended Configuration

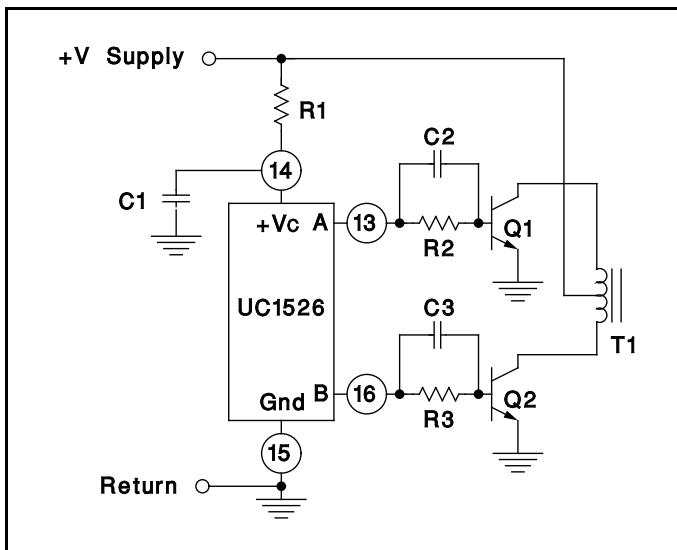


Figure 7. Push-Pull Configuration


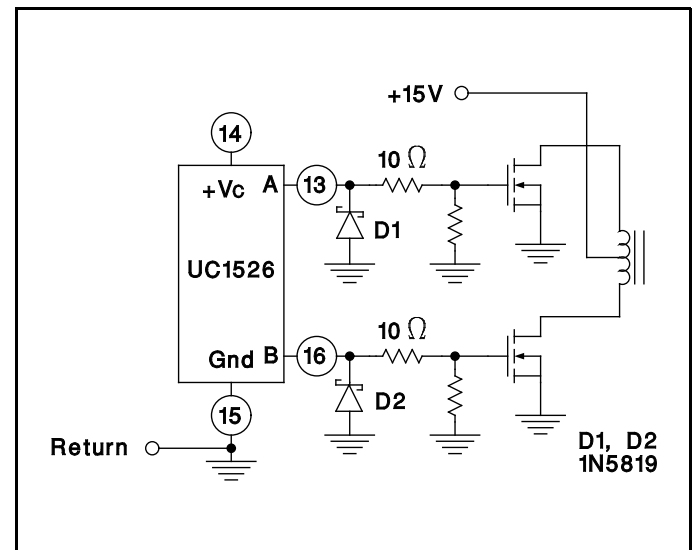



Figure 9. Driving N-channel Power Mosfets

## TYPICAL CHARACTERISTICS

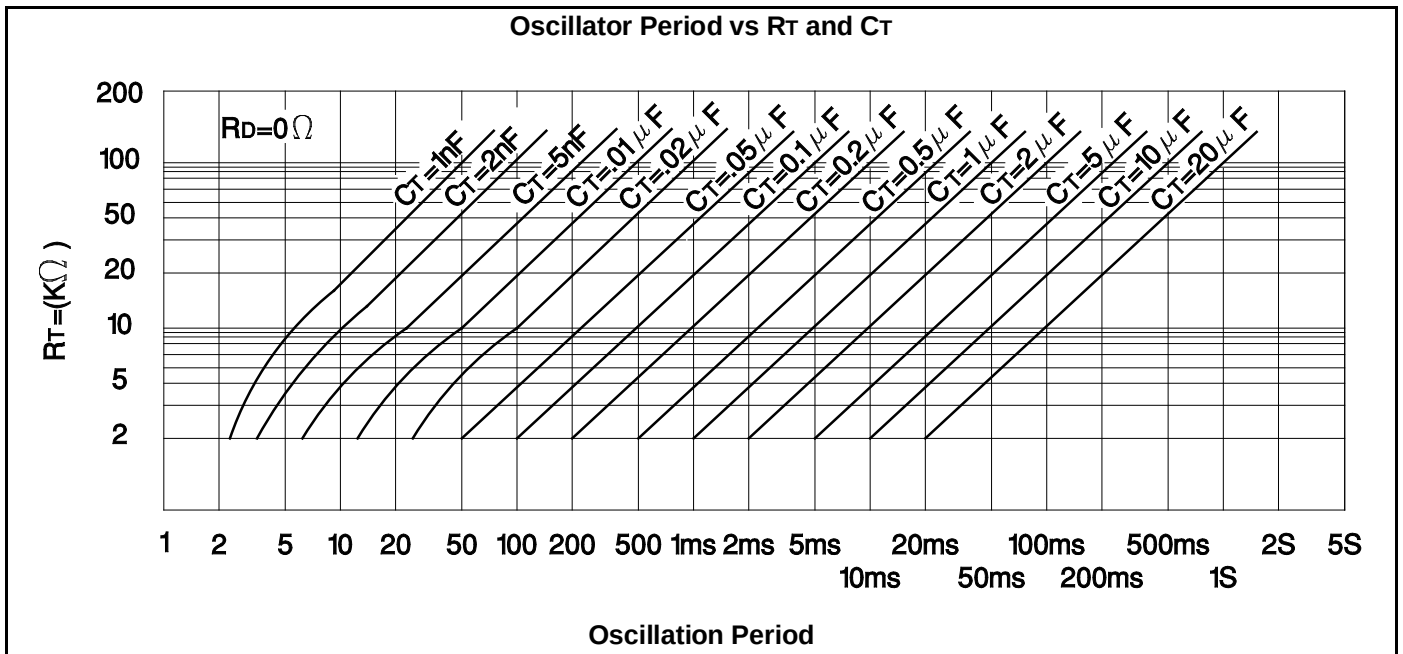


## TYPICAL CHARACTERISTICS


Output Driver Deadtime vs  $R_D$  Value

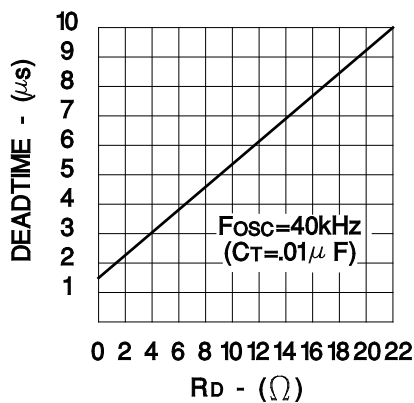


Under Voltage Lockout Characteristic

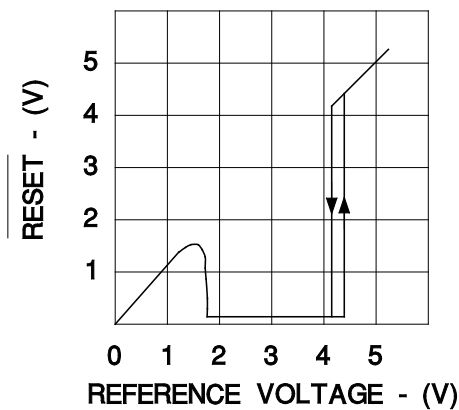


Error Amplifier Open Loop Gain vs Frequency

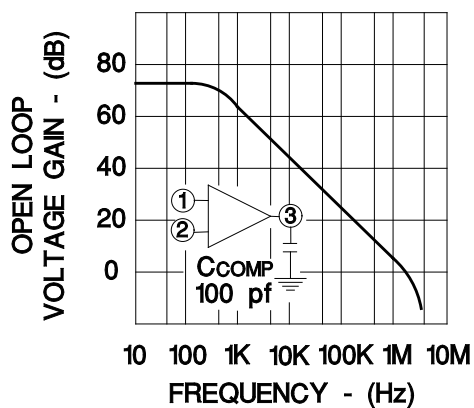


Current Limit Transfer Function

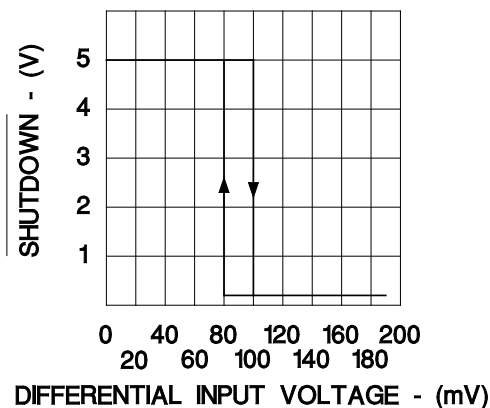

Shutdown Delay

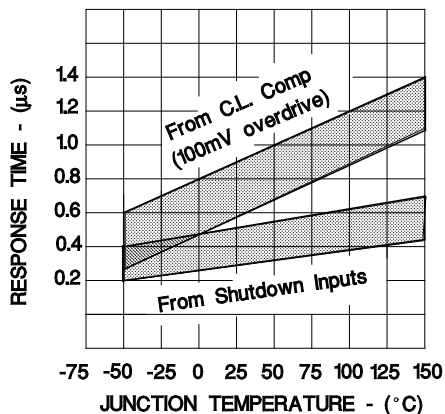

Output Driver Saturation Voltage

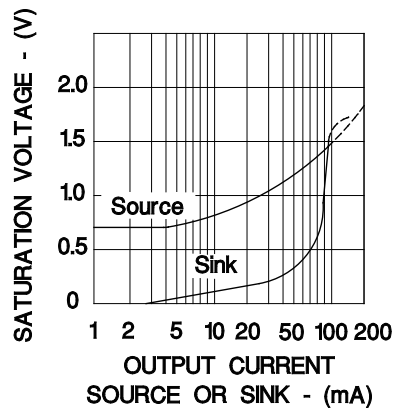

## PACKAGING INFORMATION

| Orderable part number       | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)       |
|-----------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------------|
| <a href="#">8551501VA</a>   | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8551501VA<br>UC1526J/883B |
| <a href="#">UC1526J</a>     | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | UC1526J                   |
| UC1526J.A                   | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | UC1526J                   |
| <a href="#">UC1526J883B</a> | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8551501VA<br>UC1526J/883B |
| UC1526J883B.A               | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8551501VA<br>UC1526J/883B |
| <a href="#">UC2526AJ</a>    | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -25 to 85    | UC2526AJ                  |
| UC2526AJ.A                  | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -25 to 85    | UC2526AJ                  |
| <a href="#">UC2526N</a>     | Active        | Production           | PDIP (N)   18  | 20   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -25 to 85    | UC2526N                   |
| UC2526N.A                   | Active        | Production           | PDIP (N)   18  | 20   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -25 to 85    | UC2526N                   |
| <a href="#">UC3526AJ</a>    | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | 0 to 70      | UC3526AJ                  |
| UC3526AJ.A                  | Active        | Production           | CDIP (J)   18  | 20   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | 0 to 70      | UC3526AJ                  |
| <a href="#">UC3526DW</a>    | Active        | Production           | SOIC (DW)   18 | 40   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3526DW                  |
| UC3526DW.A                  | Active        | Production           | SOIC (DW)   18 | 40   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3526DW                  |
| <a href="#">UC3526DWTR</a>  | Active        | Production           | SOIC (DW)   18 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3526DW                  |
| UC3526DWTR.A                | Active        | Production           | SOIC (DW)   18 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | 0 to 70      | UC3526DW                  |
| <a href="#">UC3526N</a>     | Active        | Production           | PDIP (N)   18  | 20   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3526N                   |
| UC3526N.A                   | Active        | Production           | PDIP (N)   18  | 20   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3526N                   |
| UC3526NG4                   | Active        | Production           | PDIP (N)   18  | 20   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | UC3526N                   |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.



(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF UC1526, UC2526AM, UC3526, UC3526AM :**

- Catalog : [UC3526](#), [UC2526A](#), [UC3526M](#), [UC3526A](#)
- Military : [UC1526](#), [UC1526A](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

## TUBE



\*All dimensions are nominal

| Device     | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| UC2526N    | N            | PDIP         | 18   | 20  | 506    | 13.97  | 11230  | 4.32   |
| UC2526N.A  | N            | PDIP         | 18   | 20  | 506    | 13.97  | 11230  | 4.32   |
| UC3526DW   | DW           | SOIC         | 18   | 40  | 507    | 12.83  | 5080   | 6.6    |
| UC3526DW.A | DW           | SOIC         | 18   | 40  | 507    | 12.83  | 5080   | 6.6    |
| UC3526N    | N            | PDIP         | 18   | 20  | 506    | 13.97  | 11230  | 4.32   |
| UC3526N.A  | N            | PDIP         | 18   | 20  | 506    | 13.97  | 11230  | 4.32   |
| UC3526NG4  | N            | PDIP         | 18   | 20  | 506    | 13.97  | 11230  | 4.32   |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated