


B2 BASICS WITH INTEGRAL LEVERS

CHOICE OF STRAIGHT, FORMED OR ROLLER LEVERS

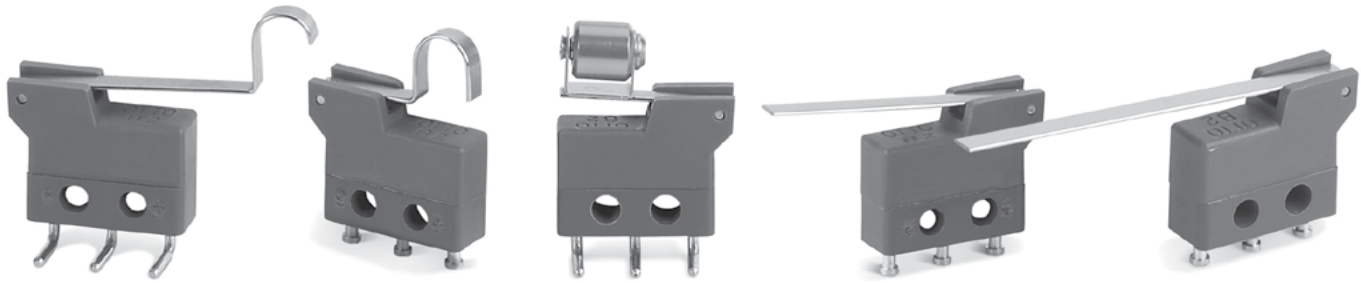

B2-500571

B2-500411

B2-501691

B2-500211

B2-500333

Shown are examples of available lever styles.

B2-5 Integral Lever Basic Switches

B2-5 series basic switches feature integral actuating levers. The lever is built-in so that the switch and actuator are one assembly.

Making the lever actuator an integral part of the basic switch case makes sense and saves money, too. Better precision, no auxiliary parts for you to assemble, and more variety add up to a cost saving proposition.

Lever Style	Catalog Number	STANDARD OPERATIONAL CHARACTERISTICS					
		Operating Force (max ounces)	Release Force (min ounces)	Pretravel (max inches)	Overtravel (min inches)	Move't Differ'l (max inches)	Operating Point (inches)
Short Lever	B2-500111	1.76	0.32	0.065	0.014	0.020	0.332 +/- 0.045
Medium Lever	B2-500211	1.10	0.18	0.115	0.025	0.035	0.325 +/- 0.075
Long Lever	B2-500311	0.71	0.11	0.185	0.046	0.060	0.305 +/- 0.115
Short Formed Lever	B2-500411	2.10	0.39	0.050	0.010	0.015	0.545 +/- 0.036
Long Formed Lever	B2-500511	1.10	0.18	0.105	0.022	0.035	0.559 +/- 0.065
Lever Style with Hole	B2-500611	1.10	0.18	0.115	0.025	0.035	0.325 +/- 0.075
Short "V" Lever	B2-501211	3.00	0.57	0.042	0.010	0.010	0.411 +/- 0.011
Roller Sleeve Sideways	B2-501611	2.29	0.43	0.065	0.008	0.020	0.581 +/- 0.045
Roller Lever in Line	B2-501911	2.29	0.43	0.070	0.008	0.020	0.581 +/- 0.050

B2-5 PART NUMBER CODE

B2-5	X X X	X	X
Lever Style*	Terminal Style or Wire Length		Contact Material
001. Short Straight	1. Single Solder Turret	9. Right Angle**	1. Silver/Gold - High Current
002. Medium Straight	2. Double Solder Turret	A. With Wires 06.0" lg.	3. Silver/Gold - Low Current
003. Long Straight	3. Quick Connect	B. With Wires 12.0" lg.	
004. Short Formed	4. PC Pin 0.150" lg.	C. With Wires 18.0" lg.	
005. Long Formed	5. PC Pin 0.270" lg.	D. With Wires 24.0" lg.	
006. With Hole	6. PC Pin 0.090" lg.	E. With Wires 30.0" lg.	
012. Short "V"	7. Right Angle PC Pin		
016. Roller Sleeve Sideways			
019. Roller Lever in Line			

* For additional lever options, contact factory.



** Opposite of 7

B2 BASICS WITH INTEGRAL LEVERS


B2 -5
BASIC
SWITCHES

CHOICE OF STRAIGHT, FORMED OR ROLLER LEVERS


**BASIC SWITCH
(APPLIES TO ALL B2-5 SWITCHES)**

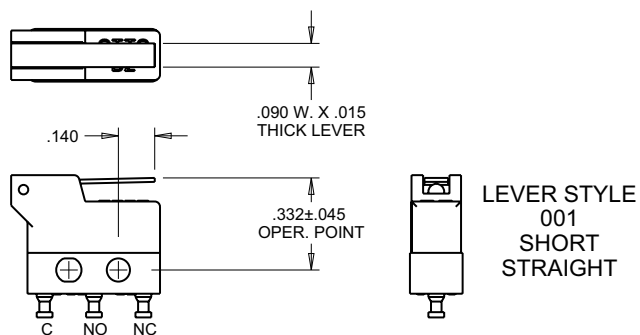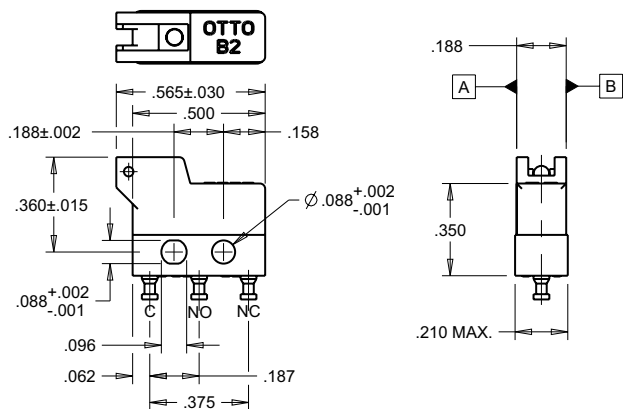


B2-50011X

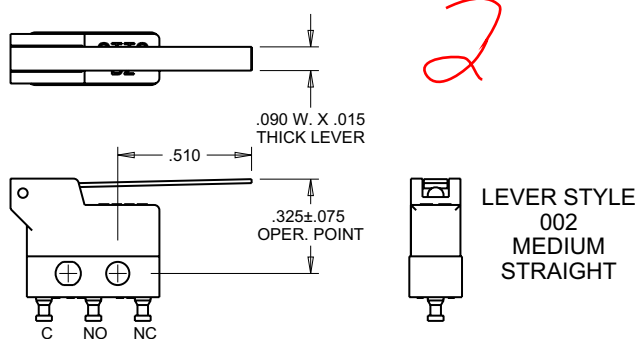


B2-50021X

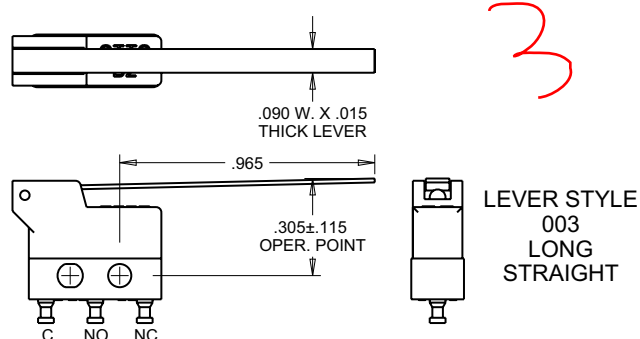

B2-50031X

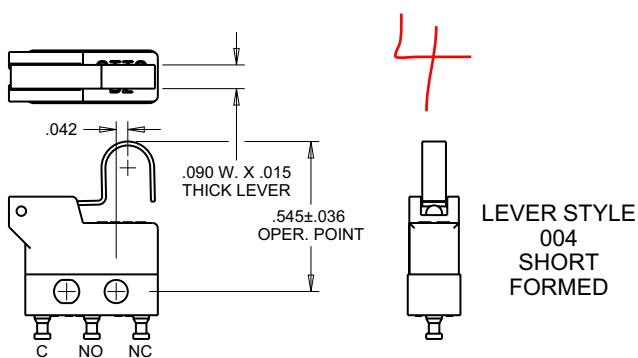


B2-50041X

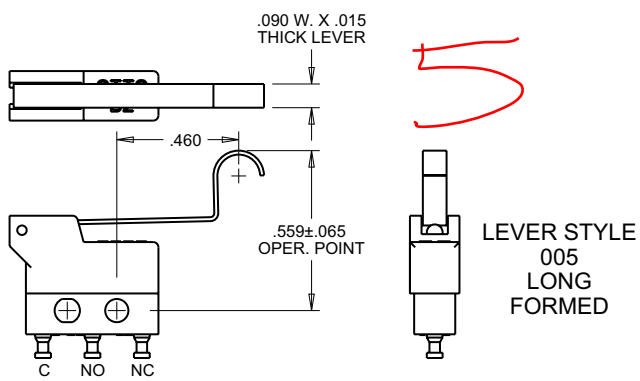


B2-50051X

B2 BASICS WITH INTEGRAL LEVERS


CHOICE OF STRAIGHT, FORMED OR ROLLER LEVERS

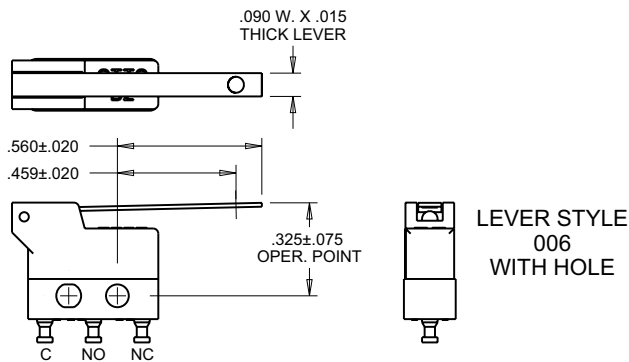


B2-50061X

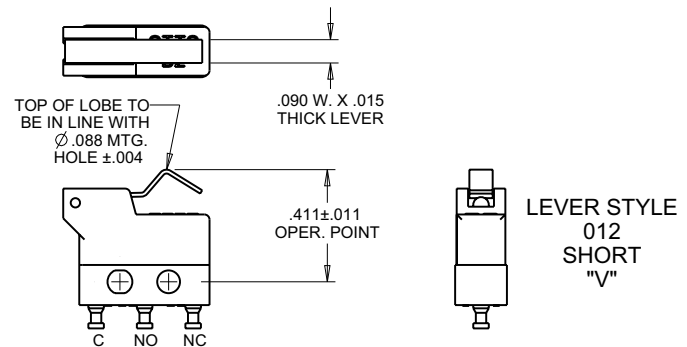

B2-50121X

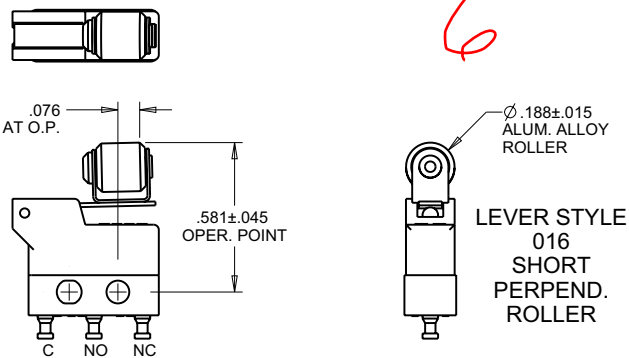


B2-50161X

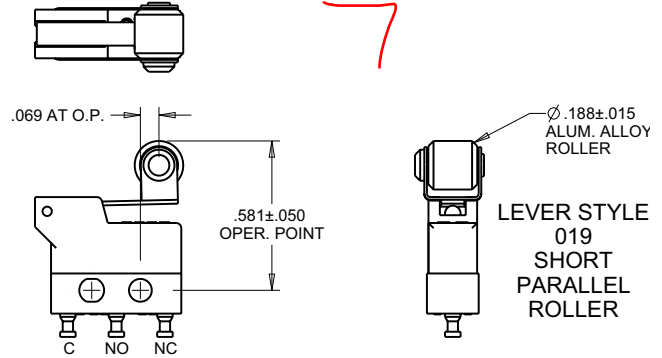

B2-50191X

WIRE LENGTHS (APPLIES TO ALL B2-5 SWITCHES)

WIRE LENGTH CODE	DIM. "X"	DIM. "Y"
A	06.00 ± .38	06.09 ± .38
B	12.00 ± .50	12.09 ± .50
C	18.00 ± .50	18.09 ± .50
D	24.00 ± .50	24.09 ± .50
E	30.00 ± .75	30.09 ± .75

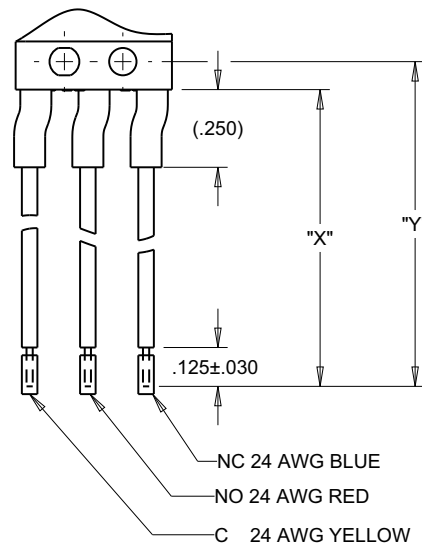

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[OTTO:](#)

[B2-500111](#) [B2-500211](#) [B2-500311](#) [B2-500411](#) [B2-5004A1](#) [B2-5005A1](#) [B2-501611](#) [B2-5016A1](#) [B2-501911](#) [B2-5019A1](#) [B2-5001A1](#) [B2-5002A1](#) [B2-5003A1](#) [B2-500047](#)