


CMOS 8-BIT MICROCONTROLLER

TMP87PM29U, TMP87PM29N

The 87PM29 is an One-Time PROM microcontroller with low-power 256K bits (32K bytes) electrically programmable read only memory for 87CH29/CK29/CM29 system evaluation. The 87PM29 is pin-compatible with 87CH29/CK29/CM29. The operations possible with the 87CH29/CK29/CM29 can be performed by writing programs to PROM. The 87PM29 can write and verify in the same way as the TC57256AD using an adaptor socket BM11117/BM11143 and an EPROM programmer.


PART No.	OTP	RAM	PACKAGE	ADAPTER SOCKET
TMP87PM29U	32K × 8-bit	1K × 8-bit	LQFP64-P-1010-0.50	BM11117
* TMP87PM29N			SDIP64-P-750-1.78	BM11143

* ; Under development

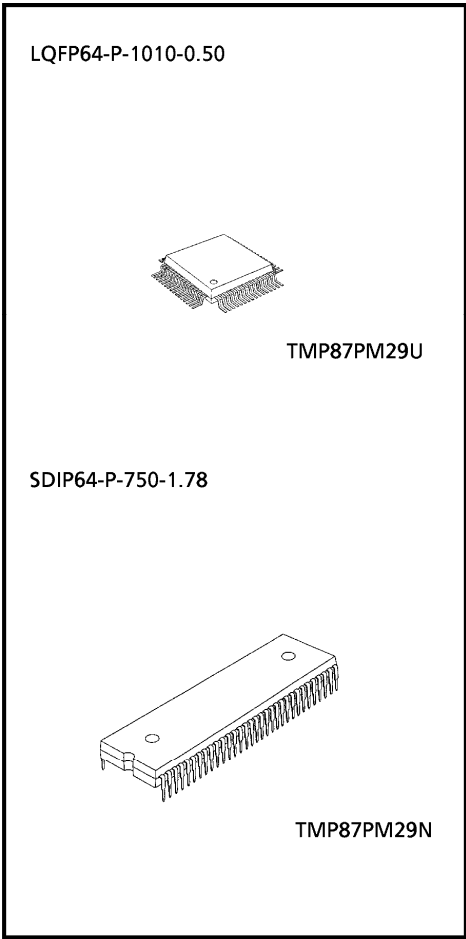


PIN ASSIGNMENTS (TOP VIEW)

LQFP64-P-1010-0.50

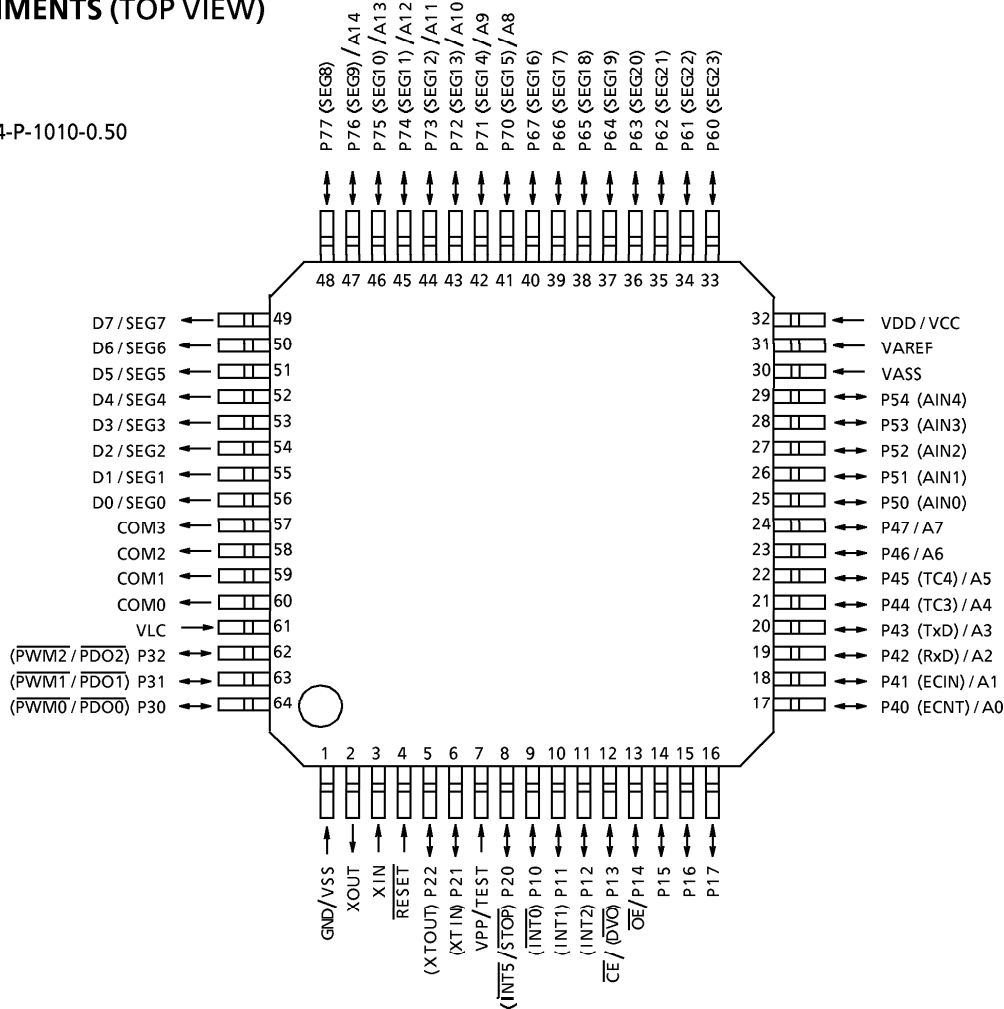

SDIP64-P-750-1.78

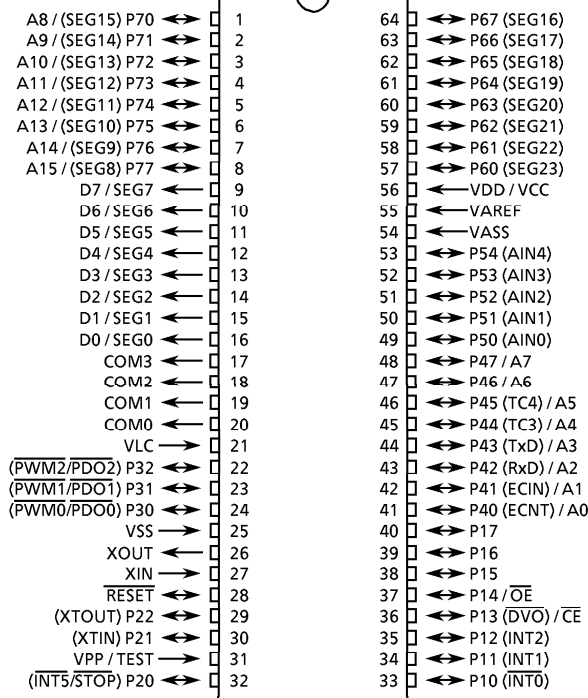

PIN FUNCTION

The 87PM29 has two modes: MCU and PROM.

(1) MCU mode

In this mode, the 87PM29 is pin-compatible with the 87CH29/CK29/CM29 (fix the TEST / VPP pin at low level).

(2) PROM mode

PIN NAME (PROM mode)	INPUT/OUTPUT	FUNCTIONS	PIN NAME (MCU mode)
A14 to A8	Input	PROM address inputs	P76 to P70
A7 to A0			P47 to P40
D7 to D0	I/O	PROM data input/outputs	SEG7 to SEG0
$\overline{CE}$	Input	Chip enable signal input (active low)	P13
$\overline{OE}$		Output enable signal input (active low)	P14
VPP	Power supply	+ 12.5V / 5V (Program supply voltage)	TEST
VCC		+ 5V	VDD
GND		0V	VSS
P32 to P30	I/O	Pull-up with resistance for input processing.	PROM mode setting pins. Fix at high level.
P54 to P50			
P67 to P60			
P11		PROM mode setting pins. Fix at low level.	
P21			
P77			
P12, P10			
P17 to P15		PROM mode setting pins. Fix at low level.	
P22, P20			
$\overline{RESET}$			
XIN	Input	Connect an 8MHz oscillator to stabilize the internal state.	
XOUT	Output		
COM3 to COM0	Output	Open.	
VLC	LCD power supply		
VASS	Power supply	0 V (GND)	
VAREF			

OPERATIONAL DESCRIPTION

The following explains the 87PM29 hardware configuration and operation. The configuration and functions of the 87PM29 are the same as those of the 87CH29/CK29/CM29, except in that a one-time PROM is used instead of an on-chip mask ROM.

The 87PM29 is placed in the single-clock mode during reset. To use the dual-clock mode, the low-frequency oscillator should be turned on by executing [SET (SYSCR2). XTEN] instruction at the beginning of the program.

1. OPERATION MODE

The 87PM29 has two modes: MCU and PROM.

1.1 MCU Mode


The MCU mode is activated by fixing the TEST / VPP pin at low level.

In the MCU mode, operation is the same as with the 87CH29/CK29/CM29 (the TEST / VPP pin cannot be used open because it has no built-in pull-down resistance).

1.1.1 Program Memory

The 87PM29 has a 32K × 8-bit (addresses 8000_H - FFFF_H in the MCU mode, addresses 0000_H - 7FFF_H in the PROM mode) of program memory (OTP).

To use the 87PM29 as the system evaluation for the 87CH29/K29/M29U/N, the program should be written to the program memory area as shown in Figure 1-1.

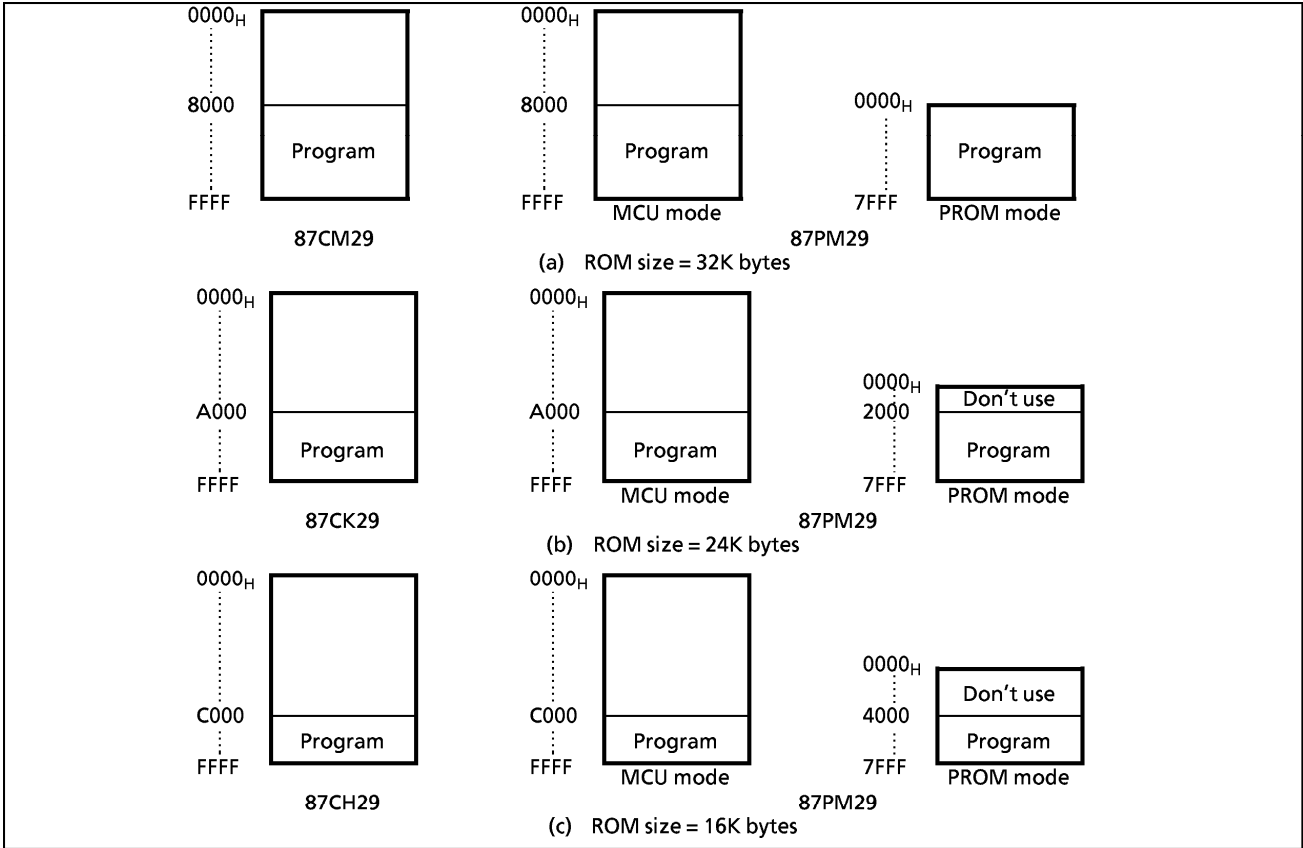

Note : Either write the data FF_H to the unused area or set the PROM programmer to access only the program storage area


1.1.2 Data Memory

The 87PM29 has an on-chip 1K × 8-bit data memory (static RAM).

1.1.3 Input/Output Circuitry

(1) Control pins

The control pins of the 87PM29 are the same as those of the 87CH29/CK29/CM29 except in that the TEST pin has no built-in pull-down resistance.



Note : TEST pin has no built-in pull-down resistance

Figure 1-2. TEST Pin

(2) I/O ports

The I/O circuitries of the 87PM29 I/O ports are the same as circuitries of the 87CH29/CK29/CM29.

1.2 PROM Mode

The PROM mode is activated by setting the pins TEST, $\overline{\text{RESET}}$ and the ports P17 - P10, P22 - P20 and P77 as shown in Figure 1-3. The PROM mode is used to write and verify programs with a general-purpose PROM programmer.

Note : Please set the high-speed programming mode according to each manual of PROM programmer.

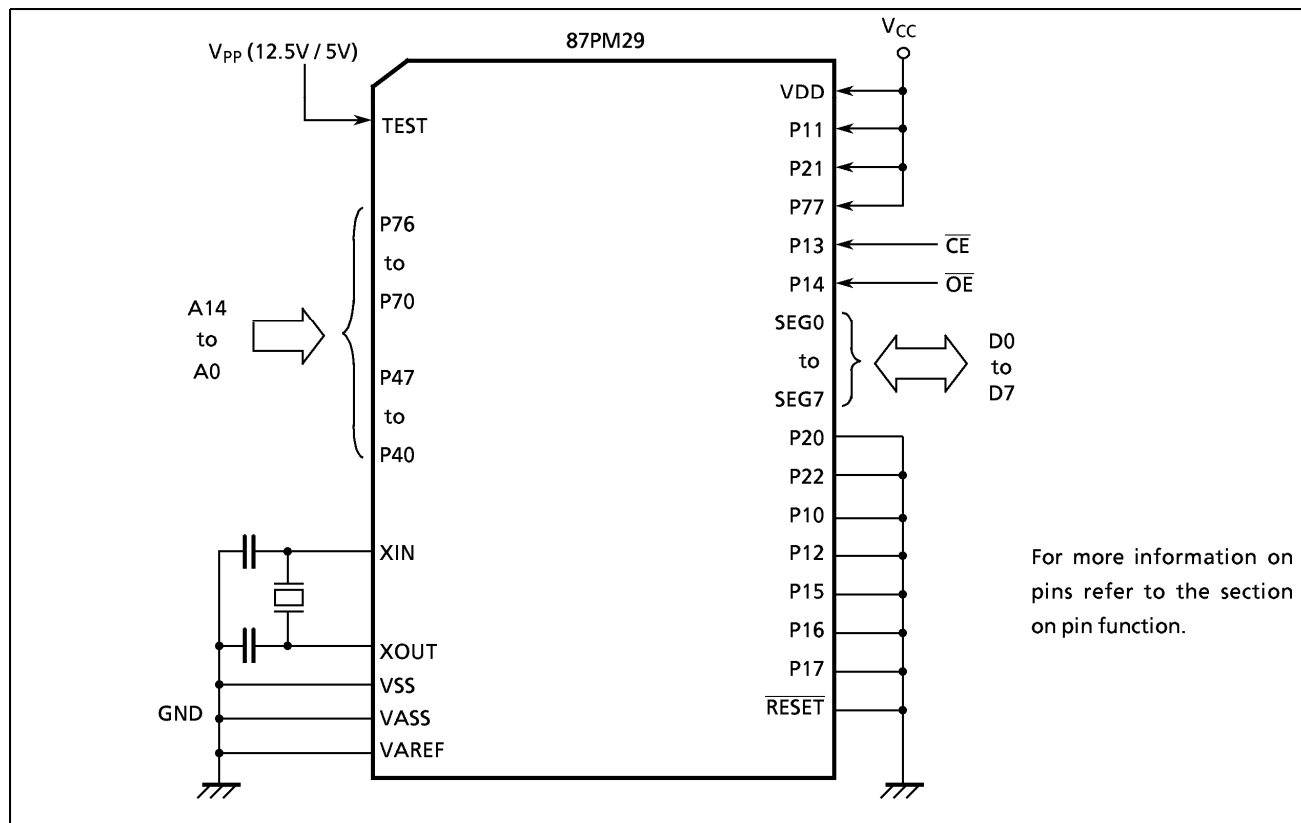


Figure 1-3. Setting for PROM Mode

PROM programmer connection adaptor socket: BM11117 for TMP87PM29U
BM11143 for TMP87PM29N

1.2.1 Programming Flowchart (High-speed Programming Mode - I)

The high-speed programming mode is achieved by applying the program voltage (+ 12.5V) to the VPP pin when $V_{CC} = 6V$. After the address and input data are stable, the data is programmed by applying a single 1ms program pulse to the $\overline{CE}$ input. The programmed data is verified. If incorrect, another 1ms program pulse is applied and then the programmed data is verified. This process should be repeated (up to 25 times) until the program operates correctly. Programming for one address is ended by applying additional program pulse with width 3 times that needed for initial programming (number of programmed times $\times$ 1 ms). After that, change the address and input data, and program as before. When programming has been completed, the data in all addresses should be verified with $V_{CC} = V_{PP} = 5V$ and verify all addresses.

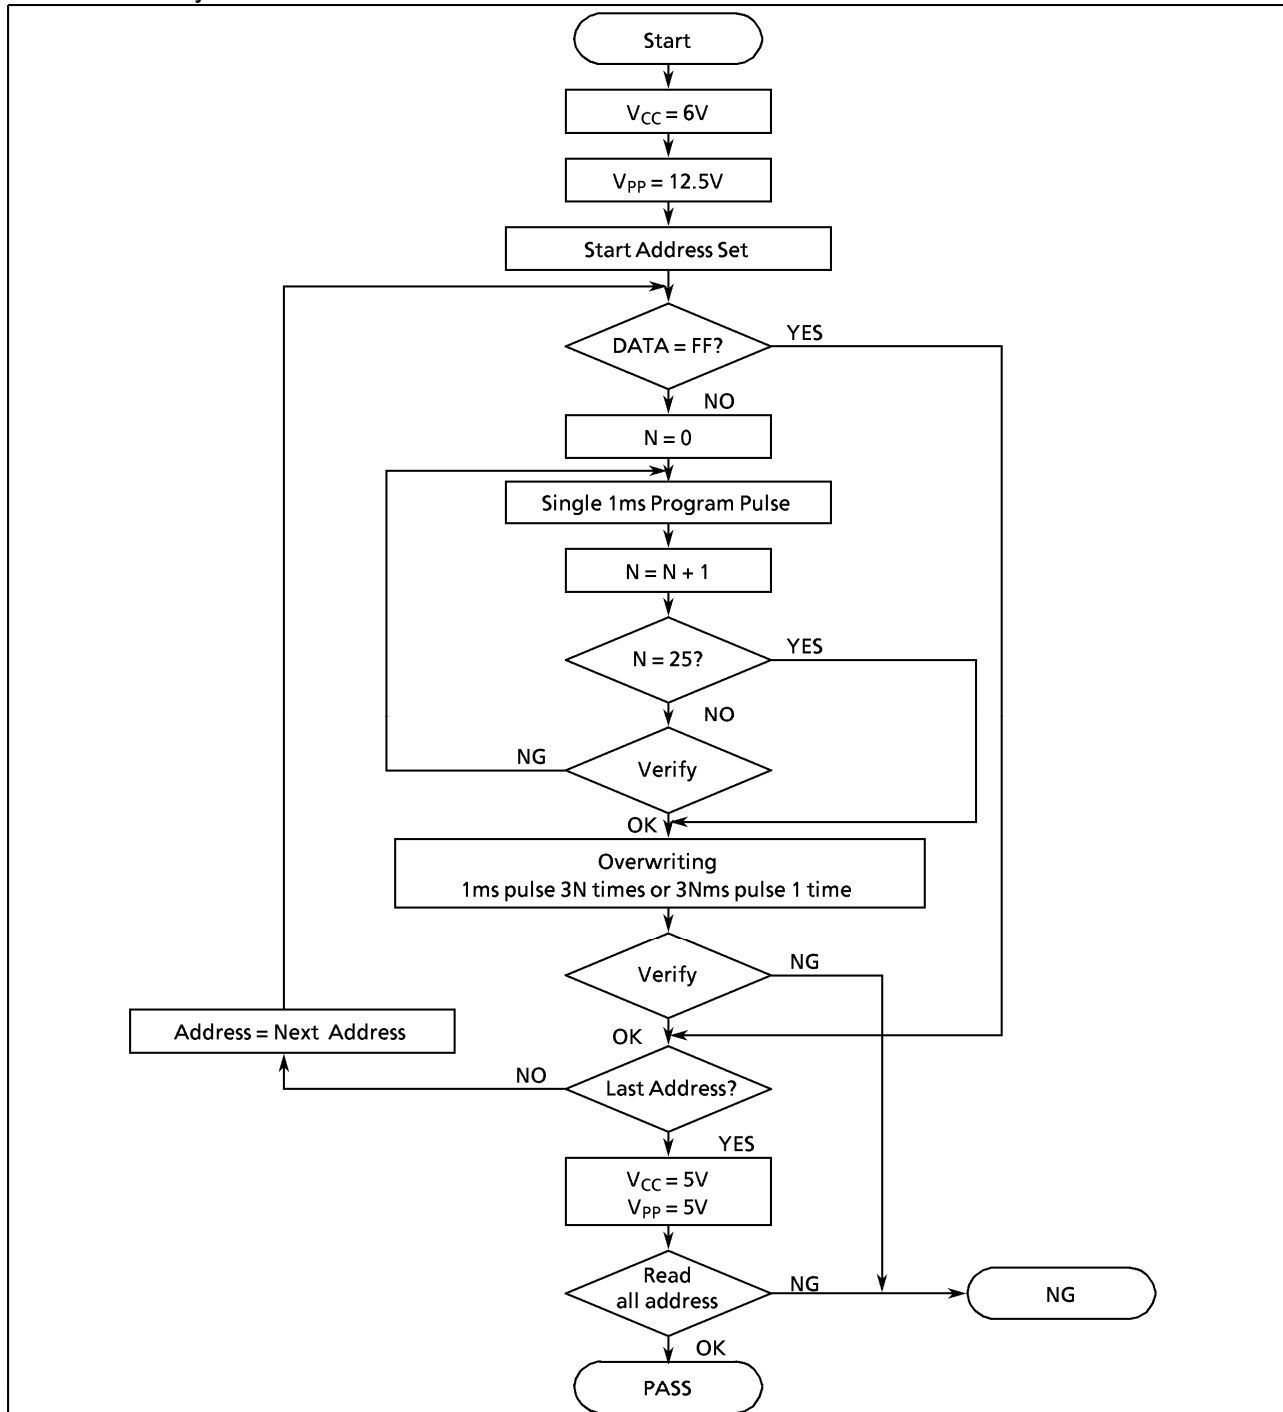


Figure 1-4. Flowchart of High-speed Programming Mode - I

1.2.2 Programming Flowchart (High-speed Programming Mode -II)

The high-speed programming mode is achieved by applying the program voltage (+ 12.75V) to the VPP pin when $V_{CC} = 6.25V$. After the address and input data are stable, the data is programmed by applying a single 0.1 ms program pulse to the $\overline{CE}$ input. The programmed data is verified. If incorrect, another 0.1 ms program pulse is applied and then the programmed data is verified. This process should be repeated (up to 25 times) until the program operates correctly. After that, change the address and input data, and program as before. When programming has been completed, the data in all addresses should be verified with $V_{CC} = V_{pp} = 5V$.

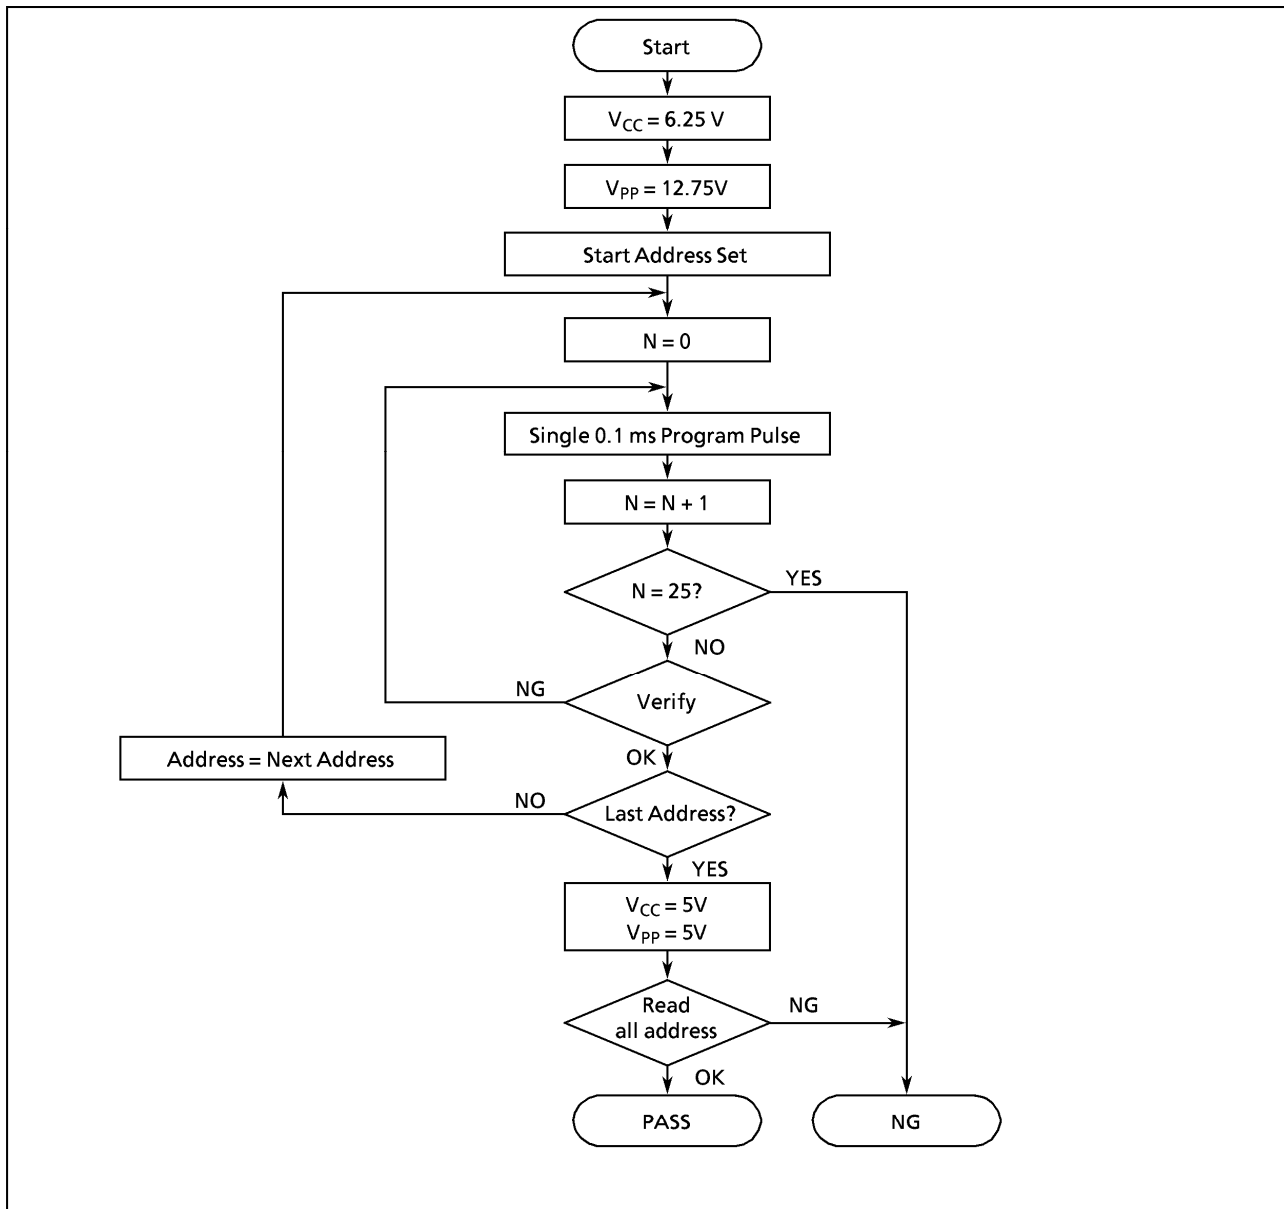


Figure 1-5. Flowchart of High-speed Programming Mode -II

1.2.3 Writing Method with a General-purpose PROM Programmer

- (1) Adapter
BM11117 : TMP87PM29U
BM11143 : TMP87PM29N
- (2) Adapter setting
Switch (SW1) is set to side N.
- (3) PROM programmer specifying
 - i) PROM type is specified to TC57256AD.
Writing voltage : 12.5V (high-speed program I mode)
12.75V (high-speed program II mode)
 - ii) Data transfer (copy) (note 1)
In the TMP87PM29, EPROM is within addresses 0000 to 7FFF_H. Data is required to be transferred (copied) to the addresses where it is possible to write. The program area in MCU mode and PROM mode is referred to "Program memory area" in figure 1-1.

Ex. : In the block transfer (copy) mode, executed as below.
ROM capacity of 16 kB : transfer address C000 to FFFF_H to address 4000 to 7FFF_H
 - iii) Writing address is specified. (note 1)
Start address : 4000_H
End address : 7FFF_H
- (4) Writing
Writing / Verifying is required to be executed in accordance with PROM programmer operating procedure.

Note1 : The specifying method is referred to the PROM programmer description. Either write the data FF_H to the unused area or set the PROM programmer to access only the program storage area.

Note2 : When MCU is set to an adapter or an adapter is set to PROM programmer, a position of pin 1 must be adjusted. If the setting is reserved, MCU the adapter and PROM program is damaged.

Note3 : The TMP87PM29 does not support, the electric signature mode (hereinafter referred to as "signature"). If the signature is used in PROM program, a device is damaged due to applying 12 V ± 0.5 V to the address pin 9 (A9). The signature must not be used.

ELECTRICAL CHARACTERISTICS

(2) 87PM29

ABSOLUTE MAXIMUM RATINGS

(V_{SS} = 0V)

PARAMETER	SYMBOL	CONDITION	RATINGS	UNIT
Supply Voltage	V _{DD}		– 0.3 to 6.5	V
Program Voltage	V _{PP}	TEST/VPP pin	– 0.3 to 13.0	V
Input Voltage	V _{IN}		– 0.3 to V _{DD} + 0.3	V
Output Voltage	V _{OUT1}	P21, P22, RESET, Tri-state port, and Push-pull port	– 0.3 to V _{DD} + 0.3	V
	V _{OUT2}	P20, port P3 and segment port	– 0.3 to 5.5	
Output Current (Per 1 pin)	I _{OUT1}	Ports P1,P2,P4,P5,P6,P7	3.2	mA
	I _{OUT2}	Port P3	30	
Output Current (Total)	Σ I _{OUT1}	Ports P1,P2,P4,P5,P6,P7	120	mA
	Σ I _{OUT2}	Port P3	60	
Power Dissipation [T _{opr} = 70°C]	PD	TMP87PM29N ----- TMP87PM29U	600 350	mW
Soldering Temperature (time)	T _{sld}		260 (10s)	°C
Storage Temperature	T _{stg}		– 55 to 125	°C
Operating Temperature	T _{opr}		– 30 to 70	°C

RECOMMENDED OPERATING CONDITIONS

(V_{SS} = 0V, T_{opr} = – 30 to 70°C)

PARAMETER	SYMBOL	PINS	CONDITIONS		Min.	Max.	UNIT
Supply Voltage	V _{DD}		fc = 8 MHz	NORMAL1, 2 mode	4.5	5.5	V
				IDLE1, 2 mode			
			fc = 4.2 MHz	NORMAL1, 2 mode	2.7		
				IDLE1, 2 mode			
			fs = 32.768 kHz	SLOW mode			
				SLEEP mode			
	STOP mode	2.0					
Input High Voltage	V _{IH1}	Except hysteresis input	V _{DD} ≥ 4.5V		V _{DD} × 0.70	V _{DD}	V
	V _{IH2}	Hysteresis input			V _{DD} × 0.75		
	V _{IH3}		V _{DD} < 4.5V	V _{DD} × 0.90			
Input Low Voltage	V _{IL1}	Except hysteresis input	V _{DD} ≥ 4.5V		0	V _{DD} × 0.30	V
	V _{IL2}	Hysteresis input				V _{DD} × 0.25	
	V _{IL3}		V _{DD} < 4.5V	V _{DD} × 0.10			
Clock Frequency	fc	XIN, XOUT	V _{DD} = 4.5 to 5.5V		0.4	8.0	MHz
			V _{DD} = 2.7 to 5.5V			4.2	
	fs	XTIN, XTOUT			30.0	34.0	kHz

Note : Clock frequency fc : The supply voltage range of the conditions shows the value in NORMAL 1, 2 modes and IDLE 1, 2 modes.

D.C.CHARACTERISTICS

(V_{SS} = 0V, T_{opr} = -30 to 70°C)

PARAMETER	SYMBOL	PINS	CONDITIONS		Min.	Typ.	Max.	UNIT
Hysteresis Voltage	V _{HS}	Hysteresis input			–	0.9	–	V
Input Current	I _{IN1}	TEST	V _{DD} = 5.5V V _{IN} = 5.5V / 0V		–	–	± 2	μA
	I _{IN2}	Sink open drain port and tri-state port						
	I _{IN3}	RESET, STOP						
Input Low Current	I _{IL}	Push-pull port	V _{DD} = 5.5V, V _{IN} = 0.4V		–	–	– 2	mA
Input Resistance	R _{IN}	RESET			100	220	450	kΩ
Output Leakage Current	I _{LO}	Sink open drain port and tri-state port	V _{DD} = 5.5V, V _{OUT} = 5.5V		–	–	2	μA
Output High Voltage	V _{OH1}	Push-pull port	V _{DD} = 4.5V, I _{OH} = – 200 μA		2.4	–	–	V
Output High Voltage	V _{OH2}	Tri- state port	V _{DD} = 4.5V, I _{OH} = – 0.7 mA		4.1	–	–	V
Output Low Voltage	V _{OL}	Except XOUT and port P3	V _{DD} = 4.5V, I _{OL} = 1.6 mA		–	–	0.4	V
Output Low Current	I _{OL}	Only P30, P31, P32	V _{DD} = 4.5V, V _{OL} = 1.0V		–	20	–	mA
Supply Current in NORMAL 1, 2 mode	I _{DD}		V _{DD} = 5.5V f _c = 8 MHz f _s = 32.768 kHz V _{IN} = 5.3V / 0.2V		–	10	16	mA
Supply Current in IDLE 1, 2 mode					–	4.5	6	mA
Supply Current in SLOW mode			V _{DD} = 3.0V f _s = 32.768 kHz V _{IN} = 2.8V / 0.2V LCD driver is not enable.		–	30	60	μA
Supply Current in SLEEP mode					–	15	30	μA
Supply Current in STOP mode			V _{DD} = 5.5V V _{IN} = 5.3V / 0.2V		–	0.5	10	μA
Segment Output Low Resistance	R _{OS1}	SEG23-SEG0 pins	V _{DD} = 5V V _{DD} – V _{LC} = 3V	RESL = 0 (Note 11) RSEL = 1 RESL = 0 RSEL = 1 RESL = 0 RSEL = 1 RESL = 0 RSEL = 1	–	20	–	kΩ
Common Output Low Resistance	R _{OC1}	7						
		20						
Segment Output High Resistance	R _{OS2}	7						
		200						
Common Output High Resistance	R _{OC2}	70						
		200						
		70						
Segment/Common Output Voltage	V _{O 2/3}	SEG23-SEG0 and COM3-COM0 pins		3.8	4.0	4.2	V	
	V _{O 1/2}		3.3	3.5	3.7			
	V _{O 1/3}		2.8	3.0	3.2			

Note 1 : Typical value show those at T_{opr} = 25 °C, V_{DD} = 5V.

Note 2 : Input Current ; The current through pull-up or pull-down resistor is not included.

Note 3 : I_{DD} ; Except for I_{REF}

Note 4 : Output resistors R_{OS}, R_{OC} indicate "on" when switching levels.

Note 5 : V_{O2/3} indicates an output current at the 2/3 level when operating in the 1/4 or 1/3 duty mode.

Note 6 : V_{O1/2} indicates an output current at the 1/2 level when operating in the 1/2 duty or static mode.

Note 7 : V_{O1/3} indicates an output current at the 1/3 level when operating in the 1/4 or 1/3 duty mode.

Note 8 : When you use a liquid crystal display (LCD), it is necessary to give careful consideration to the value of the output resistor R_{OS 1/2}, R_{OC 1/2}.

Note 9 : R_{OS1}, R_{OC1} : On time of the lower output resistor is 27/f_c, 1/(2·f_s) [s].

Note 10 : R_{OS2}, R_{OC2} : On time of the higher output resistor is 1/(n·f_F). (1/n duty, f_F : frame frequency)

Note 11 : RSEL ; Bit 6 in LCDCR

A / D CONVERSION CHARACTERISTICS

(V_{SS} = 0V, V_{DD} = 2.7 to 5.5V, T_{opr} = -30 to 70 °C)

PARAMETER	SYMBOL	CONDITIONS	Min.	Typ.	Max.	UNIT
Analog Reference Voltage	V _{AREF}	V _{AREF} - V _{ASS} ≥ 2.5V	2.7	—	V _{DD}	V
	V _{ASS}		V _{SS}	—	1.5	
Analog Input Voltage	V _{AIN}		V _{ASS}	—	V _{AREF}	V
Analog Supply Current	I _{REF}	V _{AREF} = 5.5V, V _{ASS} = 0.0V	—	0.5	1.0	mA
Nonlinearity Error		V _{DD} = 5.0V, V _{SS} = 0.0V V _{AREF} = 5.000V	—	—	± 1	LSB
Zero Point Error		V _{ASS} = 0.000V or	—	—	± 1	
Full Scale Error		V _{DD} = 2.7V, V _{SS} = 0.0V V _{AREF} = 2.700V	—	—	± 1	
		V _{ASS} = 0.000V	—	—	± 2	

Note : Quantizing error is not contained in those errors.

A.C. CHARACTERISTICS

(V_{SS} = 0V, V_{DD} = 4.5 to 5.5V, T_{opr} = -30 to 70 °C)

PARAMETER	SYMBOL	CONDITIONS	Min.	Typ.	Max.	UNIT
Machine Cycle Time	t _{cy}	In NORMAL 1, 2 mode	0.5	—	4	μs
		In IDLE 1, 2 mode				
		In SLOW mode	117.6	—	133.3	
		In SLEEP mode				
High Level Clock Pulse Width	t _{WCH}	For external clock operation (XIN input), f _c = 8 MHz	50	—	—	ns
Low Level Clock Pulse Width	t _{WCL}					
High Level Clock Pulse Width	t _{WSH}	For external clock operation (XTIN input), f _s = 32.768 kHz	14.7	—	—	μs
Low Level Clock Pulse Width	t _{WSL}					


(V_{SS} = 0V, T_{opr} = -30 to 70 °C)

PARAMETER	SYMBOL	CONDITIONS		Min.	Typ.	Max.	UNIT
TC1 input (ECIN input)	t _{TC1}	Frequency measurement mode	Single edge count	—	—	8	MHz
			Both edge count	—	—	4	
		Frequency measurement mode	Single edge count	—	—	4.2	
			Both edge count	—	—	3	


RECOMMENDED OSCILLATING CONDITION

(V_{SS} = 0V, V_{DD} = 4.5 to 5.5V, Topr = - 30 to 70°C)

PARAMETER	OSCILLATOR	FREQUENCY	RECOMMENDED OSCILLATOR	RECOMMENDED CONDITION	
				C ₁	C ₂
High-frequency	Ceramic Resonator	8 MHz	KYOCERA KBR8.0M	30pF	30pF
		4 MHz	KYOCERA KBR4.0MS		
			MURATA CSA4.00MG		
	Crystal Oscillator	8 MHz	TOYOCOM 210B 8.0000	20pF	20pF
		4 MHz	TOYOCOM 204B 4.0000		
Low-frequency	Crystal Oscillator	32.768 kHz	NDK MX-38T	15pF	15pF



(1) High-frequency



(2) Low-frequency


Note : When it is used in high electrical field, an electrical shield of the package is recommended to retain normal operations.

D.C./A.C. CHARACTERISTICS (PROM mode) (V_{SS} = 0V)

(1) Read Operation (T_{opr} = – 30 to 70 °C)

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Input High Voltage	V _{IH4}		V _{CC} × 0.7	–	V _{CC}	V
Input Low Voltage	V _{IL4}		0	–	V _{CC} × 0.12	V
Power Supply Voltage	V _{CC}		4.75	5.00	5.25	V
Program Power Supply Voltage	V _{PP}		V _{CC} – 0.6	V _{CC}	V _{CC} + 0.6	
Address Access Time	t _{ACC}	V _{CC} = 5.0 ± 0.25V	–	1.5t _{cyc} + 300	–	ns


Note: t_{cyc} = 500 ns at 8 MHz

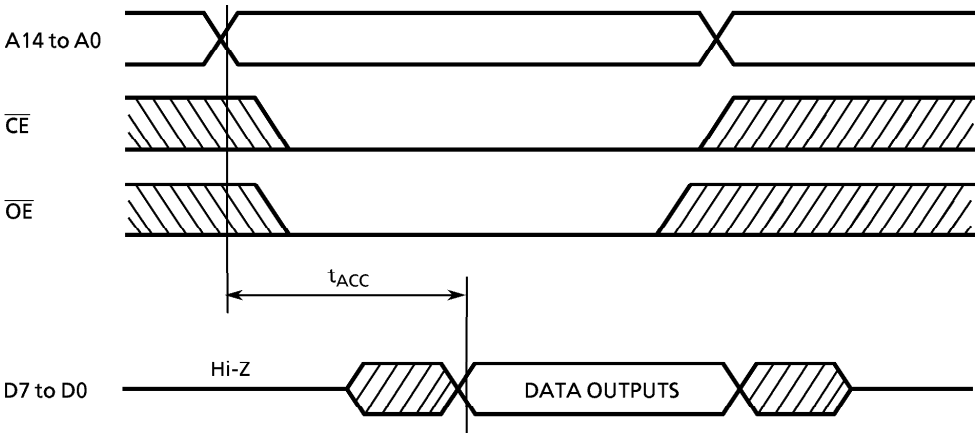

TIMING WAVEFORMS OF READ OPERATION

(2) High-Speed Programming I Operation (T_{opr} = 25 ± 5 °C)

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Input High Voltage	V _{IH4}		V _{CC} × 0.7	–	V _{CC}	V
Input Low Voltage	V _{IL4}		0	–	V _{CC} × 0.12	V
Power Supply Voltage	V _{CC}		5.75	6.0	6.25	V
Program Power Supply Voltage	V _{PP}		12.0	12.5	13.0	V
Initial Program Pulse Width	t _{PW}	V _{CC} = 6.0V, ± 0.25V V _{PP} = 12.5 ± 0.5V	0.95	1.0	1.05	ms

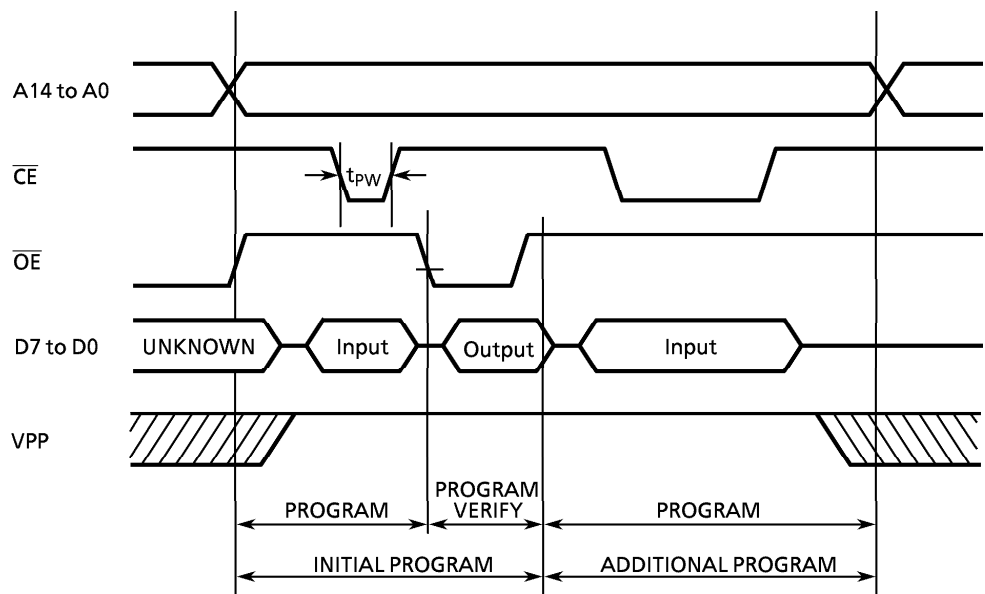


TIMING WAVEFORMS OF PROGRAMMING OPERATION

- Caution 1 :** *Vpp (12.5 V) supply is applied at the same time as Vcc supply or later. It is turned off at the same or earlier.*
- Caution 2 :** *When a device is put on or off at VPP = 12.5 V $\pm$ 0.5 V, the device may be damaged. Do not put it on or off in programming.*
- Caution 3 :** *Use the recommended adapter and mode. When using under other than these conditions, it may be not programmed.*

(3) High-Speed Programming II Operation (Topr = 25 $\pm$ 5 $^{\circ}$ C)

PARAMETER	SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT
Input High Voltage	V _{IH4}		V _{CC} $\times$ 0.7	–	V _{CC}	V
Input Low Voltage	V _{IL4}		0	–	V _{CC} $\times$ 0.12	V
Power Supply Voltage	V _{CC}		6.00	6.25	6.50	V
Program Power Supply Voltage	V _{PP}		12.50	12.75	13.0	V
Initial Program Pulse Width	t _{PW}	V _{CC} = 6.25V $\pm$ 0.25V, V _{PP} = 12.75 $\pm$ 0.25V	0.095	0.1	0.105	ms

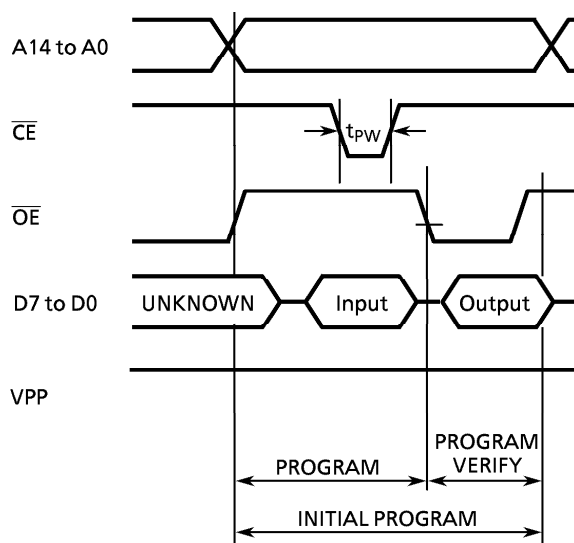

- Caution 1 :** *Vpp (12.75 V) supply is applied at the same time as Vcc supply or later. It is turned off at the same or earlier.*
- Caution 2 :** *When a device is put on or off at $VPP = 12.75 V \pm 0.25 V$, the device may be damaged. Do not put it on or off in programming.*
- Caution 3 :** *Use the recommended adapter and mode. When using under other than these conditions, it may be not programmed.*

