


Current Revision

As of 12/27/2011 1:27:16 PM

DWALATA




DASH NO.	APPLICATION		REVISIONS			
	NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED
			N	Incorporate ECN 20596	09/14/11	<i>R. Scherer</i>

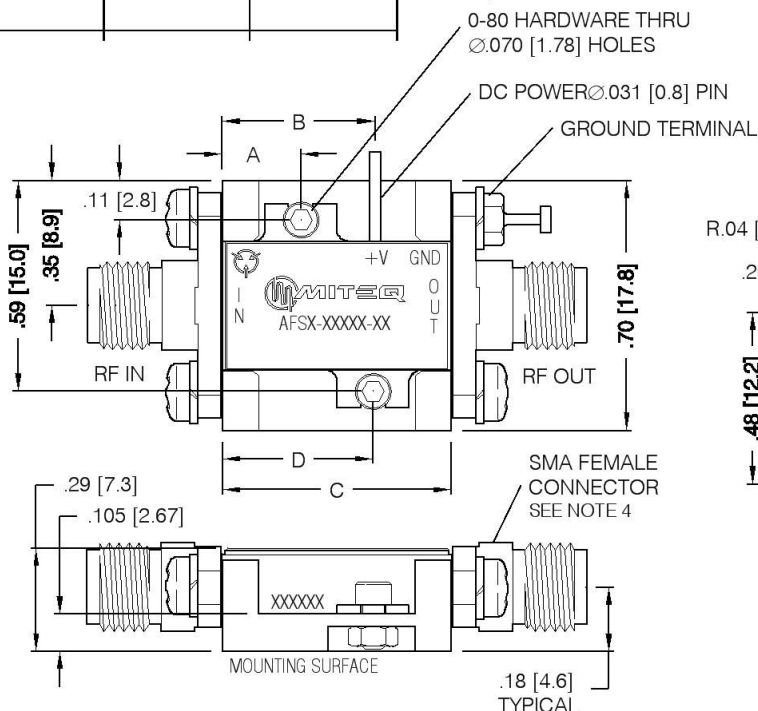

OPTION 1

AMPLIFIER MAY BE READILY USED AS IS, BY REMOVING EXISTING 0-80 HARDWARE AND SUBSTITUTING WITH LONGER 0-80 SCREWS FOR CUSTOMER MOUNTING

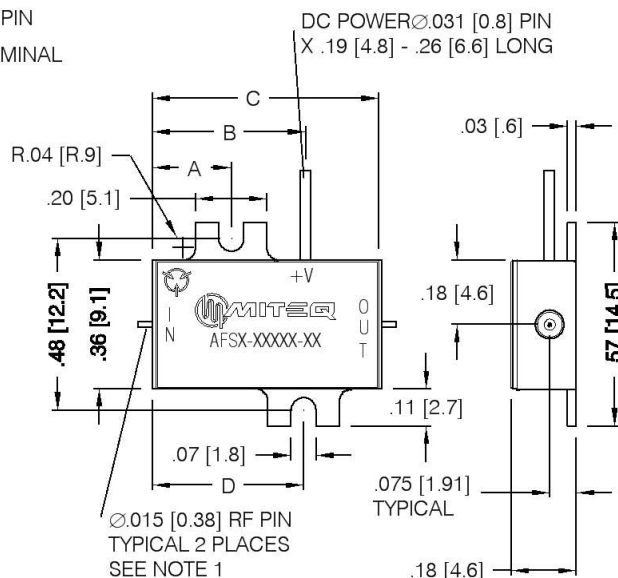

OPTION 2

"DROP-IN" AMPLIFIER BY REMOVING "SMA" CONNECTORS AND MOUNTING HARDWARE AS SHOWN

NOTES

1. RF PIN LENGTH FROM BODY TO BE 0.080 [2.03] NOMINAL, 0.050 [1.27] MIN, 0.100 [2.54] MAX
2. DIMENSIONS SHOWN IN BRACKETS ARE IN MILLIMETERS
3. MARKING MAY VARY
4. STANDARD CONNECTOR CONFIGURATION SHOWN, FOR ALTERNATE GENDER OPTION ADD SUFFIX FM, MF, OR MM AT THE END OF DASH NUMBER
EXAMPLE: 113384-4MF (AFS DASH 4 WITH MALE INPUT AND FEMALE OUTPUT)

DASH	DIM A	DIM B	DIM C	DIM D
2	.16 [4.1]	.28 [7.1]	.43 [10.9]	.27 [6.9]
3	.16 [4.1]	.32 [8.1]	.53 [13.5]	.38 [9.7]
4	.22 [5.6]	.43 [10.9]	.64 [16.3]	.42 [10.7]
5	.22 [5.6]	.53 [13.5]	.75 [19.1]	.53 [13.5]
6	.22 [5.6]	.64 [16.3]	.86 [21.8]	.64 [16.3]
7	.22 [5.6]	.75 [19.1]	.97 [24.6]	.75 [19.1]
8	.22 [5.6]	.86 [21.8]	1.07 [27.2]	.86 [21.8]

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMAL .X ±0.1 [2.5] DECIMAL .XX ±0.01 [0.25] DECIMAL .XXX ±0.005 [0.13] ANGLES X° ±30'	NAME	DATE	 100 Davids Drive, Hauppauge, New York 11788			
	DWN <i>D. Schmitz</i>	07/19/88				
	DFT <i>R. Scherer</i>	12/12/11	AFS SERIES AMPLIFIER OUTLINE			
	DGN <i>J. Buenaite</i>	12/12/11				
 ESD SENSITIVE COMPONENT	PROJ ENGR		SIZE	CODE IDENT. NO.		REV
	MFG ENGR		A	33592	113384	N
	Q.C.		SCALE	2:1	PROJECT	SHEET
	CUST					1