


CIB Module


Three Phase Converter +
Three Phase Inverter + Brake
25 Amperes/1200 Volts

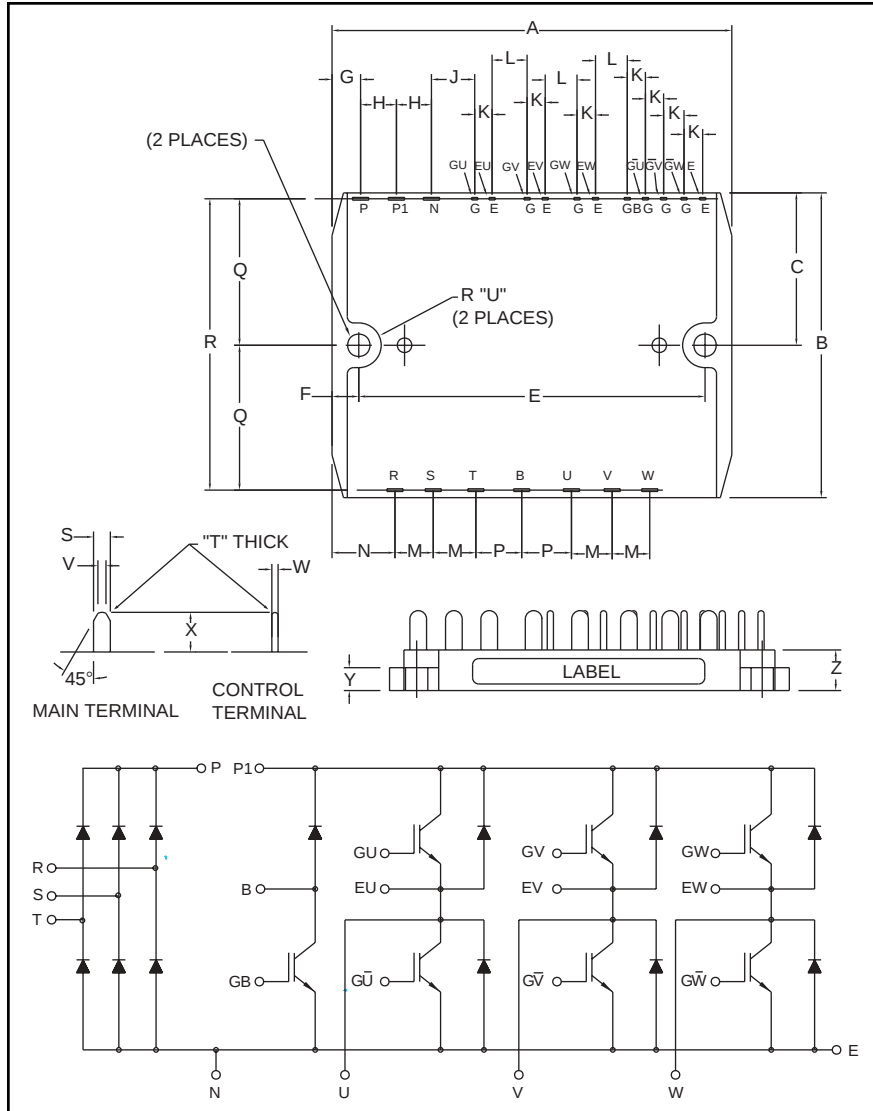

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.53	115.0
B	2.36	60.0
C	1.18	30.0
D	0.18	4.5
E	4.13	105.0
F	0.20	5.0
G	0.31	8.0
H	0.59	15.0
J	0.68	17.2
K	0.10	2.54
L	0.40	10.16
M	0.49	12.5

Dimensions	Inches	Millimeters
N	0.51	13.0
P	0.59	15.0
Q	1.14	29.0
R	2.28	58.0
S	0.16	4.0
T	0.02	0.6
U	0.22	5.5
V	0.08	2.0
W	0.02	0.6
X	0.35	9.0
Y	0.25	6.3
Z	0.47	12.0

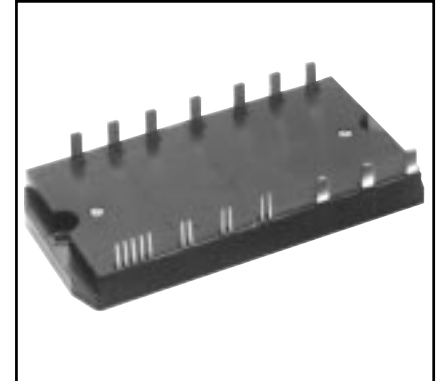

Description:

Powerex CIB Modules are designed for use in switching applications. Each module consists of a three phase diode converter section, a three phase IGBT inverter section and a brake section. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:

- ☐ Low Drive Power
- ☐ Low $V_{CE(sat)}$
- ☐ Discrete Super-Fast Recovery (70ns) Free-Wheel Diodes
- ☐ High Frequency Operation (20-25 kHz)
- ☐ Isolated Baseplate for Easy Heat Sinking

Applications:

- ☐ AC Motor Control
- ☐ Motion/Servo Control
- ☐ General Purpose Inverters
- ☐ Robotics

Ordering Information:

Example: Select the complete nine digit module part number you desire from the table below - i.e. CM25MD-24H is a 1200V (V_{CES}), 25 Ampere CIB Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 50)
CM	25	24



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM25MD-24H

CIB Module

Three Phase Converter + Three Phase Inverter + Brake

25 Amperes/1200 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	CM25MD-24H	Units
Power Device Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Mounting Torque, M4 Mounting Screws	—	13	in-lb
Module Weight (Typical)	—	100	Grams
Isolation Voltage, AC 1 minute, 60Hz	V_{RMS}	2500	Volts

Converter Sector

Repetitive Peak Reverse Voltage	V_{RRM}	1600	Volts
Recommended AC Input Voltage	E_a	440	Volts
DC Output Current	I_o	25	Amperes
Surge (Non-repetitive) Forward Current	I_{FSM}	250	Amperes
I^2t for Fusing	I^2t	260	A^2s

IGBT Inverter Sector

Collector-Emitter Voltage (G-E Short)	V_{CES}	1200	Volts
Gate-Emitter Voltage (C-E Short)	V_{GES}	± 20	Volts
Collector Current	I_c	25	Amperes
Collector Current (Pulse)*	I_{CM}	50	Amperes
Emitter Current**	I_E	25	Amperes
Emitter Current** (Pulse)*	I_{EM}	50	Amperes
Maximum Collector Dissipation	P_C	104	Watts

Brake Sector

Collector-Emitter Voltage (G-E Short)	V_{CES}	1200	Volts
Gate-Emitter Voltage (C-E Short)	V_{GES}	± 20	Volts
Collector Current	I_c	25	Amperes
Collector Current (Pulse)*	I_{CM}	50	Amperes
Collector Dissipation	P_C	104	Watts
Repetitive Peak Reverse Voltage (Clamp Diode Part)	V_{RRM}	1200	Volts
Forward Current (Clamp Diode Part)	I_{FM}	25	Amperes

* Pulse width and repetition rate should be such that device junction temperature does not exceed maximum rating.

** Characteristics of the anti-parallel emitter-collector free-wheel diode.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM25MD-24H

CIB Module

Three Phase Converter + Three Phase Inverter + Brake

25 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Converter Sector						
Repetitive Reverse Current	I_{RRM}	$V_R = V_{RRM}$, $T_j = 150^\circ\text{C}$	—	—	8	mA
Forward Voltage Drop	V_{FM}	$I_F = 25\text{A}$	—	—	1.5	Volts
Thermal Resistance (Junction-to-Fin)	$R_{th(j-f)}$	Per Diode	—	—	1.7	$^\circ\text{C/W}$
Brake Sector						
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE} = 15\text{V}$, $I_C = 25\text{A}$, $T_j = 25^\circ\text{C}$	—	2.7	3.4	Volts
		$V_{GE} = 15\text{V}$, $I_C = 25\text{A}$, $T_j = 150^\circ\text{C}$	—	2.45	—	Volts
Collector Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, $V_{GE} = 0\text{V}$	—	—	1	mA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$I_C = 2.5\text{mA}$, $V_{CE} = 10\text{V}$	4.5	6.0	7.5	Volts
Gate-Emitter Cutoff Current	I_{GES}	$V_{GE} = V_{GES}$, $V_{CE} = 0\text{V}$	—	—	0.5	μA
Input Capacitance	C_{ies}	$V_{GE} = 0\text{V}$, $V_{CE} = 10\text{V}$	—	—	5.0	nF
Output Capacitance	C_{oes}		—	—	3.8	nF
Reverse Transfer Capacitance	C_{res}		—	—	1.0	nF
Total Gate Charge	Q_G	$V_{CC} = 600\text{V}$, $I_C = 25\text{A}$, $V_{GE} = 15\text{V}$	—	125	—	nC
Forward Voltage Drop	V_{FM}	$I_F = 25\text{A}$	—	—	1.5	Volts
Thermal Resistance (Junction-to-Fin)	$R_{th(j-f)}$	Per IGBT	—	—	1.2	$^\circ\text{C/W}$
		Per Clamp Diode	—	—	1.7	$^\circ\text{C/W}$

CM25MD-24H

CIB Module

Three Phase Converter + Three Phase Inverter + Brake

25 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_{GE} = 0V$	—	—	1	mA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE} = 10V, I_C = 2.5mA$	4.5	6.0	7.5	Volts
Gate-Emitter Cutoff Current	I_{GES}	$V_{GE} = V_{GES}, V_{CE} = 0V$	—	—	0.5	μA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE} = 15V, I_C = 25A, T_j = 25^\circ\text{C}$	—	2.7	3.4	Volts
		$V_{GE} = 15V, I_C = 25A, T_j = 150^\circ\text{C}$	—	2.45	—	Volts
Input Capacitance	C_{ies}	$V_{GE} = 0V, V_{CE} = 10V$	—	—	5.0	nF
Output Capacitance	C_{oes}		—	—	3.8	nF
Reverse Transfer Capacitance	C_{res}		—	—	1.0	nF
Total Gate Charge	Q_G	$V_{CC} = 600V, I_C = 25A, V_{GE} = 15V$	—	125	—	nC
Resistive	Turn-on Time	$V_{GE1} = V_{GE2} = 15V,$ $V_{CC} = 600V, I_C = 25A,$	—	—	100	nS
Load	Rise Time		—	—	200	nS
Switching	Turn-off Time	$R_g = 13\Omega,$ Resistive Load	—	—	150	nS
Times	Fall Time		—	—	350	nS
Emitter-Collector Voltage	V_{EC}	$I_E = 25A, V_{GE} = 0V$	—	—	3.5	Volts
Reverse Recovery Time	t_{rr}	$I_E = 25A, V_{GE} = 0V,$	—	—	250	nS
Reverse Recovery Charge	Q_{rr}	$di_E/dt = -50A/\mu s$	—	0.22	—	μC
Thermal Resistance (Junction-to-Fin)	$R_{th(j-f)}$	Per IGBT	—	—	1.2	$^\circ\text{C/W}$
		Per FWDi	—	—	1.9	$^\circ\text{C/W}$

CM25MD-24H

CIB Module

Three Phase Converter + Three Phase Inverter + Brake

25 Amperes/1200 Volts

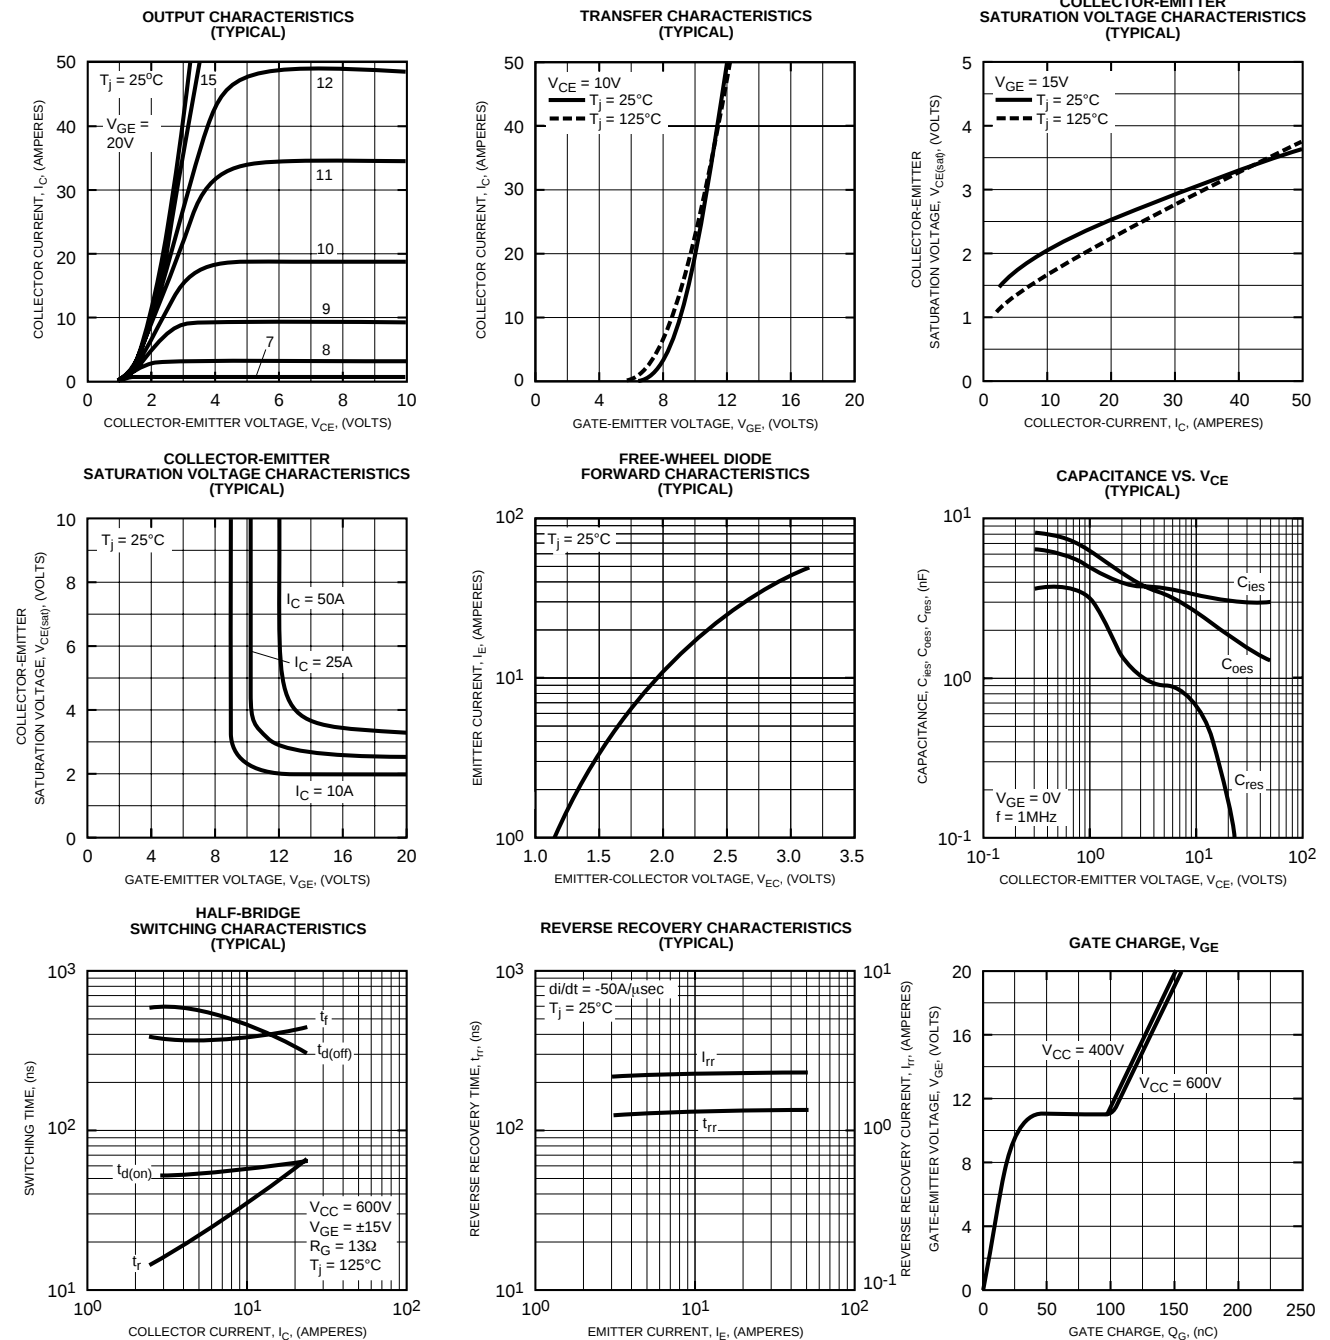

CM25MD-24H

CIB Module

Three Phase Converter + Three Phase Inverter + Brake

25 Amperes/1200 Volts

