

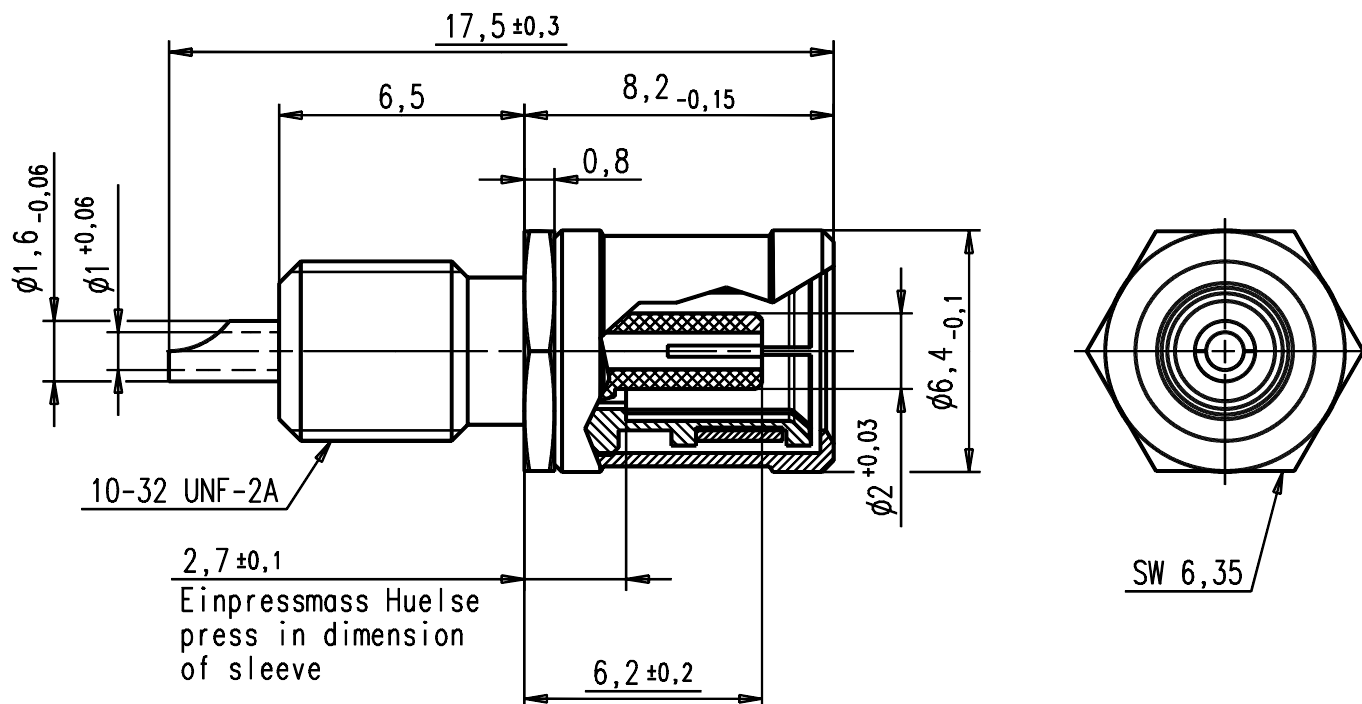




- 1) Steckkraft mit Stecker 93.1222.22'
Engagement force with plug 93.1222.22'
max. 45N
- 2) Abzugskraft mit Stecker 93.1222.22'
Separation force with plug 93.1222.22'
min. 5N

Montagebohrung/Mounting hole
(Panel-thickness max. 3mm)



M 2:1
S 2:1

IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale: 5:1		
							Assembly instruction: Stripping dimension:		
					date	name	Einbaubuchse p.c.b. mount jack		
					generate 22.11.91	Zech			
					checked				
					Norm				
					31439				
409/02	c	Schnitt hinzu	05.06.02	Hogg			944.83.2213.19'		Rev. C
397/02	b	Kraft korr.	29.05.02	Hogg					
243/95	a	Zeichnung korr.	09.01.96	I.S.					
nr.	rev.	alteration	date	name					