


# Specification for release

Customer : \_\_\_\_\_  
 Ordercode: **8231706**  
 Description : **ESD Suppressor WE-VE femtoF**



02.09.2008

## A Dimensions:




Size 0402		
A	<b>1.0 ± 0.2</b>	mm
B	<b>0.5 ± 0.2</b>	mm
C	<b>0.6 max</b>	mm
D	<b>0.3 ± 0.2</b>	mm

## B Electrical properties:

Properties	Test Conditions		Value	Unit	Tol.
DC operating voltage		V <sub>DC</sub>	6	V	max
capacitance	1 MHz	C <sub>typ</sub>	0.05	pF	typ
capacitance	1 MHz	C <sub>max</sub>	0.15	pF	max
leakage current	6 VDC	I <sub>L max</sub>	0.05	µA	max
trigger voltage	TLP measurement	V <sub>Tr</sub>	250	V	typ
clamping voltage	8kV Contact, 30ns	V <sub>Cl</sub>	40	V	typ
ESD withstand	8kV Contact		2000		min

## C Soldering spec.:

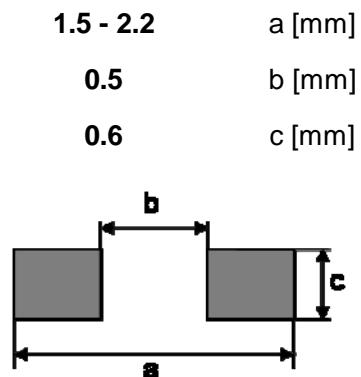

## D Test equipment:

Keithley 2410 for leakage Current  
 Agilent 4396B Analyzer for Capacitance

## E Test conditions:

Humidity: 33%  
 Temperature: +20°C

## F Material & approvals:

Base material: Ceramic

## G General specifications:

Storage temperature: -20°C ... +60°C  
 Max. operating temperature: -40°C ... +85°C

Customer				
General Release:				
.....	.....	.....	.....	.....
Date	Signature			
	Würth Elektronik			
.....	.....	.....	.....	.....
Checked	Approved	SSt	Version 2	2010-06-25
		JB	Version 1	2008-09-02
		Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

**Würth Elektronik eiSos GmbH & Co. KG**


D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>

# Specification for release


Customer : \_\_\_\_\_  
 Ordercode: **8231706**  
 Description : **ESD Suppressor WE-VE femtoF**



## H Typical Characteristics:

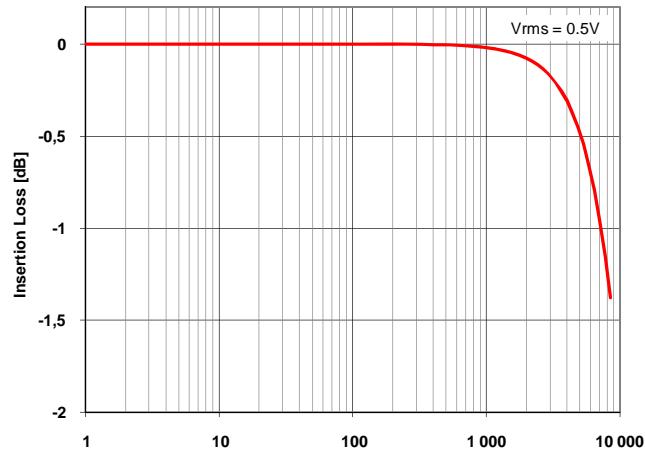

**Insertion Loss**

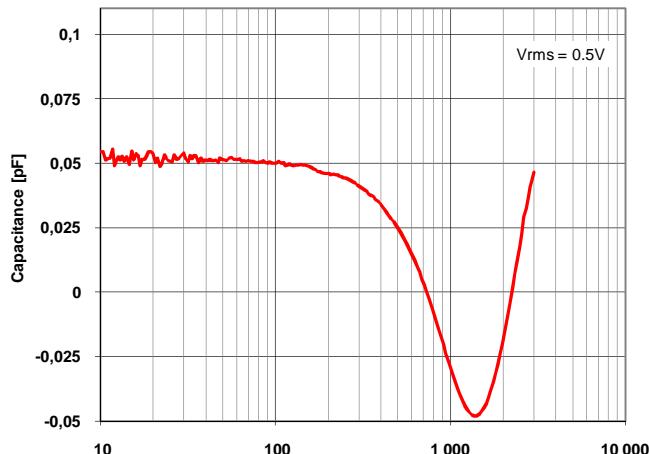

**Capacitance vs. Frequency**

General Release:	Customer		SS	Version 2	2010-06-25
Date	Signature				
	Würth Elektronik				
.....	.....	.....	JB	Version 1	2008-09-02
Checked	Approved		Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

**Würth Elektronik eiSos GmbH & Co. KG**


D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>

# Specification for release

Customer : \_\_\_\_\_  
 Ordercode: **8231706**  
 Description : **ESD Suppressor WE-VE femtoF**




## I Tape:

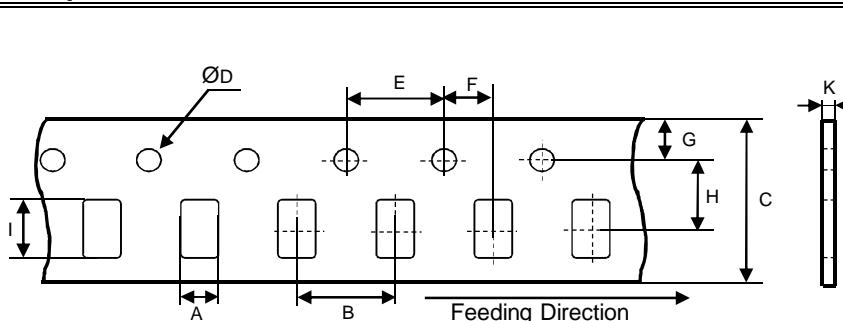


A	<b>0.69 typ</b>	mm
B	<b>2.00 ± 0.10</b>	mm
C	<b>8.0 +0.3/-0.1</b>	mm
D	<b>1.50 + 0.20</b>	mm
E	<b>4.00 ± 0.10</b>	mm
F	<b>2.00 ± 0.10</b>	mm
G	<b>1.75 ± 0.10</b>	mm
H	<b>3.50 ± 0.05</b>	mm
I	<b>1.19 typ</b>	mm
J	<b>0.66 max</b>	mm

## J Reel:

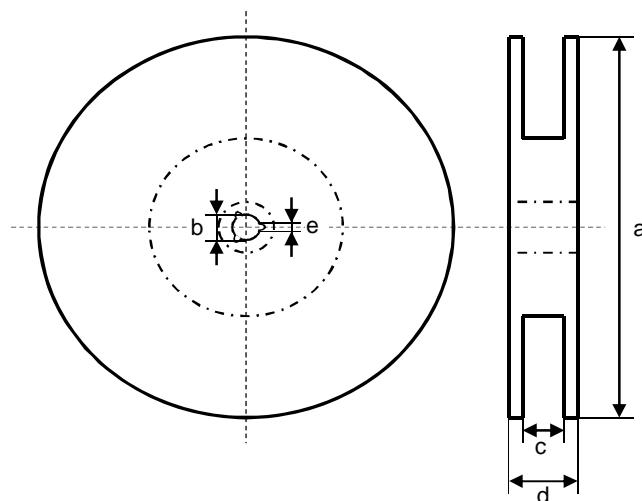

a	<b>178.0 ± 2.0</b>	mm
b	<b>13.0 ± 0.8</b>	mm
c	<b>7.9 min</b>	mm
d	<b>14.4 max</b>	mm
e	<b>1.5 min</b>	mm

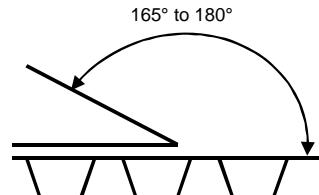

Quantity per Reel: **10000 pcs**

General Release:		Customer	
Date	Signature	Würth Elektronik	
SS1	Version 2		2010-06-25
JB	Version 1		2008-09-02
Checked	Approved	Name	Modification
			Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

**Würth Elektronik eiSos GmbH & Co. KG**

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>