

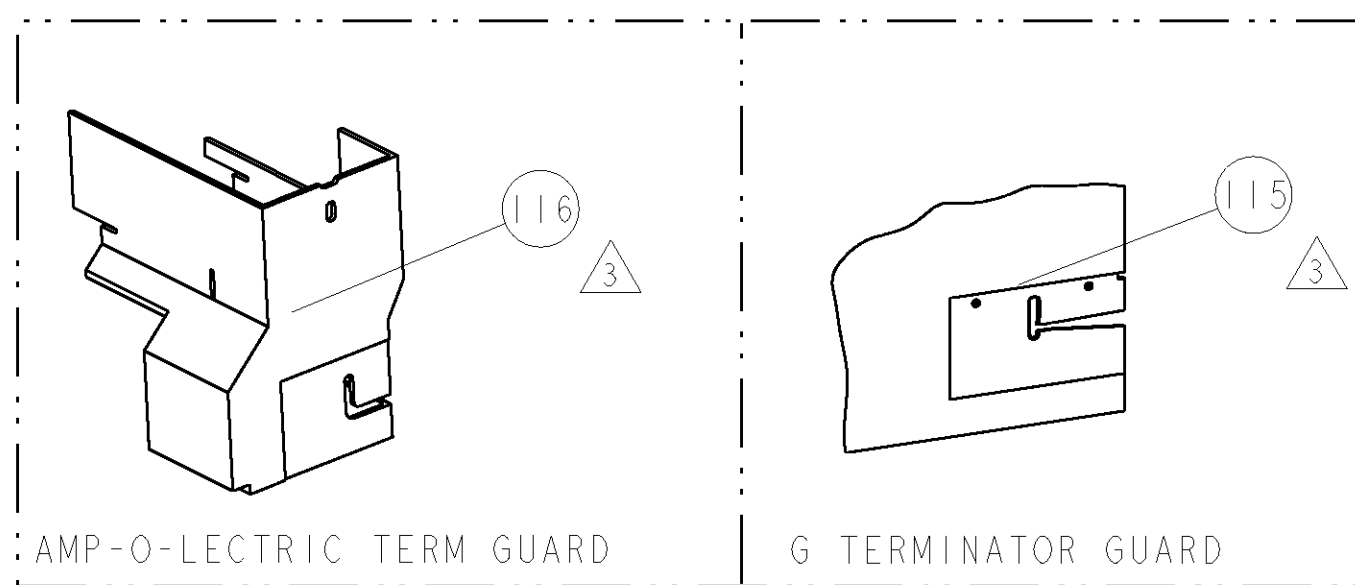
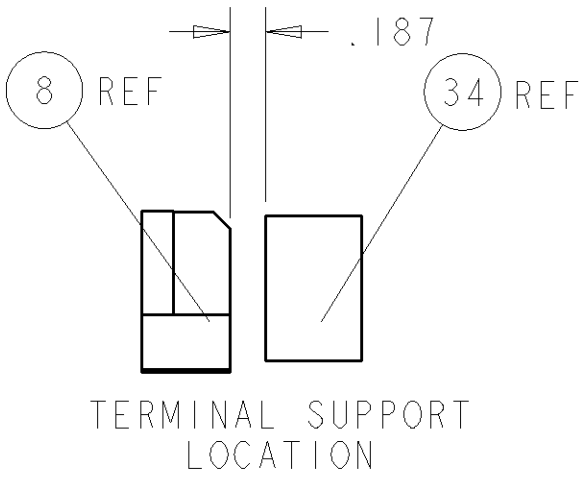
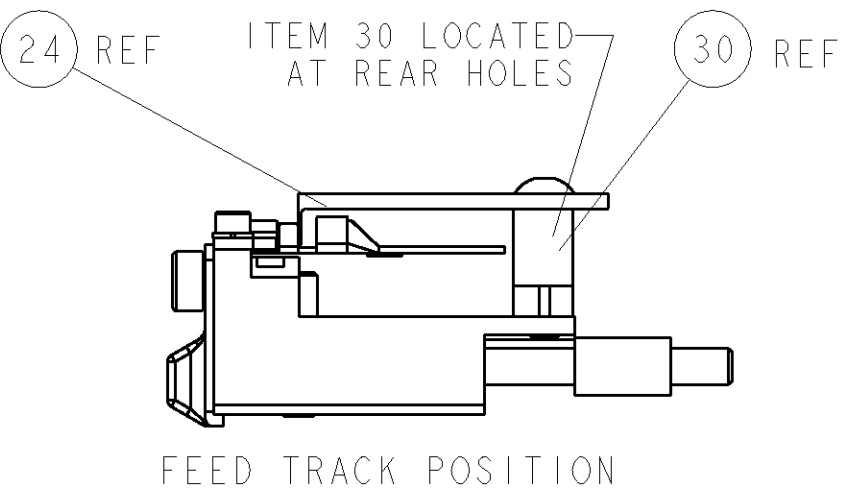
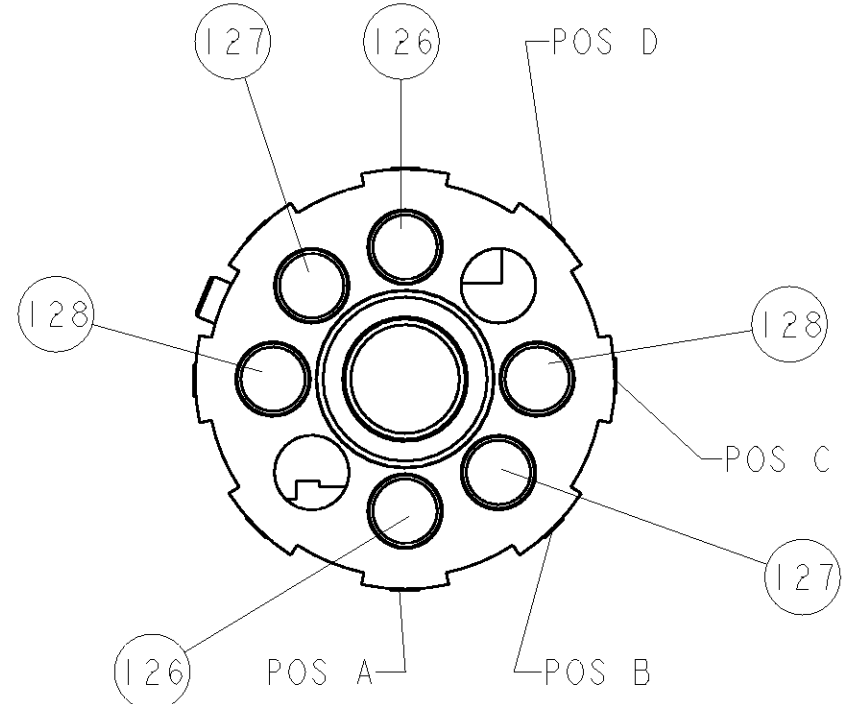


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1852311-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1852311-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1852311-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1852311-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1852311-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
△ CUT TO LENGTH AT ASSEMBLY

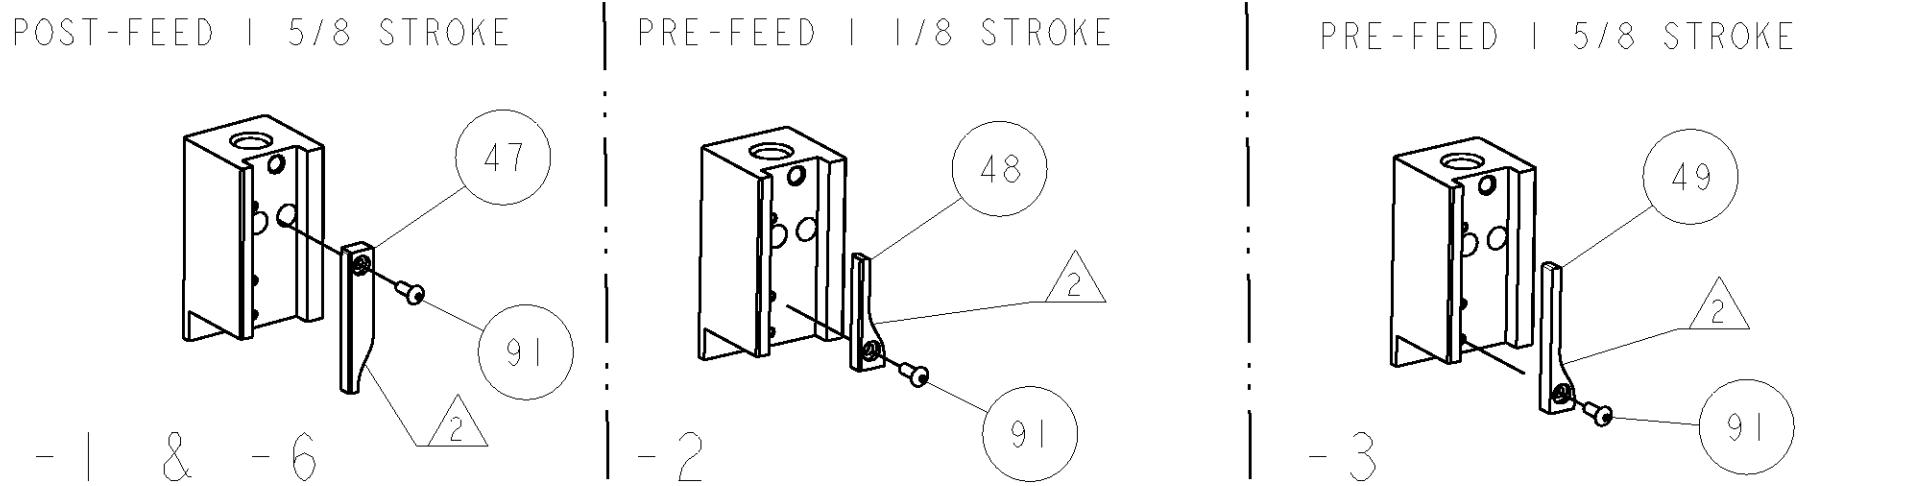

TERMINAL NAME: .250 SER. FASTIN - FASTON TAB					
1599053	-	AMP TERMINAL - AMP CRIMP SPECS			
-	-				
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE
-	-	A	1.96±0.05mm [.077±.002]		2.5mm2
-	-	B	1.78±0.05mm [.070±.002]		2.0mm2
-	-	C	1.65±0.05mm [.065±.002]		1.5mm2
-	-	D	-		-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	2.79mm [.110]	F	1.5-2.5mm2
-	-	INSUL	3.56mm [.140]	F	Ø2.10-2.90mm2
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS		SET UP GAGE
5.84-6.30mm2	NONE	17.0mm2	408-8040		458637-1

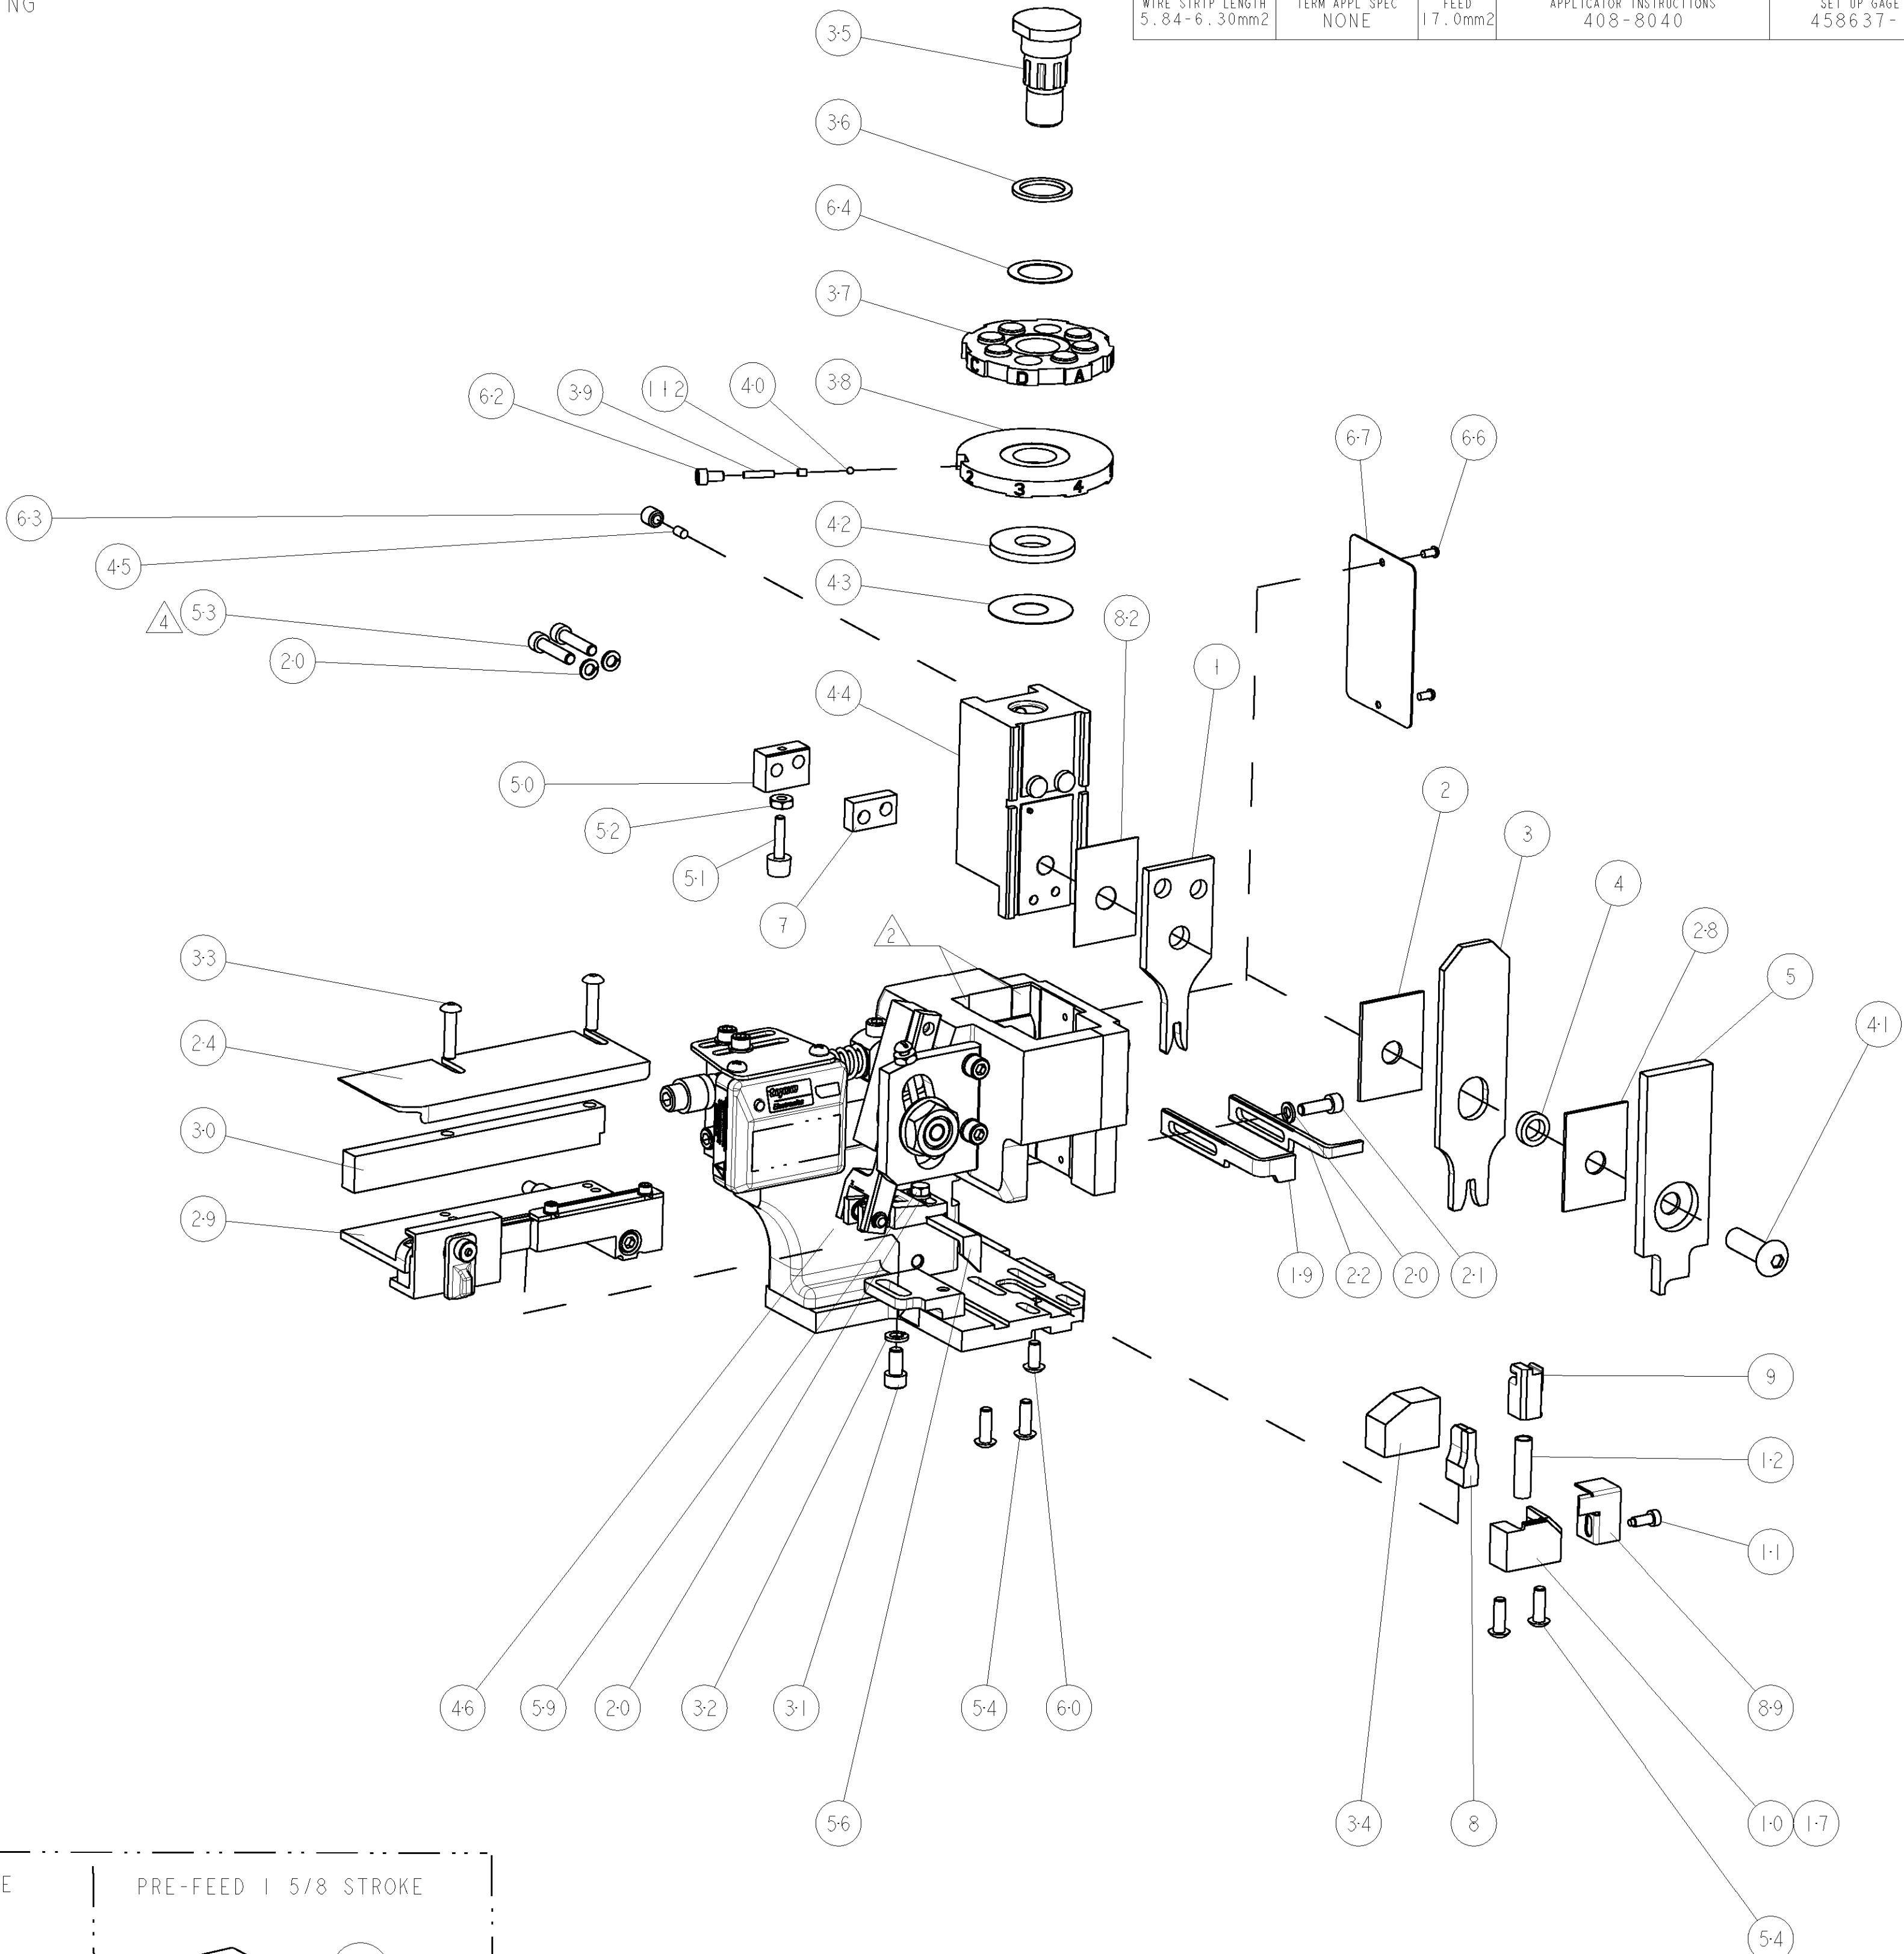

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852311-1](#)