

# Quad 2-input / 2-output analog switch

## BU9761FS

The BU9761FS are analog switches with four circuits each, two for input and two for output. Depending on the status of the SELECT pin, the two input signals can be switched to either of two output pins. In addition, the EN pin can be used to set the output status to high impedance.

### ● Applications

Videos, movies, TVs, mini-component sets, radio cassette players, audio equipment, personal computers

### ● Features

- 1) Ultra-compact slim package. (SSOP-A20)
- 2) Low current dissipation. ( $I_{Q} = 1\mu A$  Max.)
- 3) Equipped with Output Enable terminal.
- 4) Low switching ON resistance. ( $R_{ON} = 130\Omega$ )
- 5) Low dispersion in switching ON resistance for the various channels. ( $\Delta R_{ON} = 25\Omega$  Max.)

### ● Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Power supply voltage	$V_{DD}$	– 0.3 ~ + 7.0	V
Power dissipation	$P_d$	600*1	mW
Operating temperature	$T_{OPR}$	– 25 ~ + 75	°C
Storage temperature	$T_{STG}$	– 50 ~ + 150	°C

\*1 Reduced by 4.8mW for each increase in Ta of 1°C over 25°C.

### ● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	$V_{DD}$	4.0	5.0	6.0	V

## ● Block diagram

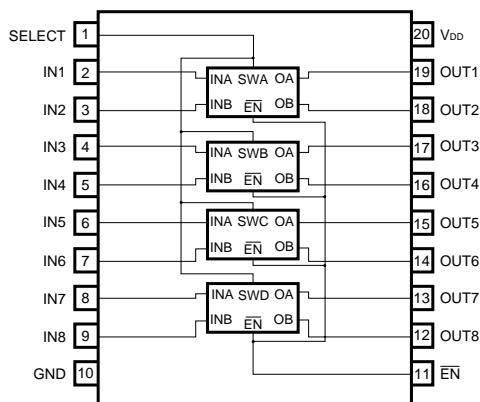

(Top View)

## ● Pin truth table

## • EN

EN	H	L
OUT1 ~ 8	High-Z	Output Enable

## • SELECT

H		L	
Input	Output	Input	Output
INA	OB	INA	OA
INB	OA	INB	OB

●DC characteristics (unless otherwise noted,  $T_a = 25^\circ\text{C}$ ,  $V_{DD} = 5\text{ V}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement circuit
Input high-level voltage	$V_{IH}$	3.5	—	—	V	$R_L = 10\text{k}\Omega$	Fig.1
Input low-level voltage	$V_{IL}$	—	—	1.5	V	$R_L = 10\text{k}\Omega$	Fig.1
Input high-level current	$I_{IH}$	—	—	0.3	$\mu\text{A}$	$R_L = 10\text{k}\Omega$	Fig.1
Input low-level current	$I_{IL}$	—	—	0.3	$\mu\text{A}$	$R_L = 10\text{k}\Omega$	Fig.1
ON resistance	$R_{ON}$	—	135	150	$\Omega$	$V_{IN} = V_{DD} / 2$ , $R_L = 1\text{k}\Omega$	Fig.2
ON resistance deflexion	$\Delta R_{ON}$	—	12	25	$\Omega$	$V_{IN} = V_{DD} / 2$ , $R_L = 1\text{k}\Omega$	Fig.2
OFF-channel leakage current	$I_{off}$	—	—	0.3 – 0.3	$\mu\text{A}$	$V_{IN} = 5\text{V}$ , $V_{OUT} = 0\text{V}$ $V_{IN} = 0\text{V}$ , $V_{OUT} = 5\text{V}$	Fig.3
Quiescent current	$I_Q$	—	—	1.0	$\mu\text{A}$	$V_{IN} = \text{GND}$	—

●AC characteristics (unless otherwise noted,  $T_a = 25^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ ,  $C_L = 50\text{ pF}$ ,  $R_L = 10\text{k}\Omega$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	$V_{DD}$ (V)	Conditions	Measurement circuit
Propagation delay time IN to OUT	$t_{PLH1}$	—	40	—	ns	5	Output "L" → Output "H"	Fig.4
	$t_{PHL1}$	—	40	—	ns	5	Output "H" → Output "L"	
Propagation delay time SELECT to OUT	$t_{PLH2}$	—	50	—	ns	5	Output "L" → Output "H"	Fig.5
	$t_{PHL2}$	—	40	—	ns	5	Output "H" → Output "L"	
Output Enable time	$t_{PHZ}$	—	200	—	ns	5	Output "H" → Output "High Z"	Fig.6
	$t_{PLZ}$	—	200	—	ns	5	Output "L" → Output "High Z"	
Output Disable time	$t_{PZH}$	—	50	—	ns	5	Output "High Z" → Output "H"	Fig.6
	$t_{PZL}$	—	50	—	ns	5	Output "High Z" → Output "L"	
Input capacitance (control input)	$C_c$	—	35	—	$\text{pF}$	5	$f = 1\text{MHz}$	—
Input capacitance (switch input)	$C_s$	—	65	—	$\text{pF}$	5	$f = 1\text{MHz}$	—
Sine wave distortion (T.H.D.)	$D$	—	0.06	—	%	5	$V_{IN} = 2.5\text{V}_{\text{P-P}}$ , $f = 1\text{kHz}$	Fig.8
Max. propagation frequency	$f_{\text{Max.}}$	—	1.15	—	$\text{MHz}$	5	$V_{IN} = 2.5\text{V}_{\text{P-P}}$	Fig.8
Feedthrough attenuation	$FT$	—	-70	—	$\text{dB}$	5	$V_{IN} = 2.5\text{V}_{\text{P-P}}$ , $f = 10\text{kHz}$	Fig.9
Crosstalk (control / switch)	$CT_c$	—	620	—	$\text{mV}_{\text{P-P}}$	5	$f = 10\text{kHz}$	Fig.10
Crosstalk between channels	$CT$	—	-50	—	$\text{dB}$	5	$V_{IN} = 2.5\text{V}_{\text{P-P}}$ , $f = 10\text{kHz}$	Fig.11

## ● Measurement circuits

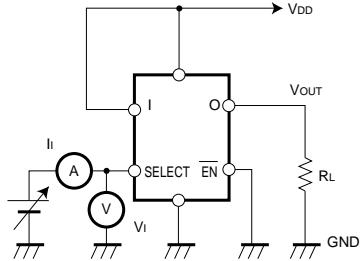


Fig.1 Input voltage, current

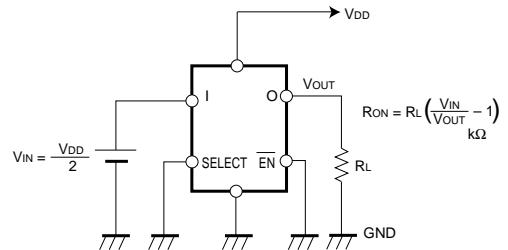


Fig.2 ON resistance, ON resistance deviation

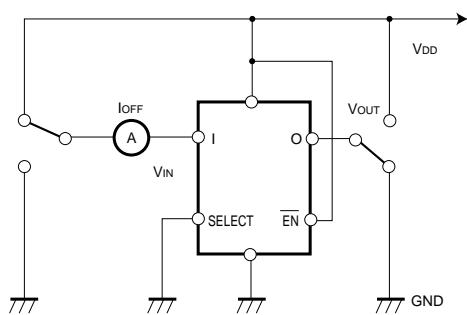


Fig.3 OFF-channel leakage current

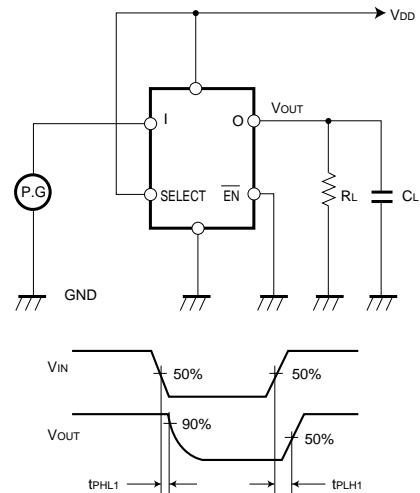


Fig.4 Propagation delay time (IN to OUT)


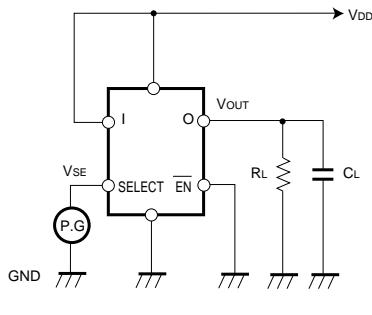


Fig.5 Propagation delay time (SELECT to OUT)


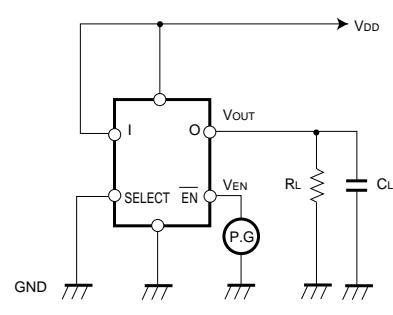


Fig.6 Output Enable, Disable time 1


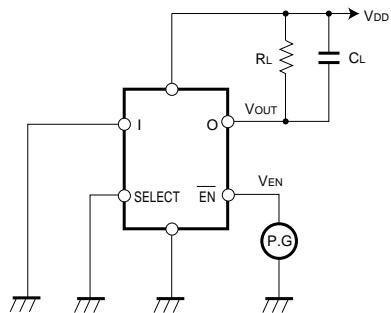


Fig.7 Output Enable, Disable time 2

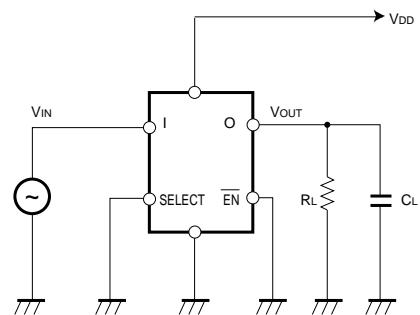
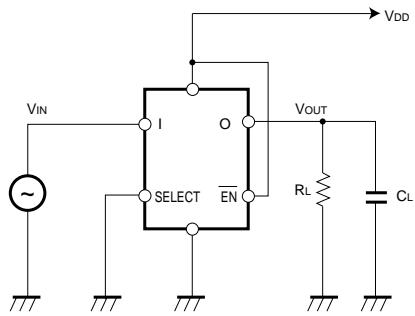
Fig.8 Sine wave distortion,  
maximum propagation frequency

Fig.9 Feedthrough attenuation

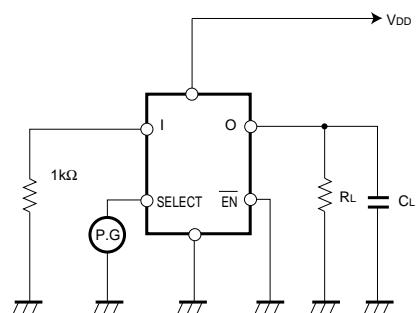


Fig.10 Crosstalk (between control switches)

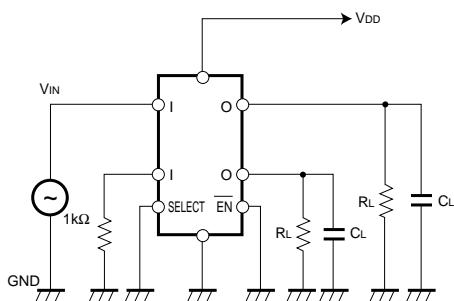


Fig.11 Crosstalk

- Electrical characteristic curve


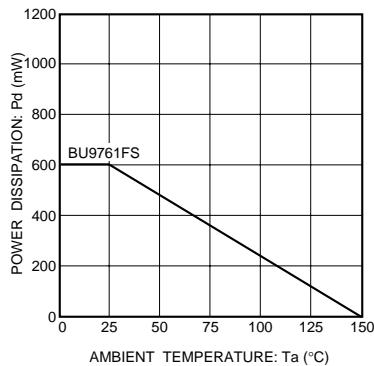


Fig.12 Power dissipation vs. ambient temperature

- External dimensions (Units: mm)

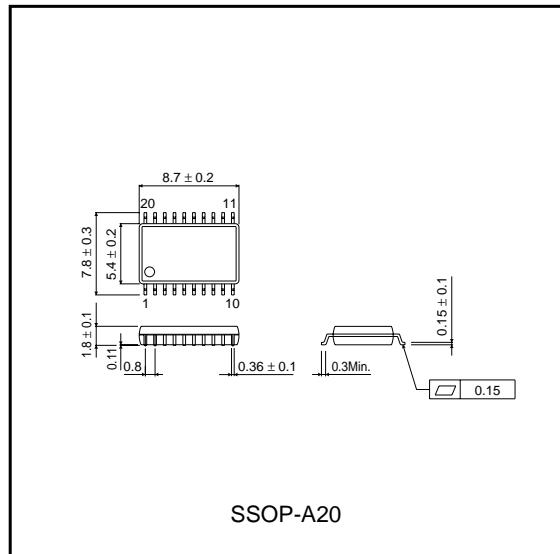

## Appendix

---

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.

Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.