

## Rad-hard high resolution DAC



Ceramic Flat-24

The upper metallic lid is internally connected to pin 8 (DGND)

### Maturity status link

[RHRDAC1612](#)

### Features

- $\Sigma\Delta$  DAC
- 16-bit resolution at 3 kHz bandwidth
- External master clock: 2.4 to 3.6 MHz
- Internal master clock: 3 MHz
- Sampling frequency: 12 ksps at 3 MHz master clock
- Serial peripheral interface (SPI)
- Selectable input format: straight binary or two's complement
- Internally filtered, single-ended output voltage
- Output feedback pin dedicated for high precision sensing
- 1.8 V/3.3 V digital interfaces
- 3 V to 3.6 V analog supply
- Compatible with the RHF100 1.2 V Vref
- Power-down mode
- 100 krad MIL-STD-883 1019.7
- SEL immune (up to 120 MeV.cm<sup>2</sup>/mg)
- SEU characterized
- SMD: 5962R16211
- Mass: 1.25 g

### Applications

- Space applications
- Telemetry
- Interferometry
- High-accuracy instrumentation

### Description


The **RHRDAC1612** is a very low-noise, low-frequency, radiation hardened DAC optimized to operate in a bandwidth up to 3 kHz. This DAC has a sigma-delta architecture which provides superior linearity performance and features a very good signal-to-noise ratio of 96 dB@3 kHz.

The DAC operates with a standard SPI input data which it converts into single-ended, internally-filtered voltage outputs. The SPI interface allows write and read mode implementations.


Specifically designed to optimize precision over power consumption, the **RHRDAC1612** only dissipates 15 mW at 12 ksps clocking.

## 1 Functional description

### Figure 1. Block diagram

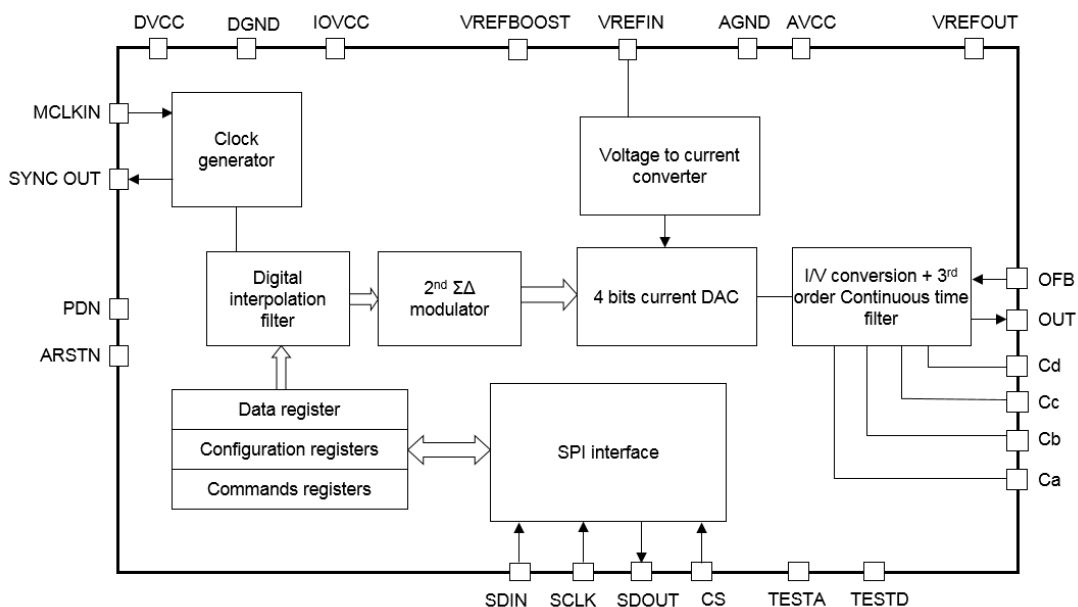

### Figure 2. Typical application schematic

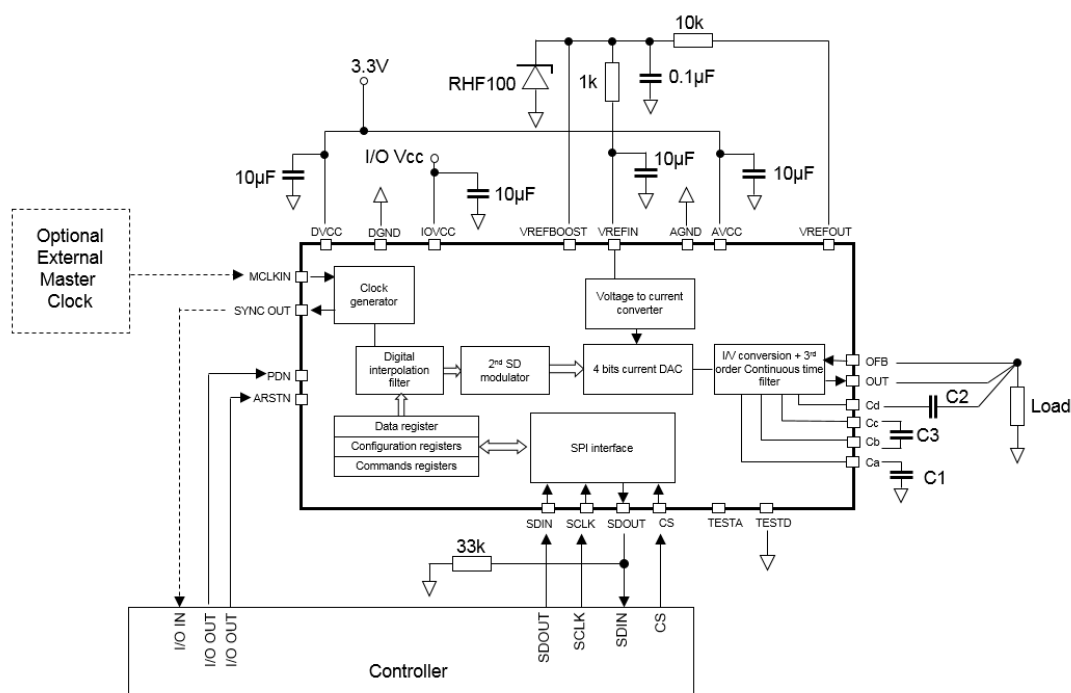


### Table 1. External filter components

| C1    | C2     | C3     | Bw    |
|-------|--------|--------|-------|
| 10 nF | 2.2 nF | 4.7 nF | 3 kHz |

## 2 Pin description

**Figure 3. Pin locations**

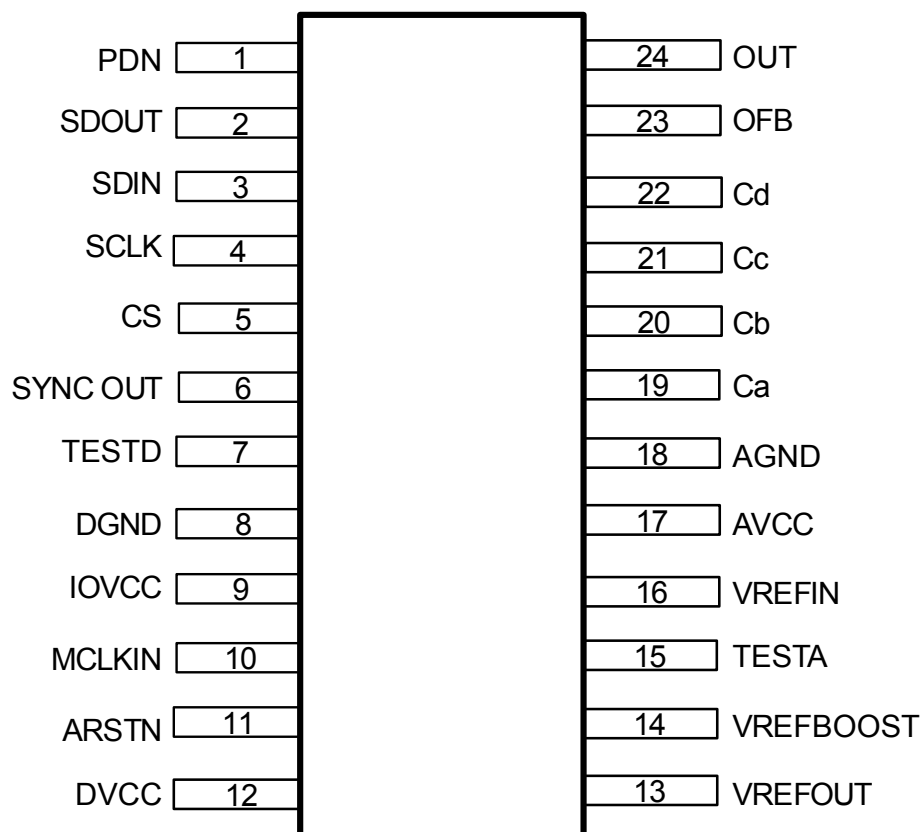

**Table 2. Pin descriptions**

| Pin n. | Pin name | Description   | Type    |
|--------|----------|---|---------|
| 1      | PDN      | Power-down (active low) + internal pull-down current source             | Digital |
| 2      | SDOUT    | SPI data output + external pull-down resistor of 33 kΩ                  |         |
| 3      | SDIN     | SPI data input + internal pull-down current source                      |         |
| 4      | SCLK     | SPI clock input + internal pull-down current source                     |         |
| 5      | CS       | Chip select and SPI synchronization + Internal pull-up current source   |         |
| 6      | SYNC OUT | Master clock divided by OSR, low level during TWU                       |         |
| 7      | TESTD    | Digital test input, must be connected to DGND                           |         |
| 8      | DGND     | Digital ground  | Power   |
| 9      | IOVCC    | IO power supply   |         |
| 10     | MCLKIN   | Master clock input, when not used, this input must be connected to DGND | Digital |
| 11     | ASRTN    | Asynchronous reset (active low) + internal pull-up current source       |         |
| 12     | DVCC     | Digital power supply  | Power   |

| Pin n. | Pin name  | Description                                    | Type   |
|--------|-----------|--|--------|
| 13     | VREFOUT   | External voltage reference output power supply | Analog |
| 14     | VREFBOOST | External voltage reference boost current       |        |
| 15     | TESTA     | Analog test pin, must be left floating         |        |
| 16     | VREFIN    | External voltage reference input               |        |
| 17     | AVCC      | Analog power supply                            | Power  |
| 18     | AGND      | Analog ground                                  |        |
| 19     | Ca        | Filter I/O                                     | Analog |
| 20     | Cb        |  |        |
| 21     | Cc        |  |        |
| 22     | Cd        |  |        |
| 23     | OFB       | Output feedback                                |        |
| 24     | OUT       | Analog buffered/filtered single-ended output   |        |

## 3 Radiations

**Table 3. Radiation performance of the RHRDAC1612**

| Type       | Features   | Value  | Unit                    |
|------------|--|--------|-------------------------|
| TID        | Dose rate = 60 mrad/s up to                                  | 100    | krad                    |
| Heavy Ions | SEL immune up to:<br>(with a particle angle of 60° at 125°C) | 125    | MeV.cm <sup>2</sup> /mg |
|            | SEL immune up to:<br>(with a particle angle of 0° at 125°C)  | 60     |                         |
|            | Analog SEFI immune up to:                                    | > 3.3  |                         |
|            | Digital SEFI   | < 1.83 |                         |
|            | SET at 25°C immune up to:                                    | > 1.83 |                         |
| Protons    | SEL at 125°C immune up to:                                   | 184    | MeV                     |
|            | Analog SEFI immune up to:                                    | 184    |                         |
|            | Digital SEFI   | < 10   |                         |
|            | SET at 25°C  | < 10   |                         |

### 3.1 Total ionizing dose (TID)

The products guaranteed in radiation within the RHA QML-V system fully comply with the MIL-STD-883 TM 1019 specification.

The RHRDAC1612 is RHA QML-V, tested and characterized in full compliance with the MIL-STD-883 specification condition C, (dose rate = 60 mrad/s, full CMOS technology).

All parameters provided in [Section 6: Electrical characteristics](#) apply to both pre- and post-irradiation, as follows:

- All test are performed in accordance with MIL-PRF-38535 and test method 1019 of MIL-STD-883 for total ionizing dose (TID).
- The initial characterization is performed in qualification only on both biased and unbiased parts.
- The initial characterization is performed in qualification only on both biased and unbiased parts.

Each wafer lot is tested at 60 mrad/s only, in the worst bias case condition, based on the results obtained during the initial qualification.

### 3.2 Heavy ions

The behavior of the RHRDAC1612 when submitted to heavy ions and protons is not tested in production. Heavy ions and protons trials are performed on qualification lots only.

During these trials, Analog and Digital SEFI have been observed. The occurrence of an Analog SEFI is very low, approximately an event over 70 years on GEO (worst case between LEO, SPOT and GEO comparison), but this event is not easily detectable in an application.

In the other hand, the occurrence of a digital SEFI is a little bit more important, approximately an event over 25 years on GEO (worst case between LEO, SPOT and GEO), but it is easily detectable in the application.

#### Analog SEFI

An analog erroneous output by a SEFI is not possible to detect in an application without using a dedicated circuitry to measure the analog output of the DAC (additional ADC and a dedicated data processing for example). Then, to prevent analog SEFI, we recommend to perform a global reset of the circuit periodically.

### Digital SET and SEFI

The following process describes how to detect a digital SET and a digital SEFI on SPI, and how to correct them:

- After reset and startup phase (DAC fully configured by the user and ready to use), store the values of the registers at the addresses 01h and 02h.
- Update these values whenever a voluntary action of the type “change of mode”, “modification of the data”, “autocal” etc is performed.
- Periodically (1) read the registers at addresses 01h and 02h
- Register 01h:
  - If configuration (n) = configuration (n-1): the circuit behaves properly, no specific action required.
  - If configuration (n) modified, then rewrite configuration (n-1), taking care to put in standby for some bits if necessary, and read the configuration.

Then:

If configuration (n + 1) = configuration (n-1): the circuit behaves properly, no specific action required.

If configuration (n + 1) different from configuration (n-1): proceed to a global reset of the circuit.

If offset (n) changed (without new autocal): proceed to a global reset of the circuit.

- Register 02h:

If data (n) = data (n-1): the circuit behaves properly, no specific action required.

If data (n) is modified, then rewrite data (n-1) and read the data.

Then:

If data (n + 1) = data (n-1) : the circuit behaves properly, no specific action required.


if data (n + 1) different from data (n-1): proceed to a global reset of the circuit.

## 4 DAC operation

### 4.1 SPI interface

The SPI interface consists of an internal 32 bit input shift register which is connected to the SDIN input. When the chip select signal, CS, is set to low level, the data on SDIN is shifted into the internal shift register on the rising edge of the clock SPI SCLK. Exactly 32 edges of SCLK must be applied to correctly update the shift register. If less than 32 edges is applied and CS goes high, the SPI transaction is aborted.

**Figure 4. SPI interface connections for stand-alone operations**

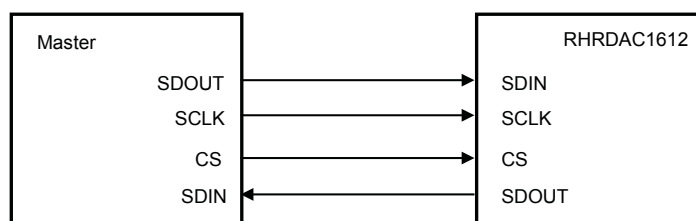

*Note:* The SPI interface is designed for stand-alone operations only. A daisy chain is not possible.

#### 4.1.1 SPI frame format


The expected SPI frame format is shown in [Figure 5. SPI frame format](#) below. The 32 bits are divided into 7 bits, 1 bit, and 24 bits of data. The 7 and 1 bits can be used to address the register bank i.e. a R/W bit which determines if it is a read or write command. If the R/W bit is set to 1, the SPI register bank is read. If the R/W bit is set to 0, the SPI register bank is written with the data bits.

**Figure 5. SPI frame format**




The data are written in the SDIN input with the MSB first. The first bit that enters in the SDIN after the falling edge of the CS is bit 7 of the address that corresponds to the MSB of the first byte. By convention, the address is coded on 7 bits. [Figure 6. Address 01h in binary](#) shows address 01h in binary for the first byte that enters in the SPI interface.

**Figure 6. Address 01h in binary**



#### 4.1.2 SPI write sequence


[Figure 7. SPI write sequence](#) describes how the SPI interface works for a write operation. The chip select signal, CS, is pulled low to indicate the start of the transaction. After the falling edge of CS, 32 cycles of SCLK are applied to shift the data on the SDIN into the shift register. The first 7 bits sent by the master on the SDIN indicate which register is to be written, and the next bit sent by the master indicates that a write access of the DAC registers is required (R/W = 0). The last 24 bits sent on the SDIN contain the data to be written to the DAC register. The DAC register specified by the address field is loaded with the data input on the rising edge of the CS.

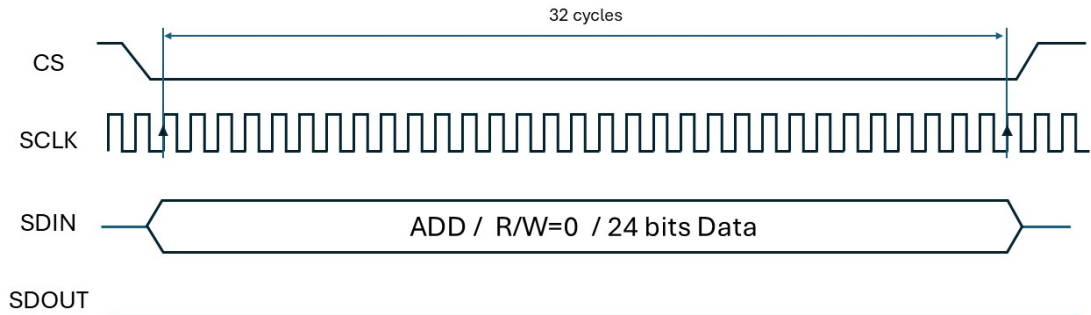**Figure 7. SPI write sequence**


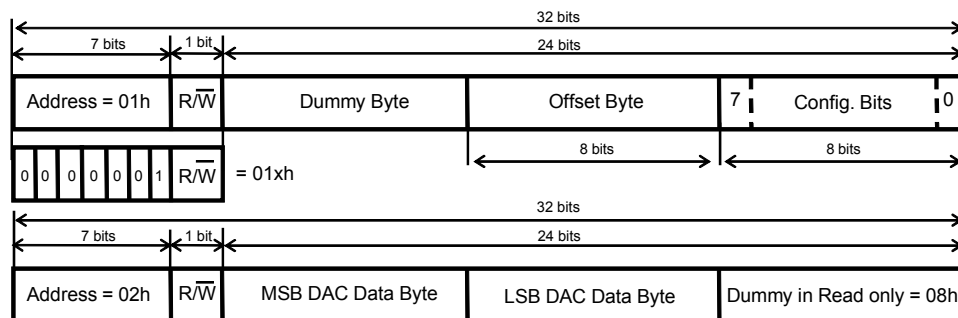
During a write sequence, the output data, SDOUT, remains at a low level.

#### 4.1.3 SPI read sequence

The CS signal is pulled low to indicate the start of a transmission. With CS low, 32 cycles of SCLK are applied to shift the data on the SDIN into the shift register. The first 7 bits sent by the master on the SDIN, indicate to the slave the address of the register to be read. The next bit ( $R/\overline{W} = 1$ ) indicates that a read operation is to be performed. The final 24 bits on the SDIN are dummy data. At the eighth rising edge of the SCLK, the contents of the register addressed are loaded into the internal shift register. This requires the shift register to be synchronously preset with the data to be shifted out. Then, the data required to be read are shifted out to the MSB first, on falling edge of the SCLK, with the last 24 cycles of the SCLK on the SDOUT output.

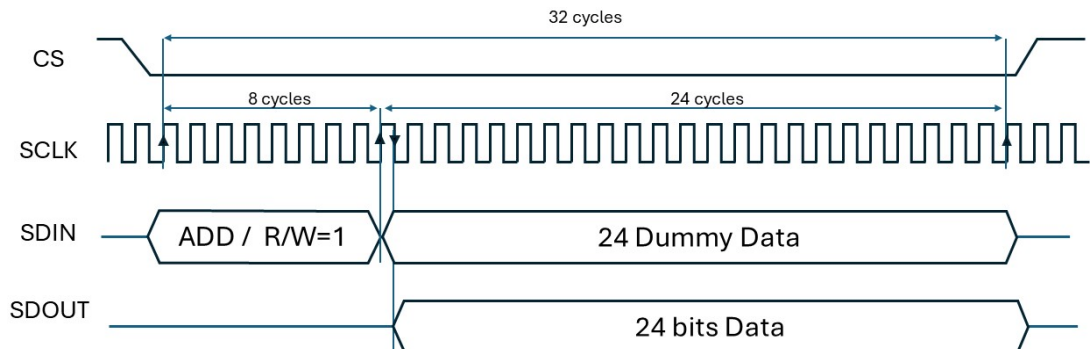**Figure 8. SPI read sequence**


## 4.2 DAC configuration registers

**Figure 9. Data and control frame format**




- Address = 01h
  - Configuration bit register: this 8-bit register is used to configure and control the DAC.
  - Offset byte register: this 8-bit register is used to read the result of the offset calibration of the DAC. The result is in two's complement format. If the value is in the range of 01h to FEh, the auto-calibration has gone well. If the value is 00h or FFh, the device cannot compensate the offset and there is an internal problem. If the result is 80h, the device has no offset error to compensate.
- Address = 02h
  - DAC data byte: this 16-bit register is used to set the output voltage of the DAC.

Table 4. DAC configuration bits and function shows the name and the function of each bit.

**Table 4. DAC configuration bits and function**


| Address | Config. bit/data | Name                             | POR or ASRSTN value | Read/Write possibilities | Description   |
|---------|------------------|----------------------------------|---------------------|--------------------------|---|
| 01h     | 0 = LSB          | CAL                              | 0                   | Read                     | This bit gives the calibration status. If set to 0, it indicates calibration is ongoing. If set to 1, it indicates calibration is complete. This bit is cleared to 0 after reading the configuration bit register.  |
|         | 1                | LC                               | 1                   | Read/Write               | Launch calibration bit: unlike other configuration bits, it performs its function only on transition from 1 to 0, or 0 to 1. <ul style="list-style-type: none"> <li>• The DAC always performs an automatic calibration on wakeup from reset or standby (reference voltage active or not) before going to the operating state.</li> <li>• If this bit transitions from 1 to 0 in the calibration state, the calibration cycle is terminated, and the DAC returns to the operating state.</li> <li>• If this bit transitions from 0 to 1 in the operating state, a new calibration cycle is started, and the DAC moves to the calibration state.</li> </ul> <b>Calibration proceeds using the internal or external master clock. It depends on the RC EN bit value. Before launching an auto-calibration, the output voltage must be set to VREFIN (DAC DATA = 8000).</b> |
|         | 2                | Vseries                          | 0                   | Read/Write               | If this bit is set to 1, it modifies the boost sequence for the Vref. This bit must be set to 1 when using an external series Vref instead of a shunt Vref. This bit is useless if the VREFOUT and VREFBOOST pins are not used. <b>It can only be written in standby mode.</b>  |
|         | 3                | Unused                           | 0                   | Read                     |   |
|         | 4                | Unused                           | 1                   | Read                     |   |
|         | 5                | RC EN                            | 1                   | Read/Write               | Enable internal RC oscillator. This bit is set to 0 to enable the external master clock input MCLKIN. <b>It can only be written in standby mode.</b>  |
|         | 6                | Unused                           | 1                   | Read                     |   |
| 01h     | 7                | Two's complement/straight binary | 0                   | Read/Write               | When set to 0, the data format is in straight binary mode and when set to 1, the data format is in two's complement mode.   |
|         | 8-15             | Offset byte register             | xxh                 | Read                     | This byte contains the results of the offset calibration which are in two's complement format.  |
| 02h     | 0-23             | DAC data                         | 800008h             | Read/Write               | These 16 bits of data set the output DAC voltage. The last bits (16 to 23) are in read-only mode and their reset value is 08h.  |

### 4.3 DAC register data update options

DAC register data can be updated in two ways.

Figure 10. Connections between the DAC and the master shows the connections between the master and the DAC.


**Figure 10. Connections between the DAC and the master**

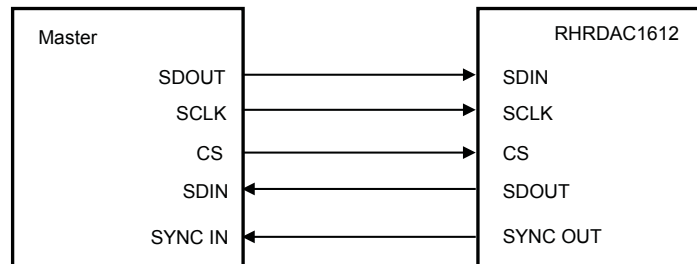

#### 1. SYNC OUT, signal not used by the master


In this configuration, data entered through the SPI interface are not synchronized with the internal sample rate. Register 2 (register used by the digital processing) is updated with the content of register 1 at the rising edge of SYNC OUT. Register 1 is updated at the rising edge of CS with the condition that 32 cycles of SCLK have been achieved. Figure 11. Asynchronous DAC data update shows this option.

**Figure 11. Asynchronous DAC data update**

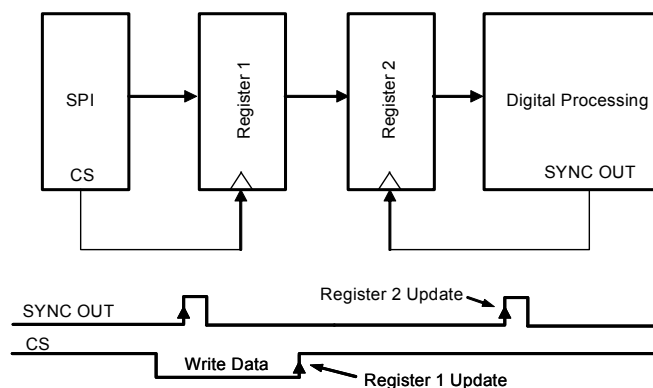

#### 1. SYNC OUT, signal used by the master

In this configuration, data entered through the SPI interface are synchronized with the internal sample rate at the condition that after a rising edge of SYNC OUT, an SPI write transaction starts and finishes before the next rising edge of SYNC OUT. Register 2 (register used by the digital processing) is updated with the content of register 1 at the rising edge of SYNC OUT. Register 1 is updated at the rising edge of CS with the condition that 32 cycles of SCLK have been achieved. Figure 12. Synchronous DAC data update shows this option.

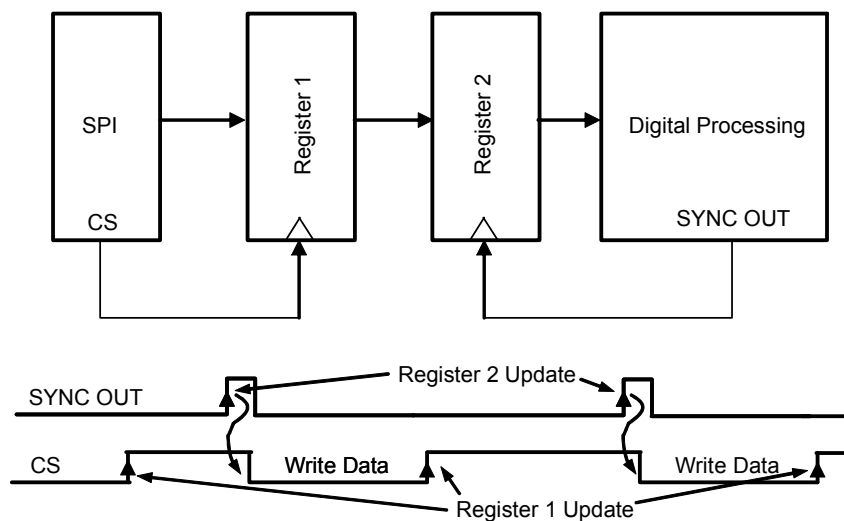**Figure 12. Synchronous DAC data update**



#### 4.4 DAC transfer function

Thanks to the two's complement/straight binary bit configuration, the RHRDAC1612 can accept data in two formats: two's complement and straight binary.

Table 5. Transfer function shows the formulas used to calculate the transfer function ( $V_{out} = f(\text{digital code})$ ) of the RHRDAC1612.

**Table 5. Transfer function**

| Data format      | 16-bit data   |
|------------------|---|
| Two's complement | $V_{out} = 2 \times V_{ref} \times \frac{\text{Data} + 2^{15}}{2^{16}}$ |
| Straight binary  | $V_{out} = 2 \times V_{ref} \times \frac{\text{Data}}{2^{16}}$          |


**Figure 13. Data frame input**


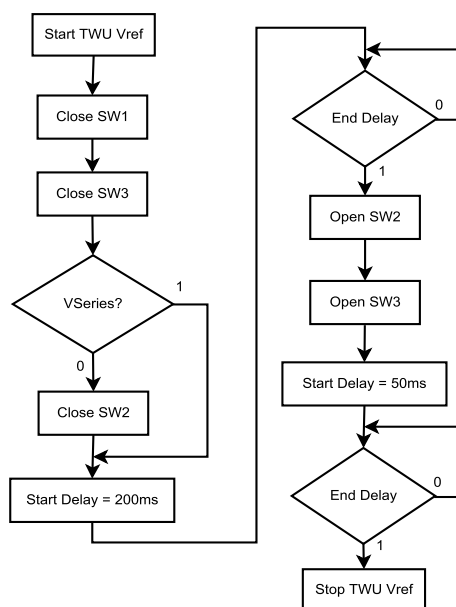
#### 4.5 External Vref power-up sequence

The RHRDAC1612 has an internal boost sequence to speed-up the charge of necessary external filtering capacitors used by the reference voltage. The boost sequence can take into consideration both shunt and series Vref thanks to the bit Vseries in the configuration register.

This boost sequence is necessary for the DAC because the auto-calibration is based on the VREFIN input voltage and this voltage must be as accurate as possible (error < LSB).

Figure 14. Internal switches for boost sequence shows the internal switches specifically used for the boost sequence.

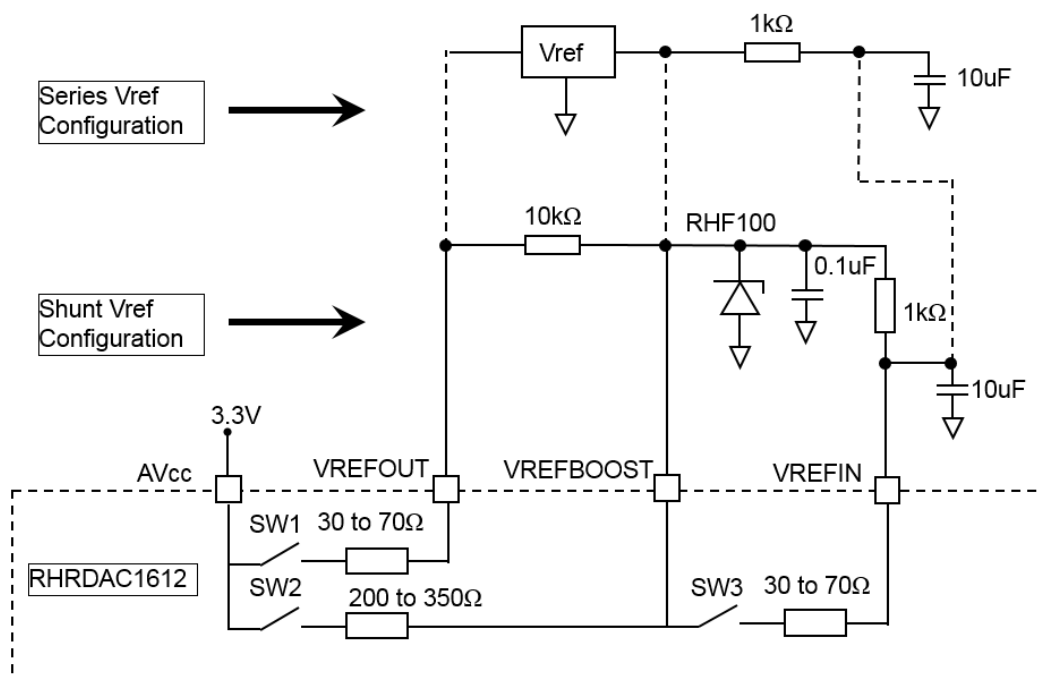
**Figure 14. Internal switches for boost sequence**

**Figure 15. Boost sequence** shows different steps of the boost sequence.


**Figure 15. Boost sequence**


## 4.6 DAC operation flow charts

Figure 16. DAC operation flow chart (main) shows how the DAC manages different situations.

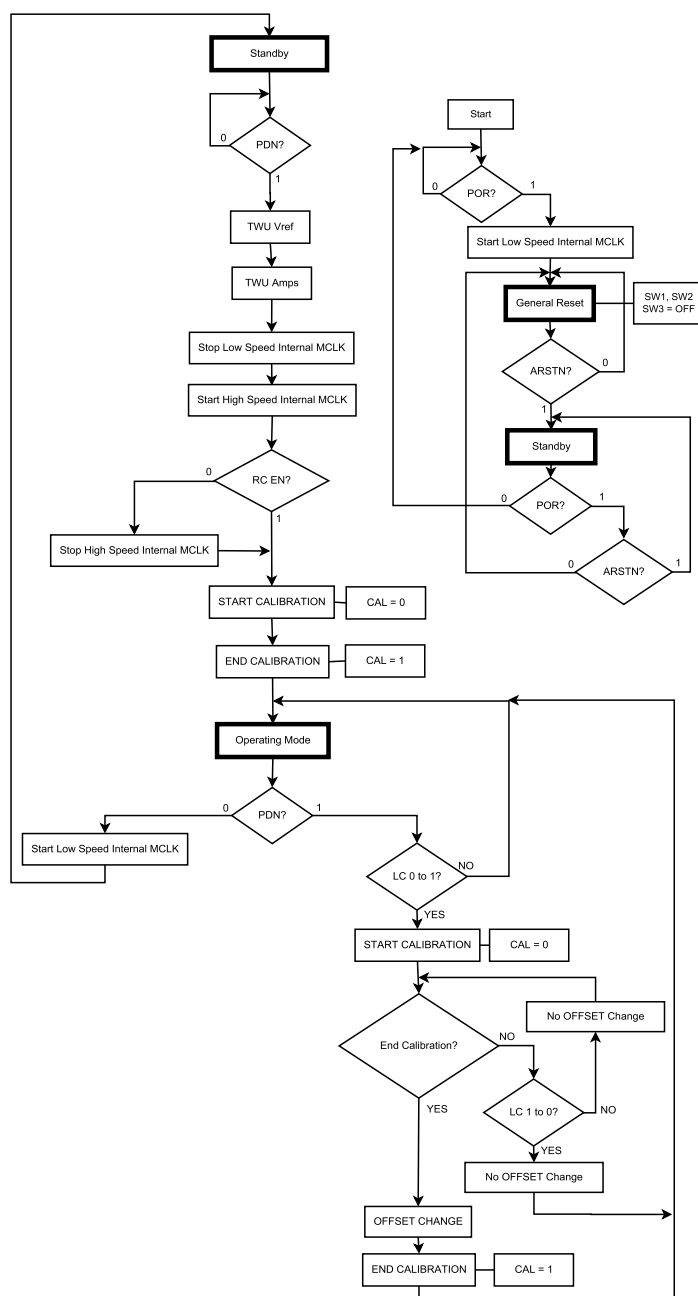**Figure 16. DAC operation flow chart (main)**

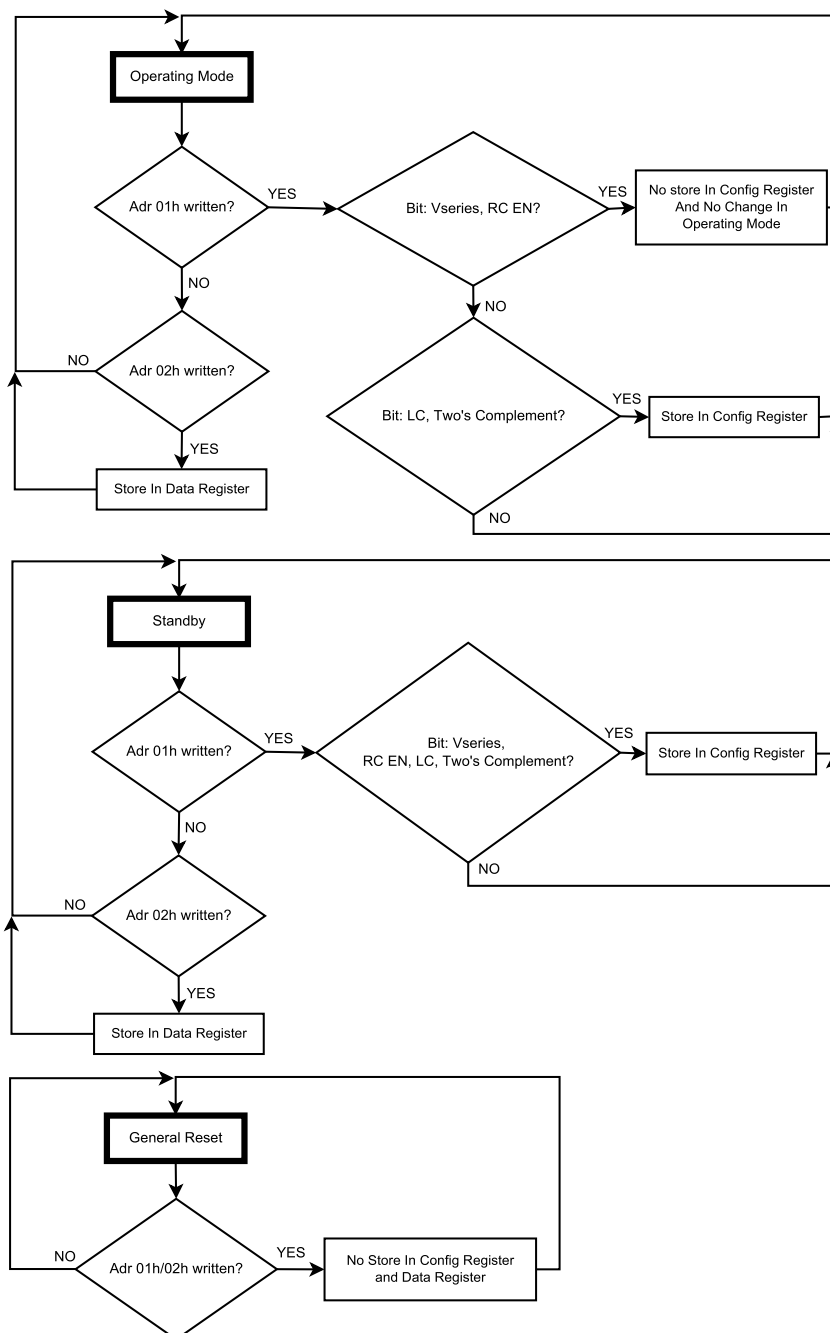

**Figure 17. DAC operation flow chart (continued)**


1. *POR = internal power-on-reset*
2. *Internal MCLK = internal master clock at 3 MHz typical*
3. *Low-power INT CLK = internal low-power clock at 10 kHz*
4. *TWU Vref = wakeup and boost sequence of external Vref*
5. *TWU amps = wakeup of output amplifiers + analog filter*
6. *TWU Vref + TWU amps = TWU in Table 11. Operating conditions (Tamb from -55 °C to 125 °C)*
7. *Reset = reset mode of DAC*
8. *Standby = standby mode of DAC*
9. *Operating = normal operation of DAC.*
10. *CAL = flag that indicates the start/end of the calibration*

11. Offset change = function that changes the offset register value
12. Calibration = function that calibrates the offset error. When the function starts, CAL = 0 and when the function ends, CAL = 1.

## 4.7 ARSTN and PDN digital pin functions

### ARSTN

ARSTN is an input that allows the RHRDAC1612 to be reset asynchronously. This input is active at low level ("0" logic) and has total priority vs. the PDN input and SPI control.

While ARSTN = "0" logic, the registers of the RHRDAC1612 cannot be set. A read of these registers gives 00h.

When ARSTN changes from "0" to "1" logic, all values in the register are set to default as indicated in [Table 6. Table 6](#) (see POR or ARSTN column).

### PDN

PDN is an input that allows the RHRDAC1612 to be set asynchronously in standby. This input is active at low level ("0" logic). Despite the standby feature, this input **must be used** to set/reset the bits Vseries and RC EN at address 01h as shown in [Figure 17. DAC operation flow chart \(continued\)](#).

[Table 6. Table 6](#) below shows the truth table of ARSTN and PDN.

**Table 6. Truth table of ARSTN and PDN**

| ARSTN | PDN | Icc       | Vout  |
|-------|-----|-----------|---|
| 0     | 0   | Standby   | HiZ state   |
| 1     | 0   |           |   |
| 0     | 1   | ≈ 2.2 mA  | LowZ, equal to ≈ VREFIN (it is not recommended to use this combination) |
| 1     | 1   | Operating | LowZ operating, Vout = f (code in Adr 02h)                              |

## 4.8 Power-on-reset (POR) feature

The RHRDAC1612 integrates an internal POR connected to AVCC. POR levels are given in [Section 6: Electrical characteristics](#). If AVCC does not reach 2 V to 2.3 V when AVCC increases, the internal POR forces a reset equivalent to ARSTN = 0. If AVCC does not reach 2 V to 1.7 V when AVCC decreases, the internal POR is not active.

## 4.9 Power supply sequencing

The RHRDAC1612 has three different power supplies (AVCC, DVCC, and IOVCC). These power supplies must be set and reset as described in [Figure 23. DAC timing diagram 2](#) and the amplitude must respect values in [Table 11. Operating conditions \(Tamb from -55 °C to 125 °C\)](#).

To avoid unwanted behavior on the output during power supply sequencing, it is also advised to keep the ARSTN and PDN inputs at low levels (GND).

## 4.10 Setting the RHRDAC1612

The RHRDAC1612 can only be programmed through the SPI bus. A specific byte, at address 01h, is dedicated for this purpose (see [Table 4. DAC configuration bits and function](#)). Depending on the ARSTN and PDN pin levels, the following table shows what can be written or read in this specific byte. Refer also to [Figure 17. DAC operation flow chart \(continued\)](#).

**Table 7. Control bit possibilities**

|                  | WRITE sequence   |         |                   |         | READ sequence |         |           |         |
|------------------|------------------|---------|-------------------|---------|---------------|---------|-----------|---------|
|                  | ARSTN = 0        |         | ARSTN = 1         |         | ARSTN = 0     |         | ARSTN = 1 |         |
|                  | PDN = 0          | PDN = 1 | PDN = 0           | PDN = 1 | PDN = 0       | PDN = 1 | PDN = 0   | PDN = 1 |
| CAL              | X <sup>(1)</sup> | X       | NA <sup>(2)</sup> | NA      | X             | X       | OK        | OK      |
| LC               |                  |         |                   | OK      |               |         |           |         |
| Vseries          |                  |         | OK <sup>(3)</sup> | NA      |               |         |           |         |
| RC EN            |                  |         |                   | OK      |               |         |           |         |
| Two's complement |                  |         |                   | OK      |               |         |           |         |

1. X = action impossible, result is always 0

2. NA = not applicable

3. OK = action possible

### Vseries, RC EN, and LC

- Vseries indicates if a shunt or series reference voltage is connected to the VREFIN pin and is supplied by the VREFOUT pin. The Vseries bit is only used when the RHRDAC1612 is woken up by the PDN pin ("0" to "1"). So, the write of this bit is only possible when PDN = 0.
- RC EN indicates if the DAC uses the internal or the external master clock. As it is not advised to switch clocks during operation, this bit can be written only when PDN = 0.
- LC is used to launch the output offset auto-calibration. Offset calibration is useful only when the DAC is in operating mode. Consequently, calibration is performed only when PDN = 1.

### Output voltage at startup

When the PDN goes from 0 to 1, RHRDAC1612 enters wakeup mode for a maximum period of 440 ms (TWU + CALT). During this time, Vout is set to VREFIN with a lowZ output impedance, whatever the DAC data code written at address 02h. At the end of 440 ms, the output voltage is set to the code present at this time in the DAC data (address 02h).

### Examples of RHRDAC1612 settings

- External Vref = shunt, internal master clock used
  - Power-up the DAC and during this sequence, keep ARSTN and PDN at GND
  - Set ARSTN to 1
  - Set the two's complement bit and DAC data word if necessary
  - There is no need to set Vseries and RC EN because, by default, they are on the Vref shunt and internal master clock
  - Set PDN to 1
  - Wait a maximum period of 440 ms (the wakeup time)
  - After 440 ms, launch an auto-calibration cycle with the LC bit
  - After a maximum period of 40 ms, the DAC is ready to use
- External Vref = shunt, external master clock used
  - Power-up the DAC and during this sequence, keep ARSTN and PDN at GND
  - Set ARSTN to 1
  - Set the two's complement bit and DAC data word if necessary
  - There is no need to set Vseries
  - Set the RC EN bit for the external master clock
  - Set PDN to 1
  - Wait a maximum period of 440 ms (the wakeup time)
  - After 440 ms, launch an auto-calibration cycle with the LC bit
  - After a maximum period of 40 ms, the DAC is ready to use



## 4.11 SYNC OUT pin

SYNC OUT is an output that mirrors the internal clocking of the RHRDAC1612.

This pin can be used to synchronize a master when an accurate timing is requested (see [Section 4.3: DAC register data update options](#)). However, depending on the state of the RHRDAC1612, five scenarios below can be described for the SYNC OUT pin.


- During operation and when the internal master clock is chosen, SYNC OUT frequency = internal master clock/256 = 9.6 kHz to 14.4 kHz.
- During operation and when the external master clock is chosen, SYNC OUT frequency = external master clock/256 = 12 kHz for ExtMCLK = 3 MHz.
- When PDN goes from 0 to 1, during t8 time (see [Section 6: Electrical characteristics](#)), SYNC OUT frequency = low-speed internal clock/256  $\approx$  32 kHz/256 = 125 Hz.
- When PDN goes from 1 to 0, during t9 time (see [Section 6: Electrical characteristics](#)), SYNC OUT frequency = low-speed internal clock/256  $\approx$  32 kHz/256 = 125 Hz.
- When PDN = 0, SYNC OUT output is disabled.

## 4.12 Output feedback pin

A dedicated output feedback pin is available to sense the output voltage as close as possible to the load to avoid errors due to parasitic resistance. [Figure 2. Typical application schematic](#) shows how the connection must be made.

Note that the C2 capacitor can be organized as presented in [Figure 2. Typical application schematic](#) but, it can also be directly connected to OUT as presented in the following figure.

**Figure 18. Another connection for C2**

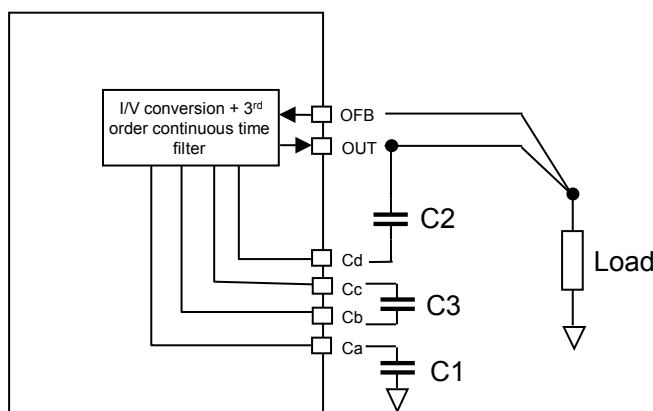

## 4.13 Pull-up and pull-down on digital inputs

To prevent floating digital inputs, the RHRDAC1612 integrates dedicated pull-ups or pull-downs vs. the IOVCC and/or DGND pins (see table below). These pull-ups or pull-downs are current source and their values are given in [Table 11. Operating conditions \(Tamb from -55 °C to 125 °C\)](#).

**Table 8. Pull-up and pull-down pin assignments**

| Pin    | Pin assignment |
|--------|----------------|
| ARSTN  | Pull-up        |
| PDN    | Pull-down      |
| MCLKIN |                |
| SDIN   |                |
| SCLK   |                |
| CS     | Pull-up        |

These pull-ups or pull-downs mean that if all the digital inputs are left floating, the RHRDAC1612 is reset and consequently put into standby mode.

#### SDOUT


SDOUT does not have an internal pull-up or pull-down functionality. Consequently and to avoid standby current fluctuating in standby mode, it is mandatory to place an external pull-down resistor vs. DGND as represented in Figure 2. Typical application schematic. A good choice of resistor is 33 kΩ.

## 4.14 Anti-aliasing output filter design

The RHRDAC1612 integrates roughly all the necessary components to make a third-order low pass output filter. The only external components needed are three capacitors as represented in Figure 2. Typical application schematic.

The following figure shows a simplified view of what is inside the RHRDAC1612 output stage.

**Figure 19. Simplified RHRDAC1612 output stage**

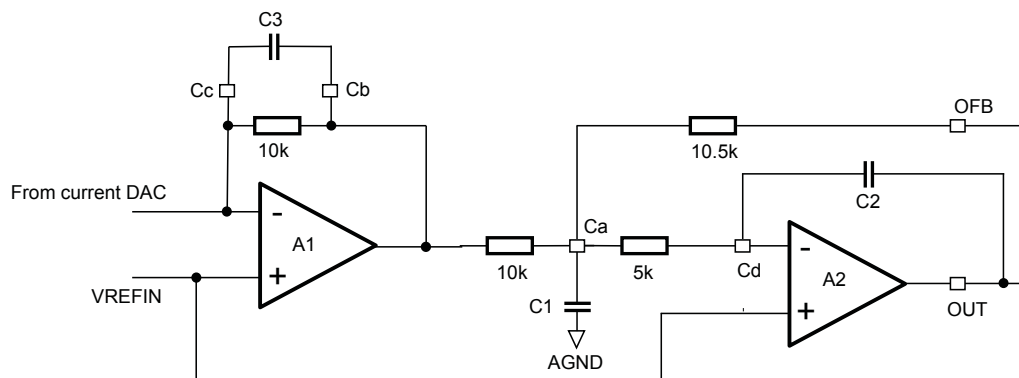

1. A1 and A2 are two auto zero operational amplifiers
2. All resistors are inside the RHRDAC1612
3. Access nodes Ca to Cd and OUT allow connection to the external capacitors C1 to C3

The relationship between the capacitors is as follows:  $C1 = 5 \times C0$ ,  $C2 = C0$ ,  $C3 = 2.5 \times C0$  where  $C0$  is the "common" capacitor. For a -3 dB cut-off frequency at 3 kHz,  $C0 = C2 = 2$  nF,  $C1 = 10$  nF, and  $C3 = 5$  nF

If you request a different -3 dB cut-off frequency, you can calculate a  $C0' = C0 \times (3 \text{ kHz}/F0')$ . For example, you request a -3 dB about 1 kHz,  $C0' = C0 \times 3$  and then,  $C1 = 30$  nF,  $C2 = 6$  nF and  $C3 = 15$  nF.

For 3 kHz, we chose a combination:  $C1 = 10$  nF,  $C2 = 2.2$  nF, and  $C3 = 4.7$  nF. This was because 2 nF and 5 nF are not values we usually find. This combination gives a -3 dB cut-off frequency of 3.2 kHz which has a very similar shape to  $C1 = 10$  nF,  $C2 = 2$  nF, and  $C3 = 5$  nF (see Section 6: Electrical characteristics).

Overall, the relationship used is  $C1 = 4.5 \times C0$ ,  $C2 = C0$  and  $C3 = 2.2 \times C0$ . Of course, if you request another -3 dB cut-off frequency,  $C0'$  becomes  $C0' = C0 \times (3.2 \text{ kHz}/F0')$

#### Note on choice of C1, C2 and C3

The second harmonic of RHRDAC1612 for a -1 dBFS is -89.5 dBc. To reach such performance, the choice of  $C1$ ,  $C2$ , and  $C3$  is really important. If you use a capacitor with high dC/dV, like a ceramic capacitor, the non-linearity induced by such a capacitor brings additional distortion and drastically reduces performance.

The best choice is to select a capacitor with low dC/dV. Film capacitors are good (see Section 6: Electrical characteristics). Even if they have a higher parasitic inductance compared to ceramic capacitors, this does not pose any problem in the targeted frequency range (less than 30 kHz).

## 4.15 Auto-calibration feature

The RHRDAC1612 includes an auto-calibration feature that can be requested on demand through the SPI bus thanks to the LC bit (see Table 4. DAC configuration bits and function).

**Before launching an auto-calibration, the output voltage must be set to VREFIN (DAC data = 8000h). If this condition is not respected, the auto-calibration can be made without errors but, a high glitch amplitude appears on the output at the end of calibration.**

Auto-calibration acts on the output offset voltage in the range  $\pm 4$  mV and a resolution step of  $31 \mu\text{V}$ .

Auto-calibration results are given for information. They can be found in bit 8 to 15 of the register at address 01h (see Table 4. DAC configuration bits and function). The number in this byte is signed with the following characteristics:


- 128 is the offset correction which is 0
- Between 1 to 127 is the negative internal correction
- Between 129 to 254 is the positive internal correction
- 0 or 255 is "auto-calibration failed" which means the offset is out of the calibration range.

*Note:*

*Due to the discrete nature of the auto-calibration feature ( $31 \mu\text{V}$ ), a repeating auto-calibration sequence with an output voltage, output current, input voltage reference, and temperature unchanged, can give a different number each time.*

The following figure shows a simplified schematic of the output stage with the auto-calibration feature.


**Figure 20. Simplified schematic of output stage with auto-calibration feature**

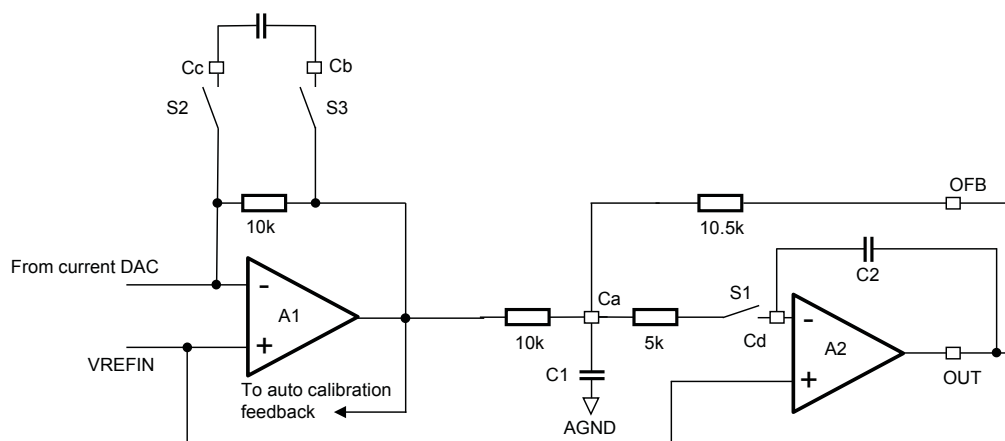

During normal operation, S1 to S3 are closed and the auto-calibration feedback is disabled. When auto-calibration is requested, S1 to S3 are open. During calibration, OUT voltage stays roughly at the value settled before the calibration request thanks to C1, C2, and the auto-calibration time. At the end of calibration, S1 to S3 are closed and OUT behavior can be as follows:

- No offset change and DAC data unchanged in address 02h during calibration i.e. OUT remains constant.
- Offset changes and DAC data unchanged in address 02h during calibration i.e. OUT has a step corresponding to offset correction value.
- No offset change and DAC data changed in address 02h during calibration i.e. OUT has a step corresponding to DAC data change value.
- Offset changes and DAC data changed in address 02h during calibration i.e. OUT has a step corresponding to DAC data change value  $\pm$  the offset correction.

The following figure shows the output behavior during an auto-calibration. The output voltage has been set to VREFIN.

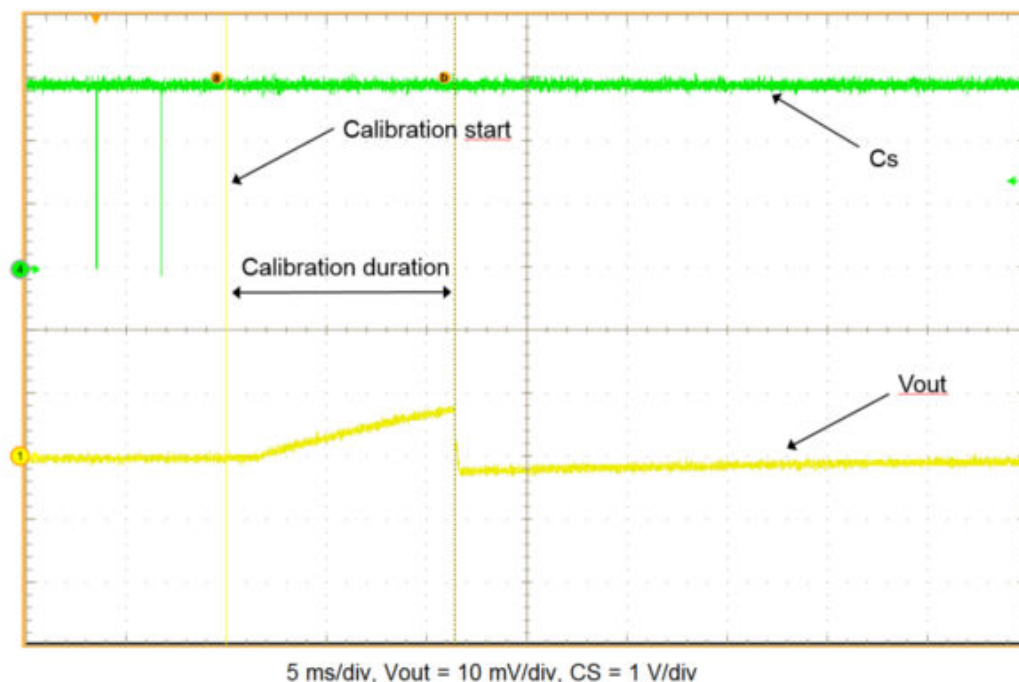**Figure 21. Output voltage behavior during calibration**

**Note on the CAL bit**

The CAL bit is a read-only bit that gives the calibration status.

1. "0" indicates:
  - a. The idle state if the calibration was not requested with the LC bit before "0" was read.
  - b. Calibration is ongoing if the calibration was requested with the LC bit before "0" was read.
2. "1" indicates that the calibration has ended. **"1" is automatically reset to "0" when this bit is read.**

*Note:* After a wakeup with PDN from "0" to "1" (see [Section 4.10: Setting the RHRDAC1612](#)), an auto-calibration is automatically made. Consequently, the first read of CAL after this wakeup is "1".

## 4.16 VREFIN input

The RHRDAC1612 output voltage is directly proportional to the VREFIN input voltage. Any variation on VREFIN (e.g. noise, absolute precision, temperature) is proportionally copied on the output voltage.

RHF100 is an STMicroelectronics 1.2 V precision shunt reference voltage. The RHRDAC1612 has been designed to work optimally with the RHF100.

In [Figure 2. Typical application schematic](#), the low-pass filter created by the 1 k $\Omega$ /10  $\mu$ F eliminates most of the noise produced by the RHF100. On the RHF100, the 0.1  $\mu$ F in parallel ensures stability while the 10 k $\Omega$  resistor biases the RHF100 through the VREFOUT pin power supply.

#### 4.17 VREFOUT output

This pin is used to provide a power supply through AVCC to the external reference connected to VREFIN (see [Figure 14. Internal switches for boost sequence](#)). This output is directly driven by the PDN pin and when the RHRDAC1612 is set in standby, VREFOUT is disconnected from AVCC thereby putting the reference voltage in standby. The internal switch can handle up to 12 mA allowing connection to a wide range of external references.

**Table 9. VREFOUT behavior vs. PDN and ARSTN**

| PDN | ARSTN | VREFOUT |
|-----|-------|---------|
| 0   | 0     | HiZ     |
| 0   | 1     |         |
| 1   | 0     |         |
| 1   | 1     | AVCC    |

#### 4.18 TESTA and TESTD pins

TESTA and TESTD pins are used for making industrial tests on the ATE. **These pins are not used in normal operation. TESTA must be left floating and TESTD must be connected to DGND.**

## 5 Absolute maximum ratings and operating conditions

**Table 10. Absolute maximum ratings**

| Symbol                 | Parameter                                     | Values                  | Unit |
|------------------------|---|-------------------------|------|
| AVCC                   | Analog supply voltage                         | 4.5                     | V    |
| DVCC                   | Digital supply voltage                        | 4.5                     |      |
| IOVCC                  | Digital buffer supply voltage                 | 4.5                     |      |
| V <sub>IN_Ana</sub>    | Analog inputs: bottom limit $\geq$ top limit  | $-0.3 \geq AVCC + 0.3$  |      |
| V <sub>IN_Dig</sub>    | Digital inputs: bottom limit $\geq$ top limit | $-0.3 \geq IOVCC + 0.3$ |      |
| I <sub>Dout</sub>      | Digital output current                        | -10 to 10               | mA   |
| T <sub>stg</sub>       | Storage temperature                           | -65 to 150              | °C   |
| R <sub>thjc</sub>      | Thermal resistance junction-to-case           | 22                      | °C/W |
| R <sub>thja</sub>      | Thermal resistance junction-to-ambient        | 60                      |      |
| ESD                    | HBM (human body model) <sup>(1)</sup>         | 2                       | kV   |
| I <sub>ESD diode</sub> | Continuous current in ESD diode               | 10                      | mA   |

1. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 kΩ resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.

**Table 11. Operating conditions (T<sub>amb</sub> from -55 °C to 125 °C)**

| Symbol           | Parameter   | Min           | Typ | Max   | Unit |
|------------------|---|---------------|-----|-------|------|
| AVCC             | Analog supply voltage   | 3             | 3.3 | 3.6   | V    |
| DVCC             | Digital supply voltage  | 3             | 3.3 | 3.6   |      |
| AVCC - DVCC      | Differential voltage  | -0.2          | 0   | 0.2   |      |
| IOVCC            | I/O supply voltage  | 1.6           |     | DVCC  |      |
| DVCC - IOVCC     | Differential voltage  | 0             |     | 2     |      |
| V <sub>ref</sub> | External reference voltage  | 1             | 1.2 | 1.4   |      |
| V <sub>IL</sub>  | Digital input voltage low level   | 0             |     | 0.4   |      |
| V <sub>IH</sub>  | Digital input voltage high level  | 0.8 x IOVCC   |     | IOVCC |      |
| V <sub>OLD</sub> | Digital output voltage low level with 1 mA sink current                                       | 0             |     | 0.4   |      |
| V <sub>OHD</sub> | Digital output voltage high level with 1 mA source current                                    | IOVCC - 0.4 V |     | IOVCC |      |
| I <sub>IHD</sub> | Digital internal pull-down current source (Vs. DGND), pins PDN, SCLK, SDIN, and MCLKI = IOVCC | 100           |     | 300   | μA   |
| I <sub>ILD</sub> | Digital internal pull-up current source (Vs. IOVCC), pins CS and ARSTN = DGND                 | -300          |     | -100  |      |
| Bw               | Bandwidth, C1 = 10 nF, C2 = 2.2 nF, C3 = 4.7 nF   |               | 3   |       | kHz  |
| MCLKI            | Internal master clock   | 2.4           | 3   | 3.6   | MHz  |
| MCLKE            | External master clock   | 2.4           | 3   | 3.6   |      |
| dt               | External master clock duty cycle  | 40            | 50  | 60    | %    |
| jt               | External master clock jitter, bench evaluation  |               |     | 100   | ps   |
| CL               | Capa-load guaranteed by design, stability, noise  | 100           |     | 200   | pF   |

## 6 Electrical characteristics

Unless otherwise specified, the test conditions in Table 12 are: AVCC = DVCC = 3 V to 3.6 V, IOVCC = 1.6 V to 3.6 V, Ext MCLKIN = 3.072 MHz, external  $V_{ref} = 1.2$  V, Cload = 100 pF,  $T_{amb} = -55$  °C to 125 °C.

**Table 12. Electrical characteristics**

| Symbol    | Parameter  | Test conditions                                    | Min   | Typ      | Max   | Unit    |
|-----------|--|--|-------|----------|-------|---------|
| IccA      | Current consumption on AVCC  | PDN = ARSTN = IOVCC                                |       | 4        | 4.7   | mA      |
| IccD      | Current consumption on DVCC internal clock <sup>(1)</sup>                    | PDN = ARSTN = IOVCC                                |       | 640      | 750   | uA      |
| IccIO     | Current consumption on IOVCC internal clock <sup>(2)</sup><br><sup>(3)</sup> | PDN = ARSTN = CS = IOVCC                           |       | 5        | 10    |         |
| IccStdbby | Total current consumption in standby mode                                    | PDN = 0.4 V, ARSTN = CS = IOVCC,<br>Ext MCLK = OFF |       | 100      | 200   |         |
| POR level | Internal power-on-reset, threshold levels                                    | VCC increasing                                     | 2.02  |          | 2.3   | V       |
|           |  | VCC decreasing                                     | 1.7   |          | 2     |         |
| RON1      | Between AVCC and VREFOUT   |  | 30    |          | 70    | Ω       |
| RON2      | Between AVCC and VREFBOOST   |  | 200   |          | 350   |         |
| RON3      | Between VREFBOOST and VREFIN   |  | 30    |          | 70    |         |
| LSB       | Lowest significant bit   | Vref = 1.2 V                                       |       | 36.6     |       | μV      |
| Vmax      | High output rail   |  |       | 2 x Vref |       | V       |
| Vmin      | Low output rail on 10 kΩ load connected to GND                               |  |       |          | 12    | mV      |
| LRsink    | Ouput load regulation with 100 μA output sink current                        | Vout = 1.2 V (middle code)                         |       | 20       | 150   | μV      |
|           |  |  |       | 0.54     | 4.1   | LSB     |
| LRsource  | Ouput load regulation with 1 mA output source current                        |  |       | 20       | 150   | μV      |
|           |  |  |       | 0.54     | 4.1   | LSB     |
| Ge        | Gain error   | Vref = 1.2 V                                       | -0.35 | -0.55    | -0.75 | %       |
| dGe/dT    | Gain error drift vs. temperature   | Vref = 1.2 V, average value                        |       | 2.4      |       | ppm/°C  |
|           |  | Vref = 1.2 V, standard deviation                   |       | 1.3      |       |         |
| Oe        | Offset error (after a calibration sequence) <sup>(4)</sup>                   | Vref = 1.2 V                                       | -150  |          | 150   | μV      |
|           |  |  | -4.1  |          | 4.1   | LSB     |
| dOe/dT    | Offset error drift vs. temperature, calibration at -55 °C and 125 °C         | Vref = 1.2 V, average value                        |       | 0.9      |       | μV/°C   |
|           |  | Vref = 1.2 V, standard deviation                   |       | 0.3      |       |         |
| INL       | Integral non-linearity (guaranteed by distortion measurement)                | Vref = 1.2 V, LSB = 36.6 μV                        | -4.5  | ±2.5     | +4.5  | LSB     |
| dINL/dT   | Linearity error drift vs. temperature  | Vref = 1.2 V, average value                        |       | 5.4      |       | mLSB/°C |
|           |  | Vref = 1.2 V, standard deviation                   |       | 0.8      |       |         |
| DNL       | Differential non-linearity   | Vref = 1.2 V, Ta = 25 °C                           |       | ± 0.3    |       | LSB     |
| N         | Noise level for Vref = 1.2 V and<br>BW = 0.1 Hz - 10 Hz                      | Ta = -55 °C  |       | 21       |       | μVrms   |
|           |  | Ta = 25 °C   |       | 15       |       |         |
|           |  | Ta = 125 °C  |       | 13       |       |         |
|           | Noise level for Vref = 1.2 V and<br>BW = 10 Hz - 3 kHz                       | Ta = -55 °C  |       | 12       |       |         |
|           |  | Ta = 25 °C   |       | 16       | 19    |         |
|           |  | Ta = 125 °C  |       | 24       |       |         |

| Symbol                 | Parameter   | Test conditions   | Min  | Typ       | Max   | Unit   |
|------------------------|---|---|------|-----------|-------|--------|
| $e_n$                  | Spectral noise density at 1 kHz and $V_{ref} = 1.2\text{ V}$          | $T_a = -55\text{ }^{\circ}\text{C}$                                       |      | 215       |       | nV/√Hz |
|                        |   | $T_a = 25\text{ }^{\circ}\text{C}$  |      | 260       | 345   |        |
|                        |   | $T_a = 125\text{ }^{\circ}\text{C}$                                       |      | 370       |       |        |
| SNR                    | Output signal to noise ratio  |   | 93   | 96        |       | dB     |
| SFDR                   | Spurious free dynamic range   | $V_{ref} = 1.2\text{ V}$ , BW = 10 Hz - 3 kHz, sine at 64 Hz and -1 dBFS, | 89.5 |           |       | dBc    |
| THD                    | H2  | $T_a = 25\text{ }^{\circ}\text{C}$  |      |           | -89.5 |        |
|                        | H3  |   |      |           | -100  |        |
| St                     | Settling time at 0.1 % on 100 pF load                                 | BW = 3 kHz, $T_a = 25\text{ }^{\circ}\text{C}$                            |      | 0.8       |       | ms     |
| SYNC OUT freq.         | Master clock divided by OSR (OSR = 256)                               | Internal MCLK   | 9.6  | 12        | 14.4  | kHz    |
|                        |   | External MCLK   | 9.6  | 12        | 14.4  |        |
| SYNC OUT pulse         | SYNC OUT pulse duration, $t_{pulse} = 8/\text{MCLKx}$                 | Internal MCLK   | 2.2  | 2.66      | 3.32  | μs     |
|                        |   | External MCLK   | 2.2  | 2.66      | 3.32  |        |
| Sample rate            | DAC sample rate (MCLK/256)  | Internal MCLK   | 9.6  | 12        | 14.4  | ksps   |
|                        |   | External MCLK   | 9.6  | 12        | 14.5  |        |
| Iref                   | Input reference current   | $V_{ref} = 1\text{ V to }1.4\text{ V}$                                    |      |           | 1     | μA     |
| PSRR                   | Power supply rejection ratio  | 100 Hz/200 mVpp ripple  |      | 80        |       | dB     |
| TWU <sup>(5) (6)</sup> | Wakeup time (during TWU, the DAC cannot be used) <sup>(7)</sup>       |   | 230  | 310       | 440   | ms     |
| CALT                   | Calibration time (during CALT, the DAC cannot be used) <sup>(8)</sup> |   |      | 20        | 40    |        |
| Vwu                    | Wakeup output voltage   | During TWU  |      | $V_{ref}$ |       |        |

1. In case of external master clock,  $I_{ccD}$  is divided by 2
2. In case of external master clock, add 20 μA to 30 μA to  $I_{ccIO}$
3. If PDN connected to IOVCC pin, add  $I_{IH}$  current
4. Due to internal ADC LSB value calibration sequencer, after each calibration a difference of about 20 to 30 μV can be observed.
5. Settling time of analog output filter is not taken into account
6. Post irradiation test measurement is not performed, however this parametric limits are guaranteed by characterization
7. Add CALT time for the total TWU.
8. Tested during offset error test by applying a calibration time lower than the maximum time specified.

Unless otherwise specified, the test conditions in Table 2 are: AVCC = DVCC = 3 V to 3.6 V, IOVCC = 1.6 V to 3.6 V,  $T_{amb} = -55\text{ }^{\circ}\text{C}$  to  $125\text{ }^{\circ}\text{C}$ . Conditions are guaranteed by design, correlation, and pattern tests.

**Table 13. Timing characteristics**


| Symbol            | Parameter  | Min | Max       | Unit |
|-------------------|--|-----|-----------|------|
| t1 <sup>(1)</sup> | Internal POR high level to ARSTN high level threshold                          | 100 |           | μs   |
| t2 <sup>(2)</sup> | ARTN high level threshold to PDN high level threshold                          | 50  |           | ns   |
| t3 <sup>(2)</sup> | PDN high level threshold to CS low level threshold                             | 1   |           | ms   |
| t4 <sup>(2)</sup> | PDN high level threshold to stable output voltage without any SPI commands     | 230 | 480       | ms   |
| t5 <sup>(1)</sup> | CS high level threshold to effective output voltage change                     |     | 5500/MCLK | s    |
| t6 <sup>(1)</sup> | PDN low level threshold to effective HiZ output                                |     | 5         | ms   |
| t7 <sup>(1)</sup> | Internal POR low level to effective HiZ output (to do with PDN falling before) |     | 5         |      |





| Symbol                | Parameter  | Min             | Max   | Unit |
|-----------------------|--|-----------------|-------|------|
| t8 <sup>(3) (1)</sup> | PDN high level threshold to effective SYNC OUT signal ON |                 | 490   | ms   |
| t9 <sup>(3) (1)</sup> | PDN low level threshold to effective SYNC OUT signal OFF |                 | 10    |      |
| t10 <sup>(1)</sup>    | ARSTN low level threshold to SYNC OUT signal OFF         |                 | 100   | μs   |
| t11 <sup>(1)</sup>    | PDN high level threshold to first calibration sequence   | t4 max + 100 μs |       | ms   |
| t12 <sup>(1)</sup>    | MCLK OFF before PDN high level threshold                 |                 | 500   | μs   |
| t13 <sup>(1)</sup>    | MCLK ON after PDN low level threshold                    | 500             |       |      |
| t14 <sup>(1)</sup>    | PDN pulse width low                                      | 20              |       | ms   |
| t15 <sup>(1)</sup>    | ARSTN pulse width low                                    | 1               |       |      |
| t16 <sup>(2)</sup>    | CS low level threshold to rising egde of SCLK            | 1               |       | ns   |
| t17 <sup>(2)</sup>    | Data setup time  | 25              |       | ns   |
| t18 <sup>(2)</sup>    | Data hold time   | 25              |       |      |
| t19 <sup>(2)</sup>    | SCLK period  | 125             |       |      |
| t20 <sup>(2)</sup>    | SCLK low time  | 50              |       |      |
| t21 <sup>(2)</sup>    | SCLK high time   | 50              |       |      |
| t22 <sup>(1)</sup>    | SCLK rising edge to CS high level threshold              | 65              |       | ns   |
| t23 <sup>(1)</sup>    | Minimum CS time at high level                            | 125             |       |      |
| t24 <sup>(2)</sup>    | SDOUT setup time from SCLK falling edge                  |                 | 20    | ns   |
| t25 <sup>(2)</sup>    | SDOUT hold time from SCLK falling edge                   | 7               |       |      |
| t26 <sup>(2)</sup>    | VCCA, DVCC, IOVCC positive slew rate                     | 300             | 0.003 | V/ms |
| t27 <sup>(1)</sup>    | Delay between POR high level to AVCC min. value          |                 | 100   | ms   |
| t28 <sup>(1)</sup>    | Delay between AVCC min., value to IOVCC min. value       |                 | 100   |      |
| t29 <sup>(2)</sup>    | VCCA, DVCC, IOVCC negative slew rate                     | 300             | 0.003 | V/ms |
| t30 <sup>(1)</sup>    | Delay between POR low level to DVCC = 0.5 V              |                 | 100   | ms   |
| t31 <sup>(1)</sup>    | Delay between POR low level to IOVCC = 0.5 V             |                 | 100   |      |

1. *Guaranteed by characterization.*
2. *Guaranteed by functional test.*
3. *See [Section 4.1.1: SPI frame format](#)*


**Figure 22. DAC timing diagram 1**

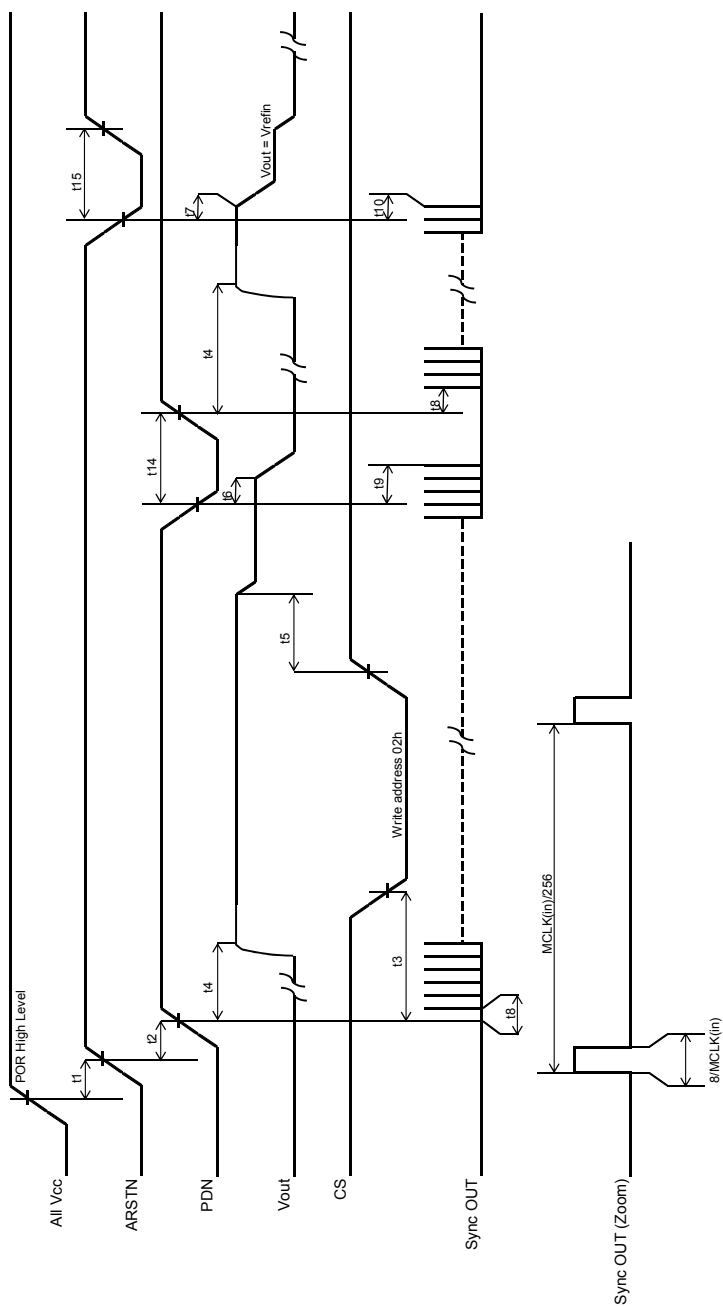

**Figure 23. DAC timing diagram 2**

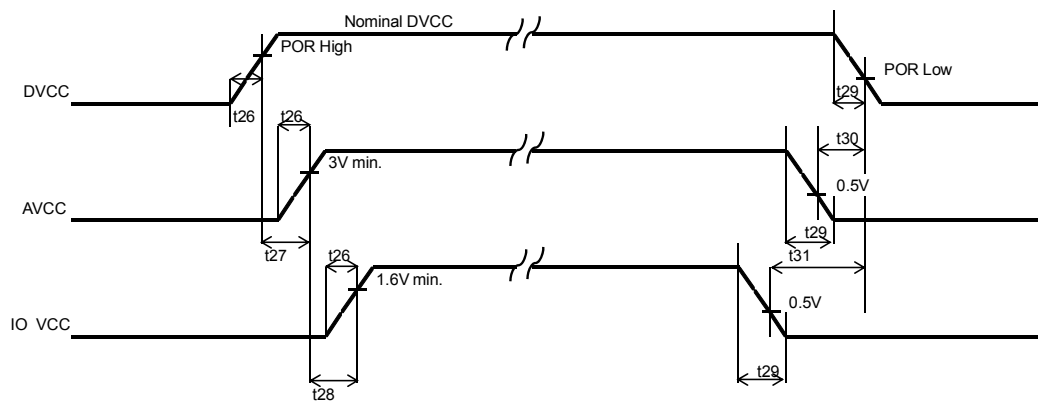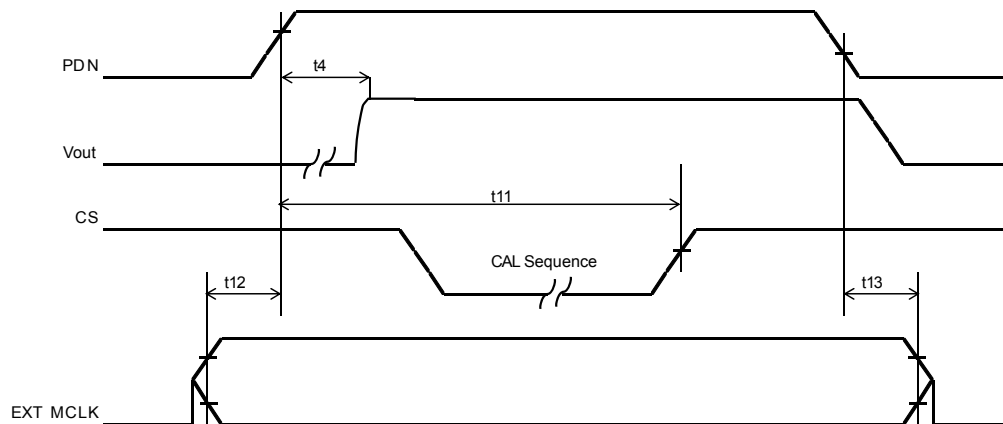


**Figure 24. DAC timing diagram 3**

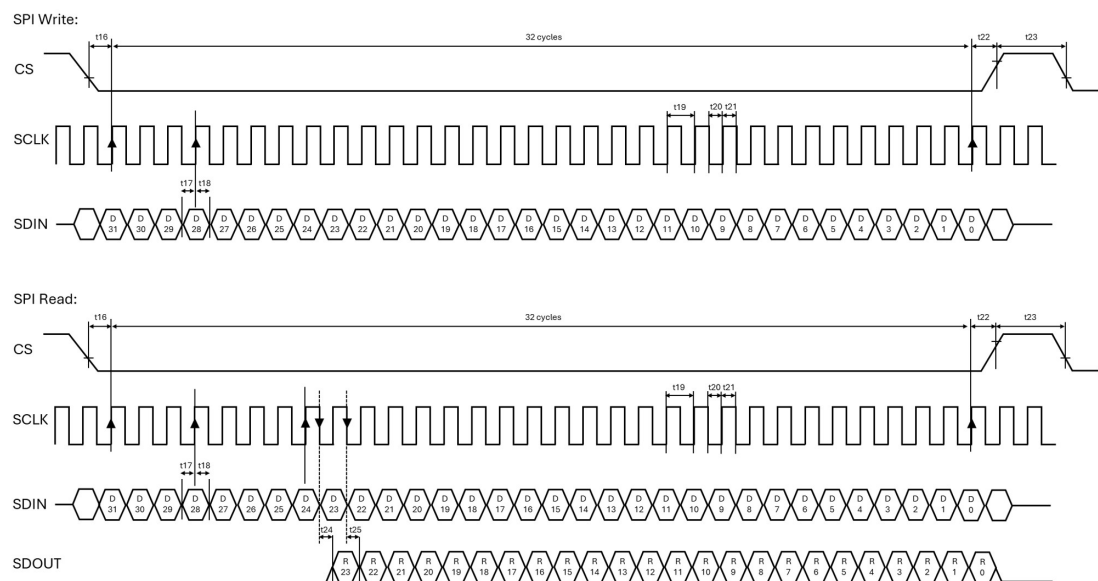


## 7 Electrical characteristic curves


**Figure 25. INL vs. input code, internal master clock, AVCC = 3.3 V**

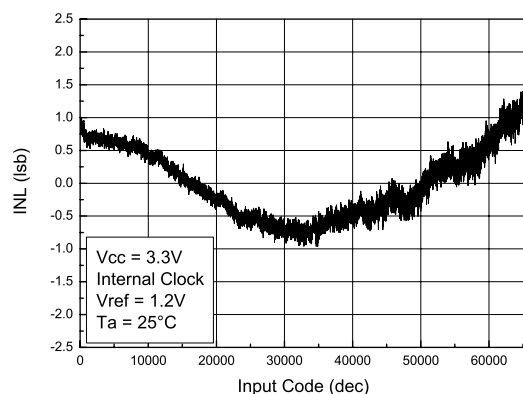


**Figure 26. DNL vs. input code, internal master clock, AVCC = 3.3 V**

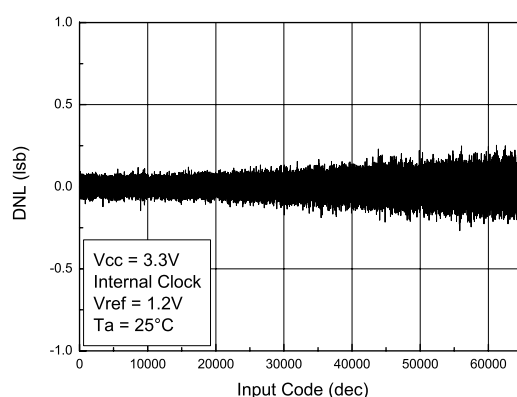


**Figure 27. INL vs. input code, external master clock, AVCC = 3.3 V**

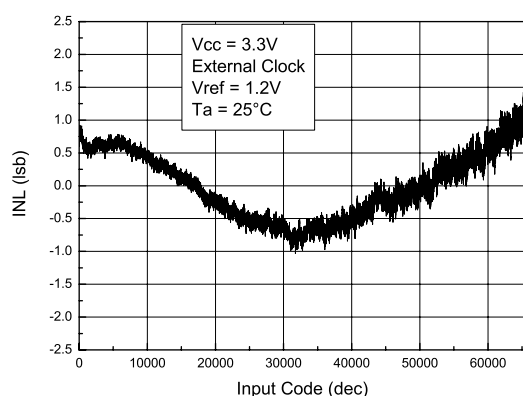


**Figure 28. DNL vs. input code, external master clock, AVCC = 3.3 V**






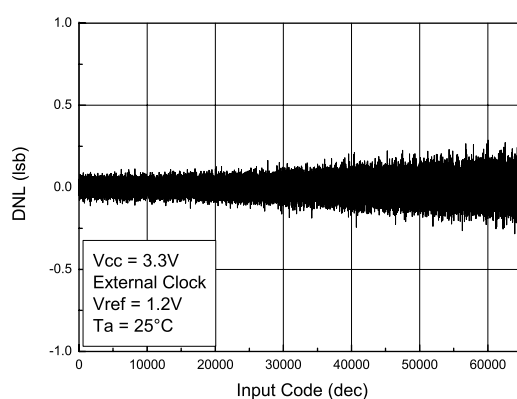


**Figure 29. INL vs. input code, internal master clock, AVCC = 3 V**

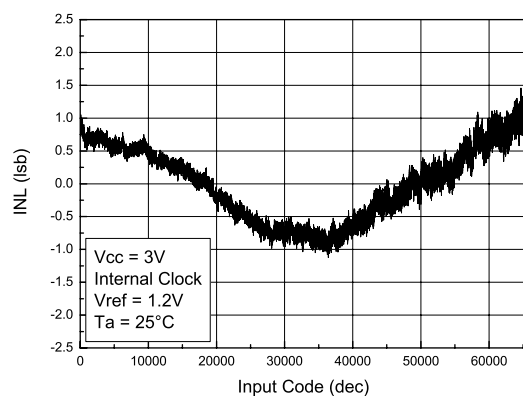


**Figure 30. DNL vs. input code, internal master clock, AVCC = 3 V**

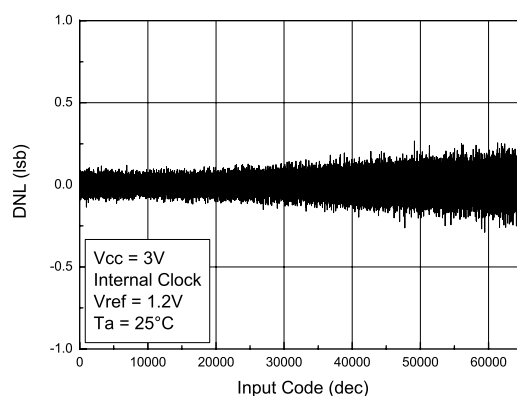


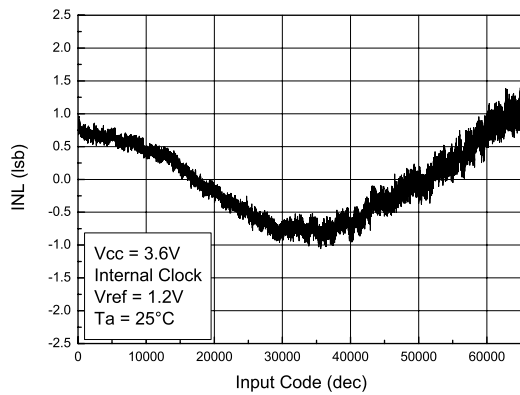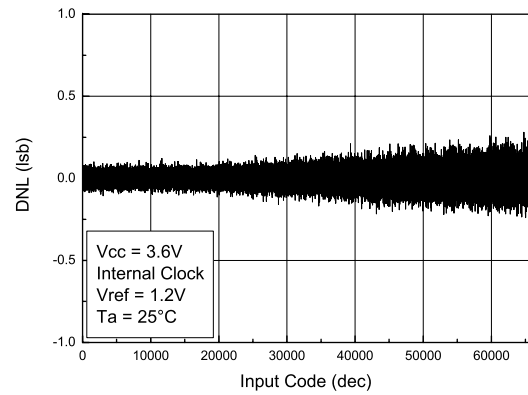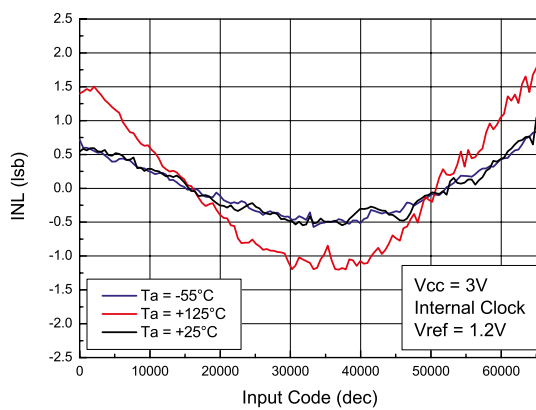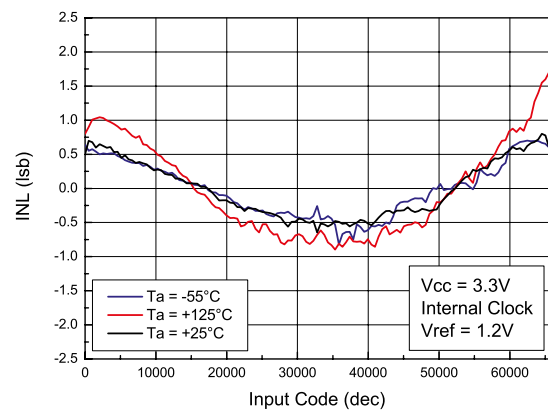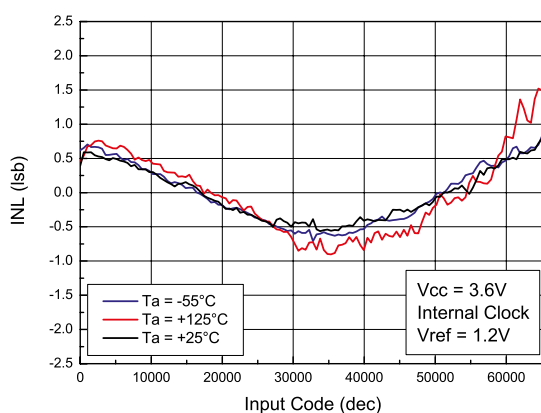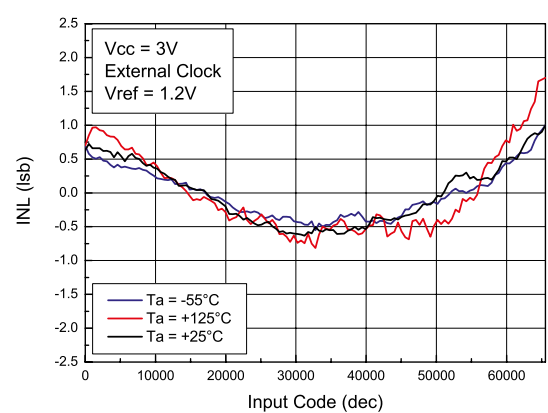**Figure 31. INL vs. input code, internal master clock, AVCC = 3.6 V**

**Figure 32. DNL vs. input code, internal master clock, AVCC = 3.6 V**

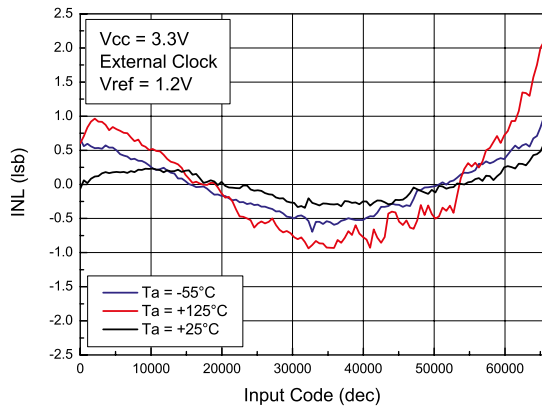**Figure 33. INL vs. input code vs. temperature, internal master clock, AVCC = 3 V**

**Figure 34. INL vs. input code vs. temperature, internal master clock, AVCC = 3.3 V**

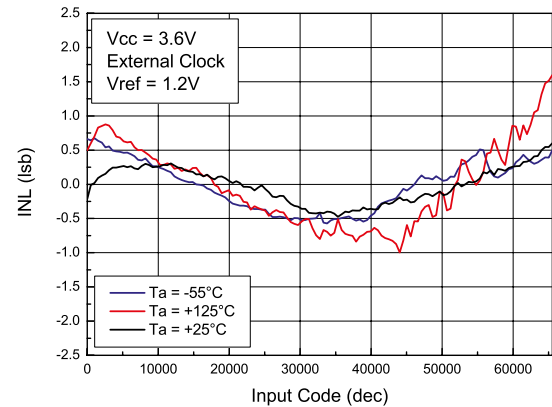**Figure 35. INL vs. input code vs. temperature, internal master clock, AVCC = 3.6 V**

**Figure 36. INL vs. input code vs. temperature, external master clock, AVCC = 3 V**


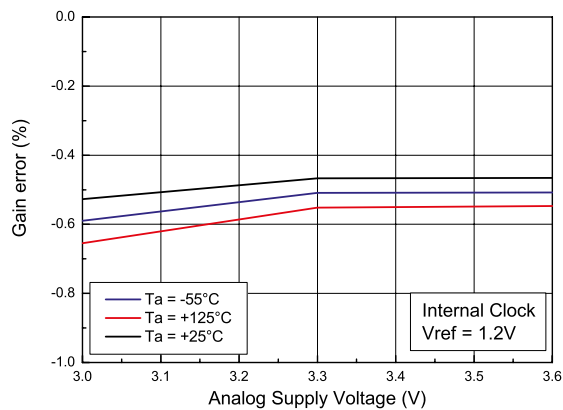
**Figure 37. INL vs. input code vs. temperature, external master clock, AVCC = 3.3 V**




**Figure 38. INL vs. input code vs. temperature, external master clock, AVCC = 3.6 V**




**Figure 39. Gain error vs. AVCC vs. temperature, internal master clock**




**Figure 40. Gain error vs. AVCC vs. temperature, external master clock**






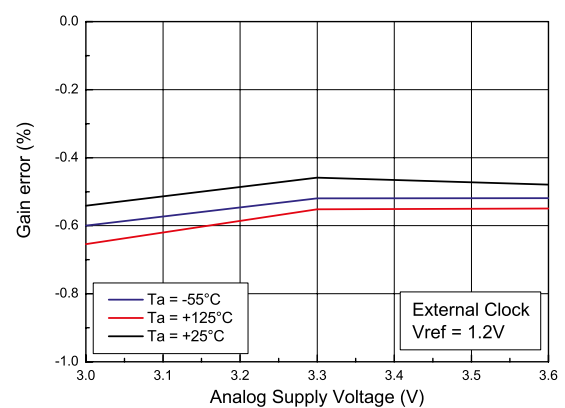


**Figure 41. Spectral noise density vs. temperature**

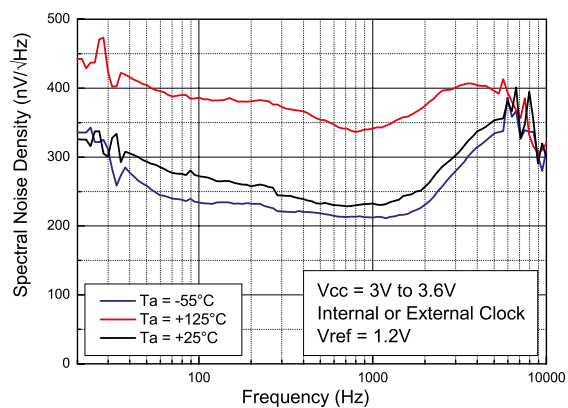


**Figure 42. Signal to noise ratio vs. temperature**

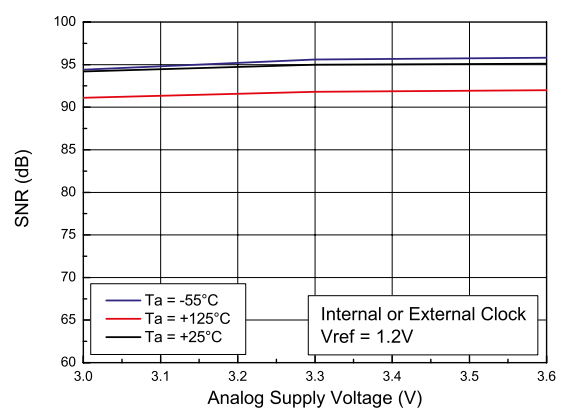

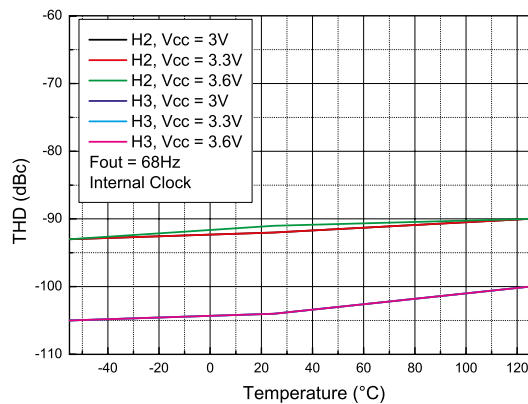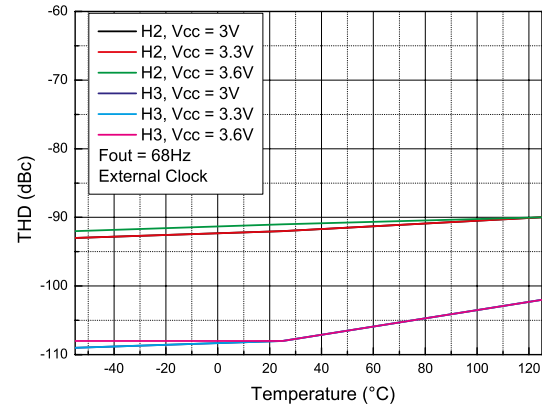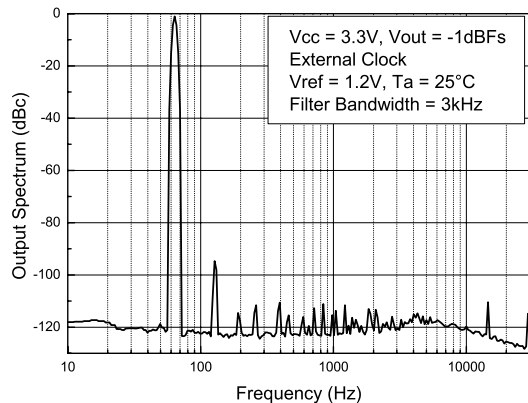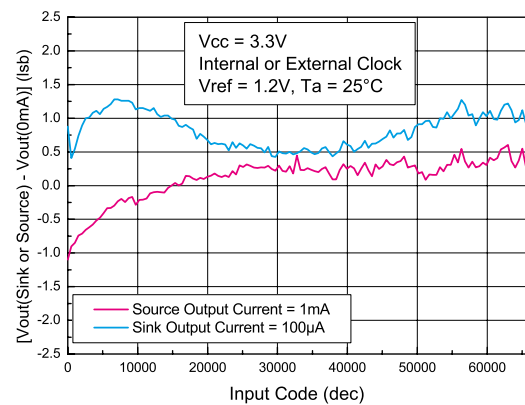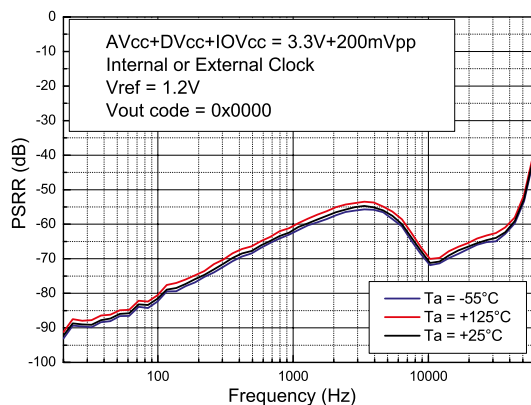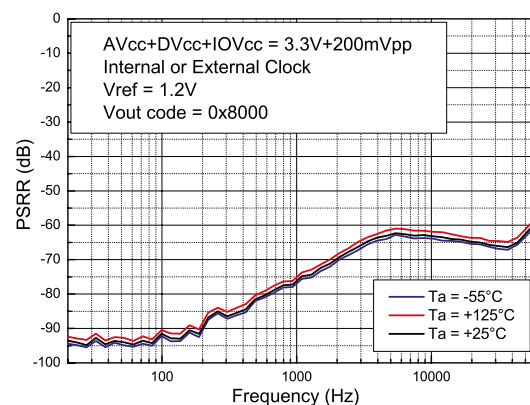**Figure 43. Distortion vs. AVCC vs. temperature, internal master clock**

**Figure 44. Distortion vs. AVCC vs. temperature, external master clock**

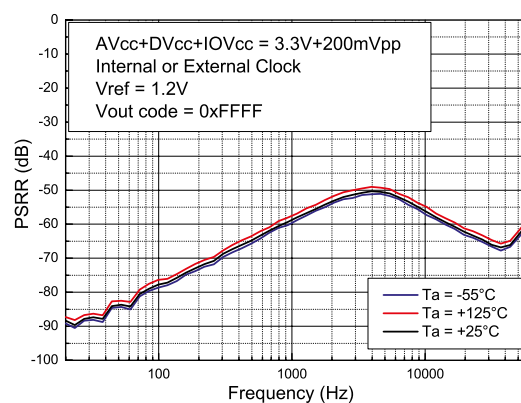**Figure 45. Voltage spectrum vs. frequency, external master clock**

**Figure 46. Load regulation vs. input code**

**Figure 47. PSRR vs. frequency vs. temperature, lower code input**

**Figure 48. PSRR vs. frequency vs. temperature, middle code input**


**Figure 49. PSRR vs. frequency vs. temperature, higher code input**





---


## 8 Package information

---

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

## 8.1 Ceramic Flat-24 package information

**Figure 50. Ceramic Flat-24 package outline**

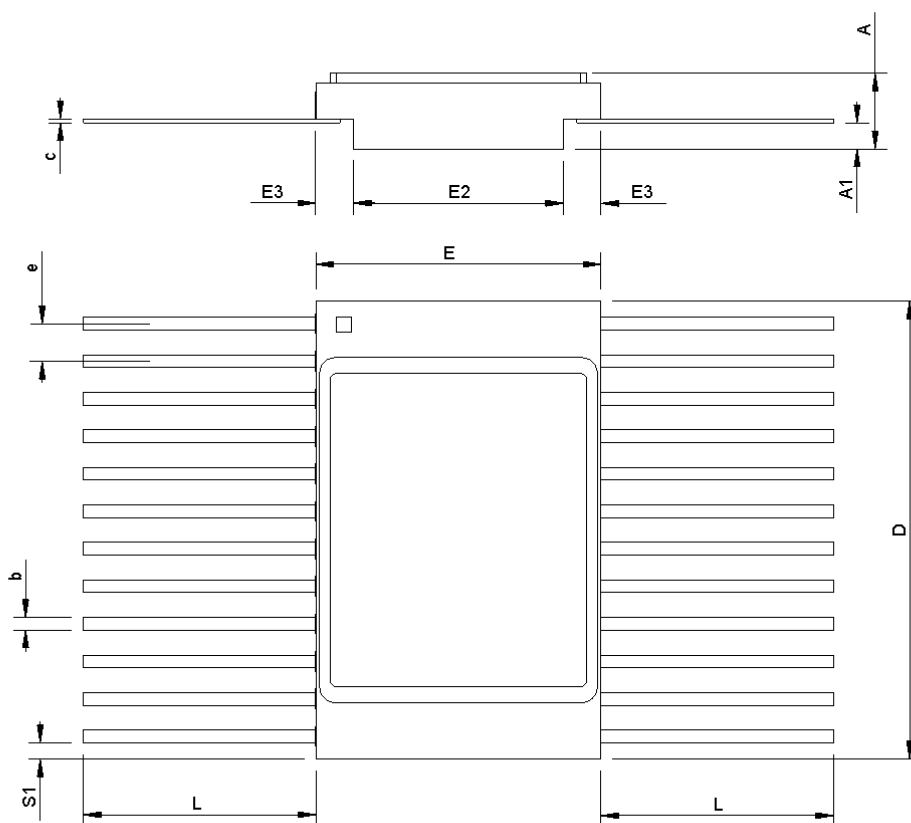

1. The upper metallic lid is internally connected to pin number 8 (DGND)

**Table 14. Ceramic Flat-24 mechanical data**

| Ref. | Dimensions  |       |       |        |       |       |
|------|-------------|-------|-------|--------|-------|-------|
|      | Millimeters |       |       | Inches |       |       |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| A    | 2.31        | 2.54  | 2.77  | 0.091  | 0.100 | 0.109 |
| A1   | 0.66        |       | 1.14  | 0.026  |       | 0.045 |
| b    | 0.38        | 0.33  | 0.48  | 0.015  | 0.013 | 0.019 |
| c    | 0.1         | 0.125 | 0.15  | 0.004  | 0.005 | 0.006 |
| D    | 15.34       | 15.49 | 15.64 | 0.604  | 0.610 | 0.616 |
| E    | 9.52        |       | 9.78  | 0.375  |       | 0.385 |
| E2   | 6.96        |       | 7.26  | 0.274  |       | 0.286 |
| E3   |             | 1.27  |       |        | 0.050 |       |
| e    |             | 1.27  |       |        | 0.050 |       |
| L    | 6.35        |       | 9.4   | 0.25   |       | 0.37  |
| S1   |             | 0.13  |       |        | 0.005 |       |

## 9 Ordering information

**Table 15. Order codes**

| Order code     | SMD <sup>(1)</sup> | Quality Level     | Mass   | Package                   | Lead-finish | Marking <sup>(2)</sup> | Packing               |
|----------------|--------------------|-------------------|--------|---------------------------|-------------|------------------------|-----------------------|
| RH-DAC1612K1   | -                  | Engineering model | 1.25 g | Flat-16 with grounded lid | Gold        | RH-DAC1612K1           | Conductive Strip pack |
| RHRDAC1612K01V | 5962R16211         | QML-V Flight      |        |                           | Gold        | 5962R1621101VXC        |                       |
| RHRDAC1612K02V |                    |                   |        |                           | Solder Dip  | 5962R1621101VXA        |                       |

1. Standard microcircuit drawing.
2. Specific marking only. Complete marking includes the following:
  - ST logo
  - Date code (date the package was sealed) in YYWWA (year, week, and lot index of week)
  - Country of origin (FR = France)

**Note:** Contact your ST sales office for information about the specific conditions for products in die form.

---

## 10 Shipping information

---

### **Date code**

The date code is structured as follows:

x = 3 (EM only), assembly location Rennes (France)

yy = last two digits of the year

ww = week digits

z = lot index of the week

Engineering model: EM xyywwz

QML flight model: FM yyywwz

### **Product documentation**

Each product shipment includes a set of associated documentation within the shipment box. This documentation depends on the quality level of the products, as detailed in [Table 16](#) below.

The Certificate of Conformance is provided on paper whatever the quality level. For QML parts, complete documentation, including the Certificate of Conformance, is provided on a CDROM.

**Table 16. Product documentation**

| Quality level     | Item <sup>(1)</sup>   |
|-------------------|---|
| Engineering Model | Certificate of Conformance including:<br>Customer name<br>Customer Purchase Order number<br>ST Sales Order number & Item<br>ST Part Number<br>Quantity delivered<br>Date Code<br>Reference to ST datasheet<br>Reference to TN1181 on Engineering Models<br>ST Rennes assembly lot ID  |
| QML-V Flight      | Certificate of Conformance including:<br>Customer name<br>Customer Purchase Order number<br>ST Sales Order number & Item<br>ST Part Number<br>Quantity delivered<br>Date Code<br>Serial numbers<br>Group C reference<br>Group D reference<br>Reference to the applicable SMD<br>ST Rennes assembly lot ID<br>Quality Control Inspection (groups A, B, C, D, E)<br>Screening electrical data in/out summary<br>Precap report<br>PIND test <sup>(2)</sup><br>SEM inspection report <sup>(3)</sup><br>X-Ray plates |

1. Contact ST for details on the documentation of other quality levels.

2. PIND : Particle Impact Noise Detection.

3. SEM : Scanning Electronic Microscope.

## Revision history

**Table 17. Document revision history**

| Date        | Revision | Changes   |
|-------------|----------|---|
| 07-Mar-2017 | 1        | Initial release   |
| 20-Jul-2017 | 2        | Added QML-V Flight Model references. Minor changes throughout the document.   |
| 14-Nov-2024 | 3        | Updated package figure on the cover page, t22, t23, t24 and t25 values in Section 6, in Figure 24 modified t24 and t25 (from SCLK falling edge).<br>Added new Section 10: Shipping information. |
| 02-Dec-2024 | 4        | Updated t24, t25 parameter in Table 13 and Figure 24.   |
| 23-Jan-2025 | 5        | Updated figure in cover page, <a href="#">Section 4.1.3</a> , <a href="#">Figure 7</a> , <a href="#">Figure 8</a> and <a href="#">Figure 24</a> .   |

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved