


Precision Thin Film Chip Resistors

PFC Series

- Standard 60/40 Sn/Pb and Pb-free (RoHS compliant) terminations available
- Available in 0402, 0603, 0805, 1206, 1505, 2010 and 2512 chip sizes
- Tested for COTS applications
- Absolute TCR to $\pm 10 \text{ ppm}/^\circ\text{C}$
- MIL screening available

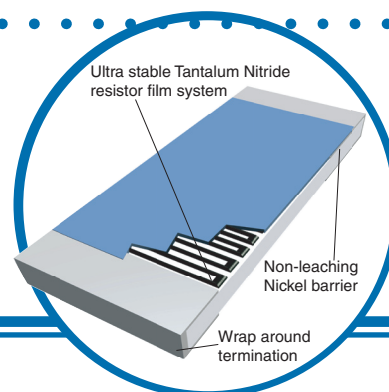

The IRC TaNFilm® PFC chip resistor series provides the high precision and ultra stable performance of our Tantalum Nitride resistive film system in 0402, 0603, 0805, 1206, 1505, 2010 and 2512 sizes. The unique characteristics of the passivated Tantalum Nitride film insure long term life stability and stability in most environments.

Using the same manufacturing line as the PFC Military Series, IRC's precision chips maintain the same superior environmental performance. Specially selected materials and processes insure initial precision is maintained in the harshest surface mount soldering environment. Wrap-around terminations with leach-resistant nickel barriers insure high integrity solder connections.

Electrical Data

Model	Power Rating (70°C)	Max Voltage Rating ($\leq \sqrt{P \times R}$)	Temperature Range	ESD Sensitivity	Noise	Termination	Substrate
W0402	50mW	75V	-55°C to +150°C	2KV to 4KV (HBM)	<-25dB	60/40 Sn/Pb or 100% tin (RoHS compliant) plated over nickel barrier	99.5% Alumina
W0603	100mW	75V					
W0805	250mW	100V					
W1206	333mW	200V					
W1505	350mW	100V					
W2010	800mW	175V					
W2512	1.0W	200V					

General Note

IRC reserves the right to make changes in product specification without notice or liability.
All information is subject to IRC's own data and is considered accurate at time of going to print.

Precision Thin Film Chip Resistors

Manufacturing Capabilities Data

W0402	±5%, ±2%, ±1%, ±0.5%, ±0.1%					Tolerance
	50Ω					30KΩ Resistance Range
	±25, ±50 or ±100 ppm/°C					TCR

W0603 W0805 W1206	$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%, \pm 0.1\%, \pm 0.05\%, \pm 0.02\%$								Tolerance
	$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%, \pm 0.1\%, \pm 0.05\%$								
	$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%, \pm 0.1\%$								
	5Ω	10Ω	50Ω	100Ω	200Ω	50KΩ	75KΩ	100KΩ	Resistance Range
	5Ω	10Ω	50Ω	100Ω	200Ω	100KΩ	180KΩ	267KΩ	
	5Ω	10Ω	50Ω	100Ω	200Ω	400KΩ	650KΩ	1.0MΩ	
± 50 or ± 100 ppm/°C								TCR	
± 25 ppm/°C									
± 15 ppm/°C									
± 10 ppm/°C									


$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%, \pm 0.1\%, \pm 0.05\%, \pm 0.02\%$							Tolerance	
$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%, \pm 0.1\%$								
$\pm 5\%, \pm 2\%, \pm 1\%, \pm 0.5\%$								
W1505	5Ω	10Ω	50Ω		400KΩ	650KΩ	1.0MΩ	Resistance Range
W2010	5Ω	10Ω	50Ω		400KΩ	650KΩ	1.0MΩ	
W2512	5Ω	10Ω	50Ω		400KΩ	650KΩ	1.0MΩ	
± 50 or ± 100 ppm/°C							TCR	
± 25 ppm/°C								

Precision Thin Film Chip Resistors

Environmental Data


Environmental Test MIL-PRF-55342	Maximum ΔR per Characteristic E	Performance	
		Typical	Maximum
Thermal Shock	$\pm 0.10\%$	$\pm 0.02\%$	$\pm 0.10\%$
Low Temperature Operation	$\pm 0.10\%$	$\pm 0.01\%$	$\pm 0.05\%$
Short Time Overload	$\pm 0.10\%$	$\pm 0.01\%$	$\pm 0.05\%$
High Temperature Exposure	$\pm 0.10\%$	$\pm 0.03\%$	$\pm 0.10\%$
Effects of Solder	$\pm 0.20\%$	$\pm 0.01\%$	$\pm 0.10\%$
Moisture Resistance	$\pm 0.20\%$	$\pm 0.03\%$	$\pm 0.10\%$
Life	$\pm 0.50\%$	$\pm 0.03\%$	$\pm 0.10\%$

Power Derating Curve

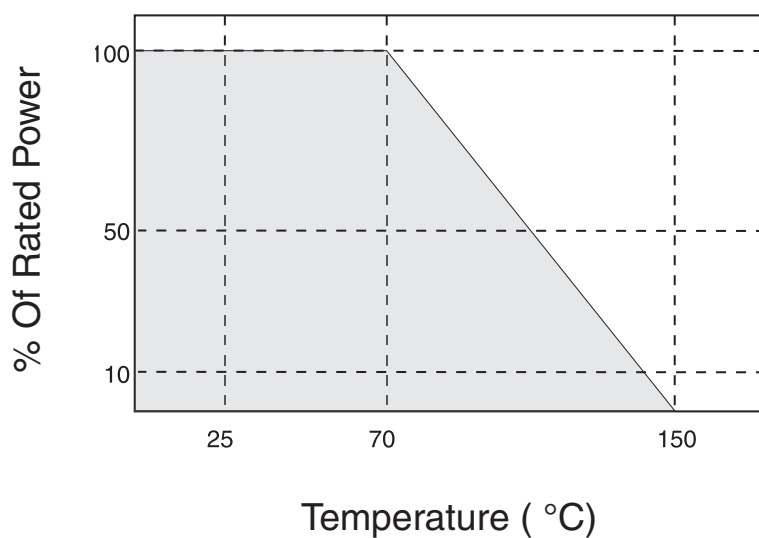

Precision Thin Film Chip Resistors

Physical Data

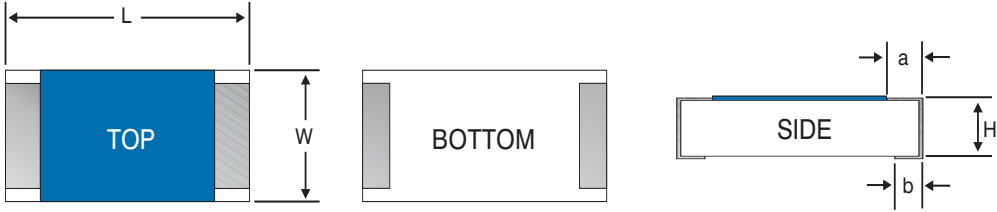

Model	L	W	H	a	b
W0402	0.040" ±0.002	0.021" ±0.002	0.012" ±0.003	0.008" ±0.002	0.010" ±0.002
W0603	0.063" ±0.004	0.031" ±0.004	0.020" ±0.004	0.012" ±0.005	0.015" ±0.005
W0805	0.081" ±0.005	0.050" ±0.005	0.020" ±0.006	0.015" ±0.008	0.016" ±0.008
W1206	0.126" ±0.006	0.063" ±0.005	0.024" ±0.004	0.025" ±0.010	0.025" ±0.010
W1505	0.155" ±0.007	0.050" ±0.005	0.024" ±0.004	0.020" ±0.010	0.020" ±0.010
W2010	0.203" ±0.007	0.103" ±0.005	0.024" ±0.004	0.020" ±0.008	0.020" ±0.008
W2512	0.255" ±0.007	0.124" ±0.005	0.024" ±0.004	0.020" ±0.008	0.020" ±0.008

MIL Screened Precision Chip Resistors

IRC's PFC chip resistors are available with MIL screening. These chips are manufactured on the same production line as our Mil-qualified chip resistors and screened in accordance with MIL-PRF-55342.

These chips are identified with IRC's ordering information and not with MIL marking.

Commercial Ordering Data

Prefix	PFC	W1206	R	01	1001	B
Model	W0402; 0603; W0805; W1206 W1505; W2010; W2512					
Termination	R = 60/40 Sn/Pb plated solder LF = 100% tin plated (Pb-free)					
TCR Code	01 = ±100ppm/°C; 02 = ±50ppm/°C; 03 = ±25ppm/°C 11 = ±15ppm/°C; 12 = ±10ppm/°C					
Resistance Code	4-Digit resistance code. Ex: 10R0 = 10Ω; 1000 = 100Ω 1001 = 1000Ω; 1002 = 10KΩ					
Tolerance Code	J = ±5%; G = ±2%; F = ±1%; D = ±0.5% B = ±0.1%; A = ±0.05%; Q = ±0.02%					

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

Mil Screened Ordering Data*

Prefix	PFC	W1206	R	04	1001	B
Model	W0402; W0603; W0805; W1206 W1505; W2010; W2512					
Termination	R = 60/40 Sn/Pb plated solder					
MIL-Screened TCR Code	04 = ±300ppm/°C; 05 = ±100ppm/°C; 06 = ±50ppm/°C 07 = ±25ppm/°C; 14 = ±20ppm/°C; 15 = ±15ppm/°C 16 = ±10ppm/°C					
Resistance Code	4-Digit resistance code. Ex: 10R0 = 10Ω; 1000 = 100Ω 1001 = 1000Ω; 1002 = 10KΩ					
Tolerance Code	J = ±5%; G = ±2%; F = ±1%; D = ±0.5% B = ±0.1%; A = ±0.05%; Q = ±0.02%					

*Please refer to our MIL-Chip Series datasheet to order parts qualified to MIL-PRF-55342.