


The metal housing also provides heat-sinking capabilities.

- High Stability: $\pm 0.5\%$ ΔR .
- High power to size ratio.
- Metal housing allows chassis mounting and provides heat sink capability.

**As of September 2006,
the 89 Series is no longer
offered as Mil. Spec.**

5W and 10W rating, 1000 VAC;
25 and 50W ratings, 2250 VAC.

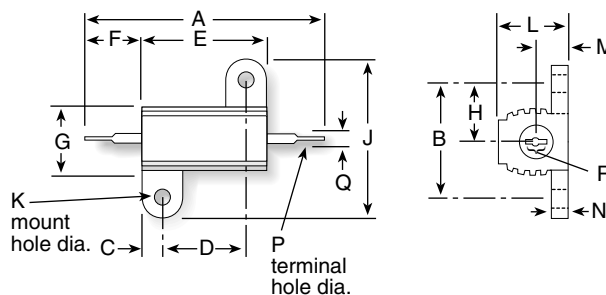

Non-Inductive versions available. Insert "N" before tolerance code. Example: 850NF560

	5 watt	10 watt	25 watt	50 watt
Series (Industrial)	805	810	825	850
Dimensions				
Dim. A (in. ± 0.062 / mm ± 1.57)	1.125 / 28.59	1.375 / 34.93	1.938 / 49.23	2.781 / 70.64
Dim. B (in. ± 0.010 / mm ± 0.25)	0.490 / 12.45	0.625 / 15.88	0.781 / 19.84	0.844 / 21.44
Dim. C (in. ± 0.031 / mm ± 0.79)	0.078 / 1.98	0.094 / 2.39	0.172 / 4.37	0.188 / 4.78
Dim. D (in. ± 0.010 / mm ± 0.25)	0.444 / 11.28	0.562 / 14.28	0.719 / 18.26	1.562 / 39.68
Dim. E (in. ± 0.062 / mm ± 1.57)	0.600 / 15.24	0.750 / 19.05	1.062 / 26.98	1.938 / 49.23
Dim. F (in. ± 0.062 / mm ± 1.57)	0.266 / 6.76	0.312 / 7.93	0.438 / 11.13	0.438 / 11.13
Dim. G (in. ± 0.062 / mm ± 1.57)	0.334 / 8.48	0.438 / 11.13	0.531 / 13.49	0.594 / 15.09
Dim. H (in. ± 0.031 / mm ± 0.79)	0.245 / 6.22	0.312 / 7.93	0.391 / 9.93	0.422 / 10.72
Dim. J (in. ± 0.031 / mm ± 0.79)	0.646 / 16.41	0.812 / 20.63	1.094 / 27.79	1.156 / 29.36
Dim. K (in. ± 0.005 / mm ± 0.13)	0.093 / 2.36	0.094 / 2.39	0.125 / 3.18	0.125 / 3.18
Dim. L (in. ± 0.031 / mm ± 0.79)	0.320 / 8.13	0.406 / 10.31	0.562 / 14.28	0.625 / 15.88
Dim. M (in. ± 0.062 / mm ± 1.57)	0.133 / 3.38	0.203 / 5.16	0.281 / 7.14	0.312 / 7.92
Dim. N (in. ± 0.031 / mm ± 0.79)	0.065 / 1.65	0.094 / 2.39	0.094 / 2.39	0.094 / 2.39
Dim. P (in. ± 0.005 / mm ± 0.13)	0.050 / 1.27	0.085 / 2.16	0.085 / 2.16	0.085 / 2.16
Q min AWG	16	12	12	12
Dim. R (in., min/mm, min)	0.085/ 2.16	0.140/ 3.56	0.140/ 3.56	0.140/ 3.56

Non-Inductive Winding —
Optional (blank = std. winding)

805NF5R0E

Series	Tolerance	Ohms	RoHS Compliant
805 = 5 Watt	F = 1%	R005 = 0.005Ω	
810 = 10 watt	J = 5%	R10 = 0.1Ω	
825 = 25 watt		1R0 = 1.0Ω	
850 = 50 watt		250 = 250Ω	
		1K0 = 1,000Ω	
		1K5 = 1,500Ω	
		25K = 25,000Ω	

Wattage					Wattage					Wattage							
Ohmic value	Part No. Prefix ▶ Suffix ▼	5	10	25	50	Ohmic value	Part No. Prefix ▶ Suffix ▼	5	10	25	50	Ohmic value	Part No. Prefix ▶ Suffix ▼	5	10	25	50
0.005	R005		✓	✓		20	—20R	✓	✓			1,500	—1K5	✓	✖	✖	✓
0.010	R010		✓	✓		25	—25R	✓	✓			2,000	—2K0	✓	✓	✖	✖
0.025	R025		✓	✓		30	—30R	✖	✖			2,500	—2K5	✓	✓		
0.1	R10		✓	✓		40	—40R	✖	✓	✓		3,000	—3K0	✖	✓	✓	✖
0.3	R30		✓	✖		50	—50R	✓	✓	✓		3,500	—3K5	✖	✖		
0.5	R50		✓	✖		75	—75R	✓	✖	✓		4,000	—4K0	✓	✓		
0.7	R70		✖	✖		100	—100	✓	✓	✓		4,500	—4K5	✖	✖		
1.0	1R0	✓	✓		✓	150	—150	✓	✓	✓		5,000	—5K0	✖		✓	✓
1.5	1R5	✖	✓			200	—200	✖	✖	✓		6,000	—6K0	✖	✖		
2.0	2R0	✖	✓	✓	✓	250	—250	✓	✓	✓		10,000	—10K	✓	✖	✓	✓
3.0	3R0	✓	✓	✓	✓	300	—300	✓	✖			15,000	—15K	✓	✓	✖	✖
4.0	4R0	✖	✓	✓		400	—400	✖	✖			20,000	—20K	✖	✖		
5.0	5R0		✓	✓	✓	500	—500	✓	✖	✓		25,000	—25K	✓	✖		✖
10.0	10R	✓	✓	✓	✓	750	—750	✖	✓	✓		50,000	—50K		✖		
15.0	15R	✓	✓	✓	✓	1,000	—1K0	✖	✓	✓		75,000	—75K			✖	
												100,000	—100K				✖

✓ = Standard values

✖ = Non-standard values subject to minimum handling charge per item

Shaded values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling.

Check product availability at www.ohmite.com