



A New Direction in Mixed-Signal

# Enhanced Full Duplex RS-485 Transceivers

## SP490E/491E

### FEATURES


- +5V Only
- Low Power BiCMOS
- Driver/Receiver Enable (SP491E)
- RS-485 and RS-422 Drivers/Receivers
- Pin Compatible with LTC490 and SN75179 (SP490E)
- Pin Compatible with LTC491 and SN75180 (SP491E)
- Improved ESD Specifications:
  - ±15kV Human Body Model
  - ±15kV IEC61000-4-2 Air Discharge

*Now Available in Lead Free Packaging*


### DESCRIPTION

The **SP490E** is a low power differential line driver/receiver meeting RS-485 and RS-422 standards up to 10Mbps. The **SP491E** is identical to the **SP490E** with the addition of driver and receiver tri-state enable lines. Both products feature ±200mV receiver input sensitivity, over wide common mode range. The **SP490E** is available in 8-pin plastic DIP and 8-pin NSOIC packages for operation over the commercial and industrial temperature ranges. The **SP491E** is available in 14-pin DIP and 14-pin NSOIC packages for operation over the commercial and industrial temperature ranges.

### BLOCK DIAGRAMS

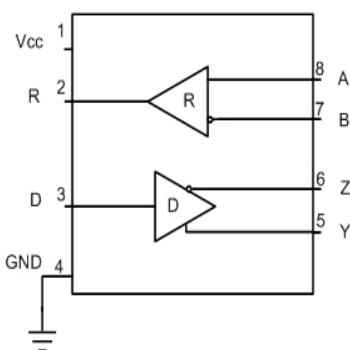

SP490E

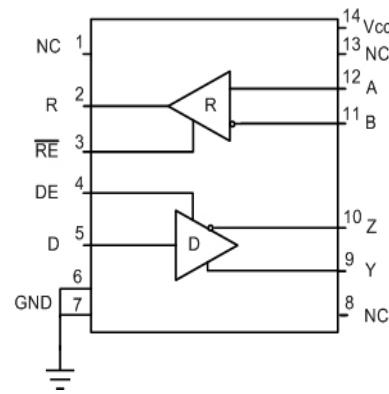

SP491E

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

$V_{CC}$	.....	+7V
Input Voltages		
Drivers	.....	-0.5V to ( $V_{CC}$ +0.5V)
Receivers	.....	±14V
Output Voltages		
Drivers	.....	±14V
Receivers	.....	-0.5V to ( $V_{CC}$ +0.5V)
Storage Temperature	.....	-65°C to +150°
Power Dissipation	.....	1000mW

## ELECTRICAL CHARACTERISTICS

$T_{MIN}$  to  $T_{MAX}$  and  $V_{CC} = 5V \pm 5\%$  unless otherwise noted.

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>SP490E DRIVER</b>					
<b>DC Characteristics</b>					
Differential Output Voltage	GND				
Differential Output Voltage	2				
Differential Output Voltage	1.5				
Change in Magnitude of Driver Differential Output Voltage for Complimentary States					
Driver Common-Mode Output Voltage					
Input High Voltage	2.0				
Input Low Voltage					
Input Current					
Driver Short-Circuit Current					
$V_{OUT} = HIGH$			250	mA	
$V_{OUT} = LOW$			250	mA	
					$-7V \leq V_O \leq +12V$
					$-7V \leq V_O \leq +12V$
<b>SP490E DRIVER</b>					
<b>AC Characteristics</b>					
Maximum Data Rate	10				
Driver Input to Output		30	60	Mbps	$t_{PLH}, R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
Driver Input to Output		30	60	ns	$t_{PLH}, R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
Driver Skew		5		ns	$t_{SKEW} =  t_{DPLH} - t_{DPLH} $
Driver Rise or Fall Time		15	40	ns	From 10% to 90%; $R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
<b>SP490E RECEIVER</b>					
<b>DC Characteristics</b>					
Differential Input Threshold	-0.2				
Input Hysteresis		70			
Output Voltage High	3.5				
Output Voltage Low					
Input Resistance					
Input Current (A, B); $V_{IN} = 12V$	12	15	+0.2	Volts	$-7V \leq V_{CM} \leq 12V$
Input Current (A, B); $V_{IN} = -7V$				mV	$V_{CM} = 0V$
Short-Circuit Current				Volts	$I_O = -4mA, V_{ID} = +200mV$
				kΩ	$I_O = +4mA, V_{ID} = -200mV$
				mA	$-7V \leq V_{CM} \leq 12V$
				mA	$V_{IN} = 12V$
				mA	$V_{IN} = -7V$
				mA	$0V \leq V_O \leq V_{CC}$

$T_{MIN}$  to  $T_{MAX}$  and  $V_{CC} = 5V \pm 5\%$  unless otherwise noted.

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>SP490E RECEIVER</b>					
AC Characteristics					
Maximum Data Rate	10				
Receiver Input to Output	20	45	100	Mbps	
Receiver Input to Output	20	45	100	ns	$t_{PLH} = t_{PHL}$ ; $R_{DIFF} = 54\Omega$ , $C_{L1} = C_{L2} = 100\text{pF}$ ; Figures 3 & 7
Diff. Receiver Skew $ t_{PLH} - t_{PHL} $		13		ns	$t_{PLH} = t_{PHL}$ ; $R_{DIFF} = 54\Omega$ , $C_{L1} = C_{L2} = 100\text{pF}$ ; Figures 3 & 7 $R_{DIFF} = 54\Omega$ ; $C_{L1} = C_{L2} = 100\text{pF}$ ; Figures 3 & 7
<b>POWER REQUIREMENTS</b>					
Supply Voltage	+4.75			+5.25	Volts
Supply Current		900		$\mu\text{A}$	
<b>ENVIRONMENTAL AND MECHANICAL</b>					
Operating Temperature					
Commercial (_C_)	0		+70	$^{\circ}\text{C}$	
Industrial (_E_)	-40		+85	$^{\circ}\text{C}$	
Storage Temperature			+150	$^{\circ}\text{C}$	
Package					
Plastic DIP (_P)					
NSOIC (_N)					




Figure 1. Driver DC Test Load Circuit

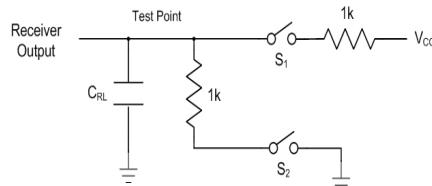


Figure 2. Receiver Timing Test Load Circuit

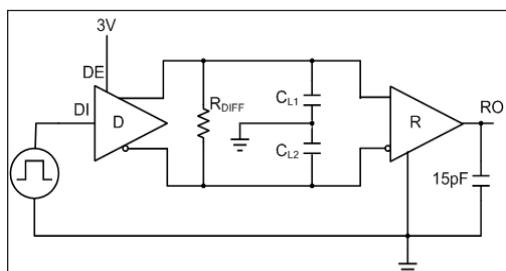


Figure 3. Driver/Receiver Timing Test Circuit

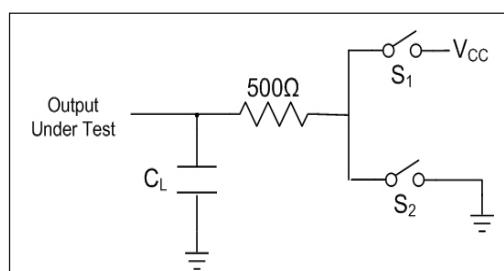


Figure 4. Driver Timing Test Load #2 Circuit

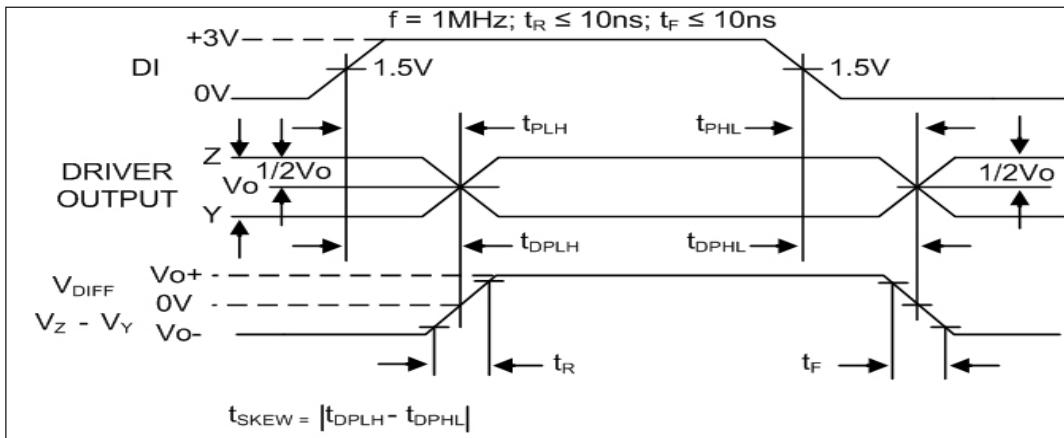


Figure 5. Driver Propagation Delays

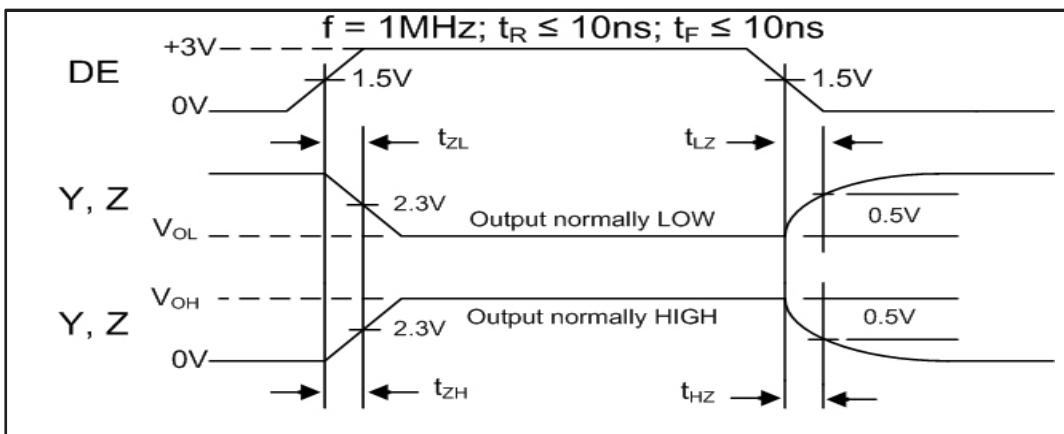


Figure 6. Driver Enable and Disable Times

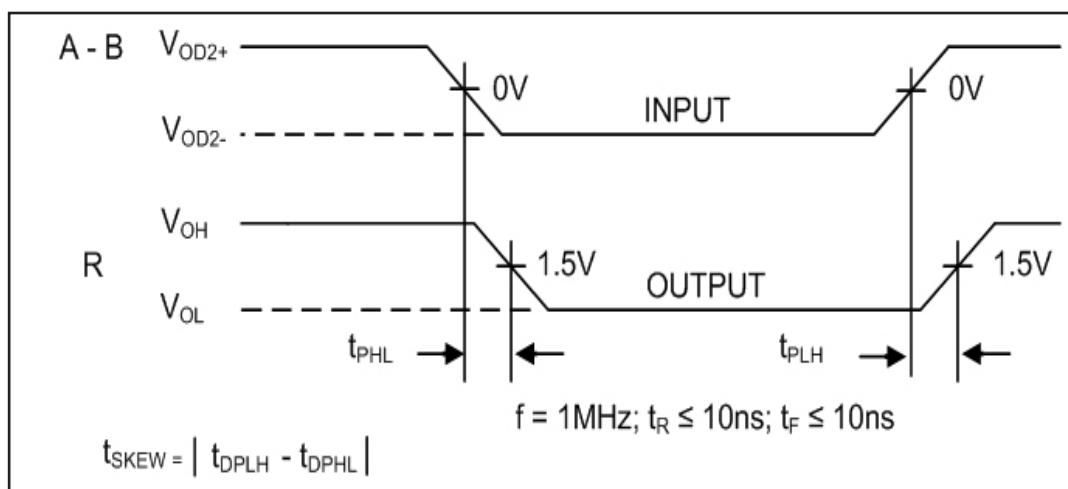


Figure 7. Receiver Propagation Delays

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

$V_{cc}$	.....	+7V
<b>Input Voltages</b>		
Logic	.....	-0.5V to ( $V_{cc} + 0.5V$ )
Drivers	.....	-0.5V to ( $V_{cc} + 0.5V$ )
Receivers	.....	±14V
<b>Output Voltages</b>		
Logic	.....	-0.5V to ( $V_{cc} + 0.5V$ )
Drivers	.....	±14V
Receivers	.....	-0.5V to ( $V_{cc} + 0.5V$ )
Storage Temperature	.....	-65°C to +150
Power Dissipation	.....	1000mW

## ELECTRICAL CHARACTERISTICS

$T_{MIN}$  to  $T_{MAX}$  and  $V_{cc} = 5V \pm 5\%$  unless otherwise noted.

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>SP491E DRIVER</b>					
<b>DC Characteristics</b>					
Differential Output Voltage	GND			$V_{cc}$	Volts
Differential Output Voltage	2			$V_{cc}$	Volts
Differential Output Voltage	1.5			$V_{cc}$	Volts
Change in Magnitude of Driver					Unloaded; $R = \infty$ ; see figure 1
Differential Output Voltage for					With Load; $R = 50\Omega$ ; (RS422);
Complementary States					see figure 1
Driver Common-Mode					With Load; $R = 27\Omega$ ; (RS485);
Output Voltage					see figure
Input High Voltage	2.0			0.2	Volts
Input Low Voltage				3	Volts
Input Current				0.8	Volts
Driver Short-Circuit Current				±10	$\mu A$
$V_{out} = HIGH$				250	mA
$V_{out} = LOW$				250	mA
					$-7V \leq V_o \leq 12V$
					$-7V \leq V_o \leq 12V$
<b>SP491E DRIVER</b>					
<b>AC Characteristics</b>					
Maximum Data Rate	10	30	60	Mbps	$RE = 5V$ , $DE = 5V$
Driver Input to Output				ns	$t_{PLH}; R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
Driver Input to Output		30	60	ns	$t_{PHL}; R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
Driver Skew		5	10	ns	$t_{SKEW} =  t_{DPLH} - t_{DPHL} $ see figures 3 and 5,
Driver Rise or Fall Time		15	40	ns	From 10% to 90%; $R_{DIFF} = 54\Omega$ , $C_{L1} = C_{L2} = 100pF$ ; see figures 3 and 5
Driver Enable to Output High		40	70	ns	$C_{L1} = C_{L2} = 100pF$ ; see figures 4 and 6; $S_2$ closed
Driver Enable to Output Low		40	70	ns	$C_{L1} = C_{L2} = 100pF$ ; see figures 4 and 6; $S_1$ closed
Driver Disable Time from Low		40	70	ns	$C_{L1} = C_{L2} = 100pF$ ; see figures 4 and 6; $S_1$ closed
Driver Disable Time from High		40	70	ns	$C_{L1} = C_{L2} = 100pF$ ; see figures 4 and 6; $S_2$ closed

$T_{MIN}$  to  $T_{MAX}$  and  $V_{CC} = 5V \pm 5\%$  unless otherwise noted.

PARAMETERS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
<b>SP491E RECEIVER DC Characteristics</b>					
Differential Input Threshold	-0.2	70	+0.2	Volts mV	$-7V \leq V_{CM} \leq 12V$ $V_{CM} = 0V$
Input Hysteresis	3.5		0.4	Volts Volts	$I_O = -4mA, V_{ID} = +200mV$ $I_O = +4mA, V_{ID} = -200mV$
Output Voltage High					
Output Voltage Low					
Three State (high impedance)					
Output Current					$0.4V \leq V_O \leq 2.4V; \bar{RE} = 5V$
Input Resistance	12	15	$\pm 1$	$\mu A$ k $\Omega$	$-7V \leq V_{CM} \leq 12V$
Input Current (A, B); $V_{IN} = 12V$			$\pm 1.0$	mA	DE = 0V, $V_{CC} = 0V$ or 5.25V, $V_{IN} = 12V$
Input Current (A, B); $V_{IN} = -7V$			-0.8	mA	DE = 0V, $V_{CC} = 0V$ or 5.25V, $V_{IN} = -7V$
Short-Circuit Current			85	mA	$0V \leq V_O \leq V_{CC}$
<b>SP491E RECEIVER AC Characteristics</b>					
Maximum Data Rate	10				$\bar{RE} = 0V$
Receiver Input to Output	20	45	100	Mbps ns	$t_{PLH}, R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; Figures 3 & 7
Receiver Input to Output	20	45	100	ns	$t_{PHL}, R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$ ; Figures 3 & 7
Diff. Receiver Skew $t_{PLH} - t_{PHL}$		13		ns	$R_{DIFF} = 54\Omega; C_{L1} = C_{L2} = 100pF$ ; Figures 3 & 7
Receiver Enable to Output Low		45	70	ns	$C_{RL} = 15pF$ ; Figures 2 and 8; $S_1$ closed
Receiver Enable to Output High		45	70	ns	$C_{RL} = 15pF$ ; Figures 2 and 8; $S_2$ closed
Receiver Disable from Low		45	70	ns	$C_{RL} = 15pF$ ; Figures 2 and 8; $S_1$ closed
Receiver Disable from High		45	70	ns	$C_{RL} = 15pF$ ; Figures 2 and 8; $S_2$ closed
<b>POWER REQUIREMENTS</b>					
Supply Voltage	+4.75	900	+5.25	Volts $\mu A$	$\bar{RE}, D = 0V$ or $V_{CC}$ ; $DE = V_{CC}$
<b>SP491E ENVIRONMENTAL AND MECHANICAL</b>					
Operating Temperature					
Commercial ( $C$ )	0		+70	$^{\circ}C$	
Industrial ( $E$ )	-40		+85	$^{\circ}C$	
Storage Temperature			+150	$^{\circ}C$	
Package					
Plastic DIP ( $P$ )					
NSOIC ( $N$ )					

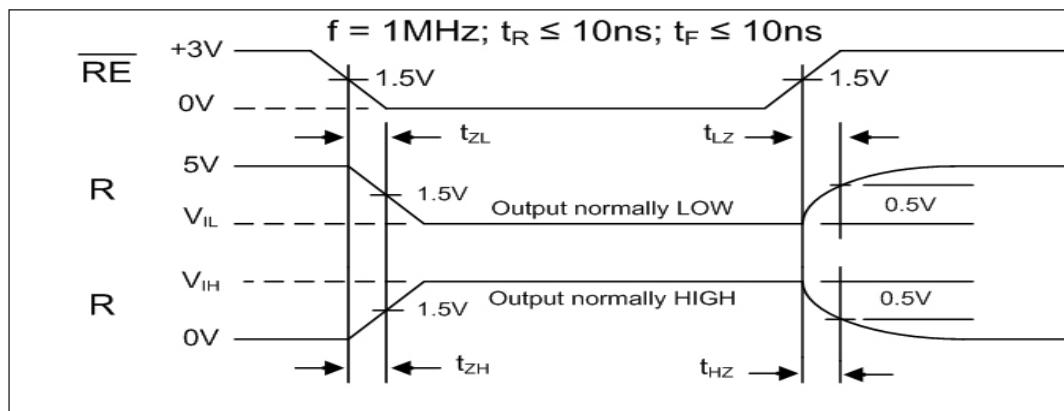


Figure 8. Receiver Enable and Disable Times

## DESCRIPTION

The **SP490E** and **SP491E** are full-duplex differential transceivers that meet the requirements of RS-485 and RS-422. Fabricated with a **Exar** proprietary BiCMOS process, both products require a fraction of the power of older bipolar designs.

The RS-485 standard is ideal for multi-drop applications or for long-distance interfaces. RS-485 allows up to 32 drivers and 32 receivers to be connected to a data bus, making it an ideal choice for multi-drop applications. Since the cabling can be as long as 4,000 feet, RS-485 transceivers are equipped with a wide (-7V to +12V) common mode range to accommodate ground potential differences. Because RS-485 is a differential interface, data is virtually immune to noise in the transmission line.

### Driver...

The drivers for both the **SP490E** and **SP491E** have differential outputs. The typical voltage output swing with no load will be 0 volts to +5 volts. With worst case loading of  $54\Omega$  across the differential outputs, the driver can maintain greater than 1.5V voltage levels.



The driver of the **SP491E** has a driver enable control line which is active high. A logic high on DE (pin 4) of the **SP491E** will enable the differential driver outputs. A logic low on DE (pin 4) of the **SP491E** will tri-state the driver outputs. The **SP490E** does not have a driver enable.

### Receiver...


The receivers for both the **SP490E** and **SP491E** have differential inputs with an input sensitivity as low as  $\pm 200mV$ . Input impedance of the receivers is typically  $15k\Omega$  ( $12k\Omega$  minimum). A wide common mode range of -7V to +12V allows for large ground potential differences between systems. The receivers for both the **SP490E** and **SP491E** are equipped with the fail-safe feature. Fail-safe guarantees that the receiver output will be in a high state when the input is left unconnected.

The receiver of the **SP491E** has a receiver enable control line which is active low. A logic low on REB (pin 3) of the **SP491E** will enable the differential receiver. A logic high on REB (pin 3) of the **SP491E** will tri-state the receiver.

REVISION HISTORY			
REV.	DESCRIPTION	DATE	APP'D
A	DRAWING ORIGINATION	08/16/05	JL
B	DRAWING FORMAT MODIFICATION	07/19/06	JL
C	CHANGE DRAWING LOGO ADD COMPANY NAME	11/16/07	JL

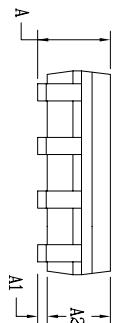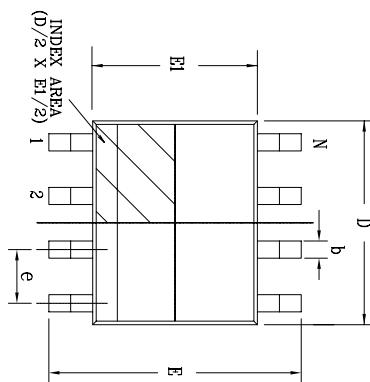

Top View

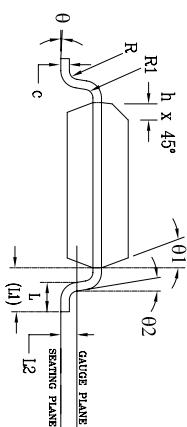

### Front View

True View

SYMBOLS	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	—	1.75	0.053	—	0.065
A1	0.10	—	0.25	0.004	—	0.010
A2	1.25	—	1.65	0.049	—	0.065
b	0.31	—	0.51	0.012	—	0.026
c	0.17	—	0.25	0.007	—	0.010
E	6.00	BSC	—	0.236	BSC	—
E1	3.90	BSC	—	0.154	BSC	—
e	1.27	BSC	—	0.050	BSC	—
h	0.25	—	0.50	0.010	—	0.020
L	0.40	—	1.27	0.016	—	0.050
L1	1.04	REF	—	0.041	REF	—
L2	0.25	BSC	—	0.010	BSC	—
R	0.07	—	—	0.003	—	—
R1	0.07	—	—	0.003	—	—
0	0°	—	8°	0°	—	8°
01	5°	—	15°	5°	—	15°
02	0°	—	0°	—	—	—
D	4.90	BSC	—	0.193	BSC	—
N	8					






EXAR CORPORATION

**EXAR**  
Powering Connectivity

**EXAR CORPORATION**

Packaging Approval:	8 PIN SOICN PACKAGE OUTLINE		
By: JL	Date: 11/16/07	Revision: C	Sheet: 1 OF 1
Drawing No: 8-PIN SOICN			

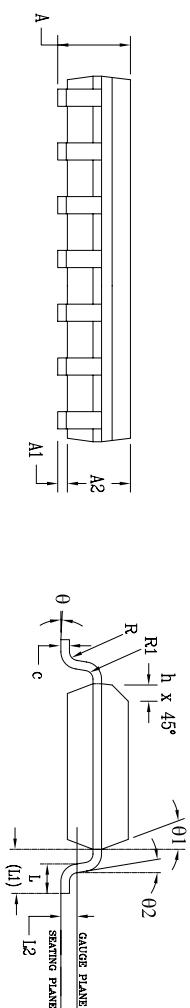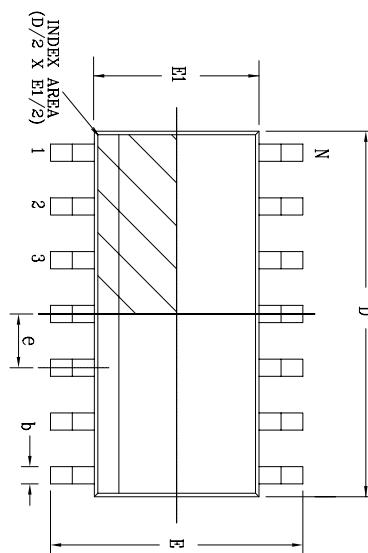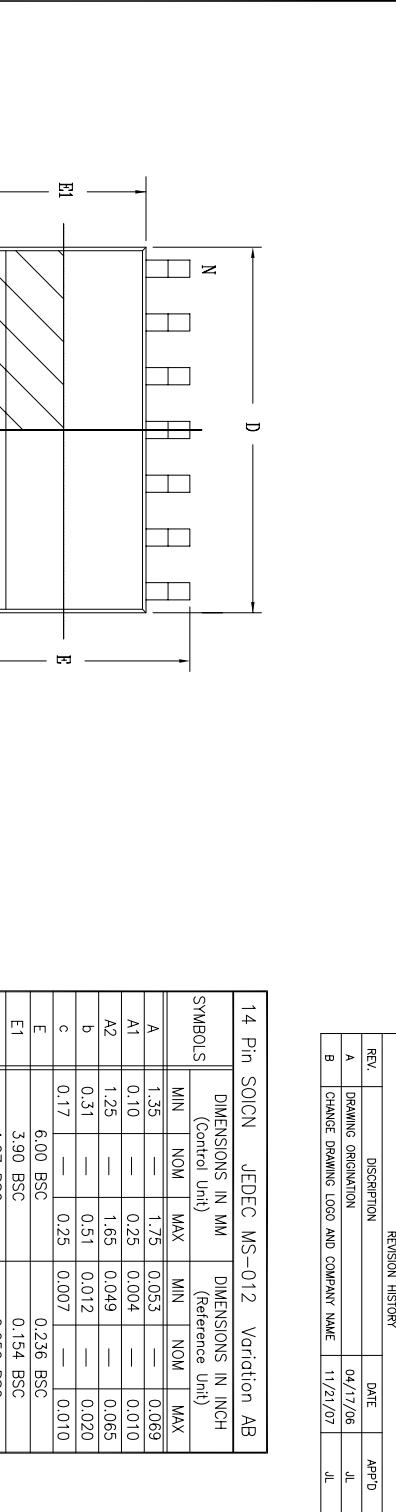


EXAR CORPORATION	
14 PIN SOICN PACKAGE OUTLINE	
Packaging Approval:	Drawing No: 14-PIN SOICN
By: JL	Revision: B
Date: 11/21/07	Sheet: 1 OF 1

# PACKAGE: 8 PIN PDIP


REMARKS:  
FOR 8LD AND 16LD  
ALL END LEADS (4X)  
ARE HALF LEAD TYPES

8 Pin PDIP JEDEC MS-001 Variation BA

SYMBOLS	DIMENSIONS IN INCH (Control Unit)			DIMENSIONS IN MM (Reference Unit)		
	MIN	NOM	MAX	MIN	NOM	MAX
A	—	—	0.210	—	—	5.33
A1	0.015	—	—	0.38	—	—
A2	0.115	0.130	0.195	2.92	3.30	4.95
b	0.014	0.018	0.022	0.36	0.46	0.56
b2	0.045	0.060	0.070	1.14	1.52	1.78
c	0.008	0.010	0.014	0.20	0.25	0.36
D1	0.030	—	0.060	0.76	—	1.52
E	0.300	0.310	0.325	7.62	7.87	8.26
E1	0.240	0.250	0.280	6.10	6.35	7.11
e	0.100	BSC	—	2.54	BSC	—
eA	0.300	BSC	—	7.62	BSC	—
eB	—	—	0.430	—	—	10.92
L	0.115	0.130	0.150	2.92	3.30	3.81
W	0.075	REF	—	1.91	REF	—
R	0.030	BSC	—	0.76	BSC	—
θ	4°	7°	10°	4°	7°	10°
D	0.355	0.365	0.400	9.02	9.27	10.16
N	8	8	8	8	8	8

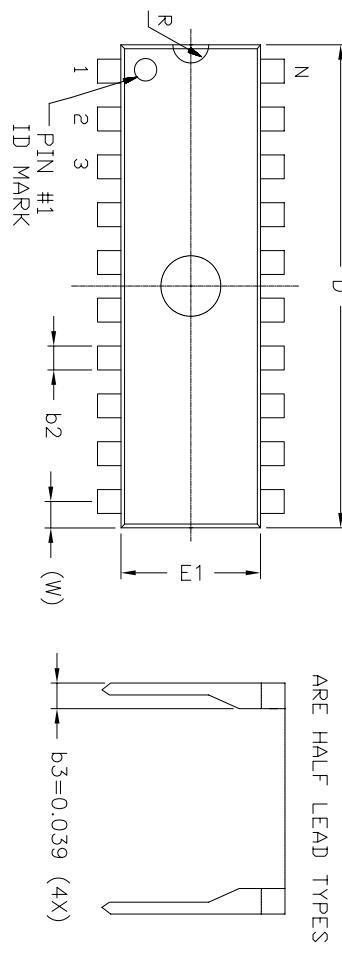

Top View

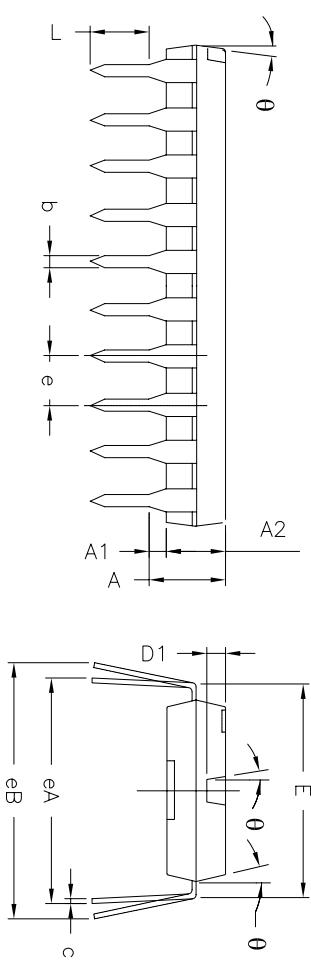

Side View

Front View


EXAR CORPORATION	
Powering Connectivity	8 PIN PDIP PACKAGE OUTLINE
Packaging Approval:	Drawing No.: 8-PIN PDIP
By: JL	Date: 11/28/07
By:	Revision: B
	Sheet: 1 OF 1

REV.		DESCRIPTION		DATE	APP'D
A	B	DRAWING ORIGINATOR		04/26/06	JL
CHANGE DRAWING LOGO AND COMPANY NAME 11/21/07 JL					


REMARKS:  
FOR 8LD AND 16LD  
ALL END LEADS (4X)  
ARE HALF LEAD TYPES

14 Pin PDIP JEDEC MS-001 Variation AA

SYMBOLS	DIMENSIONS IN INCH (Control Unit)		DIMENSIONS IN MM (Reference Unit)			
	MIN	NOM	MAX	MIN	NOM	MAX
A	—	—	0.210	—	—	5.33
A1	0.015	—	—	0.38	—	—
A2	0.115	0.130	0.195	2.92	3.30	4.95
b	0.014	0.018	0.022	0.36	0.46	0.56
b2	0.045	0.060	0.070	1.14	1.52	1.78
c	0.008	0.010	0.014	0.20	0.25	0.36
D1	0.030	—	0.060	0.76	—	1.52
E	0.360	0.370	0.325	7.62	7.87	8.26
E1	0.240	0.250	0.280	6.10	6.35	7.11
e	0.100	BSC	—	2.54	BSC	—
eA	0.300	BSC	—	7.62	BSC	—
eB	—	—	0.430	—	—	10.92
L	0.115	0.130	0.150	2.92	3.30	3.81
W	0.075	REF	—	1.91	REF	—
R	0.030	BSC	—	0.76	BSC	—
θ	4°	7°	10°	4°	7°	10°
D	0.735	0.750	0.775	18.67	19.05	19.69
N	14	—	14	—	—	—

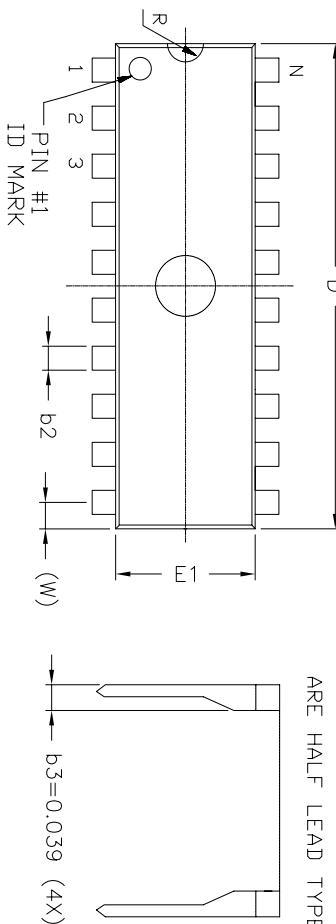

Top View

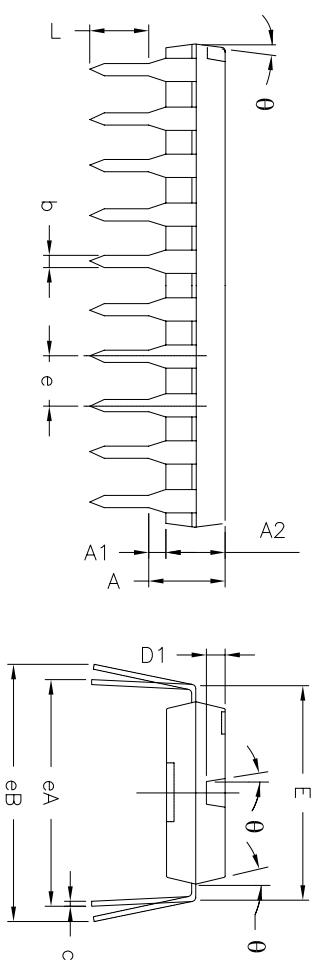

Side View

Front View

EXAR		EXAR CORPORATION
Drawing Control		14 PIN PDIP PACKAGE OUTLINE
Packaging Approval:	Drawing No.: 14-PIN PDIP	
By: JL	Date: 11/21/07	Revision: B Sheet: 1 OF 1

Model	Temperature Range	Package
SP490ECN-L.....	0°C to +70°C .....	8-Pin NSOIC
SP490ECN-L/TR.....	0°C to +70°C .....	8-Pin NSOIC
SP490ECP-L.....	0°C to +70°C .....	8-Pin PDIP
SP490EEN-L.....	-40°C to +85°C .....	8-Pin NSOIC
SP490EEN-L/TR.....	-40°C to +85°C .....	8-Pin NSOIC
SP490EEP-L.....	-40°C to +85°C .....	8-Pin PDIP
SP491ECN-L.....	0°C to +70°C .....	14-Pin NSOIC
SP491ECN-L/TR.....	0°C to +70°C .....	14-Pin NSOIC
SP491ECP-L.....	0°C to +70°C .....	14-Pin PDIP
SP491EEN-L.....	-40°C to +85°C .....	14-Pin NSOIC
SP491EEN-L/TR.....	-40°C to +85°C .....	14-Pin NSOIC
SP491EEP-L.....	-40°C to +85°C .....	14-Pin PDIP

Note: /TR = Tape and Reel

## REVISION HISTORY

Date	Revision	Description
2000	14	Sipex Legacy Data Sheet
May 2011	1.0.0	Convert to Exar format. Remove driver propagation delay minimum and driver rise/fall time minimum entry for SP490E and SP491E. Update ESD rating to IEC61000-4-2. Update ordering information.
May 2013	1.0.1	Correct type errors per PCN 13-0503-01      ECN: 1322-03 05/29/13

### Notice

EXAR Corporation reserves the right to make changes to any products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no representation that the circuits are free of patent infringement. Charts and schedules contained herein are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized ; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Copyright 2013 EXAR Corporation

Datasheet May 2013

Send your serial transceiver technical inquiry with technical details to: [serialtechsupport@exar.com](mailto:serialtechsupport@exar.com)

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.