


OZ-SH-124L,294 Product Details

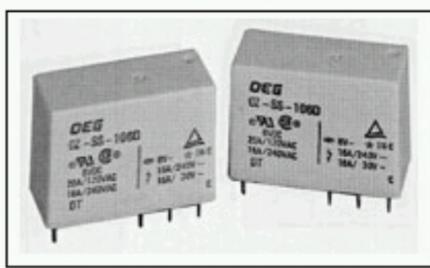

Industrial Relays (General Purpose)

Always EU RoHS compliant but not ELV Compliant
([Statement of Compliance](#))

Product Highlights:

- OZ Series
- Contact Arrangement = 1 Form C, SPDT, 1 C/O
- Contact Current Rating = 16 Amps.
- Monostable Coil Magnetic System
- Without Coil Suppression Diode

[View all Features](#) | [Find Similar Products](#)

OZ-SH-124L,294 (1461250-2)

TE Internal Number: 1461250-2

Active

[Add to Part List](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [OZ-1T CUSTOMER DRAWING](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Schematic](#)
- [Wiring Diagram](#)
- [PCB Layout \(Bottom Surface\)](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Termination Type](#) = Through Hole

Electrical Characteristics:

- [Contact Current Rating \(Amps.\)](#) = 16
- [Coil Resistance \(Ω\)](#) = 1100
- [Coil Power, Nominal \(mW\)](#) = 540
- [Actuating System](#) = DC
- [Input Voltage \(VDC\)](#) = 24

Body Related Features:

- [Series](#) = OZ
- Polarized = No

Contact Related Features:

- [Mounting Options](#) = PC Board
- [Enclosure](#) = Sealed
- FCC Part 68 Isolation = No
- Relay Type = PCB
- [Contact Material](#) = Silver Cadmium Oxide
- Approx. Dimensions (L x W x H) (mm [in]) = 29.20 x 12.80 x 20.60 [1.151 x .504 x .812]
- Approved Standards = UL Recognized, CSA Certified, TUV Approved

Configuration Related Features:

- [Contact Arrangement](#) = 1 Form C, SPDT, 1 C/O
- [Coil Magnetic System](#) = Monostable
- [Coil Suppression Diode](#) = Without
- [Coil Selection Criteria](#) = Nominal Voltage
- Coil Latching = Without
- [LED Indicator](#) = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS/Not ELV Compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS not ELV compliant

Other:

- Brand = OEG