

7002

# Switch/Control Mainframe

## 400-channel



- **Interactive channel status display**
- **Optional light pen for front panel programming**
- **Integrates easily with DMM and SourceMeter® SMU instruments**
- **Full channel status display**
- **10 card slots**
- **Supports 17 switch/control cards**

### Ordering Information

**7002      400-channel Switch/  
Control Mainframe**

### ACCESSORIES AVAILABLE

#### COMMUNICATION INTERFACES AND CABLES

|             |                                               |
|-------------|-----------------------------------------------|
| 7007-1      | Double Shielded, Premium GPIB Cable, 1m       |
| 7007-2      | Double Shielded, Premium GPIB Cable, 2m       |
| 7078-PEN    | Programming Light Pen (includes holder)       |
| KPCI-488LPA | IEEE-488 Interface/Controller for the PCI Bus |
| KUSB-488B   | IEEE-488 USB-to-GPIB Interface Adapter        |

#### RACK MOUNT KITS

|            |                      |
|------------|----------------------|
| 7002-RMK-1 | Fixed Rack Mount Kit |
| 7002-RMK-2 | Slide Rack Mount Kit |

#### TRIGGERING

|        |                                               |
|--------|-----------------------------------------------|
| 8501-1 | Trigger Link Cable, DIN-to-DIN, 1m            |
| 8501-2 | Trigger Link Cable, DIN-to-DIN, 2m            |
| 8503   | Trigger Link Cable, DIN-to-dual BNC, 1m       |
| 8505   | Male to 2 Female Y-DIN Cable for Trigger Link |

### SERVICES AVAILABLE

|            |                                                                   |
|------------|-------------------------------------------------------------------|
| 7002-3Y-EW | 1-year factory warranty extended to 3 years from date of shipment |
|------------|-------------------------------------------------------------------|

The Model 7002 Switch System is a 10-slot mainframe that supports up to 400 2-pole multiplexer channels or 400 matrix crosspoints. The front panel includes a unique interactive display of channel status for quick programming. Scanning speeds of up to 300 channels per second are possible with the high density switch cards. The wide selection of more than 30 different switch cards makes the 7002 one of the most flexible switching mainframes available.

### Reduce the Size and Cost of Your Switching Application.

**Up to 400 channels of 2-pole switching.** A single Model 7002 mainframe can accommodate up to ten 40-channel cards. That's 400 channels in a

single full-rack package that is only 178mm high (7 in). This level of density provides some important advantages. First, it reduces the amount of switching hardware required for a given application. Second, it provides high flexibility. The high density cards can be used with the special signal cards to cover all your signal needs for a large application with one mainframe.

**Switch a wide range of signals.** The 7002 is fully compatible with all 7001 switch cards. From this broad selection of 17 cards, you can assemble a switch configuration that will ensure signal integrity and minimize errors. These cards allow the 7002 to switch DC signals from femtoamps to amps, nanovolts to kilovolts, as well as RF and optical signals.

**Analog backplane.** The analog backplane used by the high density cards adds configuration flexibility and eliminates intercard wiring. For example, the outputs of a multiplexer card can be connected to the row inputs of a matrix card. Or, the outputs of ten multiplexer cards can be connected to form one large 1×400 multiplexer. Intercard wiring is eliminated by using the analog backplane to form these configurations.

### Faster Test Development

**Unique channel status display.** The interactive front panel display helps shorten the time required to configure the 7002 and develop test software. The display indicates the open/close status of each channel in the mainframe. This information is very useful when programming the 7002 and developing application software. Knowing the channel status also helps to verify proper operation during the debug phase.

**Light pen programming.** An optional light pen provides point and click programming from the front panel. By selecting the desired channels or range of channels, the scan list can be built, matrix patterns created, channels opened or closed, and patterns stored in memory. The 7002's non-volatile memory stores up to 500 complete switch patterns.

**Automatic card configuration.** When the high density cards are installed, the 7002 automatically configures each slot independently for the proper card. The channel status display on the front panel adjusts to show each card's capacity and configuration.

**Front panel Info key.** At the touch of a button, the operator receives context-sensitive, on-line information to help configure the system. This information is displayed on a 52-character alphanumeric display for clear and readable messages. There is no need to refer constantly to the operator's manual. All information messages, operating instructions, and prompts are available in English, German, and French. Just select the desired language in the configuration menu.

**Programmable channel closure restrictions.** The 7002 allows specific channels to be locked out from closure. This restriction can be conditional based on the open/close state of other channels or crosspoints. This capability is useful to prevent certain signals from being accidentally connected to high power circuits, for example.

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**  
A Tektronix Company

# 7002

## Switch/Control Mainframe 400-channel

### System Throughput

**300 channel per second scanning.** The 7002 can scan through up to 300 channels per second. This scan process can be controlled by the internal time base of the 7002 or through external triggers. The scan sequence is controlled by what appears in the scan list. The scan list can include channels, ranges of channels, and memory locations. This approach gives maximum flexibility while obtaining maximum throughput.

**Built-in Scan Control and Trigger Link.** The built-in scan control eliminates the need for the computer to control every step of the test procedure. Simply program the 7002 to control the channel spacing, scan spacing, and number of scans. Trigger Link gives you access to six independent hardware trigger lines on a single cable.

### SYSTEM

**CAPACITY:** 10 plug-in cards per mainframe.

**MEMORY:** Battery backed-up storage for 500 switch patterns.

**SWITCH SETTling TIME:** Automatically selected by the mainframe. For different switchcards, 7002 will be set to the slowest relay settling time. Additional time from 0 to 99999999 seconds can be added in 1ms increments.

#### TRIGGER SOURCES:

External Trigger (TTL-compatible, programmable edge, 600ns minimum pulse, rear panel BNC).

IEEE-488 bus (GET, \*TRG)

Trigger Link

Manual (front panel)

Internal Timer, programmable from 1.0ms to 99999999 seconds in 1.0ms increments.

**STATUS OUTPUT:** Channel Ready (TTL-compatible signal, rear panel BNC). Low going pulse (10µs typical) issued after relay settling time.

**SWITCHING SEQUENCE:** Break-before-make (programmable).

**MAINFRAME DIGITAL I/O:** Four open collector outputs (30V maximum, 100mA maximum sink current, 10Ω output impedance), one TTL compatible input, one common, one +5V.

**RELAY DRIVE:** 3.5A maximum for all 10 card slots.

**CARD SIZE:** 32mm high × 114mm wide × 272mm long (1¼ in × 4½ in × 10¾ in).

**CARD COMPATIBILITY:** Fully compatible with all 7001 cards.

### ANALOG BACKPLANE

**SIGNALS:** Four 3-pole rows (Hi, Lo, Guard). These signals provide matrix and multiplexer expansion between cards within one mainframe.

**MAXIMUM VOLTAGE:** 250V DC, 250V rms, 350V AC peak, signal path to signal path or signal path to chassis.

**MAXIMUM CURRENT:** 1A peak.

#### PATH ISOLATION:


>10<sup>10</sup>Ω, <50pF path to path (any Hi, Lo, Guard to another Hi, Lo, Guard)

>10<sup>10</sup>Ω, <50pF differential (Hi to Lo or Hi, Lo to Guard).

>10<sup>10</sup>Ω, <75pF path to chassis.

**CHANNEL CROSSTALK:** <-65dB @ 1MHz (50Ω load).

**BANDWIDTH:** <3dB loss at 100MHz (50Ω load).

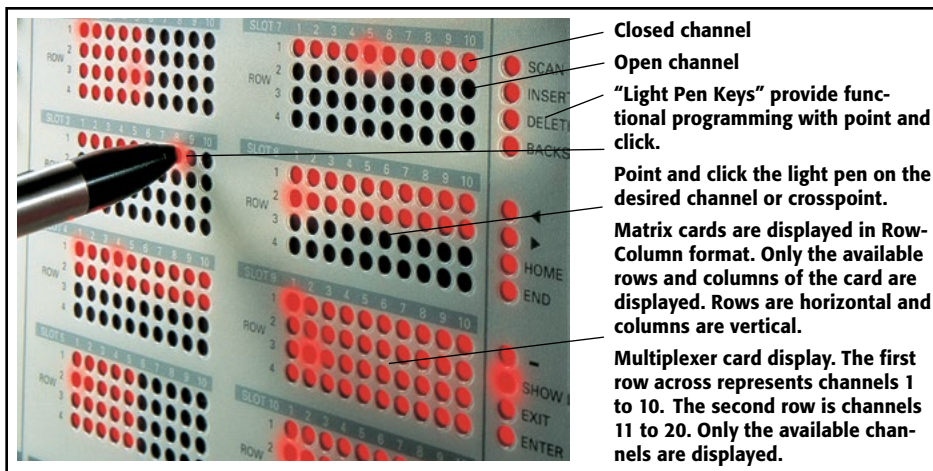

### THROUGHPUT

**EXECUTION SPEED OF SCAN LIST** (channels or memory locations per second):

|                   | Channels | Memories |
|-------------------|----------|----------|
| Break-Before-Make | OFF 300  | 243      |
|                   | ON 270   | 189      |

**TRIGGER EXECUTION TIME** (maximum time from activation of Trigger Source to start of switch open or close):

| Source       | Latency | Jitter |
|--------------|---------|--------|
| GET1         | 200 µs  | <15 µs |
| *TRG2, 3     | 3.0 ms  |        |
| Trigger Link | 200 µs  | <10 µs |
| External     | 200 µs  | <10 µs |
| Timer        |         | <25 µs |

### NOTES

1. Excluding switch settling time.
2. Assuming no IEEE-488 commands are pending execution.
3. Display off.

### IEEE-488 COMMAND EXECUTION TIME

| Command    | Execution Time <sup>1</sup>            |
|------------|----------------------------------------|
| CLOS (@!1) | <8 ms + Relay Settle Time              |
| OPEN (@!1) | <8 ms + Relay Settle Time              |
| MEM:REC M1 | <9 ms + 2 × Relay Settle Time (BBM ON) |
|            | <9 ms + Relay Settle Time (BBM OFF)    |

### NOTES

1. Measured from the time at which the command terminator is taken from the bus to relay energize. With display OFF.

### IEEE-488 BUS IMPLEMENTATION

**STANDARDS CONFORMANCE:** Conforms to SCPI-1990, IEEE-488.2, and IEEE-488.1.

**MULTILINE COMMANDS:** DCL, LLO, SDC, GET, GTL, UNT, UNL, SPE, SPD.

**UNILINE COMMANDS:** IFC, REN, EOI, SRQ, ATN.

**INTERFACE FUNCTIONS:** SH1, AH1, T5, TE0, L4, LE0, SRI, RLI, PPO, DCI, DTI, CO, EI.

All aspects of 7002 operation are available from the front panel or over the IEEE-bus interface. The 7002 conforms to IEEE-488.2 and the SCPI (Standard Commands for Programmable Instruments) command language protocol.

- Scan List
- Scan Spacing
- Channel Spacing
- Number of Scans
- Number of Channels
- Trigger Source
- Single Channel Mode
- Channel Restrictions
- Save Mainframe Configuration Setups
- Digital I/O
- Card Pair
- Channel Delay
- Number of Poles
- Channel Pattern Memory

### GENERAL

**DISPLAY:** Dual-line vacuum fluorescent. 1st line: 20-character alphanumeric. 2nd line: 32-character alphanumeric. Channel status LED grid.

**LIGHT PEN OPTION:** Provides interactive programming of channels, cross points, scan lists, and memory.

**REAR PANEL CONNECTORS:** IEEE-488; 9-pin DB9 Female; 8-pin micro DIN for Trigger Link; 8-pin micro DIN for Trigger Link expansion; BNC for External Trigger; BNC for Channel Ready

**POWER:** 100V to 240Vrms, 50/60Hz, 110VA maximum.

**EMC:** Complies with European Union Directive 89/336/EEC, EN61326-1.

**SAFETY:** Conforms to European Union Directive 73/23/EEC, EN61010-1.

**EMI/RFI:** Meets VDE 0871B and FCC Class B.

**ENVIRONMENT:** Operating: 0°C to 50°C, <80% RH (0°C to 35°C). Storage: -25°C to +65°C.

**DIMENSIONS, WEIGHT:** 178mm high × 438mm wide × 448mm deep (7 in × 17¼ in × 17½ in). Net weight 9.1kg (20 lb).

1.888.KEITHLEY (U.S. only)

www.keithley.com

A Greater Measure of Confidence

KEITHLEY

A Tektronix Company

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keithley Instruments, Inc.:](#)

[7002](#)