



# TS271C,I,M

## CMOS PROGRAMMABLE LOW POWER SINGLE OPERATIONAL AMPLIFIER

- OFFSET NULL CAPABILITY (by external compensation)
- DYNAMIC CHARACTERISTICS  
ADJUSTABLE  $I_{SET}$
- CONSUMPTION CURRENT AND DYNAMIC PARAMETERS ARE STABLE REGARDING THE VOLTAGE POWER SUPPLY VARIATIONS
- OUTPUT VOLTAGE CAN SWING TO GROUND
- VERY LARGE  $I_{SET}$  RANGE
- STABLE AND LOW OFFSET VOLTAGE
- THREE INPUT OFFSET VOLTAGE SELECTIONS

### DESCRIPTION

The TS271 is a low cost, low power single operational amplifier designed to operate with single or dual supplies. This operational amplifier uses the ST silicon gate CMOS process giving it an excellent consumption-speed ratio. This amplifier is ideally suited for low consumption applications.


The power supply is externally programmable with a resistor connected between pins 8 and 4. It allows to choose the best consumption-speed ratio and supply current can be minimized according to the required speed. This device is specified for the following  $I_{SET}$  current values : 1.5 $\mu$ A, 25 $\mu$ A, 130 $\mu$ A.

This CMOS amplifier offers very high input impedance and extremely low input currents. The major advantage versus JFET devices is the very low input currents drift with temperature (see figure 3).

### ORDER CODE

| Part Number               | Temperature Range | Package |   |
|---------------------------|-------------------|---------|---|
|                           |                   | N       | D |
| TS271C/AC/BC              | 0°C, +70°C        | •       | • |
| TS271I/AI/BI              | -40°C, +125°C     | •       | • |
| TS271M/AM/BM              | -55°C, +125°C     | •       | • |
| <b>Example : TS271ACN</b> |                   |         |   |

N = Dual in Line Package (DIP)  
D = Small Outline Package (SO) - also available in Tape & Reel (DT)




**N**  
**DIP8**  
(Plastic Package)




**D**  
**SO8**  
(Plastic Micropackage)

### PIN CONNECTIONS (top view)

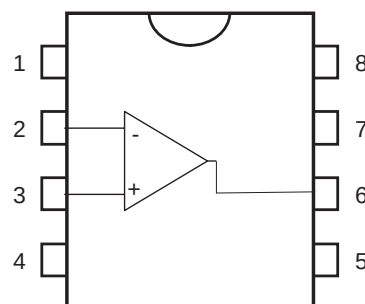

- 1 - Offset Null 1
- 2 - Inverting Input 1
- 3 - Non-inverting Input 1
- 4 -  $V_{CC}^-$
- 5 - Offset Null 2
- 6 - Output
- 7 -  $V_{CC}^+$
- 8 -  $I_{Set}$

## BLOCK DIAGRAM

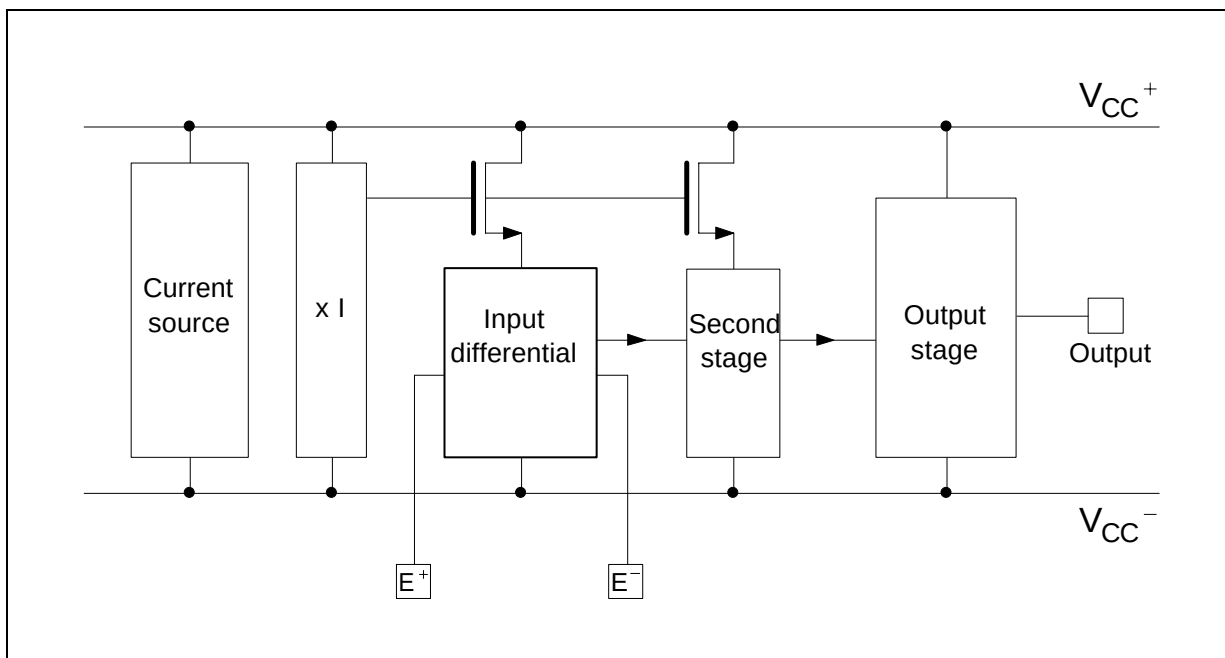

## ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                                | TS271C/AC/BC | TS271I/AI/BI | TS271M/AM/BM | Unit |
|------------|------------------------------------------|--------------|--------------|--------------|------|
| $V_{CC}^+$ | Supply Voltage <sup>1)</sup>             | 18           |              |              | V    |
| $V_{id}$   | Differential Input Voltage <sup>2)</sup> | $\pm 18$     |              |              | V    |
| $V_i$      | Input Voltage <sup>3)</sup>              | -0.3 to 18   |              |              | V    |
| $I_o$      | Output Current for $V_{CC}^+ \geq 15V$   | $\pm 30$     |              |              | mA   |
| $I_{in}$   | Input Current                            | $\pm 5$      |              |              | mA   |
| $T_{oper}$ | Operating Free-Air Temperature Range     | 0 to +70     | -40 to +125  | -55 to +125  | °C   |
| $T_{stg}$  | Storage Temperature Range                | -65 to +150  |              |              | °C   |

1. All values, except differential voltage are with respect to network ground terminal.


2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.

3. The magnitude of the input and the output voltages must never exceed the magnitude of the positive supply voltage.


## OPERATING CONDITIONS

| Symbol     | Parameter                       | Value                 | Unit |
|------------|---------------------------------|-----------------------|------|
| $V_{CC}^+$ | Supply Voltage                  | 3 to 16               | V    |
| $V_{icm}$  | Common Mode Input Voltage Range | 0 to $V_{CC}^+ - 1.5$ | V    |


## SCHEMATIC DIAGRAM

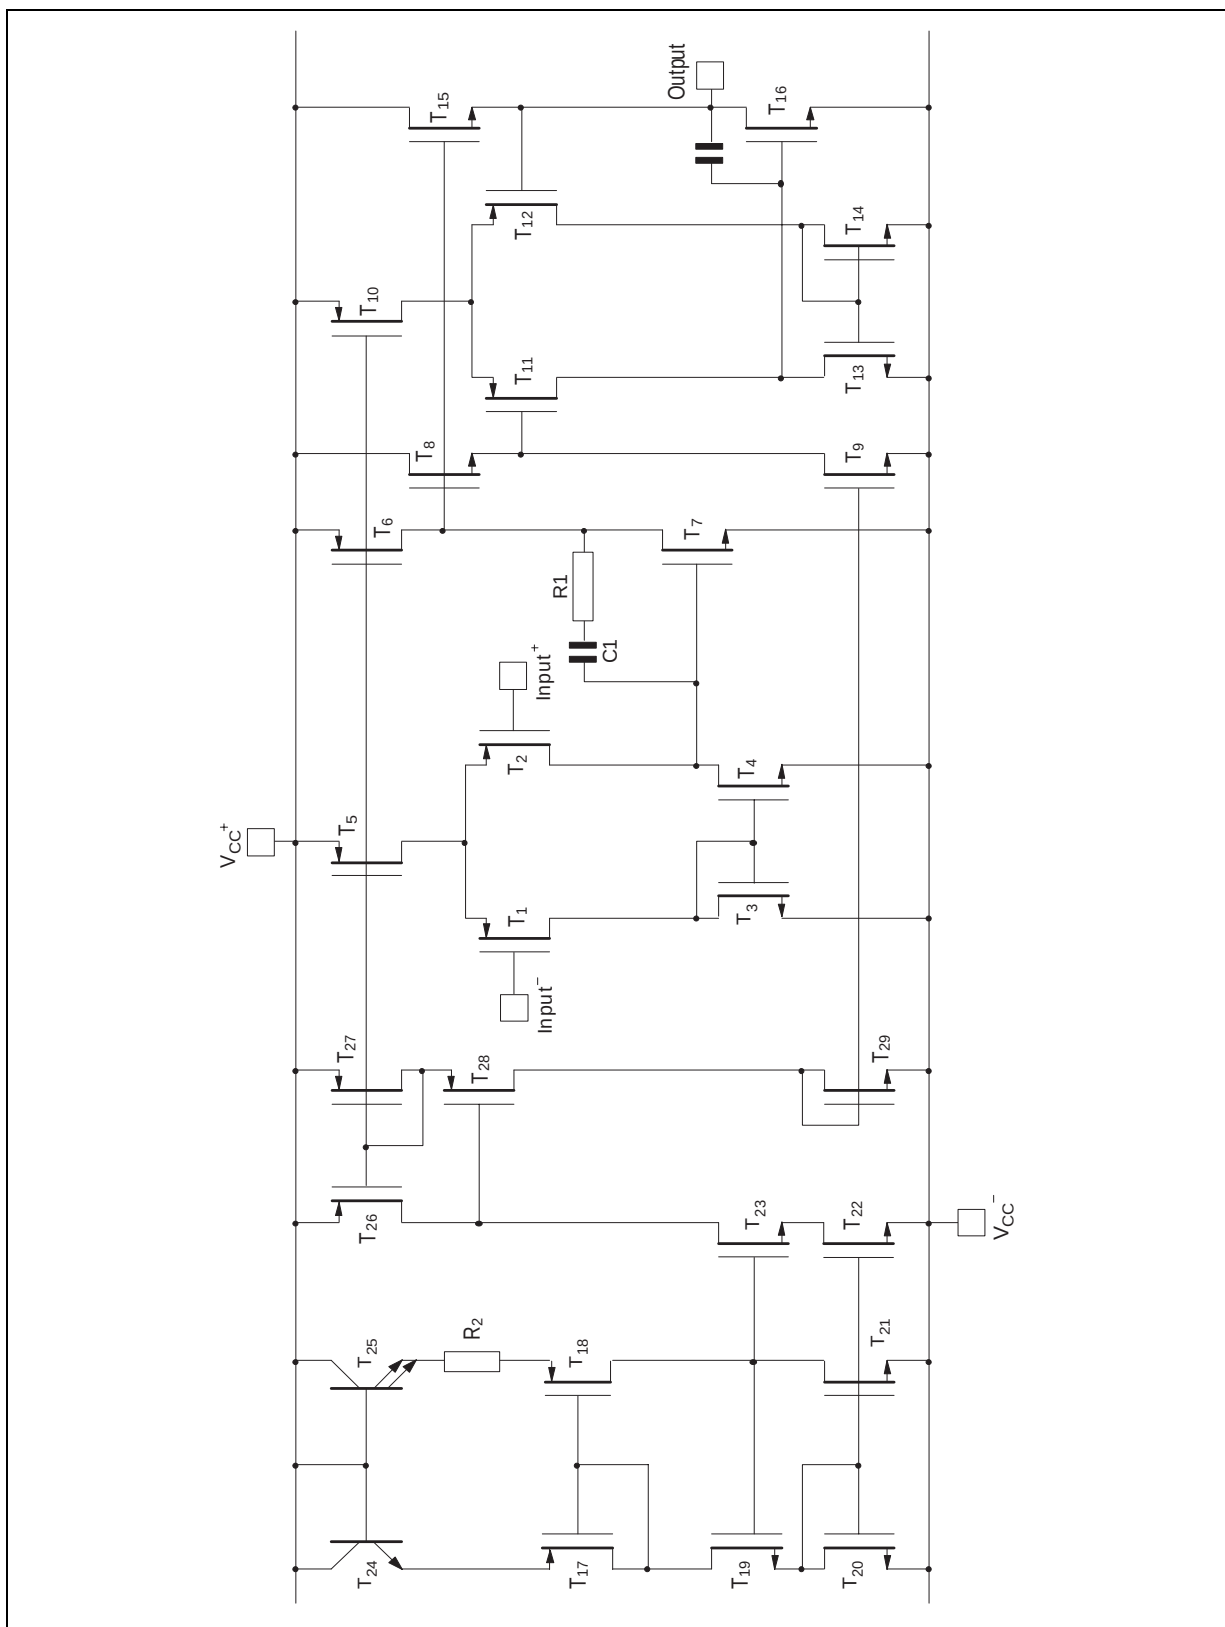


## OFFSET VOLTAGE NULL CIRCUIT

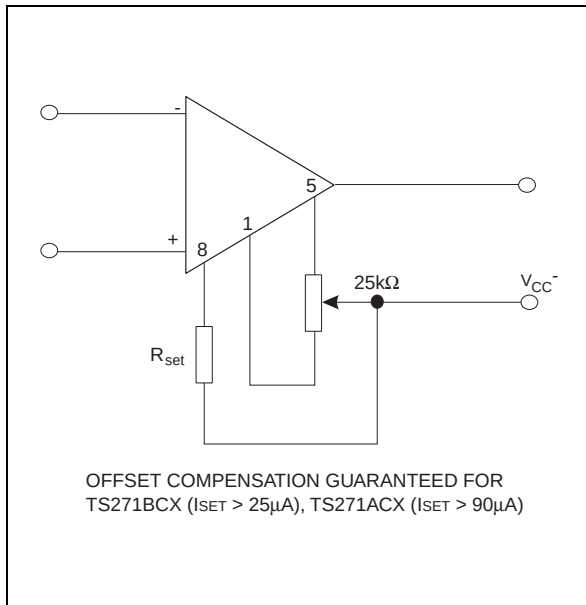

## RESISTOR BIASING

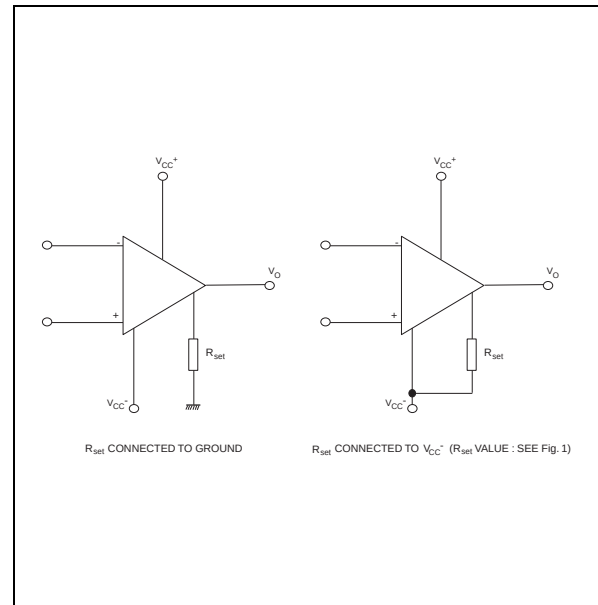

**Figure 1** :  $R_{SET}$  Connected to  $V_{CC-}$

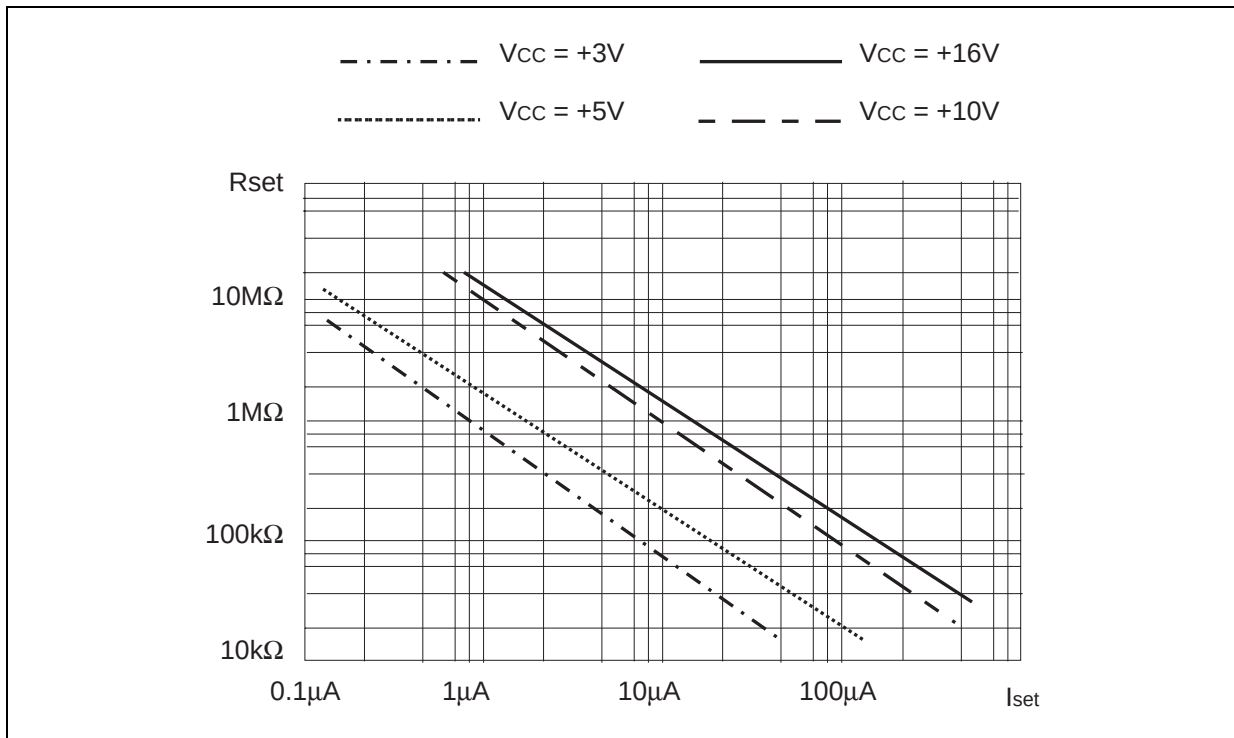


**ELECTRICAL CHARACTERISTICS for  $I_{SET} = 1.5\mu A$**  $V_{CC}^+ = +10V$ ,  $V_{CC}^- = 0V$ ,  $T_{amb} = +25^\circ C$  (unless otherwise specified)

| Symbol     | Parameter                                                                                                                                                                                 | TS271C/AC/BC |                    |                                | TS271I/AI/BI<br>TS271M/AM/BM |                    |                                  | Unit                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|--------------------------------|------------------------------|--------------------|----------------------------------|------------------------|
|            |                                                                                                                                                                                           | Min.         | Typ.               | Max.                           | Min.                         | Typ.               | Max.                             |                        |
| $V_{io}$   | Input Offset Voltage<br>$V_O = 1.4V$ , $V_{ic} = 0V$<br>TS271C/I/M<br>TS271AC/AI/AM<br>TS271B/C/I/M<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS271C/I/M<br>TS271AC/AI/AM<br>TS271B/C/I/M |              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3 |                              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3.5 | mV                     |
| $DV_{io}$  | Input Offset Voltage Drift                                                                                                                                                                |              | 2                  |                                |                              | 2                  |                                  | $\mu V/^\circ C$       |
| $I_{io}$   | Input Offset Current note 1)<br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                         |              | 1                  | 100                            |                              | 1                  | 200                              | pA                     |
| $I_{ib}$   | Input Bias Current - see note 1<br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                      |              | 1                  | 150                            |                              | 1                  | 300                              | pA                     |
| $V_{OH}$   | High Level Output Voltage<br>$V_{id} = 100mV$ , $R_L = 1M\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                   | 8.8<br>8.7   | 9                  |                                | 8.8<br>8.6                   | 9                  |                                  | V                      |
| $V_{OL}$   | Low Level Output Voltage<br>$V_{id} = -100mV$                                                                                                                                             |              |                    | 50                             |                              |                    | 50                               | mV                     |
| $A_{vd}$   | Large Signal Voltage Gain<br>$V_{ic} = 5V$ , $R_L = 1M\Omega$ , $V_O = 1V$ to $6V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                 | 30<br>20     | 100                |                                | 30<br>20                     | 100                |                                  | V/mV                   |
| GBP        | Gain Bandwidth Product<br>$A_v = 40dB$ , $R_L = 1M\Omega$ , $C_L = 100pF$ , $f_{in} = 100kHz$                                                                                             |              | 0.1                |                                |                              | 0.1                |                                  | MHz                    |
| CMR        | Common Mode Rejection Ratio<br>$V_{ic} = 1V$ to $7.4V$ , $V_O = 1.4V$                                                                                                                     | 60           | 80                 |                                | 60                           | 80                 |                                  | dB                     |
| SVR        | Supply Voltage Rejection Ratio<br>$V_{CC}^+ = 5V$ to $10V$ , $V_O = 1.4V$                                                                                                                 | 60           | 80                 |                                | 60                           | 80                 |                                  | dB                     |
| $I_{CC}$   | Supply Current (per amplifier)<br>$A_v = 1$ , no load, $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                  |              | 10                 | 15<br>17                       |                              | 10                 | 15<br>18                         | $\mu A$                |
| $I_o$      | Output Short Circuit Current<br>$V_O = 0V$ , $V_{id} = 100mV$                                                                                                                             |              | 60                 |                                |                              | 60                 |                                  | mA                     |
| $I_{sink}$ | Output Sink Current<br>$V_O = V_{CC}$ , $V_{id} = -100mV$                                                                                                                                 |              | 45                 |                                |                              | 45                 |                                  | mA                     |
| SR         | Slew Rate at Unity Gain<br>$R_L = 1M\Omega$ , $C_L = 100pF$ , $V_i = 3$ to $7V$                                                                                                           |              | 0.04               |                                |                              | 0.04               |                                  | V/ $\mu s$             |
| $\phi_m$   | Phase Margin at Unity Gain<br>$A_v = 40dB$ , $R_L = 1M\Omega$ $C_L = 10pF$<br>$C_L = 100pF$                                                                                               |              | 35<br>10           |                                |                              | 35<br>10           |                                  | Degrees                |
| $K_{OV}$   | Overshoot Factor<br>$A_v = 40dB$ , $R_L = 1M\Omega$ $C_L = 10pF$<br>$C_L = 100pF$                                                                                                         |              | 40<br>70           |                                |                              | 40<br>70           |                                  | %                      |
| $e_n$      | Equivalent Input Noise Voltage<br>$f = 1kHz$ , $R_S = 100\Omega$                                                                                                                          |              | 30                 |                                |                              | 30                 |                                  | $\frac{nV}{\sqrt{Hz}}$ |


1. Maximum values including unavoidable inaccuracies of the industrial test.

**TYPICAL CHARACTERISTICS for  $I_{SET} = 1.5\mu A$**


**Figure 2 : Supply Current versus Supply Voltage**

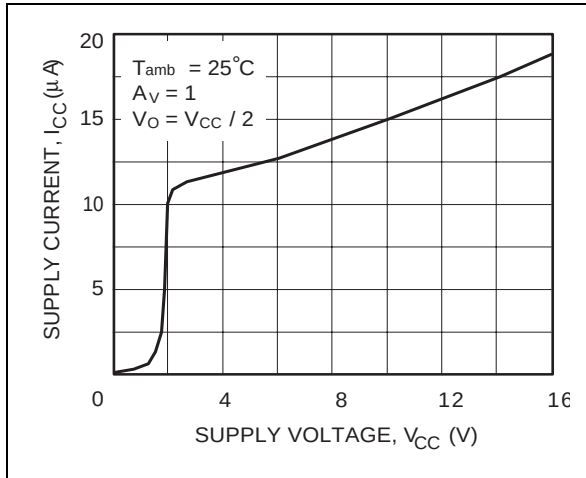


**Figure 3 : Input Bias Current versus Free Air Temperature**

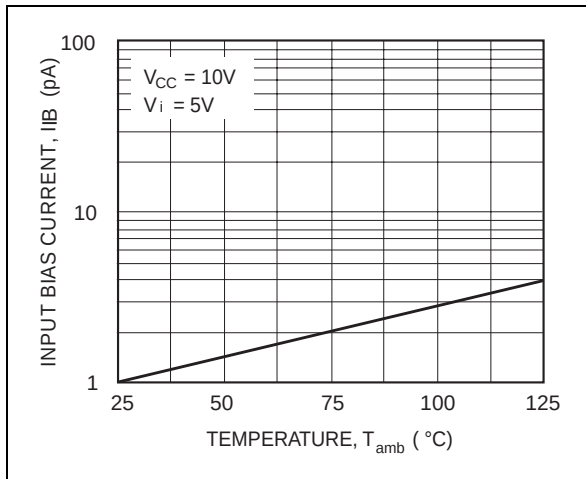


**Figure 4 : High Level Output Voltage versus High Level Output Current**

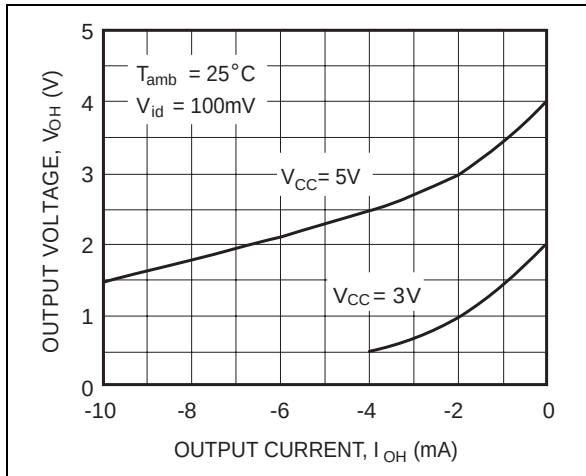


**Figure 4b : High Level Output Voltage versus High Level Output Current**





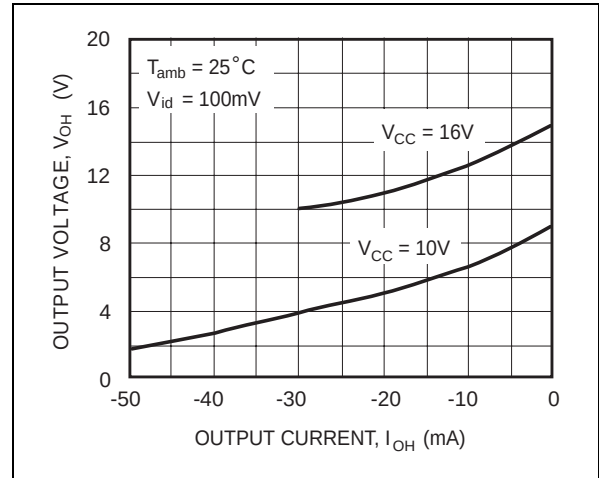


**Figure 5a : Low Level Output Voltage versus Low Level Output Current**

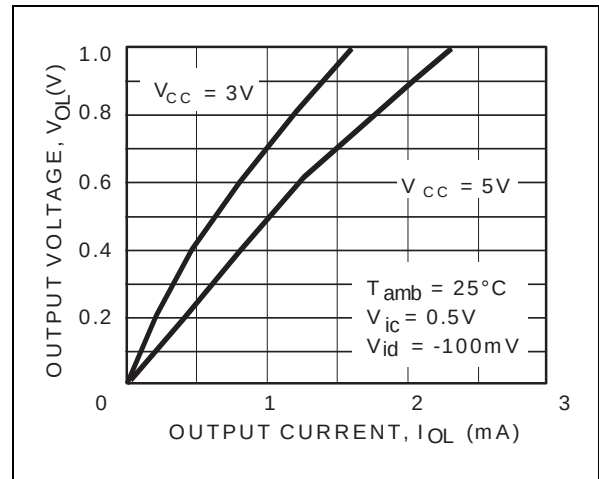

**Figure 5b : Low Level Output Voltage versus Low Level Output Current**

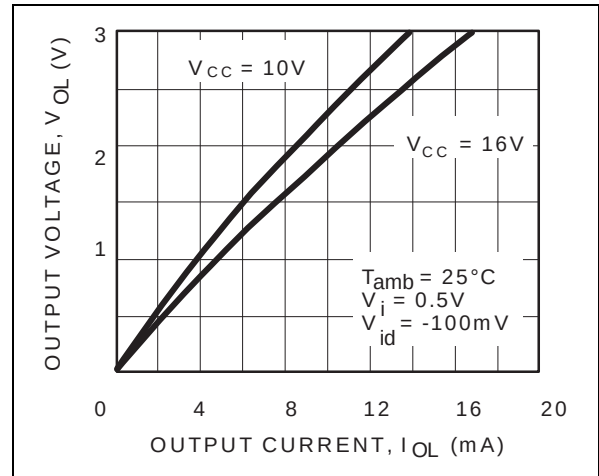


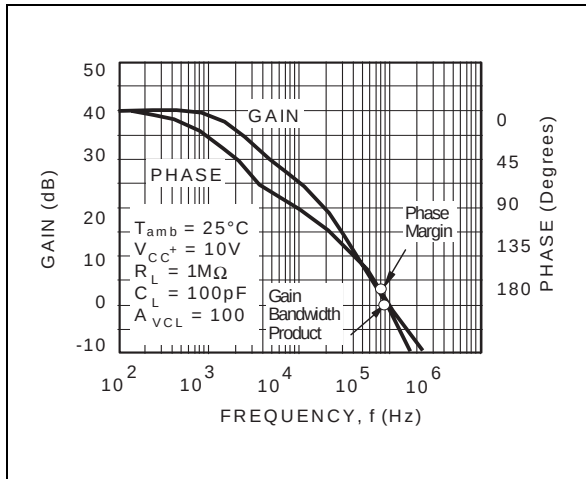
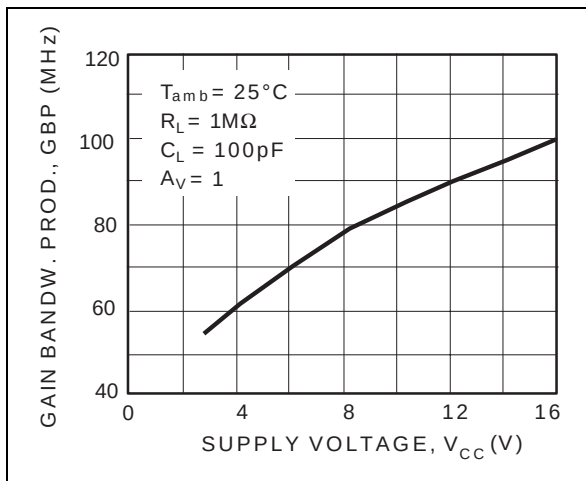
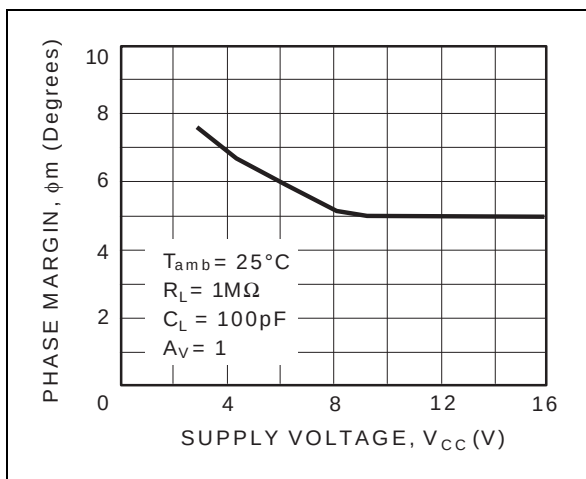
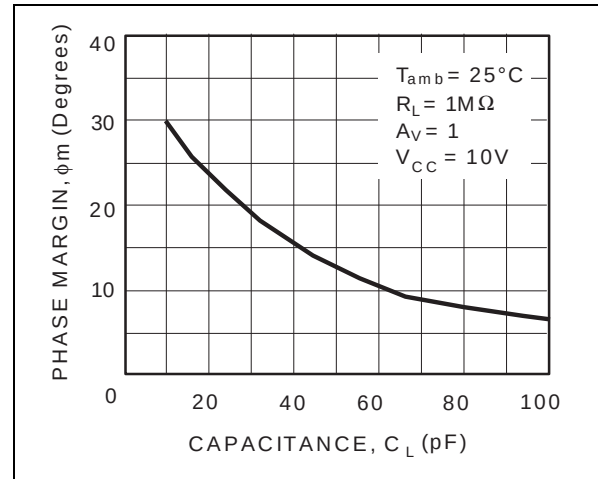
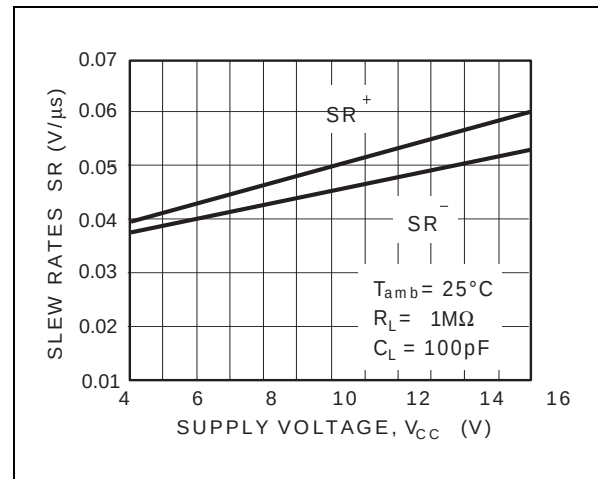
**Figure 6 : Open Loop Frequency Response and Phase Shift****Figure 7 : Gain Bandwidth Product versus Supply Voltage****Figure 8 : Phase Margin versus Supply Voltage****Figure 9 : Phase Margin versus Capacitive Load****Figure 10 : Slew Rate versus Supply Voltage**

**ELECTRICAL CHARACTERISTICS for  $I_{SET} = 25\mu A$** 
 $V_{CC}^+ = +10V$ ,  $V_{CC}^- = 0V$ ,  $T_{amb} = +25^\circ C$  (unless otherwise specified)


| Symbol     | Parameter                                                                                                                                                                                 | TS271C/AC/BC |                    |                                | TS271I/AI/BI<br>TS271M/AM/BM |                    |                                  | Unit                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|--------------------------------|------------------------------|--------------------|----------------------------------|------------------------|
|            |                                                                                                                                                                                           | Min.         | Typ.               | Max.                           | Min.                         | Typ.               | Max.                             |                        |
| $V_{io}$   | Input Offset Voltage<br>$V_O = 1.4V$ , $V_{ic} = 0V$<br>TS271C/I/M<br>TS271AC/AI/AM<br>TS271C/I/M<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS271B/C/I/M<br>TS271AC/AI/AM<br>TS271B/C/I/M |              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3 |                              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3.5 | mV                     |
| $DV_{io}$  | Input Offset Voltage Drift                                                                                                                                                                |              | 2                  |                                |                              | 2                  |                                  | $\mu V/^\circ C$       |
| $I_{io}$   | Input Offset Current note <sup>1)</sup><br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                              |              | 1                  | 100                            |                              | 1                  | 200                              | pA                     |
| $I_{ib}$   | Input Bias Current - see note 1<br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                      |              | 1                  | 150                            |                              | 1                  | 300                              | pA                     |
| $V_{OH}$   | High Level Output Voltage<br>$V_{id} = 100mV$ , $R_L = 100k\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                 | 8.7<br>8.6   | 8.9                |                                | 8.7<br>8.5                   | 8.9                |                                  | V                      |
| $V_{OL}$   | Low Level Output Voltage<br>$V_{id} = -100mV$                                                                                                                                             |              |                    | 50                             |                              |                    | 50                               | mV                     |
| $A_{vd}$   | Large Signal Voltage Gain<br>$V_{ic} = 5V$ , $R_L = 100k\Omega$ , $V_O = 1V$ to $6V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                               | 30<br>20     | 50                 |                                | 30<br>10                     | 50                 |                                  | V/mV                   |
| GBP        | Gain Bandwidth Product<br>$A_v = 40dB$ , $R_L = 100k\Omega$ , $C_L = 100pF$ , $f_{in} = 100kHz$                                                                                           |              | 0.7                |                                |                              | 0.7                |                                  | MHz                    |
| CMR        | Common Mode Rejection Ratio<br>$V_{ic} = 1V$ to $7.4V$ , $V_O = 1.4V$                                                                                                                     | 60           | 80                 |                                | 60                           | 80                 |                                  | dB                     |
| SVR        | Supply Voltage Rejection Ratio<br>$V_{CC}^+ = 5V$ to $10V$ , $V_O = 1.4V$                                                                                                                 | 60           | 80                 |                                | 60                           | 80                 |                                  | dB                     |
| $I_{CC}$   | Supply Current (per amplifier)<br>$A_v = 1$ , no load, $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                  |              | 150                | 200<br>250                     |                              | 150                | 200<br>300                       | $\mu A$                |
| $I_o$      | Output Short Circuit Current<br>$V_O = 0V$ , $V_{id} = 100mV$                                                                                                                             |              | 60                 |                                |                              | 60                 |                                  | mA                     |
| $I_{sink}$ | Output Sink Current<br>$V_O = V_{CC}$ , $V_{id} = -100mV$                                                                                                                                 |              | 45                 |                                |                              | 45                 |                                  | mA                     |
| SR         | Slew Rate at Unity Gain<br>$R_L = 100k\Omega$ , $C_L = 100pF$ , $V_i = 3$ to $7V$                                                                                                         |              | 0.6                |                                |                              | 0.6                |                                  | V/ $\mu s$             |
| $\phi_m$   | Phase Margin at Unity Gain<br>$A_v = 40dB$ , $R_L = 100k\Omega$ , $C_L = 10pF$<br>$C_L = 100pF$                                                                                           |              | 50<br>30           |                                |                              | 50<br>30           |                                  | Degrees                |
| $K_{OV}$   | Overshoot Factor<br>$A_v = 40dB$ , $R_L = 100k\Omega$ , $C_L = 10pF$<br>$C_L = 100pF$                                                                                                     |              | 30<br>50           |                                |                              | 30<br>50           |                                  | %                      |
| $e_n$      | Equivalent Input Noise Voltage<br>$f = 1kHz$ , $R_s = 100\Omega$                                                                                                                          |              | 38                 |                                |                              | 38                 |                                  | $\frac{nV}{\sqrt{Hz}}$ |

1. Maximum values including unavoidable inaccuracies of the industrial test.

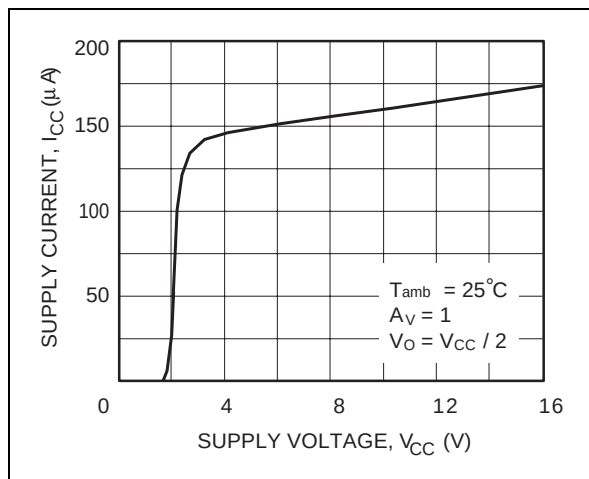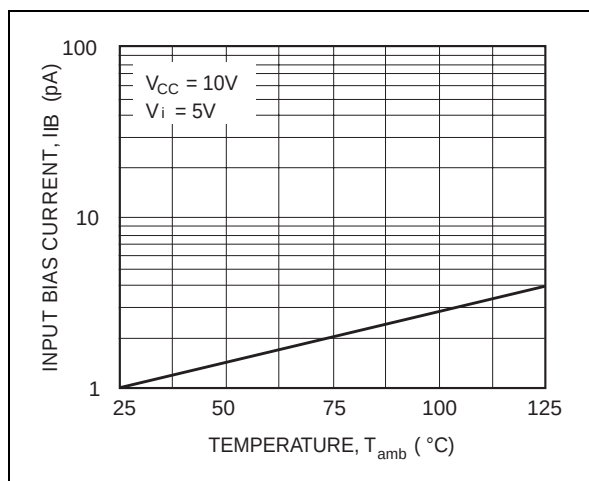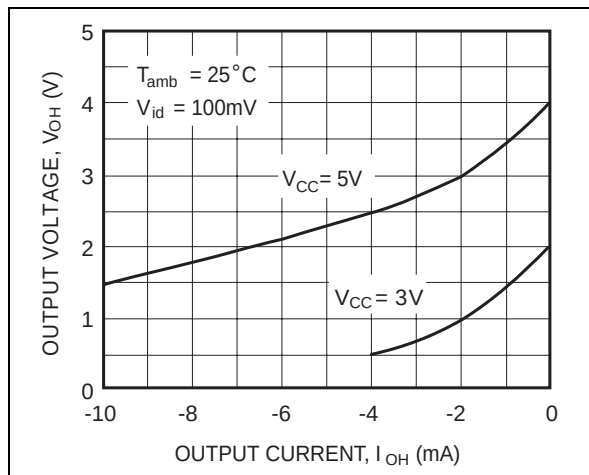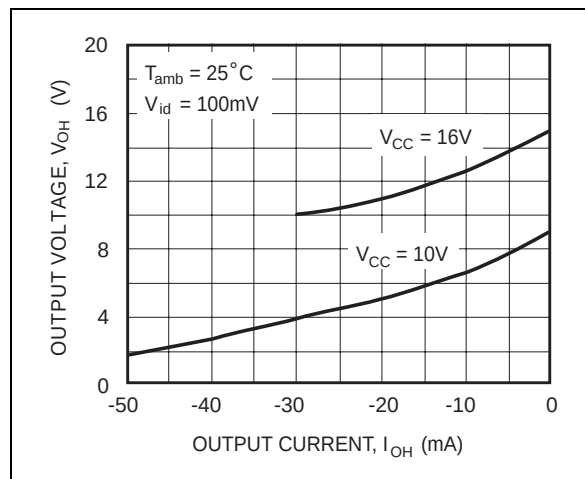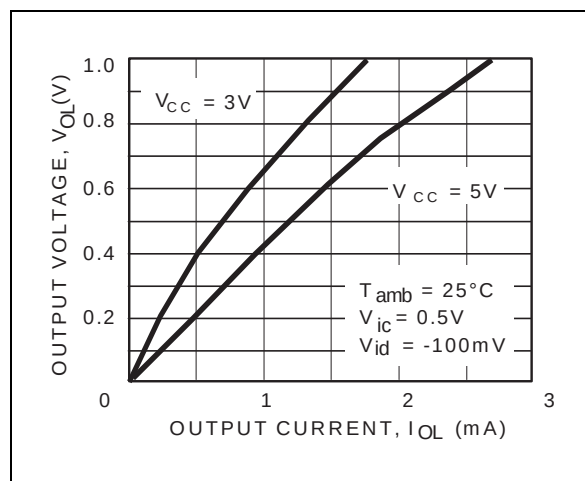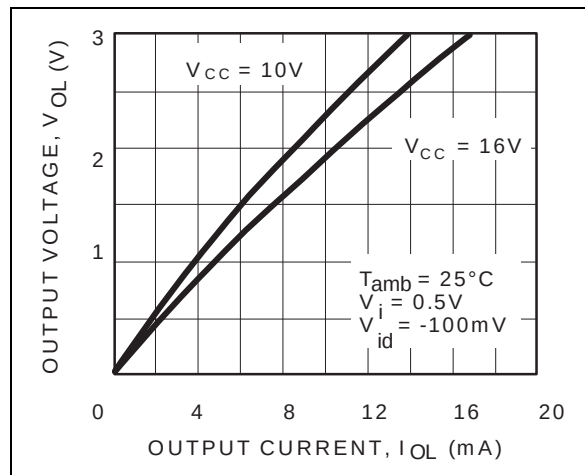


**TYPICAL CHARACTERISTICS for  $I_{SET} = 25\mu A$** **Figure 11** : Supply Current versus Supply Voltage**Figure 12** : Input Bias Current versus Free Air Temperature**Figure 13a** : High Level Output Voltage versus High Level Output Current**Figure 13b** : High Level Output Voltage versus High Level Output Current**Figure 14a** : Low Level Output Voltage versus Low Level Output Current**Figure 14b** : Low Level Output Voltage versus Low Level Output Current


**Figure 15 : Open Loop Frequency Response and Phase Shift**

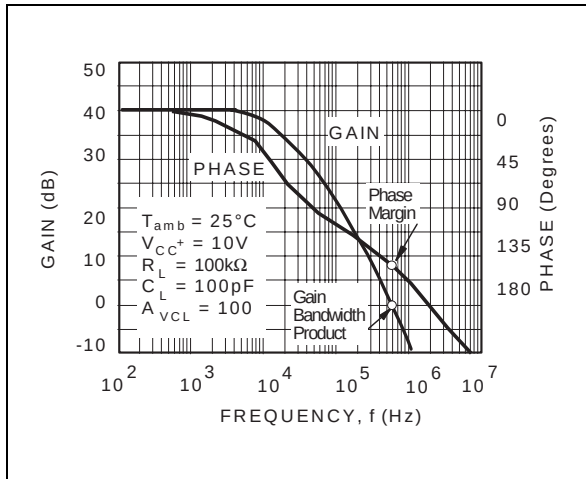


**Figure 16 : Gain Bandwidth Product versus Supply Voltage**

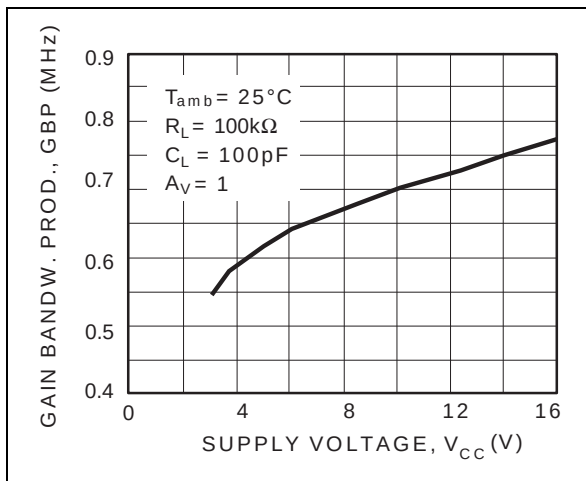


**Figure 17 : Phase Margin versus Supply Voltage**

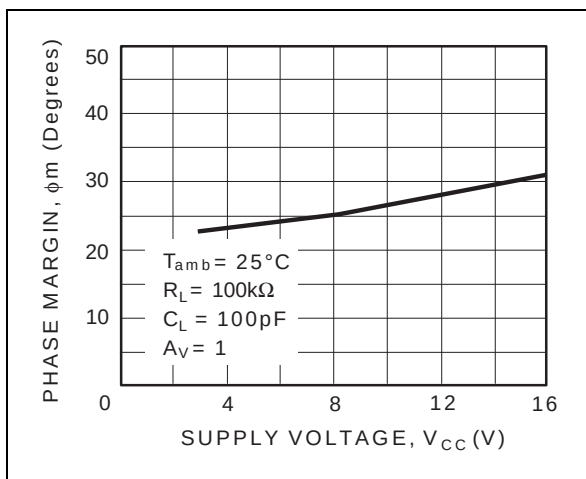

**Figure 18 : Phase Margin versus Capacitive Load**

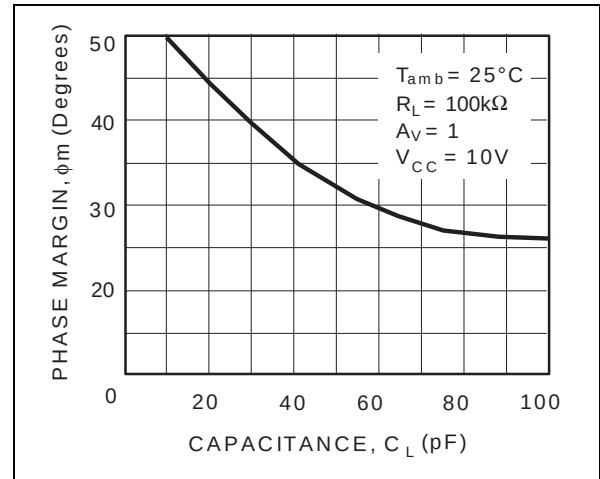







**Figure 19 : Slew Rate versus Supply Voltage**





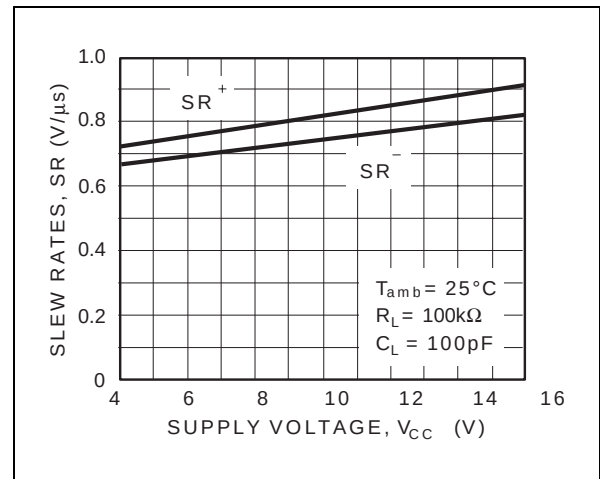



**ELECTRICAL CHARACTERISTICS for  $I_{SET} = 130\mu A$**  $V_{CC}^+ = +10V$ ,  $V_{CC}^- = 0V$ ,  $T_{amb} = +25^\circ C$  (unless otherwise specified)

| Symbol     | Parameter                                                                                                                                                                                 | TS271C/AC/BC |                    |                                | TS271I/AI/BI<br>TS271M/AM/BM |                    |                                  | Unit                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------|--------------------------------|------------------------------|--------------------|----------------------------------|------------------------|
|            |                                                                                                                                                                                           | Min.         | Typ.               | Max.                           | Min.                         | Typ.               | Max.                             |                        |
| $V_{io}$   | Input Offset Voltage<br>$V_O = 1.4V$ , $V_{ic} = 0V$<br>TS271C/I/M<br>TS271AC/AI/AM<br>TS271B/C/I/M<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>TS271C/I/M<br>TS271AC/AI/AM<br>TS271B/C/I/M |              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3 |                              | 1.1<br>0.9<br>0.25 | 10<br>5<br>2<br>12<br>6.5<br>3.5 | mV                     |
| $DV_{io}$  | Input Offset Voltage Drift                                                                                                                                                                |              | 2                  |                                |                              | 2                  |                                  | $\mu V/^\circ C$       |
| $I_{io}$   | Input Offset Current note 1)<br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                         |              | 1                  | 100                            |                              | 1                  | 200                              | pA                     |
| $I_{ib}$   | Input Bias Current - see note 1<br>$V_{ic} = 5V$ , $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                      |              | 1                  | 150                            |                              | 1                  | 300                              | pA                     |
| $V_{OH}$   | High Level Output Voltage<br>$V_{id} = 100mV$ , $R_L = 10k\Omega$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                  | 8.2<br>8.1   | 8.4                |                                | 8.2<br>8                     | 8.4                |                                  | V                      |
| $V_{OL}$   | Low Level Output Voltage<br>$V_{id} = -100mV$                                                                                                                                             |              |                    | 50                             |                              |                    | 50                               | mV                     |
| $A_{vd}$   | Large Signal Voltage Gain<br>$V_{ic} = 5V$ , $R_L = 10k\Omega$ , $V_O = 1V$ to $6V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                | 10<br>7      | 15                 |                                | 10<br>6                      | 15                 |                                  | V/mV                   |
| GBP        | Gain Bandwidth Product<br>$A_v = 40dB$ , $R_L = 10k\Omega$ , $C_L = 100pF$ , $f_{in} = 100kHz$                                                                                            |              | 2.3                |                                |                              | 2.3                |                                  | MHz                    |
| CMR        | Common Mode Rejection Ratio<br>$V_{ic} = 1V$ to $7.4V$ , $V_O = 1.4V$                                                                                                                     | 60           | 80                 |                                | 60                           | 80                 |                                  | dB                     |
| SVR        | Supply Voltage Rejection Ratio<br>$V_{CC}^+ = 5V$ to $10V$ , $V_O = 1.4V$                                                                                                                 | 60           | 70                 |                                | 60                           | 70                 |                                  | dB                     |
| $I_{CC}$   | Supply Current (per amplifier)<br>$A_v = 1$ , no load, $V_O = 5V$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                  |              | 800                | 1300<br>1400                   |                              | 800                | 1300<br>1500                     | $\mu A$                |
| $I_o$      | Output Short Circuit Current<br>$V_O = 0V$ , $V_{id} = 100mV$                                                                                                                             |              | 60                 |                                |                              | 60                 |                                  | mA                     |
| $I_{sink}$ | Output Sink Current<br>$V_O = V_{CC}$ , $V_{id} = -100mV$                                                                                                                                 |              | 45                 |                                |                              | 45                 |                                  | mA                     |
| SR         | Slew Rate at Unity Gain<br>$R_L = 10k\Omega$ , $C_L = 100pF$ , $V_i = 3$ to $7V$                                                                                                          |              | 4.5                |                                |                              | 4.5                |                                  | V/ $\mu s$             |
| $\phi_m$   | Phase Margin at Unity Gain<br>$A_v = 40dB$ , $R_L = 10k\Omega$ $C_L = 10pF$<br>$C_L = 100pF$                                                                                              |              | 65<br>30           |                                |                              | 65<br>30           |                                  | Degrees                |
| $K_{OV}$   | Overshoot Factor<br>$A_v = 40dB$ , $R_L = 10k\Omega$ $C_L = 10pF$<br>$C_L = 100pF$                                                                                                        |              | 30<br>50           |                                |                              | 30<br>50           |                                  | %                      |
| $e_n$      | Equivalent Input Noise Voltage<br>$f = 1kHz$ , $R_s = 100\Omega$                                                                                                                          |              | 30                 |                                |                              | 30                 |                                  | $\frac{nV}{\sqrt{Hz}}$ |


1. Maximum values including unavoidable inaccuracies of the industrial test.

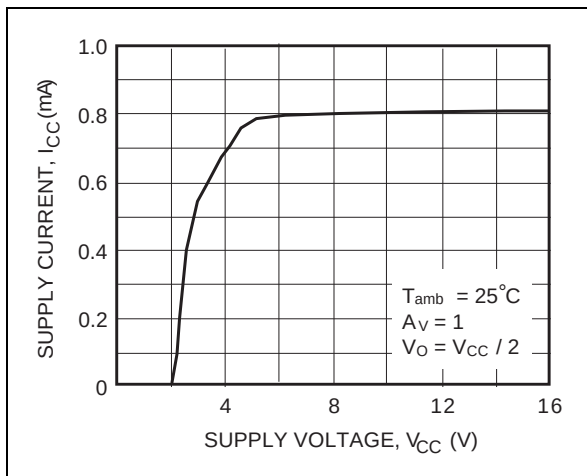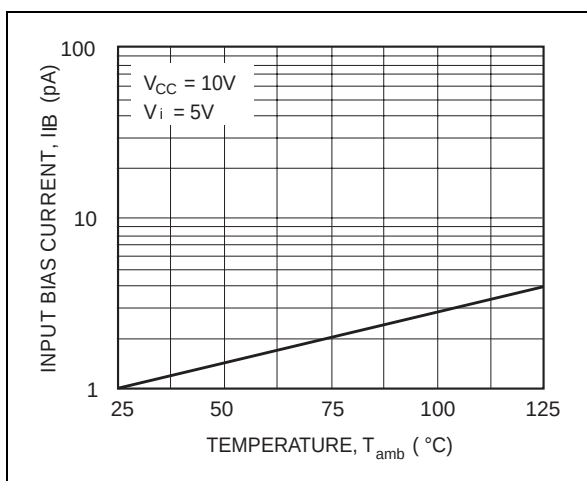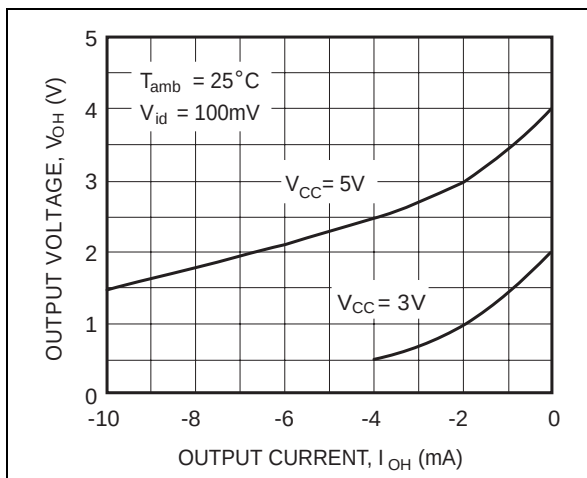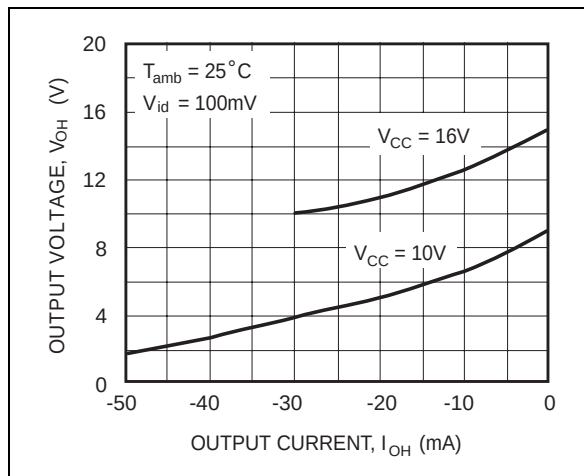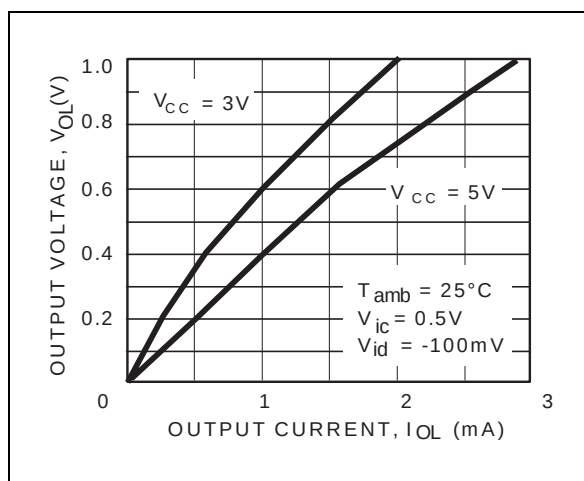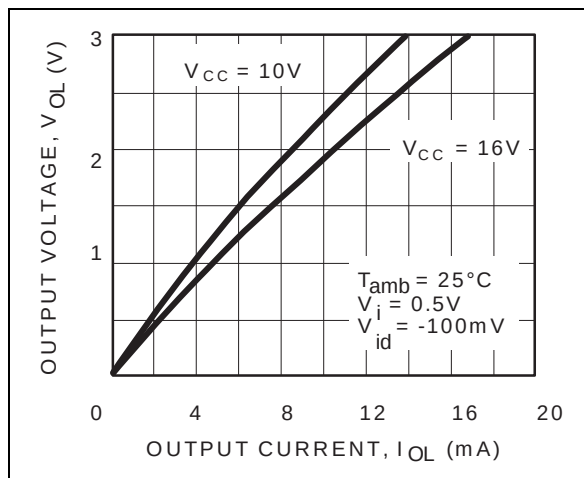TYPICAL CHARACTERISTICS for  $I_{SET} = 130\mu A$ **Figure 20** : Supply Current (each amplifier) versus Supply Voltage**Figure 21** : Input Bias Current versus Free Air Temperature**Figure 22a** : High Level Output Voltage versus High Level Output Current**Figure 22b** : High Level Output Voltage versus High Level Output Current**Figure 23a** : Low Level Output Voltage versus Low Level Output Current**Figure 23b** : Low Level Output Voltage versus Low Level Output Current

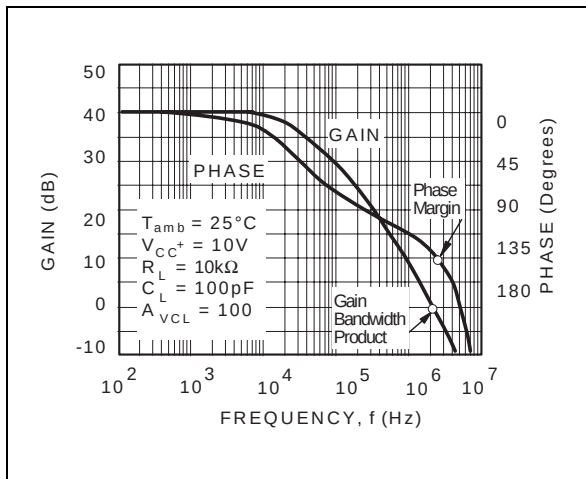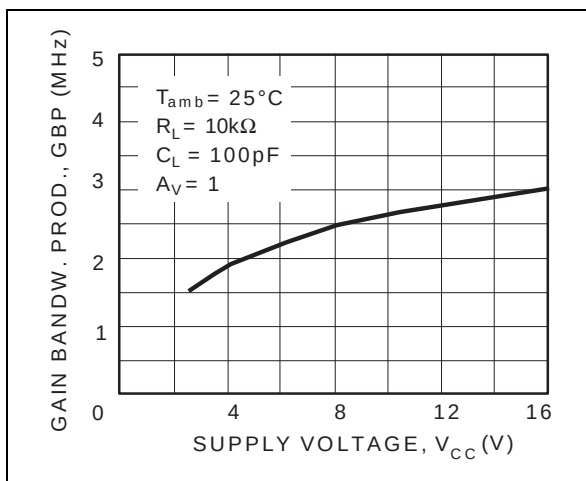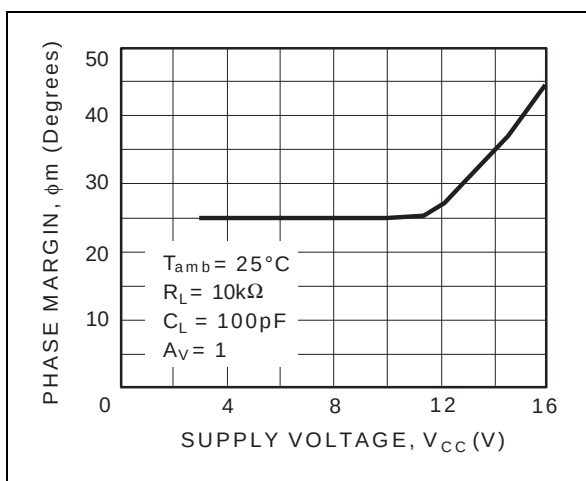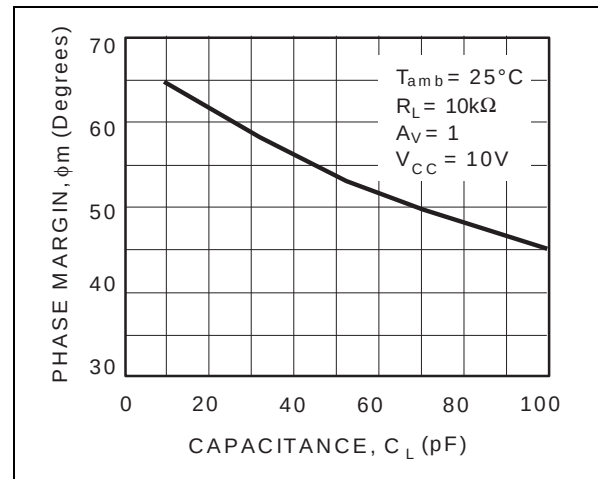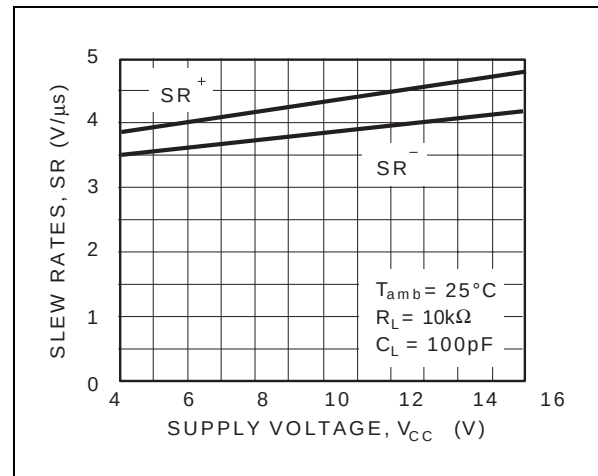**Figure 24 : Open Loop Frequency Response and Phase Shift****Figure 25 : Gain Bandwidth Product versus Supply Voltage****Figure 26 : Phase Margin versus Supply Voltage****Figure 27 : Phase Margin versus Capacitive Load****Figure 28 : Slew Rate versus Supply Voltage**

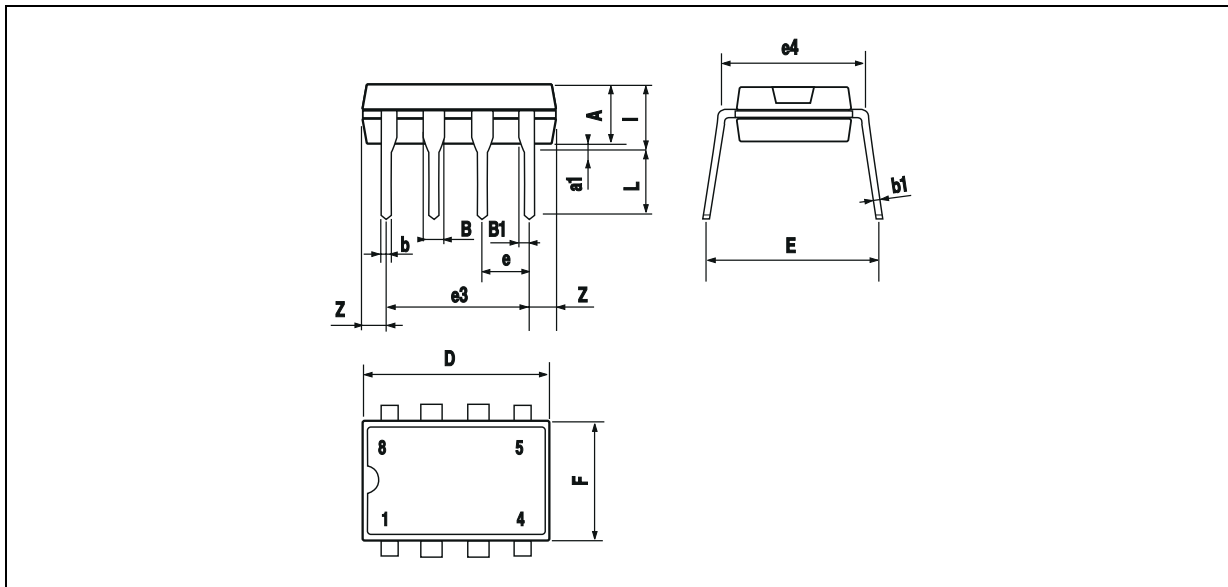**PACKAGE MECHANICAL DATA**  
 8 PINS - PLASTIC DIP


| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

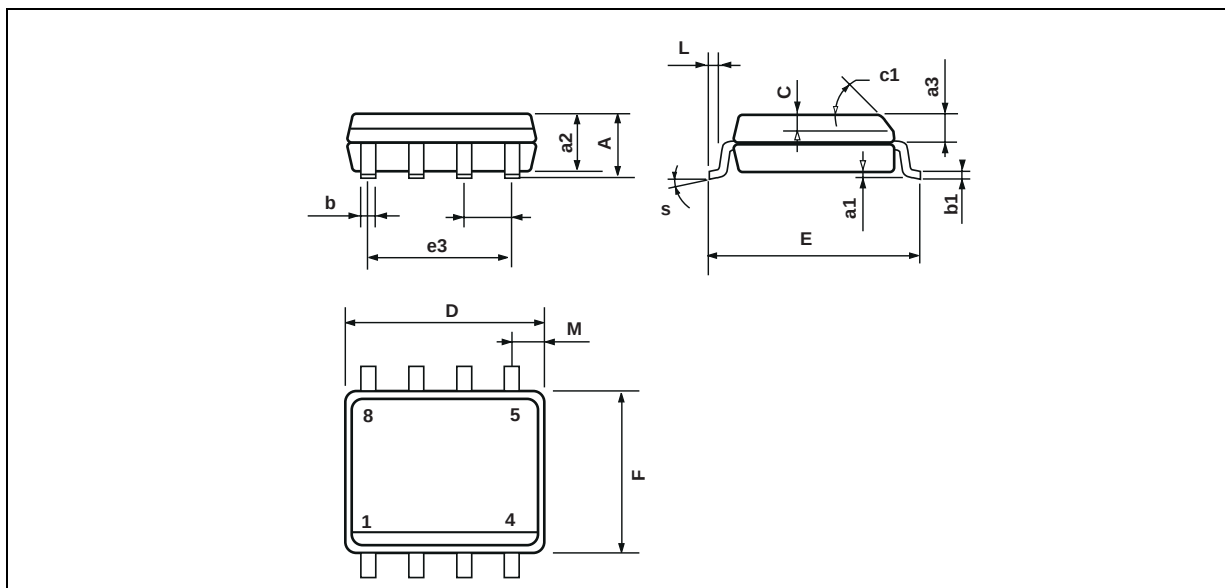**PACKAGE MECHANICAL DATA****8 PINS - PLASTIC MICROPACKAGE (SO)**

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>

