



# SAW Components

Data Sheet B3630

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a globe or a stylized wave. The graphic is rendered in a light gray color against a dark, textured background.



## SAW Components

**B3630**

## Low-Loss Filter

**151,2 MHz**

### Data Sheet


Ceramic package **DCC14B**

#### Features

- Low-loss IF filter for GSM base station
- Temperature stable
- Ceramic SMD package

#### Terminals


- Gold plated

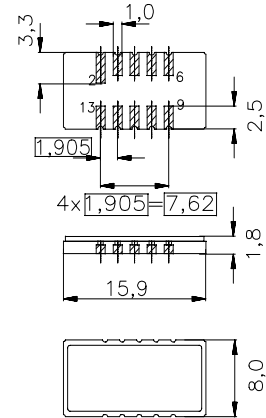

Dim. in mm, aprox. weight 0,6 g

#### Pin configuration

2	Input
9	Output
3	Input ground
11	Output ground
4, 6, 13	Ground
3, 5, 10, 12	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B3630	B39151-B3630-U110	C61157-A7-A45	F61074-V8036-Z000

Electrostatic Sensitive Device (ESD)

#### Maximum ratings

Operable temperature range	$T$	- 25/+ 85	°C	
Storage temperature range	$T_{stg}$	- 40/+ 85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	12	dBm	



<b>SAW Components</b>	<b>B3630</b>
<b>Low-Loss Filter</b>	<b>151,2 MHz</b>

## Data Sheet

### Characteristics

Reference temperature:	$T_A = -5 - 75\text{ °C}$
Terminating source impedance:	$Z_S = 50\ \Omega$ and matching network
Terminating load impedance:	$Z_L = 50\ \Omega$ and matching network

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	151,2	151,2	151,2	MHz
<b>Insertion attenuation (@ <math>f_N</math>)</b> (including matching network)	$\alpha_{\min}$	—	8,6	9,5	dB
<b>Passband width</b>					
	$\alpha_{\text{rel}} \leq 3,0\text{ dB}$	$B_{3,0\text{dB}}$	370	—	kHz
<b>Amplitude ripple (p-p)</b>					
	$\Delta\alpha$				
	$f_N \pm 95\text{ kHz}$	—	0,4	0,6	dB
	$f_N \pm 120\text{ kHz}$	—	0,8	1,5	dB
<b>Absolute group delay (@ <math>f_N</math>)</b>	$\tau$	—	2,1	4,0	$\mu\text{s}$
<b>Group delay ripple (p-p)</b>					
	$\Delta\tau$				
	$f_N \pm 95\text{ kHz}$	—	0,4	0,7	$\mu\text{s}$
	$f_N \pm 120\text{ kHz}$	—	0,7	0,9	$\mu\text{s}$
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
	$f_N \pm 330\text{ kHz} \dots f_N \pm 600\text{ kHz}$	9	11	—	dB
	$f_N \pm 600\text{ kHz} \dots f_N \pm 800\text{ kHz}$	22	27	—	dB
	$f_N \pm 800\text{ kHz} \dots f_N \pm 3\text{ MHz}$	30	41	—	dB
	$f_N \pm 3\text{ MHz} \dots f_N \pm 20\text{ MHz}$	42	48	—	dB
	@ $f_N - 3,4\text{ MHz}$	52,5	57	—	dB
	@ $f_N + 3,1\text{ MHz}$	48,5	52	—	dB
	@ $f_N + 6,5\text{ MHz}$	49,5	56	—	dB
	@ $f_N + 9,6\text{ MHz}$	43,5	48	—	dB
<b>Temperature coefficient of frequency <sup>1)</sup></b>	$TC_f$	—	- 0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	35	—	°C

<sup>1)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



SAW Components


B3630

Low-Loss Filter

151,2 MHz

Data Sheet

Matching network:

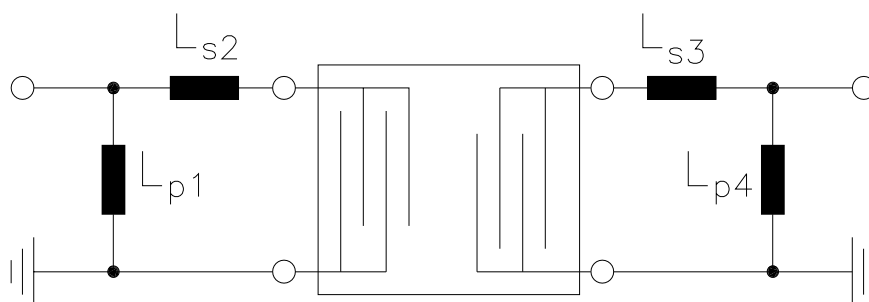

$$L_{p1} = 39 \text{ nH}$$

$$L_{s2} = 56 \text{ nH}$$

$$L_{s3} = 62 \text{ nH}$$

$$L_{p4} = 39 \text{ nH}$$



SAW Components


B3630

Low-Loss Filter


151,2 MHz

## Data Sheet

### Normalized frequency response

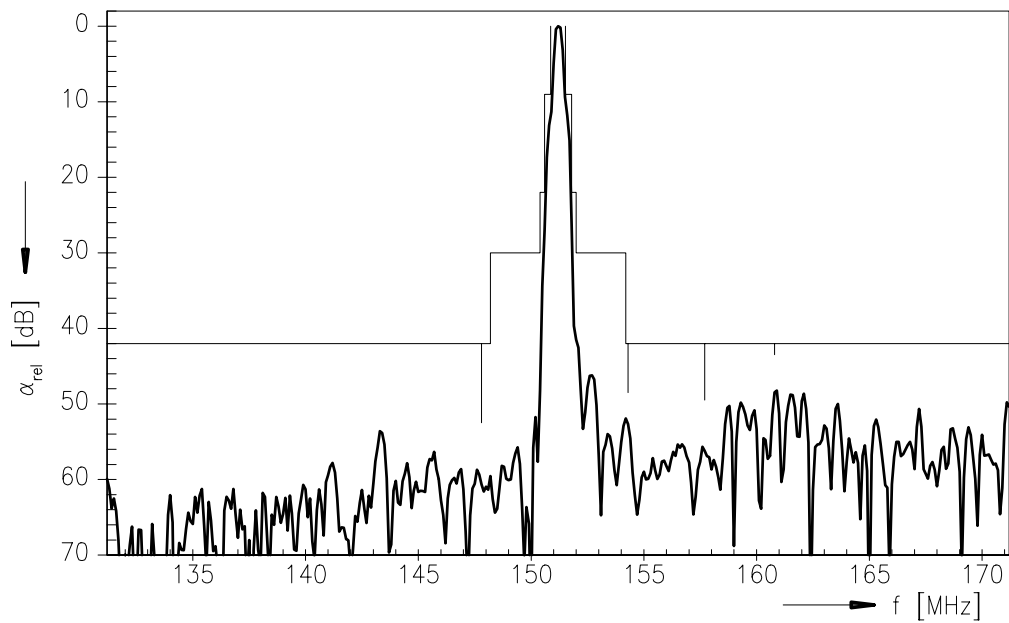

### Normalized frequency response (pass band)

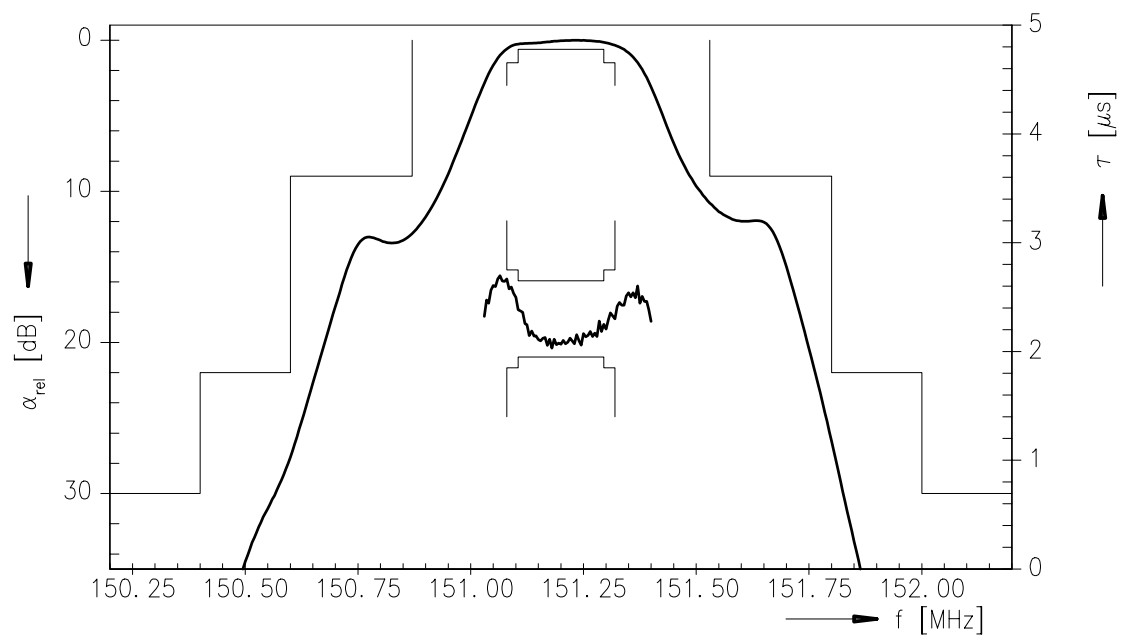



<b>SAW Components</b>	<b>B3630</b>
<b>Low-Loss Filter</b>	<b>151,2 MHz</b>

## Data Sheet

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW MC IS**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.