

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2032	A	Released	JN	07/07/09	JWM	07/07/09	JWM	07/07/09

SPECIFICATION

MECHANICAL

- Operation Force: See Table
- Stop Strength: Max.3kgf vertical static load continuously for 15 seconds
- Stroke: (6x6) 0.25+0.2mm / -0.1
- Operation Temperature: -25°C to + 70°C
- Storage Temperature: -30°C to +80°C





ELECTRICAL




- Electrical Life: 200,000 cycles min.
- Rating: 50mA , 12VDC
- Contact Resistance: 100mΩmax.
- Insulation Resistance: 100MΩmin. at 500VDC
- Dielectric Strength: 250VAC / 1 minute
- Contact Arrangement: 1 pole 1 throw

MATERIALS

- COVER: Steel
- BASE: LCP (Liquid Crystal Polymer)
Color: Black
- STEM: LCP (Liquid Crystal Polymer)
Color: Black (100gf), Brown (160gf)
- CONTACT DISC: Phosphor bronze with silver cladding.
- TERMINAL: Brass with silver plated.

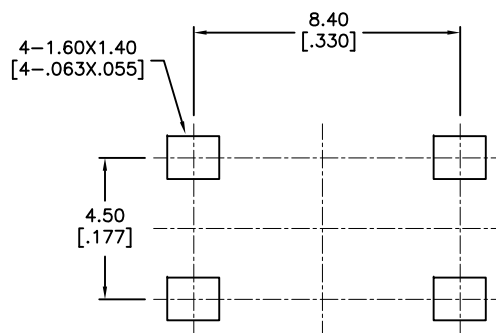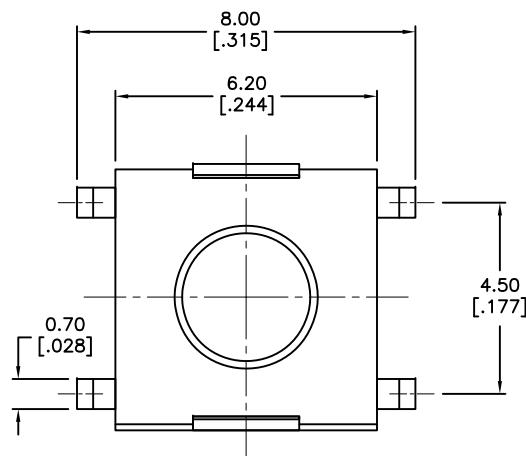

P.C.B. LAYOUT

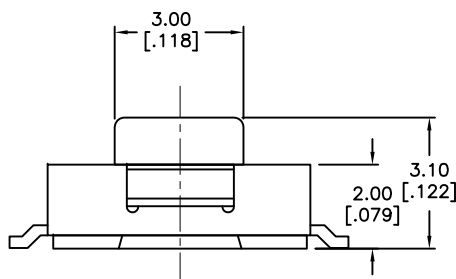

Mfg. P/N	Operating Force	Color of Stem
MC32882	100gf	Black
MC32884	160gf	Brown

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	07/07/09
CHECKED BY:	DATE:
Jeff McVicker	07/07/09
APPROVED BY:	DATE:
Jeff McVicker	07/07/09

DRAWING TITLE:			
Tactile Switch			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	Ta-1143	Ta-1143.dwg	A
SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 2