

Installation instructions



Fastening the inserts use flat headed screws of size M3 / up to M3.5 max.

Tool size for BERKER products with combination cross-head screws as fixing screws:

- Cross-head bits, type: Pozidriv size 1.
- Cross-head screwdriver: type: Pozidriv size 1.
- Slotted screwdriver: type: blade thickness 0.8 mm.

Contact screws:

- Cross-head bits, type: Pozidriv size 2.
 - Cross-head screwdriver: type: Pozidriv size 2
 - Slotted screwdriver: type: blade thickness 1 mm
- When using cordless screwdrivers, e.g. Würth ABS 12-112, setting 1st speed, step 1 with 0.5 Nm.

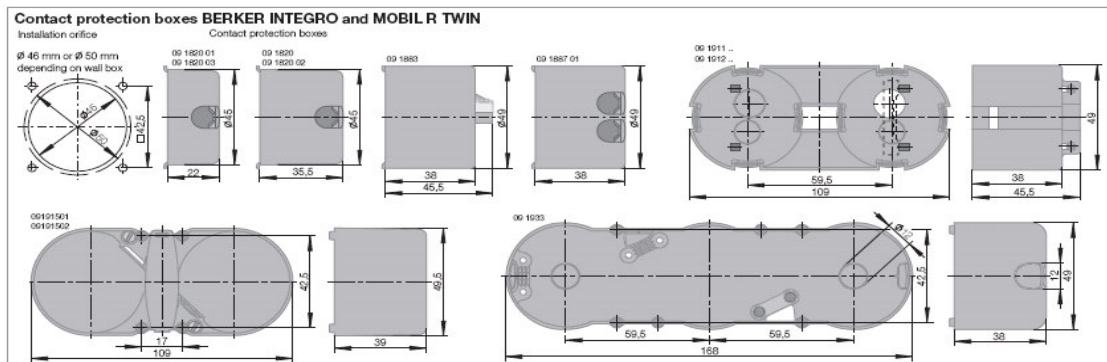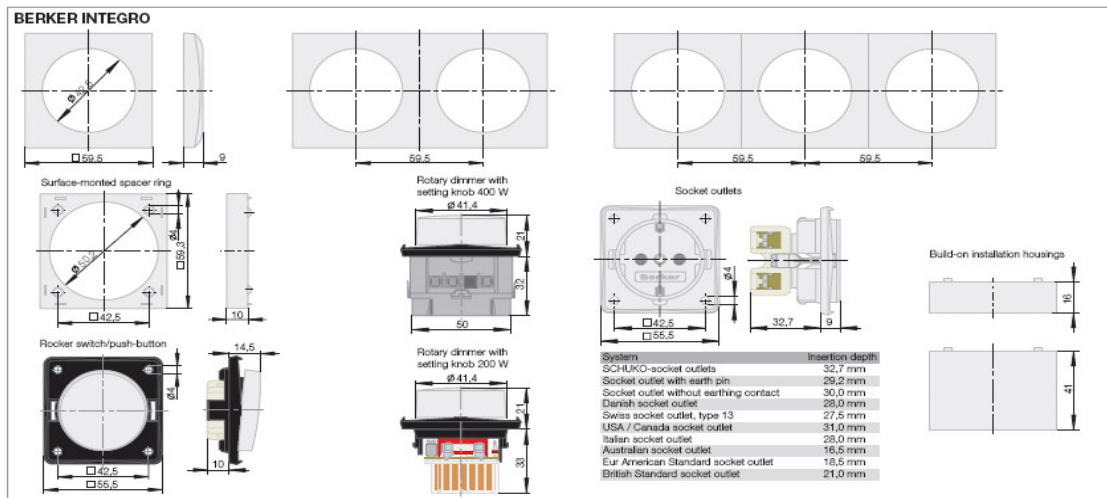

The Berker Integro range is designed for use in:

- Yachts, boats, caravans, static and motor homes
- Laboratories
- Electrical equipment such as PATs, electrical distribution boxes and power sockets
- Furniture such as office furniture and bathroom mirror cabinets
- Power tools and cleaning equipment

Berker products are widely known for:

- Ultra compact designs and minimal installation depths - ideal for applications where space is a premium.
- Ease of installation – no special tool requirements
- Outstanding quality
- Modern and forward thinking design concepts

<u>Berker Part No.</u>	<u>Technical details</u>
09-1827-25-09 – Frame 1 gang	• Polar white, glossy
09-1826-25-19 – Frame 2 gang	• For vertical and horizontal mounting
09-3651-25-09 – Rocker switch	• Polar white, glossy, off • 16AX 250V • Suitable for all Berker Integro wall boxes
09-4185-25-02 – SCHUKO socket outlet	• Suitable for all Berker Integro wall boxes • Connection terminals IEC 60884-1 DIN 49440 • With screw terminals
09-6262-25-02 – British standard socket outlet	• 13A, 250V • Suitable for all Berker Integro wall boxes • Standard BS 1363 • 2 pole and earth • With screw terminals
09-4570-25-05 – Motor vehicle power socket outlet	• 6-24V, 20A at 2.5mm², 15A at 1.5mm² • Not suitable for wall boxes • With flat plug connection
1980 – Mini jack 8 pole	• Black, RJ45, cat.3 ISDN-compatible • Protective screen DIN EN 55022 class B • Colour code A and B EIA/TIA 568A • With insulation piercing terminals
09-1828-25-99 – Frame with hinged cover and IP44 imprint	• Protection class IP44 only guaranteed when used with seal 09-1853 • For the cover on socket outlets
09-1853 – Seal	• For rocker switches and push buttons • For SCHUKO socket outlets and socket outlets with earth pin • Use with 09-1828-25-99 for IP44 protection
19820 – Wall box 45mm Ø	• Grey with cable clamp • Insertion depth 35.5mm • Flame resistant according to VDE 0606-1 • For switches and socket outlets • With 4 line entries • 3 knockout openings