

PCM codec IC for digital cellular telephones

BU8733KV

The BU8733KV is a PCM codec IC developed for use with digital cellular telephones. The BU8733KV contains analog input / output features such as a 14-bit linear precision, μ / A-LAW codec, mic and speaker amplifiers, and a switching transistor for the ringer drive. Also, there is a built-in DSP interface circuit for support of multiple DSP formats making this IC perfect for use with PDC cellular telephones.

●Applications

Digital cellular telephones

●Features

- 1) +3V single power supply ($V_{DD} = 2.7V$ to $3.3V$).
- 2) Built-in 14-bit precision linear, μ / A-LAW codec.
- 3) Transmission filter for the codec unit conforms to ITU-T recommendations.
- 4) Built-in PLL circuit for system clock generation.
- 5) Tone signal generator contains DTMF signal, scale tone, and variable tone functions.
- 6) Analog input / output functions:
 - Built-in mic amplifier.
 - Built-in receiver speaker amplifier (32Ω BTL type).
- Built-in attenuator for wide gain adjustment range.
- Data signal I / O circuit allows for connection to external devices.
- For the external output and receiver output, soft-mute function reduces pop noise when the power is turned on and off.
- 7) Internal switching transistor for ringer drive.
- 8) Internal DSP interface circuit supports multiple DSP formats.

●Absolute maximum ratings ($T_a = 25^\circ C$)

Parameter	Symbol	Limits	Unit
Digital power supply voltage	DV_{DD}	$-0.3 \sim +4.5$	V
Analog power supply voltage	RXV_{DD}	$-0.3 \sim +4.5$	V
	TXV_{DD}	$-0.3 \sim +4.5$	V
Digital input voltage	V_{DIN}	$DV_{SS} - 0.3 \sim DV_{DD} + 0.3$	V
Analog input voltage	V_{AIN}	$RXV_{SS} - 0.3 \sim RXV_{DD} + 0.3$	V
		$TXV_{SS} - 0.3 \sim TXV_{DD} + 0.3$	V
Input current	I_{IN}	$-10 \sim +10$	mA
Power dissipation	P_d	400*1	mW
Operating temperature	T_{stg}	$-50 \sim +125$	$^\circ C$
Storage temperature	T_{opr}	$-30 \sim +85$	$^\circ C$


*1 Reduced by 4.0 mW for each increase in T_a of $1^\circ C$ over $25^\circ C$.

● Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Digital power supply voltage	DV _{DD}	2.7	—	3.3	V
Analog power supply voltage	RXV _{DD}	2.7	—	3.3	V
	TXV _{DD}	2.7	—	3.3	V
PLL sync signal frequency	FSY	—	8	—	kHz

©Not designed for radiation resistance.

● Block diagram

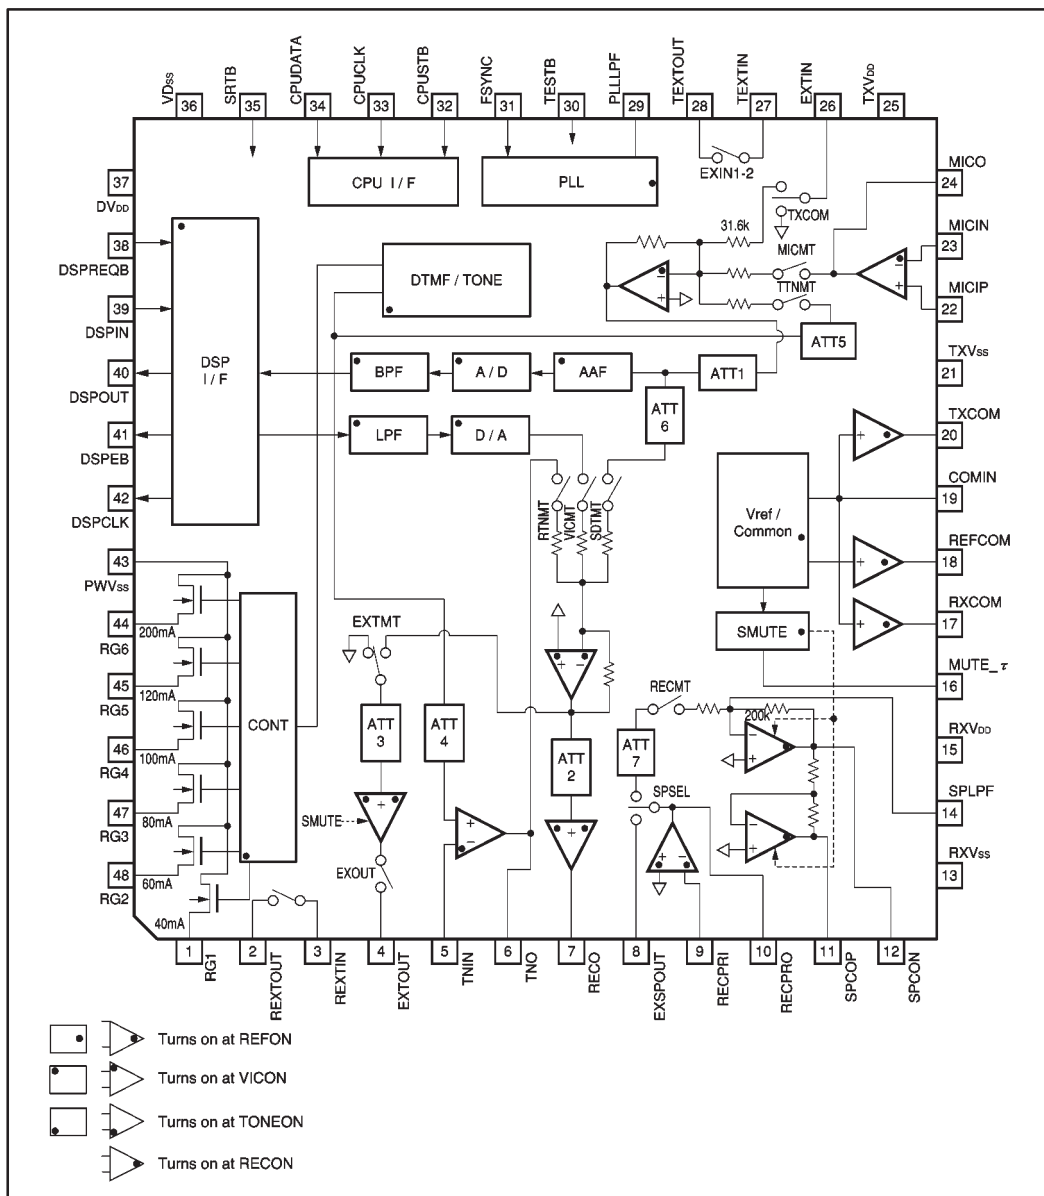

● Pin descriptions

Pin No.	I / O	Pin name	Function	Minimum load resistance (Ω)	Maximum load capacitance (F)
1	O	RG1	Ringer 40mA output	75	—
2	O	REXTOUT	Reception data output	—	—
3	I	REXTIN	Reception data input	—	—
4	O	EXTOUT	Reception external output	50k	20p
5	I	TNIN	TONE output gain control amplifier inverse input	—	—
6	O	TNO	TONE output gain control amplifier output	50k	20p
7	O	RECO	Reception signal output	50k	20p
8	O	EXSPOUT	Output for external receiver	50k	20p
9	I	RECPRI	Receiver gain control amplifier inverse input	—	—
10	O	RECPRO	Receiver gain control amplifier output	50k	20p
11	O	SPCOP	Receiver amplifier inverse output	32 (BTL)	—
12	O	SPCON	Receiver amplifier non-inverse output	32 (BTL)	—
13	—	RXV _{ss}	Analog ground for reception	—	—
14	I	SPLPF	Receiver amplifier filter input	—	—
15	—	RXV _{DD}	Analog power supply for reception	—	—
16	O	MUTE_ τ	For connecting capacitor for soft mute	—	—
17	O	RXCOM	Analog reference voltage output for reception	—	—
18	O	REFCOM	Reference voltage output for internal reference	—	—
19	I	COMIN	Analog reference voltage input	—	—
20	O	TXCOM	Analog reference voltage output for transmission	—	—
21	—	TXV _{ss}	Analog ground for transmission	—	—
22	I	MICIP	Mic amplifier non-inverse input	—	—
23	I	MICIN	Mic amplifier inverse input	—	—
24	O	MICO	Mic amplifier output	50k	20p
25	—	TXV _{DD}	Analog power supply for transmission	—	—
26	I	EXTIN	Transmission external input	—	—
27	I	TEXTIN	Transmission data input	—	—
28	O	TEXTOUT	Transmission data output	—	—
29	O	PLLLPF	Filter output for PLL	—	—
30	I	TESTB	Test input ($\rightarrow$ DV _{DD})	—	—
31	I	FSYNC	PLL reference 8kHz clock input	—	—
32	I	CPUSTB	CPU I/F strobe input	—	—
33	I	CPUCLK	CPU I/F shift clock input	—	—
34	I	CPUDATA	CPU I/F address data input	—	—
35	I	RSTB	System reset input (L: reset)	—	—
36	—	DV _{ss}	Digital ground	—	—
37	—	DV _{DD}	Digital power supply	—	—
38	I	SDPREQB	DSP serial data request input	—	—
39	I	DSPIN	DSP serial data input (50k Ω pull-down)	—	—

Pin No.	I / O	Pin name	Function	Minimum load resistance (Ω)	Maximum load capacitance (F)
40	O	DSPOUT	DSP serial data output	—	—
41	O	DSPEB	DSP serial data enable output	—	—
42	O	DSPCLK	DSP serial data clock output	—	—
43	—	PWVss	Ringer ground	—	—
44	O	RG6	Ringer 200mA output	15	—
45	O	RG5	Ringer 120mA output	25	—
46	O	RG4	Ringer 100mA output	30	—
47	O	RG3	Ringer 80mA output	38	—
48	O	RG2	Ringer 60mA output	50	—

- Electrical characteristics(unless otherwise noted, Ta = 25°C, DV_{DD} = RXV_{DD} = TXV_{DD} = 3.0V, FSYNC = 8kHz, gain of each attenuator = 0dB)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	
〈DC characteristics〉							
Current consumption*1	I _{DD0}	—	—	20	μA	Complete power down	FSYNC=fixed
	I _{DD1}	—	2.7	3.9	mA	Only reference on	FSYNC=8kHz
	I _{DD2}	—	3.2	4.5	mA	Reference and tone on	FSYNC=8kHz
	I _{DD3}	—	4.1	5.8	mA	Reference and audio on	FSYNC=8kHz
	I _{DD4}	—	4.4	6.2	mA	Reference, tone, and audio on	FSYNC=8kHz
	I _{DD5}	—	5.4	7.6	mA	All power on	FSYNC=8kHz
Digital input high level voltage	V _{IH}	0.8 DV _{DD}	—	—	V	—	—
Digital input low level voltage	V _{IL}	—	—	0.2 DV _{DD}	V	—	—
Digital input high level current 1	I _{IH1}	—	—	10	μA	V _{IH} =DV _{DD}	*2
Digital input high level current 2	I _{IH2}	30	60	120	μA	V _{IH} =DV _{DD}	DSPIN pin
Digital input low level current	I _{IL}	−10	—	—	μA	V _{IL} =0V	—
Digital output high level voltage	V _{OH}	DV _{DD} −0.5	—	—	V	I _{OH} =−1mA	—
Digital output low level voltage	V _{OL}	—	—	0.5	V	I _{OL} =1mA	—
〈Ringer drive〉							
Level output voltage 1	V _{OL1}	—	—	0.5	V	I _o =40mA, RG1	
Level output voltage 2	V _{OL2}	—	—	0.5	V	I _o =60mA, RG2	
Level output voltage 3	V _{OL3}	—	—	0.5	V	I _o =80mA, RG3	
Level output voltage 4	V _{OL4}	—	—	0.6	V	I _o =100mA, RG4	
Level output voltage 5	V _{OL5}	—	—	0.6	V	I _o =120mA, RG5	
Level output voltage 6	V _{OL6}	—	—	0.8	V	I _o =200mA, RG6	
OFF leak current	I _{OH}	—	—	3	μA	V _O =DV _{DD} , RG1~RG6=OFF	

*1 The power supply voltage (DV_{DD}, RXV_{DD}, and TXV_{DD}) is 3V. There is no load on the digital and analog output pins.

Digital input pins other than the FSYNC pin are connected to DV_{DD} or DV_{SS}.

Analog input pins are connected to TXCOM or RXCOM with the proper resistance.

*2 Digital input pins other than DSPIN.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions		
〈Transmission characteristics〉								
Signal to total power distortion ratio (A→D) EXTIN→DSPOUT	S _{DT}	24	—	—	dB	1020Hz reference	—45dBm0	C-Wgt
		29	—	—			—40dBm0	
		35	—	—			0, —30dBm0	
Signal to total power distortion ratio (D→A) DSPIN→RECO	S _{DR}	24	—	—	dB	1020Hz reference	—45dBm0	C-Wgt
		29	—	—			—40dBm0	
		35	—	—			0, —30dBm0	
Transmission level characteristics (A→D) EXTIN→DSPOUT	G _{TX}	—0.9	—	0.9	dB	1020Hz reference	—55dBm0	Reference level =—10dBm0 C-Wgt
		—0.6	—	0.6			—50dBm0	
		—0.3	—	0.3			0, —40dBm0	
Transmission level characteristics (D→A) DSPIN→RECO	G _{TR}	—0.9	—	0.9	dB	1020Hz reference	—55dBm0	Reference level =—10dBm0 C-Wgt
		—0.6	—	0.6			—50dBm0	
		—0.3	—	0.3			0, —40dBm0	
Transmission output level	V _{OTX}	—	0.501	—	V _{rms}	1020Hz, 0dBm0 input reference	MICO→ DSPOUT	MICO level is set to 0dB
		—	0.158	—	V _{rms}		EXTIN →DSPOUT	—
Reception output level	V _{ORX}	—	0.501	—	V _{rms}	1020Hz, 3dBm0 input reference	DSPIN→ EXTOUT	—
		—	0.501	—	V _{rms}		DSPIN →SPCOP SPCON	When RECO→ RECPRO—6dB
Transmission loss frequency characteristics (A→D) EXTIN→DSPOUT	G _{RX}	24	—	—	dB	1020Hz, 0dBm0 input reference	0.06kHz	—
		0	—	2.5			0.2kHz	
		—0.3	—	0.3			0.3~3.0kHz	
		—0.3	—	0.9			3.4kHz	
		0	—	—			3.6kHz	
		6.5	—	—			3.78kHz	
Transmission loss frequency characteristics (D→A) DSPIN→RECO	G _{RR}	—0.3	—	0.3	dB	1020Hz, 0dBm0 input reference	0.0~3.0kHz	—
		—0.3	—	0.9			3.4kHz	
		0	—	—			3.6kHz	
		6.5	—	—			3.78kHz	

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions			
〈Tone generator〉									
Tone output level	High	V _{TNH}	−11.1	−9.6	−8.1	dBm	Set at 2kHz	→RECO	30kHz LPF 0dBm=0.775V _{rms}
			−11.1	−9.6	−8.1	dBm		→DSPOUT	
	Low	V _{TNL}	−13.3	−11.8	−10.3	dBm		→RECO	
Tone distortion		S _{DTN}	—	—	−29	dB	HTONE set at 2kHz	→RECO	30kHz LPF
〈Attenuator〉									
Gain error	ATT1	ΔATT1	−1	—	+1	dB	1kHz input	→DSPOUT	−21~+10dB
	ATT2	ΔATT2	−1	—	+1	dB		→RECO	−31~0dB
	ATT3	ΔATT3	−1	—	+1	dB		→EXTOUT	−31~0dB
	ATT4	ΔATT4	−1	—	+1	dB	Set at 2kHz	→RECO	−31~0dB
	ATT5	ΔATT5	−1	—	+1	dB		→DSPOUT	−31~0dB
	ATT6	ΔATT6	−1	—	+1	dB	1kHz input	→RECO	−41~−10dB
	ATT7	ΔATT7	−1	—	+1	dB		→SPCON	−5~+10dB
〈PLL block〉									
PLL lead-in time	T _{PL}	—	5	100	ms	—			Guaranteed design value
〈Speaker〉									
Gain resistance	R _{SG}	140	200	260	kΩ	—			—
Output power	P _{SP}	6.4	40	—	mW	Load 32Ω			—

● Digital AC characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
〈Serial data interface / timing〉					
DSPCLK frequency	f_{sck}	—	256	—	kHz
DSPREQB input setup time	t_{sur}	3.0	—	—	μs
DSPREQB input hold time	t_{htr}	3.0	—	—	μs
DSPIN input setup time	t_{sus}	100	—	—	ns
DSPIN input hold time	t_{hts}	100	—	—	ns
DSPEB low pulse width	t_{wen}	5.0	—	—	μs
DSPREQB scan internal clock frequency	t_{rex}	—	8	—	kHz
〈Register write timing〉					
CPUCLK frequency	f_{clk}	—	—	3	MHz
CPUDATA input setup time	t_{suda}	100	—	—	ns
CPUDATA input hold time	t_{htda}	100	—	—	ns
Input setup time (CPUCLK high vs. CPUSTR high)	t_{sud}	333	—	—	ns
Input hold time (CPUCLK high vs. CPUSTR low)	t_{htd}	1000	—	—	ns
CPUSTR strobe pulse width	f_{pwd}	667	—	—	ns

● Measurement circuit

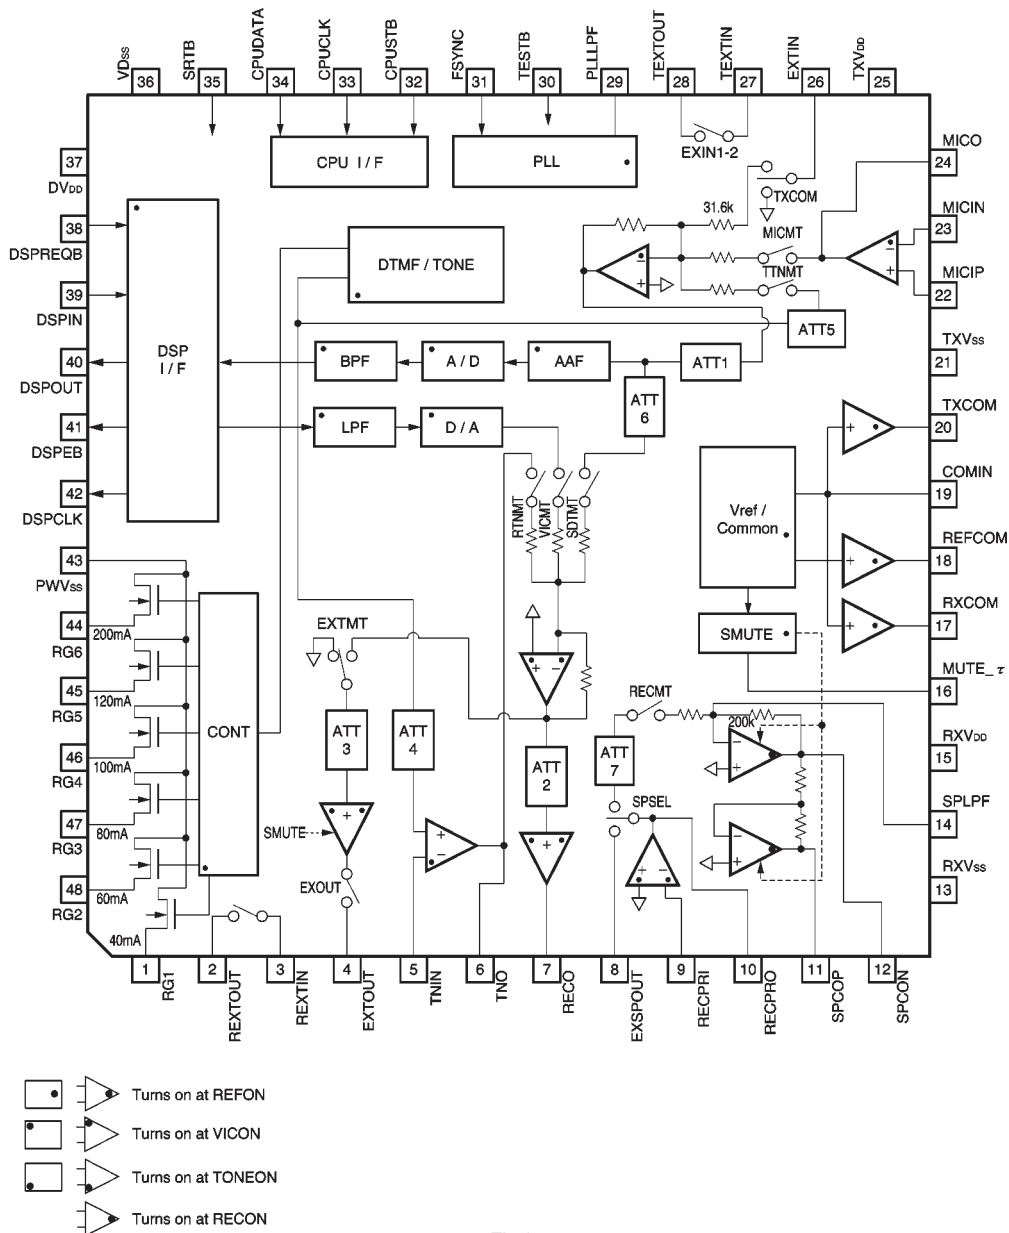


Fig.1

●Application example

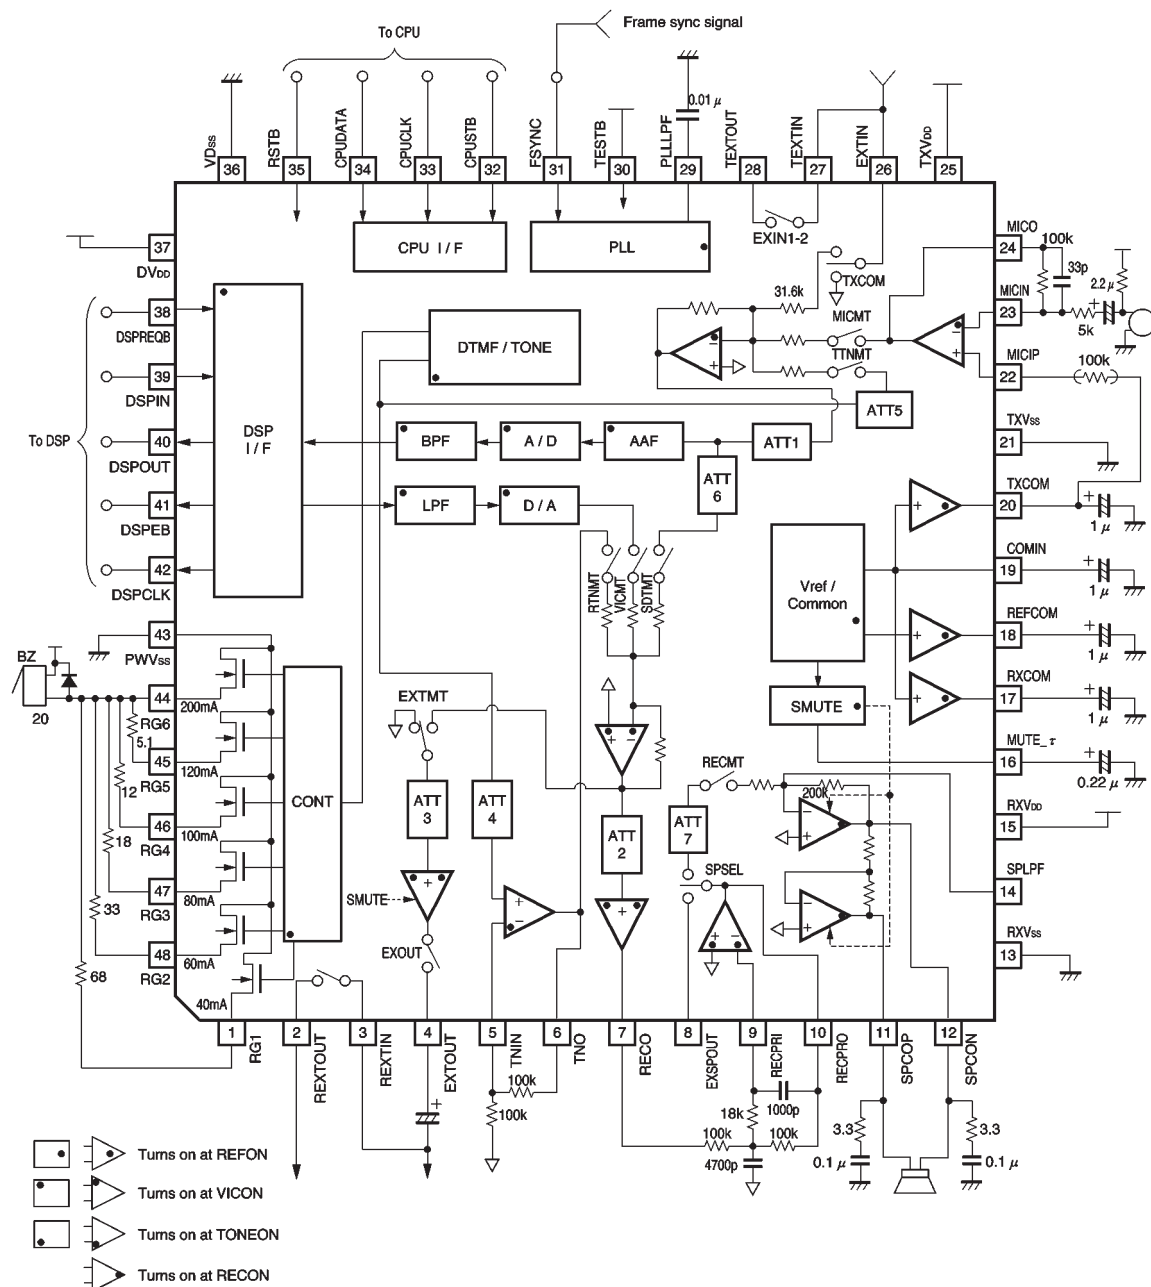


Fig.2

●External dimensions (Units: mm)

